

eCOA User Requirements Specification (URS)

Specification Version: 1.0 / May 18, 2026

Prepared for Study Sponsor: Terremoto Biosciences, Inc.

Protocol Number: TER-4480-C01

Protocol Version: 1.0

Protocol Date: XX-XX-2026

CONFIDENTIAL

Generated from spec/ on May 18, 2026

Contents

1	Introduction and Purpose	12
2	Document Revision History	13
3	Signatures	14
4	SYSTEM-WIDE STANDARDS	15
4.1	Common User Interface Elements and Actions	15
4.1.1	Buttons	15
4.1.2	UI Elements	16
4.1.3	Actions	16
4.1.4	Interaction Patterns	16
4.1.5	Dialog Patterns	16
4.1.6	<i>Sponsor Portal User Status</i>	17
4.1.7	<i>Participant Status</i>	17
4.1.8	<i>Participant Status Transitions</i>	18
4.1.9	<i>Questionnaire Status</i>	19
4.2	Status Registry	20
4.3	User Roles and Permissions	20
4.3.1	Customizable Role-Based Access Control	20
4.3.2	Action Inventory	21
4.3.3	Role Definitions	23
4.3.4	Permissions Table	24
4.3.5	Role Switching — Interface Behavior	27
4.3.6	Action Inventory	28
4.4	Questionnaire Score Display	29
4.4.1	Questionnaire Score Display Prohibition	29
4.5	Audit Log Visibility	29
4.5.1	Audit Log View — Common Presentation	30
4.5.2	Study Coordinator Audit Log View	31
4.5.3	CRA Audit Log View	32
4.5.4	Administrator Audit Log View	33
4.6	Notification Behavior	34
4.6.1	Notification Behavior	34
4.7	Help and Resources	35
4.7.1	Help and Resources	35
4.8	Configuration	37
4.8.1	Configuration Precedence	37

5	PRODUCT REQUIREMENTS	39
5.1	Administration	39
5.1.1	Create User Account	39
5.1.2	Account Activation Workflow	40
5.1.3	Site Assignment	42
5.1.4	Resend Activation Email	43
5.1.5	Edit User Account	44
5.1.6	Deactivate User Account	45
5.1.7	Reactivate User Account	46
5.1.8	Reason Field Constraints	47
5.1.9	User Management Tabs	48
5.1.10	Deactivate User Account	50
5.1.11	Reactivate User Account	51
5.1.12	User Information Modal	52
5.1.13	Administrator Dashboard	54
5.3	Questionnaire Management	55
5.3.1	Clinical Questionnaire System	55
5.3.2	Sponsor Questionnaire Configuration	58
5.3.3	Clinical Data Submission Control	59
5.3.4	Questionnaire Change Control	59
5.3.5	Start Trial Workflow	60
5.3.6	Start Trial Workflow Interface	61
5.3.7	NOSE HHT and HHT-QoL Questionnaire Workflow	62
5.3.8	Manage Questionnaires Modal	64
5.3.9	Questionnaire Finalization Workflow	67
5.3.10	Questionnaire Cycle Tracking	68
5.3.11	Questionnaire Session Resume and Timeout	71
5.4	Participant Workflows	72
5.4.1	Linking Code Lifecycle Management	72
5.4.2	Linking Code Lifecycle Configuration	74
5.4.3	Participant Registration	75
5.4.4	Participant Registration Configuration	76
5.4.5	Link New Participant Workflow	77
5.4.6	Participant Disconnection Workflow	78
5.4.7	Disconnection Reason Options	79
5.4.8	Participant Reconnection Workflow	80
5.4.9	Mark as Not Participating	81
5.4.10	Mark as Not Participating Reason Options	82
5.4.11	Reactivate Participant	82
5.4.12	Participant Dashboard	83
5.4.13	Participant Dashboard Configuration	85
5.4.14	Show Linking Code	87
5.4.15	Link Participant Flow	88

5.5	Sponsor Portal Authentication	89
5.5.1	Password Requirements	89
5.5.2	Two-Factor Authentication	90
5.5.3	Two-Factor Authentication Configuration	92
5.5.4	Forgot Password	93
5.5.5	Forgot Password Workflow Interface	94
5.5.6	Session Management	97
5.5.7	Login Attempt Rate Limiting Configuration	98
5.6	Administrator Settings	99
5.6.1	Administrator Settings Surface	99
5.6.2	Administrator Settings Configuration Inventory	101
5.6.3	Administrator Settings Interface	103
6	MOBILE APPLICATION	105
6.1	Mobile Application Foundation	105
6.1.1	Diary Mobile Application	105
6.1.2	Offline-First Data Entry	106
6.1.3	Diary Start Day Definition	107
6.1.4	Clinical Trial Privacy Policy	109
6.1.5	Clinical Trial Privacy Policy Configuration	110
6.1.6	Application Lock	111
6.1.7	Application Lock Configuration	114
6.2	Questionnaires Overview	115
6.2.1	Daily Epistaxis Record Questionnaire	115
6.2.2	NOSE HHT Questionnaire	116
6.2.3	HHT-QoL Questionnaire	117
6.3	Participant Questionnaire Workflow	119
6.3.1	Portal-Sent Questionnaire Rules	119
6.3.2	Portal-Sent Questionnaire Workflow	123
6.3.3	Portal-Sent Questionnaire Call-Back — Participant Experience	129
6.3.4	Questionnaire Session Timeout	132
6.3.5	Questionnaire Session Expiry	138
6.4	Daily eDiary: HHT Epistaxis Data Capture	141
6.4.1	HHT Epistaxis Data Capture Standard	141
6.4.2	Record Nosebleed Event	142
6.4.3	Nosebleed Event Delete	145
6.5	Score Calculation	148
6.5.1	Questionnaire Score Calculation	148
6.5.2	HHT-QoL Score Calculation	149
6.5.3	NOSE HHT Score Calculation	149
6.6	Diary Entry Rules	150
6.6.1	Time-Based Entry Restrictions	150
6.6.2	Time-Based Entry Restrictions Configuration	152

6.6.3	Duration Reasonableness Check	153
6.6.4	Duration Reasonableness Check Configuration	155
6.6.5	Overlapping Event Detection and Resolution	156
6.6.6	Overlapping Event Resolution Flow	160
6.7	Mobile Application Navigation and Screens	164
6.7.1	Main Screen Layout	164
6.7.2	Mobile Application Navigation and Screens	166
6.7.3	Calendar and Day View	168
6.8	Participant Tasks and Notifications	171
6.8.1	Participant Task List	171
6.8.2	Disconnection Notification	174
6.8.3	Participation Status Badge	177
6.8.4	Incomplete Record Lock Warning Notification	179
6.8.5	Incomplete Record Lock Warning Notification Configuration	180
6.8.6	Portal-Sent Questionnaire Notification	181
6.8.7	Yesterday Entry Reminder Notification	184
6.8.8	Yesterday Entry Reminder Configuration	186
6.8.9	Ongoing Epistaxis Event Reminder	187
6.8.10	Ongoing Epistaxis Event Reminder Configuration	190
6.8.11	Historical Gap Reminder	191
6.8.12	Historical Gap Reminder Configuration	194
6.9	Device Linking	195
6.9.1	Linking Code Entry Error Handling	195
6.9.2	Linking Code Entry Error Handling Configuration	197
6.9.3	Join the Study Screen	198
6.9.4	Successful Linking Confirmation	199
7	Appendices	202
7.1	Screens	202
7.1.1	Questionnaire Review Screen	202
7.1.2	Questionnaire Preamble Screen	204
7.1.3	Resolve Conflict — Resolution Screen	206
7.1		208
7.1.4	Troubleshooting Popover	208
7.2	Modals	209
7.2.1	User Information Modal	209
7.1.1		211
7.2.2	Show Linking Code	211
7.2.3	Manage Questionnaires Modal	213
7.3	Dialogs	214
7.3.1	Deactivate User Account — Reason Dialog (Free Text)	214
7.3.2	Reactivate User Account — Reason Dialog (Free Text)	215
7.3.3	Link Participant — Confirmation Dialog	216

7.1.2	217
7.3.4 Linking Code Generated — Acknowledgement Dialog	217
7.3.5 Start Trial — Confirmation Dialog	218
7.1.3	219
7.3.6 Disconnect Participant — Reason Dialog	219
7.1.4	220
7.3.7 Reconnect Participant — Reason Dialog (Free Text)	220
7.3.8 Mark as Not Participating — Reason Dialog (Predefined)	221
7.1.5	223
7.3.9 Reactivate Participant — Reason Dialog (Free Text)	223
7.3.10 Delete Record — Reason Dialog — Predefined List	224
7.3.11 Post-Submission Acknowledgement Dialog	226
7.1.6	228
7.1.7 7.3.12 Session Expiry Dialog	228
7.3.13 Questionnaire Finalization Dialog	230
7.3.14 Terminal Cycle Warning Dialog	231
7.3.15 Call Back Questionnaire — Reason Dialog (Free Text)	232

Call Back Questionnaire

Participant ID: 002-1013456

Calling back the NOSE HHT Questionnaire will set its status to Not Sent.

Reason for call back *

Enter reason for calling back this Questionnaire...

0/100

Cancel

Confirm

7.2		233
7.3.16	Call Back Notice	233
7.3.17	Successful Linking Confirmation	236
7.4	Notifications	238
7.4.1	Timeout Warning Notification	238
7.2.1		240
7.4.2	Session Expiry Notification	240
7.2.2		242
7.4.3	Disconnection Notification	242
7.4.4	Portal-Sent Questionnaire Notification	243
7.4.5	Yesterday Entry Reminder Notification	245
7.4.6	Ongoing Epistaxis Event Reminder	246
7.4.7	Historical Gap Reminder	247
8	Glossary	249
8.1	A	249

8.2	C	251
8.3	D	252
8.4	E	254
8.5	F	256
8.6	G	257
8.7	H	257
8.8	I	258
8.9	J	259
8.10	L	259
8.11	M	260
8.12	N	261
8.13	O	261
8.14	P	261
8.15	Q	263
8.16	R	263
8.17	S	265
8.18	T	267
8.19	U	267
8.20	V	268
8.21	Y	268
9	Term Index	269
9.1	ACT-PAT-001 — Link Participant	269
9.2	Action	269
9.3	Action Inventory	270
9.4	Activation Webpage	270
9.5	Administrator	270
9.6	Administrator Dashboard	271
9.7	Administrator Settings	271
9.8	Application Lock	271
9.9	Application Menu	272
9.10	Application Privacy Policy	272
9.11	Audit Trail	272
9.12	Authentication Method	272
9.13	Calendar	272
9.14	Clinical Research Associate (CRA)	273
9.15	Clinical Trial Privacy Policy	273
9.16	Code Expiry	273
9.17	Completion Status	273
9.18	Configuration Category	273
9.19	Configuration Parameter	274
9.20	Conflicting Record	274
9.21	Daily Epistaxis Record	274

eCOA User Requirements Specification

Sponsor: Terremoto Biosciences

Protocol: TER-4480-C01 Version: 1.0

9.22	Daily Status	274
9.23	Database	275
9.24	Day View	275
9.25	De-identified Data	275
9.26	Deactivation	275
9.27	Device Authentication	275
9.28	Diary	276
9.29	Diary Data Synchronization	276
9.30	Diary Entry	277
9.31	Diary Platform	277
9.32	Diary Start Day	277
9.33	Disconnection Notification	277
9.34	Duration Reasonableness Check	277
9.35	Electronic Record	277
9.36	Electronic Signature	277
9.37	Email Address	277
9.38	Entry Justification	278
9.39	Epistaxis Event	278
9.40	eSource	279
9.41	Event Sourcing	279
9.42	Event Store	279
9.43	FDA 21 CFR Part 11	279
9.44	Finalization	279
9.45	Full Name	279
9.46	HHT-QoL	280
9.47	Historical Gap	280
9.48	Historical Gap Reminder	280
9.49	Idle Timeout	280
9.50	Incomplete Record	280
9.51	Incomplete Records Task	281
9.52	Intensity	281
9.53	Investigator	281
9.54	Justification Threshold	281
9.55	Linking Code	281
9.56	Linking Code Validation Failure	282
9.57	Linking Consent	282
9.58	Lock Threshold	282
9.59	Lock Warning Offset	283
9.60	Long Duration Threshold	283
9.61	Main Screen	283
9.62	Mobile Application	283
9.63	Mobile Linking Code	284
9.64	Multi-Sponsor Isolation	284

9.65	NOSE HHT	284
9.66	Offline-First	284
9.67	Overlap	284
9.68	Participant	285
9.69	Participant Actions Modal	288
9.70	Participant Linking Code	288
9.71	Participation Status Badge	288
9.72	Password	288
9.73	Password Reuse Limit	289
9.74	Patient	289
9.75	PIN	289
9.76	Portal-Sent Questionnaire	290
9.77	Preamble	290
9.78	Progress Indicator	290
9.79	Questionnaire	290
9.80	Questionnaire Display Name	292
9.81	Questionnaire Task	292
9.82	Questionnaire Type	292
9.83	Rate Limit Cooldown	292
9.84	Rate Limit Threshold	292
9.85	RBAC (Role-Based Access Control)	293
9.86	Record State	293
9.87	Reminder Schedule	293
9.88	Reminder Time	293
9.89	Resolution	293
9.90	Resolution Screen	294
9.91	Review Screen	294
9.92	Role	294
9.93	Role Selector	295
9.94	Row-Level Security	295
9.95	Second Factor	295
9.96	Session	295
9.97	Session Expiry	296
9.98	Session Expiry Dialog	296
9.99	Session Expiry Notification	296
9.100	Session Idle Timeout	296
9.101	Session Timeout	296
9.102	Short Duration Threshold	296
9.103	Site	296
9.104	Sponsor	297
9.105	Sponsor Portal	299
9.106	Sponsor-Level Action Extension	299
9.107	Study Coordinator	299

9.108Submission	300
9.109System Notice Area	300
9.110Task List	301
9.111 Time Picker	301
9.112Timeout Warning Notification	301
9.113Trial	301
9.114Trial Start	302
9.115True Copy	302
9.116User	302
9.117User Account	304
9.118User Information Modal	304
9.119User Menu	305
9.120User Session	305
9.121Verification Code	305
9.122Verification Link	305
9.123Yesterday Reminder Task	305

Introduction and Purpose

CureHHT eCOA solution is composed of a sponsor portal and a mobile application with available web-based interface, which are integrated with each other and serve as the primary user interfaces for recording of nosebleed events and completion of participant questionnaires for the TER-4480-C01 study.

The Sponsor Portal is the web-based interface used by clinical staff — Study Coordinators, Clinical Research Associates, and Administrators — to manage participant linking, monitor trial progress, distribute questionnaires, and review submitted data. The Mobile Application is the participant-facing interface used to record daily nosebleed events and complete questionnaires sent from the Sponsor Portal. The two components are integrated in such that data captured in the Mobile Application is synchronized to the Sponsor Portal and onward to Rave EDC, and questionnaires initiated in the Sponsor Portal are delivered to the participant's device.

Document Revision History

Version	Date	Author	Description of Changes
1.0	25-Mar-2026	Elvira Koliadina	Initial draft

Signatures

Trial Sponsor Agreement

By my signature below I confirm that the settings have been reviewed and approved within the Trial Sponsor organization.

Approver	Signature
First Name Last Name Study Manager	
First Name Last Name Quality Assurance	
First Name Last Name Data Management	
Print Name & Title	Signature / Date

CureHHT Personnel Agreement

By my signature below I confirm the information contained herein will be implemented as appropriate by CureHHT on behalf of the Trial Sponsor.

Approver	Signature
First Name Last Name Lead Developer	
Elvira Koliadina Project Manager	
Print Name & Title	Signature / Date

SYSTEM-WIDE STANDARDS

4.1 Common User Interface Elements and Actions

The system shall use a consistent set of commonly displayed elements, buttons, and interaction patterns across the *Sponsor Portal* and *Mobile Application*. Where these terms are used in subsequent requirements, their behavior shall be interpreted according to the definitions provided in this section, unless specified otherwise.

4.1.1 Buttons

Element	Behavior
Confirm	Confirms a pending <i>Action</i> displayed in a dialog. Proceeds with the <i>Action</i> upon click.
Cancel	Discards any unsaved changes and returns the <i>User</i> to the previous state. No data is modified.
OK	Acknowledges a system message or notification and dismisses it. No <i>Action</i> is confirmed or cancelled.
Submit	Finalizes and sends the current form or <i>Questionnaire</i> data. Once submitted, the <i>Action</i> cannot be undone unless explicitly permitted by the relevant requirement.
Next	Advances to the next step in a sequence. Data entered in the current step is preserved.
Back	Returns to the previous step in a sequence. Previously entered data is preserved.
Continue	Resumes a flow that was interrupted or paused. Returns the <i>User</i> to the point where they left off.
More details	Opens a detailed view displaying the full record associated with the current row. Represented as a button or link affordance on the row.

Element	Behavior
Close	Dismisses a modal or dialog without performing any <i>Action</i> . No data is modified.

4.1.2 UI Elements

Element	Behavior
Tab	A navigation element that filters a list by a category.
Search Input	A single text input that filters a list in real time across specified fields.
Status Badge	An inline label displaying the current status of a record.

4.1.3 Actions

Element	Behavior
Edit	Opens an existing record for modification. Changes are not applied until confirmed or submitted. Represented by a pencil icon.

4.1.4 Interaction Patterns

Element	Behavior
Real-time Filtering	A list updates as the <i>User</i> types without requiring explicit <i>Submission</i> .
Preserved Search State	The search input is retained when the <i>User</i> navigates between tabs.

4.1.5 Dialog Patterns

Element	Behavior
Acknowledgement Dialog	Displays a message informing the <i>User</i> of a system event or outcome. Requires the <i>User</i> to click OK to dismiss. No <i>Action</i> is cancelled or confirmed.
Confirmation Dialog	Displays the consequence of a pending <i>Action</i> . Requires the <i>User</i> to either confirm or cancel before the <i>Action</i> is applied.
Reason Dialog — Free Text	Displayed before a high-impact <i>Action</i> . Requires the <i>User</i> to enter a free text reason of up to 100 characters before proceeding. The <i>Action</i> SHALL NOT proceed until a reason is provided.
Reason Dialog — Predefined List	Displayed before a high-impact <i>Action</i> . Requires the <i>User</i> to select a reason from a <i>Sponsor</i> -defined list before proceeding. The <i>Action</i> SHALL NOT proceed until a reason is selected.

4.1.6 *Sponsor Portal User Status*

The system maintains a defined set of status values for *Sponsor Portal User* accounts.

Status	Description
Pending Activation	The account has been created but the <i>User</i> has not yet accepted the invitation or set up their credentials.
Active	The account has been created and the <i>User</i> can log in and perform actions per their <i>Role</i> and permissions.
Inactive	The account has been deactivated and the <i>User</i> can no longer log in.

4.1.7 *Participant Status*

The system maintains a defined set of status values representing the *Participant's* linking, *Trial* participation, device, and data synchronization state.

Status	Description
Not Connected	The <i>Participant</i> record has been synced from <i>Rave EDC</i> to the <i>Sponsor Portal</i> but the <i>Mobile Application</i> has not been linked to the <i>Sponsor Portal</i> .
Pending	An invitation has been sent to the <i>Participant</i> but the <i>Participant</i> has not yet linked their device.
Expired	An invitation has been sent to the <i>Participant</i> but expired before the <i>Participant</i> linked their device.
Linked - Awaiting Start	The <i>Participant's</i> device is linked to the <i>Sponsor Portal</i> but <i>Diary Data Synchronization</i> has not yet been activated.
<i>Trial Active</i>	<i>Diary Data Synchronization</i> has been activated and <i>Diary</i> entries are being transmitted to the <i>Sponsor Portal</i> and <i>Rave EDC</i> .
Disconnected	A <i>Study Coordinator</i> has manually disconnected the <i>Participant</i> in the <i>Sponsor Portal</i> . <i>Sponsor-specific</i> rules remain applied to the <i>Mobile Application</i> but data is not syncing. Data will resume syncing when the <i>Participant</i> is reconnected.
Not Participating	The <i>Participant</i> has been marked as not participating following disconnection. <i>Sponsor-specific</i> rules are no longer applied to the <i>Mobile Application</i> .

4.1.8 *Participant Status Transitions*

The following transitions are valid. All other transitions are prohibited.

From	To	Trigger
Not Connected	Pending	<i>Study Coordinator</i> generates <i>Linking Code</i>
Pending	Linked - Awaiting Start	<i>Participant</i> successfully enters <i>Linking Code</i> for the first time

From	To	Trigger
Pending	Expired	The <i>Linking Code</i> expires as the <i>Participant</i> did not use it
Expired	Pending	<i>Study Coordinator</i> regenerates <i>Linking Code</i>
Linked - Awaiting Start	<i>Trial</i> Active	<i>Study Coordinator</i> starts <i>Trial</i>
Linked - Awaiting Start	Disconnected	<i>Study Coordinator</i> disconnects <i>Participant</i>
<i>Trial</i> Active	Disconnected	<i>Study Coordinator</i> disconnects <i>Participant</i>
Disconnected	Pending	<i>Study Coordinator</i> initiates reconnection
Disconnected	Not Participating	<i>Study Coordinator</i> marks <i>Participant</i> as not participating
Not Participating	Disconnected	<i>Study Coordinator</i> reactivates <i>Participant</i>

4.1.9 Questionnaire Status

The system maintains a defined set of status values for *Questionnaire* instances.

Status	Description
Not Sent	No active <i>Questionnaire</i> exists for the current <i>Cycle</i> and a new one may be sent.
Sent	The <i>Questionnaire</i> has been transmitted to the <i>Participant's Mobile Application</i> and is awaiting <i>Participant</i> completion.
Delivery Failed	Transmission of the <i>Questionnaire</i> to the <i>Participant's Mobile Application</i> was unsuccessful and the <i>Participant</i> has not received it.
Ready to Review	The <i>Participant</i> has submitted answers and the <i>Study Coordinator</i> may finalize.

Status	Description
Closed	The <i>Questionnaire</i> for that <i>Cycle</i> has been completed by the <i>Participant</i> and is finalized by the <i>Study Coordinator</i> . Subsequent Questionnaires for that <i>Cycle</i> cannot be generated.

4.2 Status Registry

(No content found for 4.2 — manifest references [])

4.3 User Roles and Permissions

This section defines the *Role* model used across the solution: the generic *Role* templates provided by the platform, the inventory of actions subject to access control, and the *Sponsor* portal deployment's *Role* assignments and permissions. All functional requirements that reference roles or permissions depend on the definitions established here.

4.3.1 Customizable Role-Based Access Control

REQ ID: DIARY-PRD-rbac-customizable

Overview

The system supports multi-*Role* assignment and seamless *Role* switching without disrupting active sessions. Self-privilege-escalation is prevented structurally by disallowing users to modify *Role* assignments of their own account.

Assertions

- A.** The System SHALL allow a ****User** Account** to be assigned one or more roles.
- B.** The System SHALL allow an active *Role* to be switched without terminating the *User*'s *Session*.
- C.** The System SHALL NOT permit a *User* to modify the *Role* assignments of their own ****User** Account**.

Rationale

Clinical *Trial Sponsor* portals are routinely staffed by individuals who hold more than one operational *Role* across studies or sites (e.g. a *Study Coordinator* who is also an *Administrator* on a sister study). Forcing those users to maintain separate accounts duplicates audit trails, fragments responsibility, and increases the operational burden of account life-cycle. Allowing multi-*Role* assignment with seamless switching keeps a single accountable identity per individual while supporting the legitimate need to perform actions in different capacities. The structural prohibition on self-modification of *Role* assignments is a defense-in-depth control against privilege escalation that does not depend on any single permission check elsewhere in the system.

4.3.2 Action Inventory

REQ ID: DIARY-PRD-action-inventory

Overview

The *Action Inventory* enumerates every operation subject to *Role*-based access control. It is the authoritative source for the *Sponsor*-level permissions table — every permission granted or denied in a *Sponsor* deployment must reference an *Action* from this inventory. Actions not listed here cannot be granted or denied. *Sponsor* deployments may extend the inventory with deployment-specific actions.

Action

Action A discrete operation that a user can perform within the System, subject to role-based access control. An Action either changes system state or retrieves protected data.

Action Inventory

Action Inventory The complete enumerated set of Actions the System recognizes, comprising the platform-level inventory in this requirement and any sponsor-level extensions.

Sponsor-Level Action Extension

Sponsor-Level Action Extension An additional Action defined by a specific sponsor deployment beyond the platform Action Inventory.

Assertions

A. The System SHALL enforce *Role*-based access control for every **Action** in the ****Action** Inventory**.

B. The System SHALL reject any attempt to perform an **Action** by a *User* whose active *Role* does not have permission for that **Action**.

C. The System SHALL permit an **Action** to proceed when the *User*'s active *Role* has permission for that **Action** and the *User* is within the permitted scope.

D. The System SHALL support ****Sponsor-Level Action Extensions to the ****Action** Inventory**.

Action Inventory Table

Category	Action ID	Action
****Participant** Management**	ACT-PAT-001	Link <i>Participant</i>
	ACT-PAT-002	Start <i>Trial</i>
	ACT-PAT-003	Disconnect <i>Participant</i>
	ACT-PAT-004	Reconnect <i>Participant</i>
	ACT-PAT-005	Mark <i>Participant</i> as not participating
	ACT-PAT-006	Reactivate <i>Participant</i>
	ACT-PAT-007	View <i>Participant</i> info
Questionnaire	ACT-QST-001	Send <i>Questionnaire</i>
	ACT-QST-002	Call back <i>Questionnaire</i>
	ACT-QST-003	Finalize <i>Questionnaire</i>
User Account**	ACT-USR-001	Create <i>User</i> Account
	ACT-USR-002	Edit <i>User</i> Account
	ACT-USR-003	Deactivate <i>User</i> Account
	ACT-USR-004	Reactivate <i>User</i> Account
	ACT-USR-005	Unlock <i>User</i> Account
	ACT-USR-006	Resend activation email
	ACT-USR-007	Assign <i>Role</i> to <i>User</i> Account
	ACT-USR-008	Assign <i>Site</i> to <i>User</i> Account
Site	ACT-SIT-001	View Sites

Category	Action ID	Action
Audit Log	ACT-AUD-001	View audit log
Administrator Settings**	ACT-ADM-001	View Administrator Settings

Rationale

The *Action* Inventory is the single source of truth for what operations the platform recognizes as access-controlled. *Sponsor* deployments author their permissions table by referencing these *Action* IDs; deployments may extend the inventory with *Sponsor*-specific actions but cannot redefine or remove platform actions. Centralizing the inventory ensures that every audit log entry, permission check, and *Role* binding refers to a stable, named operation rather than an ad hoc string, which is essential for *FDA 21 CFR Part 11* auditability and for cross-*Sponsor* consistency in the platform's compliance posture.

4.3.3 Role Definitions

REQ ID: DIARY-PRD-role-definitions

Refines: DIARY-PRD-rbac-customizable

Overview

This requirement defines the generic *Role* templates the platform provides and maps the *Sponsor* portal's named roles to those templates. *Sponsor* deployments bind permissions to roles via the deployment's permissions table; the platform-side definitions establish the shared vocabulary.

Study Coordinator

Study Coordinator A portal user responsible for managing day-to-day participant interactions at one or more assigned Sites.

Clinical Research Associate (CRA)

Clinical Research Associate (CRA) A portal user responsible for monitoring Study Coordinator activities and site compliance at one or more assigned Sites.

Administrator

Administrator A portal user responsible for managing User Accounts, role assignments, and Site assignments across the study.

Assertions

A. The System SHALL recognize the following roles in the *Sponsor* portal: **Study Coordinator**, **Clinical Research Associate**, and **Administrator**.

B. The System SHALL map the **Study Coordinator Role** to the **Investigator** generic *Role* template.

C. The System SHALL map the **Clinical Research Associate Role** to the **Auditor** generic *Role* template.

D. The System SHALL map the **Administrator Role** to the **Administrator** generic *Role* template.

Rationale

The *Sponsor* portal's named roles are deployment-facing labels chosen for clarity to clinical staff; the underlying generic *Role* templates (*Investigator*, *Auditor*, *Administrator*) carry the platform-level semantics and are the units of inheritance for cross-*Sponsor* permission patterns. Establishing the mapping at the platform level lets *Sponsor* configurations alter labels and add scope rules without diverging from the platform's shared model, and lets cross-cutting compliance behavior key off the generic template rather than every *Sponsor*'s chosen name.

4.3.4 Permissions Table

REQ ID: CAL-PRD-role-definitions

Refines:

- DIARY-PRD-rbac-customizable
- DIARY-PRD-role-definitions

Satisfies: DIARY-PRD-action-inventory

Overview

The permissions table defines which roles are granted each *Action* from the *Action* Inventory (DIARY-PRD-action-inventory). It is the *Sponsor*-level binding from platform-defined roles (DIARY-PRD-role-definitions) to platform-defined Actions for the Calisto deployment.

Assertions

A. The System SHALL enforce the per-*Role Action* permissions defined in the **Permissions Table** below.

Permissions Table

In the following tables, Y indicates the *Role* is granted the *Action* and N indicates the *Role* is denied the *Action*.

User Account Management

Action ID	Action	Study Coordinator	CRA	Administrator
ACT-USR-001	Create <i>User</i> Account	N	N	Y
ACT-USR-002	Edit <i>User</i> Account	N	N	Y
ACT-USR-003	Deactivate <i>User</i> Account	N	N	Y
ACT-USR-004	Reactivate <i>User</i> Account	N	N	Y
ACT-USR-005	Unlock <i>User</i> Account	N	N	Y
ACT-USR-006	Resend activation email	N	N	Y
ACT-USR-007	Assign <i>Role</i> to <i>User</i> Account	N	N	Y
ACT-USR-008	Assign <i>Site</i> to <i>User</i> Account	N	N	Y

Participant Management

All Participant* actions are restricted to participants at Sites assigned to the *User*.*

Action ID	Action	Study Coordinator	CRA	Administrator
ACT-PAT-001	Link <i>Participant</i>	Y	N	N
ACT-PAT-002	Disconnect <i>Participant</i>	Y	N	N
ACT-PAT-003	Reconnect <i>Participant</i>	Y	N	N

eCOA User Requirements Specification

Sponsor: Terremoto Biosciences

Protocol: TER-4480-C01 Version: 1.0

Action ID	Action	Study Coordinator	CRA	Administrator
ACT-PAT-004	Mark <i>Participant</i> as not participating	Y	N	N
ACT-PAT-005	Reactivate <i>Participant</i>	Y	N	N
ACT-PAT-006	View <i>Participant</i>	Y	Y	N

Questionnaire Management

All *Participant** actions are restricted to participants at Sites assigned to the *User*.*

Action ID	Action	Study Coordinator	CRA	Administrator
ACT-QST-001	Send <i>Questionnaire</i>	Y	N	N
ACT-QST-002	Call back <i>Questionnaire</i>	Y	N	N
ACT-QST-003	Finalize <i>Questionnaire</i>	Y	N	N

Sites and Audit Log

Action ID	Action	Study Coordinator	CRA	Administrator
ACT-SIT-001	View All Sites	N	N	Y
ACT-SIT-002	View Assigned Sites	Y	Y	N
ACT-AUD-001	View audit log	Y	Y	Y

Rationale

The Callisto permissions matrix encodes a strict separation between operational roles (*Study Coordinator*), monitoring roles (CRA), and administrative roles (*Administrator*). Study Coordinators perform all *Participant*- and *Questionnaire*-facing actions because the operational workflow is theirs alone; CRAs are read-only by design, with view access to participants and the audit log at their assigned sites so they can monitor compliance without altering *Trial* state; Administrators are confined to *User* Account lifecycle because their accountability is account governance, not clinical operations. Every cell in the matrix is defensible against the *FDA 21 CFR Part 11* principle of separation of duties and against the operational principle that a single mistake by any *Role* should not cascade across boundaries.

4.3.5 Role Switching — Interface Behavior

REQ ID: DIARY-GUI-role-switching

Refines: DIARY-PRD-rbac-customizable

Overview

This requirement specifies how the *Sponsor* portal interface exposes *Role* switching to users assigned more than one *Role*.

Role Selector

Role Selector UI element displayed in the header that shows the user's currently active role and allows users with multiple assigned roles to switch their active role.

Display

Assertions

- A.** The interface SHALL display the ******Role** Selector**** in the header for any *User* assigned two or more roles.
- B.** The interface SHALL NOT display the ******Role** Selector**** for a *User* assigned exactly one *Role*.
- C.** The ******Role** Selector**** SHALL display the *User*'s currently active *Role*.
- D.** When opened, the ******Role** Selector**** SHALL display the complete list of the *User*'s assigned roles and SHALL visually indicate which *Role* is currently active.

Interaction

- E.** When the *User* selects a *Role* from the ******Role** Selector****, the interface SHALL set that *Role* as the active *Role*.
- F.** When the active *Role* changes, the interface SHALL load the default landing view for the selected *Role*.
- G.** The ******Role** Selector**** SHALL NOT present a confirmation step before switching roles.

Rationale

Users assigned multiple roles need an unobtrusive, always-visible affordance to confirm and change which *Role* is currently active, since the active *Role* determines visible data and available actions throughout the portal. Hiding the selector from single-*Role* users keeps the header uncluttered for the common case. Omitting a confirmation step keeps *Role* switching fast for users who switch many times per *Session*; the underlying audit log already records *Role* context for every *Action* so the cost of an accidental switch is bounded.

4.3.6 Action Inventory

REQ ID: CAL-PRD-role-definitions::DIARY-PRD-action-inventory

Assertions

- A.** The System SHALL enforce *Role*-based access control for every **Action** in the *****Action*** Inventory**.
- B.** The System SHALL reject any attempt to perform an **Action** by a *User* whose active *Role* does not have permission for that **Action**.
- C.** The System SHALL permit an **Action** to proceed when the *User*'s active *Role* has permission for that **Action** and the *User* is within the permitted scope.
- D.** The System SHALL support ******Sponsor-Level Action Extensions** to the *****Action*** Inventory**.

Rationale

The *Action* Inventory is the single source of truth for what operations the platform recognizes as access-controlled. *Sponsor* deployments author their permissions table by referencing these *Action* IDs; deployments may extend the inventory with *Sponsor*-specific actions but cannot redefine or remove platform actions. Centralizing the inventory ensures that every audit log entry, permission check, and *Role* binding refers to a stable, named operation rather than an ad hoc string, which is essential for *FDA 21 CFR Part 11* auditability and for cross-*Sponsor* consistency in the platform's compliance posture.

4.4 Questionnaire Score Display

4.4.1 Questionnaire Score Display Prohibition

REQ ID: CAL-PRD-questionnaire-score-display-prohibition

Overview

The platform does not permit calculated *Questionnaire* scores to be displayed to any *User*.

Assertions

A. The System SHALL NOT display calculated *Questionnaire* Score to any *User*.

Rationale

For the Callisto deployment, calculated *Questionnaire* scores are clinical research outputs that belong in the analysis pipeline, not the *User*-facing interface. Displaying a score to a *Study Coordinator* or to a *Participant* could bias subsequent *Participant* responses (priming effects in *Patient*-reported outcome instruments are well documented), undermine the blinding required by the *Trial* protocol, and create the impression that the score is itself a clinical finding for which the portal is the authoritative surface. The score is computed and recorded for downstream analysis; the display surface stays free of it across every *Role* and every screen.

Follow-up — configurability: This requirement currently encodes the only option implemented in code. Future sponsors may require different rules; introduce a configurable seam (e.g. a parameter on the CAL-PRD-* parent, or a new platform-side template the CAL- REQ Satisfies) when the need arises. Until that seam exists, this REQ is normative for the Callisto deployment.

4.5 Audit Log Visibility

This section defines per-*Role* visibility scope of audit log records and the *User* interface presentation of the **Audit Log View**. The content captured in each **Audit Log Entry**.

4.5.1 Audit Log View — Common Presentation

REQ ID: DIARY-GUI-audit-log-common

Overview

The **Audit Log View** uses a consistent presentation across all roles. This requirement defines the shared display, ordering, content, and empty state behavior. *Role*-specific GUI requirements refine this base by adding *Role*-specific columns, controls, and entry points.

Display

Assertions

- A.** The interface SHALL display the **Audit Log View** as a table containing at minimum the following columns: Timestamp, *Action*, *User*, Details.
- B.** The interface SHALL display Audit Log Entries in reverse chronological order, with the most recent entry first.

Content

- C.** When an **Audit Log Entry** corresponds to an **Action** that included a free text input from the *User* (such as a reason, justification, or note), the interface SHALL include that text in the Details column.
- D.** The interface SHALL display in the Details column a human-readable summary of the **Action** that includes, where applicable, the previous state of the affected record and the parameter or option selected as part of the **Action**.

Empty State

- E.** When the **Audit Log View** contains no Audit Log Entries within the active scope or filter selection, the interface SHALL display a message indicating no results were found.

Action Display

- F.** The interface SHALL display the **Action** name in the *Action* column.

G. When an **Action** has parameters that distinguish meaningful variants (such as ****Questionnaire** Type), the interface **SHALL append the parameter to the Action**** name in the *Action* column for human readability.

Detail View

H. The interface **SHALL** provide a **More details** button on each **Audit Log Entry** that, when selected, displays the full **Audit Log Entry** record as raw text.

Rationale

A consistent audit log presentation across roles reduces training overhead, allows reviewers comparing entries across roles to read them with the same mental model, and concentrates accessibility, formatting, and column-ordering decisions in one place. Reverse chronological ordering surfaces the most recent activity first, matching the typical investigative workflow of “what just happened?”. The Details column carries the free-text reason that originated with the *Action* so reviewers do not have to drill into the raw record to understand intent. The raw-text **More details** affordance preserves the full record for inspectors who need every field, while keeping the table dense enough to scan quickly.

4.5.2 Study Coordinator Audit Log View

REQ ID: DIARY-GUI-audit-log-study-coordinator

Refines: DIARY-GUI-audit-log-common

Overview

The **Study Coordinator Audit Log View** presents the **Study Coordinator**’s own Actions. **Participant**-related Actions are displayed alongside a ****Participant** ID** column.

Display

Assertions

A. The interface **SHALL** display the ****Participant** ID** column in addition to the columns defined in *Diary-GUI-audit-log-common*.

Controls

B. The interface SHALL provide a ****Participant** ID** search input that filters the displayed Audit Log Entries by ****Participant** ID** in real time.

Rationale

A *Study Coordinator*'s investigative workflow centers on individual participants — confirming what was done for a specific *Participant* during a specific visit, or assembling documentation in response to a monitoring request. Surfacing ****Participant** ID** as a first-class column and providing a dedicated search input collapses the most common filter operation to a single keystroke. Limiting the view to the Coordinator's own actions reinforces the separation-of-duties model encoded in the per-*Role* scope: Coordinators are accountable for their own *Audit Trail* and do not need (and should not have) visibility into peer actions.

4.5.3 CRA Audit Log View

REQ ID: DIARY-GUI-audit-log-cra

Refines: DIARY-GUI-audit-log-common

Overview

The **CRA Audit Log View** is accessed by selecting a **Site** from the **CRA**'s list of assigned Sites and presents **Study Coordinator** Actions for the selected **Site**. A **Study Coordinator** filter and a ****Participant** ID** search input enable focused review.

Display

Assertions

A. The interface SHALL display the ****Participant** ID** and **Site** columns in addition to the columns defined in *Diary-GUI-audit-log-common*.

B. The interface SHALL display the name of the selected **Site** in the **Audit Log View** header.

Controls

C. The interface SHALL provide a **Study Coordinator** selector that filters the displayed Audit Log Entries by the selected **Study Coordinator**.

D. The interface SHALL provide a default selection in the **Study Coordinator** selector that displays Audit Log Entries for all Study Coordinators at the selected **Site**.

E. The interface SHALL provide a ****Participant** ID** search input that filters the displayed Audit Log Entries by ****Participant** ID** in real time.

Rationale

CRA's perform *Site* monitoring — verifying that *Study Coordinator* activity at a specific *Site* is compliant and consistent with protocol. The single-*Site* scope makes the unit of monitoring explicit (a CRA reviews one *Site* at a time, not their entire assignment portfolio in a single view), the *Site* name in the header keeps the active scope visible, and the Coordinator selector with an “all Coordinators” default supports both audit-wide review and Coordinator-specific drill-down without forcing the CRA to apply filters manually. The *Participant* ID search supports the same per-*Participant* investigation pattern the *Study Coordinator* view supports, but scoped to the *Site* under review.

4.5.4 Administrator Audit Log View

REQ ID: DIARY-GUI-audit-log-administrator

Refines: DIARY-GUI-audit-log-common

Overview

The *Administrator* audit log view is presented as a dedicated tab inside the *Administrator* dashboard, alongside the *User* Account management tab where *Administrator* actions originate.

Assertions

A. The interface SHALL present the **Administrator Audit Log View** on a dedicated tab within the **Administrator** dashboard, alongside the ****User** Account** management tab.

Rationale

Administrator actions are scoped to *User* Account management; placing the audit log view on the same dashboard as the *User* Account management surface keeps the *Administrator*'s investigative loop tight — review an account, switch to the audit tab, inspect the history of changes to that account, switch back. A separate top-level audit log surface would force navigation away from the *Administrator*'s working context for what is fundamentally an inline review activity.

4.6 Notification Behavior

4.6.1 Notification Behavior

REQ ID: DIARY-PRD-notification-behavior

Overview

This section defines system-wide standards for **Push Notifications** delivered by the **Mobile Application** to the **Participant**'s device. The standards defined herein apply to all notifications generated by the **Mobile Application** and shall not be restated within individual notification requirements.

Push Notifications delivered by the **Mobile Application** serve as nudges that prompt the **Participant** to open the application.

Definitions

Push Notification: A notification delivered by the **Mobile Application** to the **Participant**'s device notification center via the operating system's notification service.

Tap Behavior

Assertions

A. When the **Participant** taps a **Push Notification** delivered by the **Mobile Application**, the System SHALL open the **Mobile Application** to the **Main Screen**.

B. The System SHALL NOT include response actions within the body of a **Push Notification**.

Offline Delivery

C. When the **Mobile Application** is offline at the time a **Push Notification** is generated, the System SHALL deliver the **Push Notification** when the **Mobile Application** next establishes connectivity.

Rationale

Push notifications in the *Diary* Platform are nudges, not interaction surfaces: their job is to bring the *Participant* back into the app, where the full clinical context, validation, and *Audit Trail* are available. Two consequences follow. First, tapping a notification always opens the **Main Screen** — never a deep link into a partial workflow — so the *Participant* resumes from a known, audit-traceable starting point. Second, the platform never offers response actions inside the notification body (e.g. “Submit answer”, “Acknowledge”), because actions taken without the in-app context bypass authentication, validation, and the data-attribution evidence chain. Offline delivery semantics ensure that a notification generated while the device is disconnected is not dropped; the operating system’s deferred-delivery mechanism is sufficient for the nudge purpose and avoids the complexity of an app-level re-notification scheduler.

4.7 Help and Resources

4.7.1 Help and Resources

REQ ID: DIARY-PRD-help-resources

Overview

The ****Sponsor** Portal** provides users with access to in-portal help materials including video tutorials, frequently asked questions, an interactive guided tour, and a downloadable *User* guide. The materials surfaced are *Role*-aware so that each *User* is presented with content relevant to their responsibilities. The detailed inventory of materials, tour content, and FAQ entries is maintained in internal documentation; this requirement defines only the platform-level expectation that the help affordance exists and is available to all ****Sponsor** Portal** roles.

Definitions

Help and Resources: The collection of in-portal help materials available to ****Sponsor** Portal** users, comprising video tutorials, frequently asked questions, an Interactive Tour, and a downloadable *User* guide.

Interactive Tour: A guided walkthrough of the ****Sponsor** Portal** interface presented to a *User* on first login and replayable on demand from **Help and Resources**.

Availability

Assertions

A. The **System** SHALL make **Help and Resources** available to every **Administrator**, **Clinical Research Associate**, and **Study Coordinator** from any screen of the ****Sponsor** Portal**.

Content

B. The **System** SHALL present **Help and Resources** content scoped to the *User*'s active **Role**.

C. **Help and Resources** SHALL include video tutorials, frequently asked questions, the **Interactive Tour**, and a downloadable *User* guide.

Interactive Tour

D. The **System** SHALL present the **Interactive Tour** to a *User* on their first successful login to the ****Sponsor** Portal**.

E. The **System** SHALL allow a *User* to replay the **Interactive Tour** on demand from **Help and Resources**.

Rationale

Clinical staff using the ****Sponsor** Portal** are not full-time users of the system — they engage with it intermittently during their *Participant*-facing workday. In-portal, always-available help is essential to keep training overhead low and to support correct use without external documentation lookups. *Role*-aware content keeps each *User*'s help surface focused on what they can actually do (a *Study Coordinator* should not have to filter through *Administrator* topics, and vice versa). The **Interactive Tour** on first login bootstraps new

users into the portal's primary surfaces; replayability supports occasional refreshers without rerunning onboarding. This requirement deliberately defines only the affordance and the major content categories — the precise tour script, FAQ entries, and tutorial inventory are operational artifacts maintained in internal documentation, since they evolve continuously with the product.

4.8 Configuration

4.8.1 Configuration Precedence

REQ ID: DIARY-PRD-configuration-precedence

Overview

The platform defines a baseline set of behaviors and default values that apply to every deployment. Each *Sponsor* deployment may, where the platform requirement explicitly permits configuration, override those defaults with values appropriate to that study's protocol. This requirement establishes the precedence rule that resolves any apparent conflict between a platform requirement and a *Sponsor* configuration: when both apply to the same behavior, the *Sponsor* configuration governs. The rule is structural — it ensures that *Sponsor*-specific values such as thresholds, reason lists, reminder times, and enabled features take effect deterministically without requiring each individual platform requirement to restate the precedence relationship. The rule applies only within the bounds set by the platform requirement itself; *Sponsor* configuration cannot grant capabilities the platform does not expose, and cannot override platform behavior that is not declared as configurable.

Definitions

Platform Requirement: A requirement that defines behavior, structure, or default values applicable to every deployment of the **System**. Identified by a requirement ID of the form REQ-pXXXXX or GUI-pXXXXX.

****Sponsor** Configuration Requirement: **A requirement that specifies the values applied to a configurable parameter exposed by a Platform Requirement**** for a specific *Sponsor* deployment. Identified by a requirement ID of the form REQ-CAL-pXXXXX for the *Sponsor*-specific deployment, with analogous prefixes for other deployments.

Configurable Parameter: A value, threshold, list, label, enablement flag, or option that a **Platform Requirement** explicitly declares as configurable per deployment.

Configuration Conflict: A state in which a ****Sponsor** Configuration Requirement** specifies a value for a **Configurable Parameter** that differs from the default value or behavior described in the corresponding **Platform Requirement**.

Assertions

A. The **System** SHALL apply the value specified in a ****Sponsor** Configuration Requirement** in place of the default value or behavior described in the corresponding **Platform Requirement** when a **Configuration Conflict** exists.

B. The **System** SHALL apply a ****Sponsor** Configuration Requirement** only to a **Configurable Parameter** that is explicitly declared as configurable by a **Platform Requirement**.

C. The **System** SHALL NOT permit a ****Sponsor** Configuration Requirement** to override behavior of a **Platform Requirement** that is not declared as configurable.

D. The **System** SHALL NOT permit a ****Sponsor** Configuration Requirement** to grant a capability that is not defined by a **Platform Requirement**.

E. When no ****Sponsor** Configuration Requirement** exists for a given **Configurable Parameter**, the **System** SHALL apply the default value or behavior described in the corresponding **Platform Requirement**.

F. When a **Platform Requirement** specifies that a behavior takes effect only if a corresponding **Configurable Parameter** is configured, and no ****Sponsor** Configuration Requirement** configures it, the **System** SHALL NOT apply that behavior.

Rationale

A multi-*Sponsor* platform must absorb deployment-specific differences (reason lists, reminder cadences, lock thresholds, enabled feature flags) without forking the codebase or rewriting platform requirements per *Sponsor*. The conventional pattern — a single config file silently overrides defaults — is unsuitable for an FDA-regulated platform because it loses traceability: when a behavior is wrong in production, the auditor cannot reconstruct from the requirements which value the *Sponsor* actually configured and why. This requirement encodes a structural precedence rule so every *Sponsor* overlay (REQ-CAL-pXXXXX and equivalents) becomes a first-class, citable artifact. The two-way containment — *Sponsor* configuration cannot exceed the platform's exposed configurability, and cannot grant capabilities the platform does not implement — keeps the platform requirements authoritative for the set of behaviors that exist at all, and keeps *Sponsor* requirements authoritative for the specific values within that set. The absence-of-configuration rules (E, F) make the default-vs-opt-in semantics explicit so that a missing *Sponsor* requirement is never ambiguous.

PRODUCT REQUIREMENTS

5.1 Administration

The *Sponsor* Portal supports the full ******User** Account**** lifecycle: creation, activation, *Site* assignment, activation-email resend, edit, *Deactivation*, and reactivation. A consistent *User*-management interface — tabs, modals, the *Administrator* Dashboard, and the shared **Reason Field Constraints** that govern every free-text reason input — exposes these capabilities to the *Administrator Role*.

5.1.1 Create User Account

REQ ID: DIARY-PRD-user-account-create

Overview

This requirement defines the minimum identity and authorization data the **System** captures when an **Administrator** creates a new ******User** Account****. Subsequent requirements in this file refine activation, *Site* assignment, edits, and lifecycle transitions on the account established here.

User Account

User Account The complete set of identity, credential, and authorization data that the **Sponsor Portal** maintains for a single human user.

Full Name

Full Name A common name, which is **PII**, of the person associated with a **User Account** that identifies a specific individual in the context of the **Sponsor Portal**.

Email Address

Email Address A unique technical identifier used as a destination for system notifications and as a username for authentication to access the system.

Assertions

- A.** The **System** SHALL require a **Full Name**, **Email Address**, at least one **Role**, and — for non-**Administrator** accounts — at least one **Site** to be selected before a ******User** Account**** is created.
- B.** The **System** SHALL validate the format of the *Email Address* provided (e.g., presence of an “@” symbol).
- C.** The **System** SHALL allow assignment of the **Administrator**, **CRA** and **Study Coordinator Role** during *User Account* creation.

Rationale

A ******User** Account**** is the unit of authorization and audit attribution in the ******Sponsor** Portal**: **every *Action* recorded in the *Audit Trail* is bound to the account that performed it, and every permission check resolves against the account’s assigned roles and Sites. Requiring Full Name, Email Address**, *Role*, and (for non-Administrators) at least one *Site* at creation time ensures the account is fully addressable, fully scoped, and fully attributable from the moment it exists; partial accounts that lack one of these fields would either be unable to receive activation email, unable to participate in audit reporting, or unable to be authorized for any operation. Validating the email format at the creation boundary catches obvious typos before the activation flow consumes an invalid address.**

5.1.2 Account Activation Workflow

REQ ID: DIARY-PRD-user-account-activation-workflow

Refines: DIARY-PRD-user-account-create

Overview

The account activation process starts when a ******User** Account**** is created, reactivated, or when an activation email is sent again. Activation links are time-limited and can only be used once, which helps protect account security. A *User* cannot access the system until their account has been successfully activated.

Verification Link

Verification Link A unique, time-limited, single-use secured URL delivered to an email address to confirm that the recipient controls that address.

Activation Webpage

Activation Webpage A **Verification Link** associated with a **User Account** that provides a mechanism for the **Account Owner** to activate their account and configure their password and 2FA.

Account States

Assertions

A. When the status of the *****User** Account*** is **Pending Activation**, the *User* SHALL NOT be able to access the system.

Activation Webpage Lifecycle

B. When a *****User** Account*** is set to **Pending Activation**, the **System** SHALL create a unique **Activation Webpage** for that *****User** Account***.

C. When an **Activation Webpage** is created, the **System** SHALL deliver it to the associated *****User** Account*** owner's registered **Email Address**. The username of the *User* is the **Email Address** that has been entered during *User* creation.

D. When a *****User** Account*** owner has activated their account and configured a valid *Password* and 2FA, the **System** SHALL set its status to **Active**.

Email Address Verification Lifecycle

E. When an **Administrator** updates the *Email Address* of a *User*, a new **Verification Link** is generated and sent to that updated *Email Address*. When the **Verification Link** is used, the **System** SHALL replace the previous **Email Address** with the new **Email Address** as the *****User** Account***'s username.

Verification Link Behavior

F. When a **Verification Link** is used or 14 days have passed from generation, whichever occurs first, the **System** SHALL invalidate the **Verification Link**.

G. When a new **Verification Link** is issued for a *****User** Account*, the *System*** SHALL invalidate any previously issued **Verification Link** for that *****User** Account***.

Rejection Behavior

H. When a *User* attempts to access an invalidated **Verification Link**, the **System** SHALL reject the attempt and display the following message: “This link is no longer valid. Please contact your *Administrator* to request a new activation email.”

Rationale

Account activation is the boundary at which a candidate ******User** Account**** (created or restored by an *Administrator*) becomes a credentialed account that can authenticate. Two security properties are essential at this boundary: control of the registered *Email Address* (verified by delivering a single-use link to that address), and a bounded window in which the verification holds (14 days). Single-use enforcement prevents the link from being replayed if it leaks; expiry caps the window during which a stolen or stale link could be exploited; invalidating prior links when a new one is issued ensures that resend operations do not leave multiple valid paths open simultaneously. The mid-lifecycle email-update path uses the same verification mechanism so that an *Administrator*-initiated address change cannot redirect login to an address the *User* does not control. The rejection message is deliberately generic — it directs the *User* to the *Administrator* without disclosing whether the underlying account exists, which preserves *User*-enumeration resistance.

5.1.3 Site Assignment

REQ ID: DIARY-PRD-user-account-site-assignment

Refines: DIARY-PRD-user-account-create

Overview

Sites are managed in **Rave EDC**. The portal displays **Sites** for assignment purposes only and does not allow modification, to maintain data integrity. Near real-time synchronization ensures that the *Site* list reflects the data within **Rave EDC** at all times.

Site

Site A clinical research location authorized by the Sponsor to enroll **Participants** and conduct trial activities. Each **Site** is uniquely identified and synchronized from **Rave EDC**.

Assertions

- A. The system SHALL include only **Sites** that are created in **Rave EDC**.
- B. The system SHALL refresh the list of valid **Sites** each time an **Administrator** logs in.
- C. An **Administrator** SHALL have access to all **Sites**.
- D. The system SHALL allow an **Administrator** to assign any **Site** to a ****User** Account**.

Rationale

Sites are clinical *Trial* entities owned by the EDC system of record, not by the portal; replicating *Site* authorship in the portal would create a divergent inventory and break the EDC-to-portal data-integrity contract. The portal therefore reads the *Site* list and never edits it, refreshing on *Administrator* login so that newly-created *Sites* are available promptly for assignment without requiring an explicit sync *Action*. Administrators are granted study-wide *Site* visibility because their accountability for ****User** Account** lifecycle requires they be able to assign any *Site* to any account; restricting Administrators to a *Site* subset would block legitimate account configuration and create operational deadlocks during staff onboarding.

5.1.4 Resend Activation Email

REQ ID: DIARY-PRD-user-account-activation-resend

Refines: DIARY-PRD-user-account-activation-workflow

Overview

A *User* may not receive or may lose their activation email before completing setup. Re-sending generates a new **Activation Webpage** and invalidates the previous one, ensuring only one valid link exists at any time.

Assertions

- A. While the status of the ****User** Account** is **Pending Activation**, the system SHALL allow the **Administrator** to resend a new activation email.
- B. The system SHALL NOT impose a limit on the number of resend attempts for a **Pending Activation** ****User** Account**.

C. When an activation email is resent, the system SHALL create a new **Activation Webpage** for that ****User** Account** and invalidate the previous one.

Rationale

The activation email is the only delivery channel for the **Activation Webpage**, and legitimate failure modes (spam filtering, address typos surfaced after creation, transient email infrastructure issues) are common. Allowing unlimited resends keeps the recovery path open for the *Administrator* without requiring an escalation channel; the resend operation is itself audited and rate-limited only by the *Administrator*'s manual cadence, so abuse potential is low. Invalidating the previous link on each resend keeps the single-valid-link invariant from the parent activation workflow intact: at most one **Verification Link** exists per ****User** Account** at any moment, regardless of how many times the activation email has been resent.

5.1.5 Edit User Account

REQ ID: DIARY-PRD-user-account-edit

Refines: DIARY-PRD-user-account-create

Overview

This functionality allows *User* access to be updated as roles or responsibilities change. If access is removed or changed, the *User* is immediately logged out by the system to prevent access to information they should no longer see. When an *Email Address* is updated, the new one must be verified by the *User* again before using their *User* account.

Assertions

- A. The **System** SHALL allow an **Administrator** to edit any ****User** Account** other than their own.
- B. The **System** SHALL require at least one **Role** for non-**Administrator** users.
- C. The **System** SHALL require at least one **Site** for non-**Administrator** users.
- D. The **System** SHALL validate **Email Address** uniqueness across all existing ****User** Accounts**.
- E. When an **Administrator** changes a ****User** Account's **Role**** or **Site**, the **System** SHALL enforce the change immediately.

F. When an **Administrator** changes a ******User** Account's** Email Address, **the System**** SHALL deliver a **Verification Link** to the new **Email Address**.

G. When an **Administrator** initiates an **Email Address** change, the **System** SHALL notify the ******User** Account**** owner at the original **Email Address** that a change has been initiated.

Rationale

User edits encode three risks the platform contains structurally. First, an *Administrator* editing their own account could escalate privilege or remove their own *Deactivation* safeguard; prohibiting self-edit closes that channel. Second, *Role* or *Site* changes that take effect on the next login leave a window in which a *User* retains stale authorization; enforcing the change immediately collapses that window. Third, an email change is effectively a credential change (the email is the username and the activation channel), so the new address must be verified by the same mechanism used at account creation, and the prior address must be notified so that an unauthorized change initiated against an unattended *Administrator Session* is visible to the legitimate account owner.

5.1.6 Deactivate User Account

REQ ID: DIARY-PRD-user-account-deactivate

Refines: DIARY-PRD-user-account-create

Overview

Deactivation is the *Action* of revoking a ******User** Account****'s ability to access the system without permanently removing the account or its associated data. A deactivated account retains all historical data and *Audit Trail* but cannot be used to log in or maintain active sessions.

Deactivation

Deactivation The action of revoking a **User Account**'s ability to access the system without permanently removing the account or its associated data. A deactivated account retains all historical data and **Audit Trail** but cannot be used to log in or maintain active sessions.

Assertions

- A. The System SHALL allow the *Administrator* to deactivate any ****User** Account** except their own.
- B. The System SHALL terminate all active sessions associated with a ****User** Account** immediately upon **Deactivation**.
- C. The System SHALL prevent login to a deactivated ****User** Account**.
- D. The System SHALL preserve all data and **Audit Trail** associated with a deactivated ****User** Account**.
- E. The System SHALL set the status of a deactivated ****User** Account** to **Deactivated**.
- F. When an **Administrator** deactivates a ****User** Account, the System** SHALL require a free text reason before applying the change. The reason SHALL be captured in the *Audit Trail*.

Rationale

Deactivation is the standard off-boarding mechanism for users who should no longer access the system — completion of a study assignment, *Role* change off the study, departure from the *Sponsor* or *Site* organization. Retaining the account record and its full **Audit Trail** is required by *FDA 21 CFR Part 11*: every historical *Action* attributed to that account must remain auditable indefinitely, even after the account is no longer usable. Terminating active sessions immediately is necessary because any *Session* in flight at *Deactivation* time was authenticated under the about-to-be-revoked credentials and must be invalidated to honor the access decision. Prohibiting self-*Deactivation* closes a denial-of-service vector against the *Administrator* workforce (an *Administrator* deactivating themselves and leaving no other active *Administrator* could lock out the deployment). The free-text reason is captured to support audit reviews of why each account was deactivated.

5.1.7 Reactivate User Account

REQ ID: DIARY-PRD-user-account-reactivate

Refines: DIARY-PRD-user-account-deactivate

Assertions

- A. The System SHALL support reactivation of any deactivated ****User** Account**.
- B. When a ****User** Account** is reactivated, the system SHALL restore all previously assigned roles and **Site** assignments.

C. Upon reactivation, the status of the ******User** Account**** SHALL be set to **Pending Activation** state.

D. When an **Administrator** reactivates a ******User** Account**, **the System**** SHALL require a free text reason before applying the change. The reason SHALL be captured in the *Audit Trail*.

Rationale

Reactivation is the inverse of *Deactivation* and serves the case where a previously off-boarded *User* resumes a *Role* on the study — a returning *Study Coordinator*, an *Administrator* restored after a leave of absence. Restoring previously assigned roles and **Site** assignments is the operational expectation: the reactivation event is logically “this same person, same responsibilities, again”, not a fresh account creation. Routing the reactivated account through **Pending Activation** rather than directly to **Active** is a security floor: the *User* must complete a fresh activation flow, which proves they still control the registered *Email Address* and produces a current credential (*Password*, 2FA) rather than reviving stale credentials that may have been compromised during the deactivated interval. The free-text reason is captured for the same audit purpose as *Deactivation*.

5.1.8 Reason Field Constraints

REQ ID: DIARY-PRD-reason-field-constraints

Overview

Where a reason is required before an *Action* proceeds, consistent input constraints ensure reasons are meaningful and auditable. Empty or whitespace-only submissions are rejected to ensure every high-impact *Action* is accompanied by a documented reason for compliance purposes. This requirement is the platform-wide template for free-text reason inputs and is referenced by every Reason Dialog (Free Text) defined elsewhere in the specification.

Assertions

A. Where the **System** requires a reason, the **System** SHALL reject a *Submission* where the reason is empty or contains only whitespace.

B. Where the **System** requires a reason, the **System** SHALL enforce a maximum input length of 100 characters.

Rationale

Free-text reason inputs accompany high-impact, irreversible actions (*Deactivation*, disconnection, mark-as-not-participating, record deletion) and are the principal narrative artifact the *Audit Trail* carries forward for those actions. Two failure modes degrade their audit value: empty or whitespace-only submissions (which let users bypass the reason requirement while passing the input control) and unbounded length (which lets users paste pages of irrelevant text that obscure the actual rationale). The whitespace rejection rule eliminates the former; the 100-character cap addresses the latter while still leaving room for a usefully descriptive sentence. Both constraints are platform-wide so reviewers see consistent reason-field behavior across every *Action* that requires one, and so the audit log's free-text field has predictable bounds.

5.1.9 User Management Tabs

REQ ID: DIARY-GUI-user-management-tabs

Refines:

- DIARY-PRD-user-account-create
- DIARY-PRD-user-account-edit

Overview

The *User* management interface separates active and inactive accounts into distinct tabs to reduce cognitive load and prevent accidental actions on the wrong account. Real-time search and preserved search state allow Administrators to work efficiently across tabs without losing context.

User Information Modal

User Information Modal A modal dialog displaying the details and available actions for a selected **User Account**.

Tab Display

Assertions

A. The interface SHALL display two tabs: Active Users and Inactive Users.

- B. The Active Users tab SHALL display all *User Accounts* with a status of Active or Pending Activation.
- C. The Inactive Users tab SHALL display all *User Accounts* with a status of Deactivated.
- D. The interface SHALL display the Active Users tab by default.
- E. The interface SHALL highlight the currently active tab.
- F. Each tab SHALL display the total count of *User Accounts* it contains inline with the tab label.
- G. When a *User Account* status changes, the interface SHALL move the account to the appropriate tab immediately.

Search Behavior

- H. The interface SHALL provide a single search input that filters *User Accounts* by *Full Name* and *Email Address*.
- I. The interface SHALL update search results in real time as the *User* types.
- J. The interface SHALL preserve the search state when the *User* switches between tabs.

Empty State

- K. When a tab contains no *User Accounts* matching the current search, the interface SHALL display a message indicating no results were found.

Row Display

- L. The interface SHALL display each ****User** Account** as a row showing **Full Name**, **Email Address**, ****Role(s), **Assigned Sites**, and **Status**.
- M. Each ****User** Account** row SHALL be selectable and open the ****User** Information Modal**.
- N. The interface SHALL display a **Create User**** Action**.

Rationale

Active and inactive accounts are operationally distinct surfaces: actions available on one are not available on the other, and the most common *Administrator* error in unified lists is acting on an inactive account believing it was active. Splitting into two tabs makes the active/inactive distinction structural rather than visual, and immediate row-movement on

status change keeps each tab self-consistent without manual refresh. Real-time search across **Full Name** and **Email Address** matches the two identifiers Administrators use in practice (a *Full Name* supplied by someone reporting an issue, or an *Email Address* supplied by the *User* themselves). Preserving search state across tabs supports the recurring workflow of “search for a *User*, check Active, then check Inactive” without forcing the *Administrator* to retype the query. Row selection opens the ****User** Information Modal** rather than navigating away, so the table context remains visible behind the modal and consecutive lookups are quick.

5.1.10 Deactivate User Account

REQ ID: DIARY-GUI-user-account-deactivate

Refines: DIARY-PRD-user-account-deactivate

Overview

The *Deactivation Action* is available from the Active Users tab only, since deactivated accounts are no longer present there after the *Action* completes.

Availability

Assertions

A. The interface SHALL make the *Deactivation Action* available for every ****User** Account** displayed in the **Active Users** tab, with the exception of the current *User*’s own account.

Interaction Flow

B. When the *Deactivation Action* is initiated, the interface SHALL display the confirmation dialog and require a free text reason before proceeding.

C. The interface SHALL not allow the *Deactivation Action* to proceed until a reason has been provided.

D. If the *User* cancels the confirmation, the ****User** Account** will remain unchanged.

E. When *Deactivation* is confirmed, the interface SHALL move the ****User** Account** to the **Inactive Users** tab immediately.

Rationale

The *Deactivation* surface is anchored to the **Active Users** tab because that is where the *Administrator* finds candidates for *Deactivation*; offering the same *Action* from the Inactive Users tab would be either a no-op (the account is already deactivated) or a confusing alternative entry point. Excluding the *Administrator*'s own account from the *Action* list closes the self-*Deactivation* channel from the GUI side, complementing the PRD-level prohibition and making the unavailable state visible rather than producing a back-end rejection after the *Administrator* has invested in the workflow. Requiring the reason at the confirmation step rather than after the *Action* commits gives the *Administrator* a final opportunity to back out and ensures the reason is captured before any state change is applied.

5.1.11 Reactivate User Account

REQ ID: DIARY-GUI-user-account-reactivate

Refines: DIARY-PRD-user-account-reactivate

Overview

Reactivation is initiated from the Inactive Users tab and immediately returns the account to the Active Users tab with **Pending Activation** status, requiring the *User* to complete the activation workflow before regaining access.

Availability

Assertions

A. The interface SHALL make the reactivation *Action* available for every ******User** Account**** displayed in the **Inactive Users** tab.

Interaction Flow

B. When the reactivation *Action* is initiated, the interface SHALL display the confirmation dialog and require a free text reason before proceeding.

C. The interface SHALL NOT allow the reactivation *Action* to proceed until a reason has been provided.

D. If the *User* cancels the confirmation, the ******User** Account**** will remain unchanged.

E. When reactivation is confirmed, the interface SHALL move the ****User** Account** to the **Active Users** tab immediately with a status of **Pending Activation**.

Rationale

Reactivation is anchored to the **Inactive Users** tab to mirror the *Deactivation* pattern: the candidate set lives in the inactive tab, and the *Action* there is the only one available. Moving the account to the **Active Users** tab with **Pending Activation** status on confirmation makes the next-step responsibility (the *User* must complete the activation flow before logging in) immediately visible — the account is back in the active surface and its status badge communicates that login is gated on activation. The free-text reason is gathered at the same confirmation step as *Deactivation* for symmetry and to keep the *Audit Trail*'s reason fields populated for every reactivation event.

5.1.12 User Information Modal

REQ ID: DIARY-GUI-user-information-modal

Refines:

- DIARY-PRD-user-account-create
- DIARY-PRD-user-account-edit

Overview

The ****User** Information Modal** provides a summary view of a ****User** Account** and the primary actions available for that account. All account management actions are initiated from this modal.

Display

Assertions

A. The ****User** Information Modal** SHALL display the **Full Name**, **Email Address**, **Status**, assigned **Role(s)**, and **Site** assignments of the selected ****User** Account**.

B. The ****User** Information Modal** SHALL display every **Role** assigned to the ****User** Account**.

C. When the ****User** Account** is an **Administrator**, the interface SHALL indicate that the ****User** Account** has access to all **Sites**.

D. When the ******User** Account**** holds one or more non-**Administrator Roles**, the interface SHALL allow the viewer to select a single **Role** to scope the **Site** list.

E. When a **Role** is selected, the interface SHALL display only the ******Site(s)** assigned to the ******User** Account**** under that **Role**.

F. The interface SHALL display the total count of **Sites** assigned to the selected **Role**.

G. The interface SHALL display each **Site** entry using the **Site** identifier and **Site** name.

H. The interface SHALL indicate which **Role** is currently selected.

Actions

I. The ******User** Information Modal**** SHALL present an **Edit User**** Action**, a **Deactivate User**** Action**, and a **Close Action** for accounts displayed in the **Active Users** tab.

J. The ******User** Information Modal**** SHALL present a **Reactivate User**** Action** and a **Close Action** for accounts displayed in the **Inactive Users** tab.

K. The ******User** Information Modal**** SHALL NOT present a **Deactivate User**** Action** for the currently authenticated *User*'s own account.

L. When the *User* selects **Close**, the interface SHALL dismiss the modal without making any changes.

M. When the *User* selects **Edit User******, the interface SHALL open the edit workflow for that ******User** Account****.

Rationale

The ******User** Information Modal**** is the per-account hub: every lifecycle *Action* (edit, deactivate, reactivate) launches from here, and every account-related question (who, what *Role*, which *Sites*) is answered here. Scoping the *Site* list by *Role* addresses the multi-*Role* case directly — a *User* holding both *Study Coordinator* and *CRA* roles on overlapping but distinct *Site* sets is shown the correct subset for whichever *Role* context the *Administrator* is reasoning about. Surfacing **Sites** by *Role* rather than as a flat union prevents the inverse error in which an *Administrator* believes a *User* has *Study Coordinator* access at a *Site* that they actually have only as a *CRA*. Suppressing **Deactivate User****** on the current *User*'s own account mirrors the PRD-level self-*Deactivation* prohibition and the GUI-level *Active Users* tab rule, so the unavailable state is consistent across every surface a self-*Deactivation* attempt could originate from.

5.1.13 Administrator Dashboard

REQ ID: DIARY-GUI-administrator-dashboard

Overview

The ****Administrator** Dashboard** is the primary surface for an **Administrator** to manage ****User** Accounts** and review audit log activity. Organising the surface as a container with two top-level tabs separates ****User** Account** management from audit log review while keeping both areas reachable from a single entry point. The dashboard scaffolding defined here establishes the header, the top-level tab navigation, and the default landing tab; the contents of each tab are governed by the requirements referenced from those tabs.

Administrator Dashboard

Administrator Dashboard The default surface presented to an **Administrator** upon successful authentication to the **Sponsor Portal**, containing top-level navigation to **User Account** management and audit log review.

Header

Assertions

- A.** The interface SHALL display a header at the top of the ****Administrator** Dashboard** containing the ****Sponsor** Portal** name, the **Full Name** of the authenticated *User*, the *User's* active **Role**, a **Settings Action**, and a **Logout Action**.
- B.** The header SHALL remain visible on every screen of the ****Administrator** Dashboard**.
- C.** When the **Administrator** selects **Settings**, the interface SHALL navigate to the **Administrator Settings** surface defined in *Diary-GUI-Administrator-settings*.

Top-Level Tabs

- D.** The ****Administrator** Dashboard** SHALL display two top-level tabs: **Users** and **Audit Logs**.
- E.** The **Users** tab SHALL display the *User* Management interface defined in *Diary-GUI-User-management-tabs*.

F. The **Audit Logs** tab SHALL display the *Administrator* Audit Log View defined in *Diary-GUI-audit-log-Administrator*.

G. The interface SHALL display the **Users** tab by default upon login.

H. The interface SHALL display a visual indicator identifying the currently active top-level tab.

Logout

I. When the **Administrator** selects **Logout**, the **System** SHALL terminate the **Session** and return the **Administrator** to the **Sponsor** Portal login interface.

Rationale

The **Administrator** Dashboard consolidates the two responsibilities of the **Administrator Role** — **User** Account management and audit review — into adjacent tabs of a single surface so the *Administrator* can switch between investigating an account and reviewing the audit log without navigating away from a shared context. A persistent header keeps identity (who is logged in, in what *Role*), system context (which *Sponsor* Portal), settings access, and logout reachable from any screen of the dashboard, which is necessary because an *Administrator* may need to log out from any state without first navigating back to a landing page. Defaulting to the **Users** tab on login matches the most common *Administrator* entry point (open the dashboard to perform account actions); the Audit Logs tab is one click away when investigation is the goal.

5.3 Questionnaire Management

The platform's **Questionnaire** system rests on a clinical *Questionnaire* foundation, *Sponsor*-specific configuration surfaces, a controlled *Submission* gate that enforces approved structures, and change-control discipline that keeps questionnaires stable within a *Trial*.

5.3.1 Clinical Questionnaire System

REQ ID: DIARY-PRD-questionnaire-system

Overview

Clinical trials use structured questionnaires to collect reliable data in a consistent and compliant way. The questionnaires are carefully built to ensure accuracy and a good *Participant* experience. New questionnaires can be added as needed, and the content always comes from approved documents, not edited directly in the app. This requirement is the foundation that all other *Questionnaire*-handling requirements refine.

Questionnaire

Questionnaire A validated data collection instrument presented to a participant to capture self-reported clinical outcomes at protocol-defined points in a clinical trial.

Questionnaire Type

Questionnaire Type A named category of **Questionnaire**. Each **Questionnaire Type** is implemented as an individual coded component.

Trial Start

Trial Start The event that formally begins a participant's active trial participation. The trigger and label for **Trial Start** are sponsor-configurable.

Completion Status

Completion Status The current state of a **Questionnaire** instance for a given participant. Valid values are defined per **Questionnaire** workflow.

Diary Data Synchronization

Diary Data Synchronization The continuous transmission of participant diary entries from the participant's mobile application to the **Sponsor Portal** and **Rave EDC**.

Questionnaire Display Name

Questionnaire Display Name The participant-facing name of a **Questionnaire** as presented in the mobile application. Distinct from the instrument name used for internal identification and clinical reference.

Trial

Trial A clinical study conducted under a Sponsor's protocol in which **Participants** are enrolled to capture self-reported clinical outcomes through the **Mobile Application**. The **Trial** begins at **Trial Start**.

Questionnaire Registry

Assertions

- A.** The System SHALL allow implementation of multiple ******Questionnaire**** **Types****, each as an individual coded component.
- B.** The System SHALL track **Completion Status** for each **Questionnaire** instance.

Data Synchronization

- C.** The System SHALL activate ******Diary**** **Data Synchronization**** upon **Trial Start**.
- D.** The System SHALL deactivate ******Diary**** **Data Synchronization**** when a *Participant* is disconnected or is marked as Not Participating.

Configuration

- E.** The System SHALL support *Sponsor*-configurable configuration of the trigger and workflow that activates **Trial Start**.
- F.** Each **Questionnaire** SHALL have a ******Questionnaire**** **Display Name****.

Rationale

The *Questionnaire* subsystem is the principal source of *Trial*-grade clinical data in the platform, and its design choices reflect that *Role*. Implementing each ******Questionnaire**** **Type**** as an individual coded component is a defense against ad hoc clinical content: every *Questionnaire* that ships is a deliberate engineering artifact reviewed against an approved source document, not a configuration table that a *Sponsor* could edit without change control. **Completion Status** tracking is the foundation for the workflow rules that govern how a *Questionnaire* moves from sent to answered to finalized; without per-instance status the platform could not distinguish “answered but not finalized” from “answered and locked”, which is a clinical and regulatory distinction. **Trial Start** is the gate at which ******Diary**** **Data Synchronization**** activates because pre-*Trial Diary* data is *Participant*-private and must not be promoted to the *Sponsor* portal or *Rave EDC* until the

Sponsor has acknowledged that the *Participant* is in *Trial*; making the trigger *Sponsor*-configurable keeps the platform protocol-neutral.

5.3.2 Sponsor Questionnaire Configuration

REQ ID: DIARY-PRD-questionnaire-sponsor-configuration

Refines: DIARY-PRD-questionnaire-system

Overview

A configuration-driven approach allows the *Sponsor* to tailor *Questionnaire* behavior to their study protocol without requiring platform code changes, ensuring that mid-study modifications are managed deliberately and do not unintentionally affect data collection.

Assertions

- A.** The System SHALL support *Sponsor*-specific configuration of which **Questionnaires** are enabled per deployment.
- B.** The System SHALL support *Sponsor*-specific configuration of *Participant* reminder behavior for each enabled **Questionnaire**.
- C.** The System SHALL support *Sponsor*-specific configuration of the processing steps that occur between *Participant Submission* and **Rave EDC** synchronization for each **Questionnaire**.
- D.** The System SHALL support *Sponsor*-specific configuration of whether a *Participant* may edit their answers after *Submission* and under what conditions.
- E.** The System SHALL support *Sponsor*-specific configuration of which languages are enabled per **Questionnaire**.

Rationale

The five configuration axes named here — enablement, reminder behavior, post-*Submission* processing, post-*Submission* editability, and language — are the dimensions along which clinical protocols typically vary between sponsors using the same underlying **Questionnaire** Type****. Encoding them as *Sponsor* configuration rather than platform code keeps the platform's *Questionnaire* library stable across deployments while letting each *Sponsor* express the protocol-specific decisions that their IRB and operations teams require. The configuration approach is bounded — sponsors choose from the offered axes, they do not

edit *Questionnaire* content — which preserves the change-control discipline established in the foundation requirement.

5.3.3 Clinical Data Submission Control

REQ ID: DIARY-PRD-questionnaire-submission-control

Refines: DIARY-PRD-questionnaire-system

Overview

Clinical data integrity requires that the system only accepts data conforming to approved, predefined structures. A controlled registry of approved data collection instruments ensures that unrecognized or malformed data is rejected at the point of entry, supporting *Audit Trail* integrity and validation requirements under 21 CFR Part 11.

Assertions

- A.** The System SHALL maintain a controlled list of approved **Questionnaire** definitions.
- B.** The System SHALL reject any data *Submission* that does not conform to an approved **Questionnaire** definition.

Rationale

A clinical *Trial's* evidence chain begins at the data-ingest boundary: every *Submission* that reaches the *Sponsor* portal or **Rave EDC** must be traceable to an approved **Questionnaire** definition, because data that does not conform to a known instrument has no defensible interpretation and corrupts the *Trial's* analyzability. The controlled registry is the platform's enforcement point — submissions are matched against it at the point of entry and rejected if they do not conform, so malformed or unrecognized data never enters the data store. This is a structural prerequisite for 21 CFR Part 11 *Audit Trail* integrity: every data point in the *Audit Trail* must reference a definition that existed at the time the data was submitted.

5.3.4 Questionnaire Change Control

REQ ID: DIARY-PRD-questionnaire-change-control

Refines: DIARY-PRD-questionnaire-system

Overview

Questionnaires must stay the same throughout an active *Trial* so the data remain consistent and traceable. Any updates must follow a formal change process to protect the integrity of the system.

Assertions

A. The System SHALL use predefined **Questionnaires** for all clinical data collection.

B. The System SHALL NOT allow **Questionnaires** to be created, modified, or deleted during *Trial* operation. If any new **Questionnaire** is required, a new ******Questionnaire** Type**** will be implemented. Modifications for an existing **Questionnaire** will follow the process outlined in the below two assertions.

C. Changes to **Questionnaires** SHALL be subject to formal change control procedures before deployment.

D. The System SHALL maintain backward compatibility to allow viewing of data collected with previous **Questionnaire** versions.

Rationale

Mid-*Trial* **Questionnaire** changes would silently alter the meaning of the data being collected: a question reworded between Day 30 and Day 60 of a *Participant's* enrollment produces two non-comparable answer streams under the same instrument name. The change-control discipline encoded here prevents that class of error by treating every **Questionnaire** modification as a deliberate engineering act subject to review and approval. The new-*Questionnaire-Type* rule (rather than in-place edit) keeps the data semantics for any given ******Questionnaire** Type**** stable for the lifetime of any *Trial* that uses it. Backward-compatible viewing is essential because trials regularly span multiple **Questionnaire** versions when long-running studies adopt updated instruments part-way through; reviewers must be able to inspect historical data captured under the previous version without that data being silently re-interpreted under the new version's rules.

5.3.5 Start Trial Workflow

REQ ID: CAL-PRD-trial-start-workflow

Overview

Before the *Trial* is started, the *Diary* entries remain on the **Participant**'s device and are not transmitted to the ****Sponsor** Portal** or **Rave EDC**. This requirement defines the **Start Trial Action** that activates ****Diary** Data Synchronization** and gates the **NOSE HHT** and **HHT-QoL Questionnaires** for the Callisto deployment.

Start Trial

Start Trial The action available to a Study Coordinator for a participant with **Linked - Awaiting Start** status that activates **Diary Data Synchronization** and begins the participant's active trial participation.

Assertions

A. When a *Study Coordinator* confirms **Start Trial** for a *Participant* with **Linked - Awaiting Start** status, the System SHALL change the *Participant Status* to ****Trial** Active** and activate ****Diary** Data Synchronization**.

B. The System SHALL NOT activate ****Diary** Data Synchronization** for a *Participant* before **Start Trial** is confirmed.

C. The System SHALL NOT permit **NOSE HHT** or **HHT-QoL Questionnaires** to be sent to a *Participant* before **Start Trial** is confirmed.

Rationale

Start Trial is the boundary at which a **Participant** transitions from pre-*Trial* (their device is linked but their *Diary* data and clinical questionnaires remain device-local) to active *Trial* (their data flows to the ****Sponsor** Portal** and **Rave EDC**, and clinical questionnaires can be administered). Anchoring synchronization activation and clinical *Questionnaire* eligibility to a single, Study-Coordinator-confirmed event ensures that the *Trial*-active state is an explicit clinical decision rather than an emergent consequence of device linking. The gate on clinical *Questionnaire* delivery (**NOSE HHT** and **HHT-QoL**) is necessary because those questionnaires generate *Trial*-grade clinical data; sending them before **Start Trial** would either produce data with no *Trial* context or force a retroactive *Trial*-start backdate that the *Audit Trail* cannot defensibly represent.

5.3.6 Start Trial Workflow Interface

REQ ID: CAL-GUI-trial-start-workflow

Refines: CAL-PRD-trial-start-workflow

Assertions

- A.** The interface SHALL present a **Start Trial** button to the *Study Coordinator* in the *Action* column for participants with **Linked - Awaiting Start** status.
- B.** When the *Study Coordinator* selects **Start Trial**, the interface SHALL display a Confirmation Dialog.
- C.** The Confirmation Dialog SHALL present a **Send EQ** button and a cancel *Action*.
- D.** When the *Study Coordinator* selects **Send EQ**, the interface SHALL update the *Participant's* status to ******Trial** Active**** and replace the **Start Trial** button with a **Manage Questionnaires** button in the *Action* column.
- E.** If the *Study Coordinator* cancels the Confirmation Dialog, the *Participant's* status SHALL remain unchanged.

Rationale

The **Start Trial** button is placed in the *Action* column of the *Participant* row so it is reachable in a single click from the ******Participant** Dashboard**, **matching the daily workflow of a Study Coordinator who steps a series of newly-linked participants into Trial-active state. The Confirmation Dialog is gated by an explicit Send EQ** confirmation** rather than a yes/no toggle because the *Action* is consequential (it commits the **Participant** to clinical *Questionnaire* administration and *Trial*-grade data synchronization) and the labelling makes the next operational step (send the first clinical *Questionnaire*) visible. Replacing **Start Trial****** with **Manage Questionnaires** on confirmation is the visual cue that the **Participant** has moved into the *Trial*-active workflow and the next set of actions is the per-*Questionnaire* workflow.

5.3.7 NOSE HHT and HHT-QoL Questionnaire Workflow

REQ ID: CAL-PRD-nose-hht-qol-workflow

Overview

NOSE HHT and **HHT-QoL** questionnaires are administered to participants on Day 1 of each treatment **Cycle**. A *Study Coordinator* initiates each *Cycle* by sending the *Questionnaire(s)* to the **Participant's Mobile Application**. This requirement governs the per-*Questionnaire* workflow from send through *Finalization*.

Sending

Assertions

A. The System SHALL enforce a limit of one active **Questionnaire** per **Cycle** per ******Questionnaire** Type****.

B. When a **Questionnaire** fails to reach the *Participant's Mobile Application*, the System SHALL change its status to **Delivery Failed**.

C. After the first **Cycle** has been finalized, the System SHALL make the **Start Next Cycle****** available in place of **Send Now Action** for that ******Questionnaire** Type****.

Deleting

D. The System SHALL allow a *Study Coordinator* to call back a **Questionnaire** with **Sent**, **Delivery Failed** or **Ready to Review** status.

E. The System SHALL NOT allow a *Study Coordinator* to call back a **Questionnaire** when it is already completed by the *Participant* and finalized by the *Study Coordinator*.

Participant Completion

F. The System SHALL allow the *Participant* to edit their answers at any time before *Finalization* (i.e., while the **Questionnaire** has **Sent** or **Ready to Review** status). There is no limit on how many times a *Participant* may edit their answers.

G. When a *Participant* submits a **Questionnaire**, the System SHALL change its status to **Ready to Review**.

Site Visit Review

H. The System SHALL allow a *Study Coordinator* to review submitted **Questionnaire** answers before *Finalization*.

Finalizing

I. The System SHALL allow a *Study Coordinator* to finalize a **Questionnaire** with **Ready to Review** status.

J. Upon *Finalization*, the System SHALL lock the answers, calculate the **Questionnaire** score, and transmit answers to **Rave EDC**.

K. When the *Finalization* operation fails, the System SHALL automatically retry the operation in the background. The **Questionnaire** SHALL remain in **Ready to Review** status throughout.

L. While a *Finalization* retry is in progress, the System SHALL display the following message to the *Study Coordinator*: “*Submission* is taking longer than expected. The system is retrying. No *Action* is required.”

M. Upon successful *Finalization*, the System SHALL change the **Questionnaire** status to **Not Sent**.

Rationale

NOSE HHT and *HHT-QoL* are administered once per treatment **Cycle**, and the workflow encoded here reflects that cadence: at most one active **Questionnaire** per **Cycle** per **Type**, with the **Cycle** advancing only after *Finalization* completes. The send/edit/submit/review/finalize sequence mirrors the clinical workflow — the *Participant* fills out the instrument at home (with unlimited edits before *Submission* to support honest answer revision), the *Study Coordinator* reviews the submitted answers during a *Site* visit, and the Coordinator finalizes only after the review. *Finalization* is the locking event: it transmits to *Rave EDC*, calculates the score, and freezes the answers, after which call-back is no longer available. The retry-on-failure pattern with the *Participant*-facing message is operationally important because *Rave EDC* connectivity can be transient, and a failure during *Finalization* should not block the workflow or force the Coordinator to wait at the dialog. Returning the card to **Not Sent** on successful *Finalization* is the signal that the next **Cycle** can be initiated.

Follow-up — configurability: This requirement currently encodes the only option implemented in code. Future sponsors may require different rules; introduce a configurable seam (e.g. a parameter on the CAL-PRD-* parent, or a new platform-side template the CAL- REQ Satisfies) when the need arises. Until that seam exists, this REQ is normative for the Callisto deployment.

5.3.8 Manage Questionnaires Modal

REQ ID: CAL-GUI-manage-questionnaires-modal

Refines: CAL-PRD-nose-hht-qol-workflow

Questionnaire Card

Questionnaire Card The UI component displayed within the **Manage Questionnaires Modal** representing a single **Questionnaire Type** for a participant, showing its current status and available actions.

Select Starting Cycle Dialog

Select Starting Cycle Dialog The dialog displayed when a Study Coordinator selects **Send Now** for the first time for a given **Questionnaire Type**, allowing selection of the **Starting Cycle** before sending.

Modal

Assertions

- A.** The interface SHALL display the **Manage Questionnaires Modal** with the *Participant ID* in the modal header.
- B.** The interface SHALL display one **Questionnaire Card** per *****Questionnaire** Type***.
- C.** The interface SHALL present a close *Action* that dismisses the modal without making any changes.

Questionnaire Card — Display and Actions

D. Each **Questionnaire Card** SHALL display the *****Questionnaire** Type*** name and the current *****Questionnaire** Status*. **Date and time information SHALL be paired inline with the Cycle**** it describes (e.g., “Cycle 1 . Apr 24, 2026, 11:34 AM”), not as a standalone field.

E. The interface SHALL present *Cycle* information, **Status Badge** placement, and available actions on each **Questionnaire Card** according to the following table: | *Questionnaire Status* | *Cycle Fields Displayed* | *Status Badge Placement* | *Actions Available* | | — | — | — | — | | **Not Sent** — never sent | None | Below *****Questionnaire** Type*** name | **Send Now** | | **Not Sent** — after finalize or call back | **Finalized Cycle****** (with date), **Next Cycle****** | Inline with **Finalized Cycle****** row | **Start Next Cycle****** | | **Sent** | **Current Cycle****** | Inline with **Current Cycle****** row | **Call Back** (Trash icon) | | **Delivery Failed** | **Current Cycle****** | Inline with **Current Cycle****** row, with information icon | **Finalize**, **Call Back** (Trash icon) | | **Ready to Review** | **Current Cycle****** (with completion date) | Inline with **Current Cycle****** row | **Finalize**, **Call Back** (Trash icon) | | **Closed** | **Finalized Cycle****** (with date) | Inline with **Finalized Cycle****** row, as combined badge (“Closed . End of Treatment” or “Closed . End of Study”) | None |

Delete Interaction

F. When a *Study Coordinator* selects the call back (Trash icon) *Action*, the interface SHALL display a Reason Dialog — Free Text before proceeding.

G. When the *Study Coordinator* confirms the call back *Action*, the interface SHALL update the **Questionnaire Card** status to **Not Sent**.

H. When the *Study Coordinator* cancels the Reason Dialog, the **Questionnaire** SHALL remain unchanged.

Send Now

I. The **Send Now Action** is displayed only when the first **Questionnaire** of each ******Questionnaire** Type**** will be sent to the *Participant*. When a *Study Coordinator* selects **Send Now**, the interface SHALL display the **Select Starting Cycle Dialog**.

J. The **Select Starting Cycle Dialog** SHALL present a **Confirm and Send** button and a *Cancel Action*.

K. When the *Study Coordinator* confirms the **Select Starting Cycle Dialog**, the interface SHALL update the **Questionnaire Card** status to **Sent**.

L. If the *Study Coordinator* cancels the **Select Starting Cycle Dialog**, the **Questionnaire Card** SHALL remain unchanged.

Start Next Cycle

M. When a *Study Coordinator* selects **Start Next Cycle******, the interface SHALL update the **Questionnaire Card** status to **Sent** without displaying the **Select Starting Cycle Dialog**.

Delivery Failed Troubleshooting

N. When the ******Questionnaire** Status**** is **Delivery Failed**, the interface SHALL display an information icon adjacent to the **Status Badge**. When the *Study Coordinator* selects this icon, the interface SHALL display a **Troubleshooting Popover** with guidance on resolving delivery issues.

O. The **Troubleshooting Popover** SHALL dismiss when the *Study Coordinator* clicks outside its bounds or selects a close *Action* within it.

Rationale

The **Manage Questionnaires Modal** is the per-*Participant* control surface for the clinical *Questionnaire* workflow, and its design favors a card-per-type layout because the *Study Coordinator*'s mental model is "what is the state of *NOSE HHT* for this *Participant*, and what is the state of *HHT-QoL*?" rather than a flat list of every *Questionnaire* ever sent.

The status-driven *Action* table collapses the workflow's branch logic into a visible matrix: each status has exactly the actions it can take, no others appear, and the status badge sits next to the *Cycle* it describes so the **Cycle** context is never ambiguous. The *Select Starting Cycle** Dialog* appears only on the first send because that is the only moment at which the **Starting Cycle****** is a Coordinator choice — every subsequent *Cycle* is auto-incremented per CAL-PRD-questionnaire-cycle-tracking. The information-icon Troubleshooting Popover handles the **Delivery Failed** state inline without requiring a separate screen, because the Coordinator's diagnostic loop typically completes (try re-sending, check connectivity) without leaving the modal.

Follow-up — configurability: This requirement currently encodes the only option implemented in code. Future sponsors may require different rules; introduce a configurable seam (e.g. a parameter on the CAL-PRD-* parent, or a new platform-side template the CAL- REQ Satisfies) when the need arises. Until that seam exists, this REQ is normative for the Callisto deployment.

5.3.9 Questionnaire Finalization Workflow

REQ ID: CAL-GUI-questionnaire-finalization-workflow

Refines: CAL-PRD-nose-hht-qol-workflow

Finalization Dialog

Finalization Dialog The Confirmation Dialog displayed to the Study Coordinator when the **Finalize** button is selected, containing a **Cycle** dropdown for selecting the **Cycle** value before confirming finalization.

Finalization Dialog

Assertions

- A.** When a *Study Coordinator* selects **Finalize**, the interface SHALL display the **Finalization Dialog** containing a **Cycle** dropdown.
- B.** The **Cycle** dropdown SHALL present the following selectable options: the **Current Cycle**** N Day 1** value, **End of Treatment**, and **End of Study**.
- C.** The **Finalization Dialog** SHALL present a **Finalize Questionnaire****** button and a *Cancel Action*.

Finalization Outcomes

D. When the **Study Coordinator** finalizes the **Questionnaire** with a **Cycle N Day 1** value selected, the interface SHALL update the **Questionnaire Card** status to **Not Sent** and display the **Finalized Cycle****** (paired with the *Finalization* date and time) and the **Next Cycle****** on the card.

E. When the *Study Coordinator* finalized the **Questionnaire** with a **Terminal Cycle****** value (**End of Treatment** or **End of Study**) selected, the interface SHALL update the **Questionnaire Card** status to **Closed**, display the **Terminal Cycle****** value alongside the **Closed** status as a combined badge.

F. When the *Study Coordinator* cancels the **Finalization Dialog**, the **Questionnaire** SHALL remain unchanged.

G. When the **Study Coordinator** cancels the **Terminal Cycle Warning Dialog**, the **Questionnaire** SHALL remain unchanged and the **Study Coordinator** SHALL be returned to the **Finalization Dialog**.

Rationale

Finalization is the *Action* that locks a *Questionnaire*'s answers and commits its score to *Rave EDC*, and the **Finalization Dialog** captures the two pieces of information that must be set at lock time: the **Cycle** value being finalized and the Coordinator's confirmation. Presenting the **Current Cycle**** N Day 1** plus the two terminal options (**End of Treatment, End of Study**) covers every legitimate *Finalization* case — most cycles finalize to their own N Day 1, and the two terminal cases mark the **Participant's** endpoint for this ******Questionnaire** Type**. **The Terminal Cycle Warning Dialog (referenced as a cancel path here) exists because terminal Finalization is irreversible — no further Questionnaires** of this type can be sent — and warrants a confirmation step distinct from the standard Finalization confirmation.** Cancelling either dialog returns the **Questionnaire** to its prior state so the Coordinator can revisit the choice without unintended side effects.

Follow-up — configurability: This requirement currently encodes the only option implemented in code. Future sponsors may require different rules; introduce a configurable seam (e.g. a parameter on the CAL-PRD-* parent, or a new platform-side template the CAL- REQ Satisfies) when the need arises. Until that seam exists, this REQ is normative for the Callisto deployment.

5.3.10 Questionnaire Cycle Tracking

REQ ID: CAL-PRD-questionnaire-cycle-tracking

Refines: CAL-PRD-nose-hht-qol-workflow

Overview

Each *Questionnaire* must be traceable to a specific protocol **Cycle** for regulatory compliance and data integrity. Automatic *Cycle* incrementing reduces manual error. Because the protocol allows only one *Questionnaire* of each type per *Cycle*, no two completed questionnaires of the same type for a given *Participant* may share the same **Cycle** value. Some participants start the study using paper records, meaning their first electronic *Questionnaire* may not be *****Cycle*** 1 Day 1. **A Study Coordinator may select the starting Cycle when sending the first Questionnaire of each type. Cycle tracking is independent per Questionnaire Type**.**

Cycle

Cycle The protocol event identifier assigned to a **Questionnaire** representing the treatment cycle during which it was administered. Valid values are **Cycle N Day 1** (where N is a positive whole number), **End of Treatment**, and **End of Study**.

Current Cycle

Current Cycle The **Cycle** value assigned to the most recently sent **Questionnaire** of a given **Questionnaire Type** for a participant.

Finalized Cycle

Finalized Cycle The **Cycle** value of the most recently finalized **Questionnaire** of a given **Questionnaire Type** for a participant.

Next Cycle

Next Cycle The **Cycle** value that will be assigned when the next **Questionnaire** of that **Questionnaire Type** is sent. Always the next sequential **Cycle N Day 1** value following the **Finalized Cycle** (the **Finalized Cycle** N incremented by 1).

Starting Cycle

Starting Cycle The **Cycle** value assigned to the first **Questionnaire** of a given **Questionnaire Type** sent to a participant.

Terminal Cycle

Terminal Cycle A **Cycle** value of **End of Treatment** or **End of Study** indicating no further **Questionnaires** of that **Questionnaire Type** will be sent to the participant.

Cycle N Day 1

Cycle N Day 1 A **Cycle** value identifying the first day of the Nth treatment cycle, where N is a positive whole number (Cycle 1 Day 1, Cycle 2 Day 1, etc.).

Cycle Assignment

Assertions

- A. The System SHALL assign a **Cycle** value to each **Questionnaire** at the time it is sent.
- B. The System SHALL NOT allow two **Questionnaires** of the same ****Questionnaire** Type** for the same *Participant* to share the same **Cycle** value.
- C. When a *Study Coordinator* sends the first **Questionnaire** of a given ****Questionnaire** Type** to a *Participant*, the System SHALL require the *Study Coordinator* to select a **Starting Cycle****** before the **Questionnaire** is sent.
- D. For each subsequent **Questionnaire** of a given ****Questionnaire** Type, the System SHALL assign the Next **Cycle**** value automatically by incrementing the ****Cycle** N** value by 1.
- E. When a **Questionnaire** is called back before *Finalization*, the System SHALL reassign the same **Cycle** value to the next **Questionnaire** of that ****Questionnaire** Type** for that *Participant*.

Terminal Cycles

- F. When a **Questionnaire** is finalized with a **Terminal Cycle****** value, the System SHALL change the **Questionnaire** status to **Closed**.
- G. The System SHALL NOT allow a **Terminal Cycle****** value to be assigned to more than one **Questionnaire** of the same ****Questionnaire** Type** per *Participant*.
- H. When the **Questionnaire** status is **Closed**, the System SHALL NOT permit a new **Questionnaire** of that ****Questionnaire** Type** to be sent to that *Participant*.

Configuration

I. The System SHALL support per-*Sponsor* configuration request of whether *Cycle* tracking is enabled for a given deployment.

J. When *Cycle* tracking is enabled, the System SHALL support per-*Sponsor* configuration request of whether the *Study Coordinator* is required to select a **Starting Cycle****** when sending the first **Questionnaire** of a given *****Questionnaire*** *Type*** to a *Participant*.

K. When the **Starting Cycle****** selection is disabled, the System SHALL assign *****Cycle*** 1 Day 1** as the **Starting Cycle****** for all participants.

Rationale

The **Cycle** value is the protocol coordinate that lets *Rave EDC* and downstream analyses know which treatment *Cycle* a given **Questionnaire** answer corresponds to. Two **Questionnaires** of the same *****Questionnaire*** *Type*** sharing a **Cycle** value would break that coordinate (which *Cycle* did the *Participant* actually answer for?), so the uniqueness rule is structural rather than advisory. Automatic incrementing of **Next Cycle****** removes a category of manual data-entry error from the Coordinator's workflow; the **Starting Cycle****** Coordinator-selection at first-send accommodates the paper-then-electronic pattern in which the first electronic *Cycle* is not *Cycle* 1. Reassigning the same **Cycle** value to the next **Questionnaire** after a call-back preserves the protocol coordinate across the call-back/resend round-trip — the call-back is operationally an “undo and redo” rather than a “skip and advance”. Terminal cycles end the *****Questionnaire*** *Type*** stream for the **Participant**; uniqueness of terminal cycles per **Type** per **Participant** prevents the ambiguous case of two End-of-Treatment markers for the same instrument.

5.3.11 Questionnaire Session Resume and Timeout

REQ ID: CAL-PRD-questionnaire-session-resume-timeout

Refines: DIARY-PRD-questionnaire-session-timeout

Overview

Session resume, expiry behavior, state preservation, and clock semantics are defined by the platform-side DIARY-PRD-questionnaire-session-timeout requirement. This requirement specifies only the *Sponsor* portal-specific configuration values for the Callisto deployment.

Assertions

A. The **NOSE HHT** and **HHT-QoL** questionnaires SHALL be configured with a ******Session** Timeout**** of 30 minutes.

B. The **NOSE HHT** and **HHT-QoL** questionnaires SHALL be configured with a **Timeout Warning Notification** threshold of 5 minutes before expiry.

Rationale

The 30-minute ******Session** Timeout**** matches the typical clinical-portal completion time for the *NOSE HHT* and *HHT-QoL* instruments (10-20 minutes for a *Participant* working through the questions, with comfortable headroom for interruption). The 5-minute warning threshold gives the *Participant* enough time to either complete the *Session* or actively dismiss the warning before expiry without being so early that the warning becomes background noise. Both values are *Sponsor*-configurable at the platform level (DIARY-PRD-questionnaire-session-timeout); this Callisto overlay pins the specific values that the deployment is operating under.

5.4 Participant Workflows

The **Participant** lifecycle in the ******Sponsor** Portal**** is governed by linking-code generation and use, *Participant* registration, the link / disconnect / reconnect / mark-not-participating / reactivate workflows, and the ******Participant** Dashboard**** GUI through which the **Study Coordinator** operates them.

5.4.1 Linking Code Lifecycle Management

REQ ID: DIARY-PRD-linking-code-lifecycle

Overview

The **Mobile** Linking Code^{****} mechanism provides a secure, time-limited channel through which clinical staff can link a **Participant's** device to the ******Sponsor** Portal**** without requiring the **Participant** to authenticate directly. Single-use enforcement and unpredictability ensure that codes cannot be reused or guessed, while configurable expiry balances security with the practical time **Participants** need to complete the linking process.

Mobile Linking Code

Mobile Linking Code A unique, time-limited, single-use code generated by the **System** and provided to a **Participant** by clinical staff. The **Participant** enters the code in the **Mobile Application** to establish a connection between their device and the **Sponsor Portal**.

Participant Linking Code

Participant Linking Code The **Mobile Linking Code** that was used to establish the connection between a **Participant**'s device and the **Sponsor Portal**. Displayed for reference and troubleshooting purposes. Cannot be used to establish a new connection.

Generation

Assertions

- A.** When a *Study Coordinator* initiates the *Participant* linking workflow, the System SHALL generate a unique **Mobile Linking Code****** for that *Participant*.
- B.** The System SHALL generate each **Mobile Linking Code****** such that it cannot be predicted or derived from any other known value.
- C.** The System SHALL generate **Mobile Linking Codes** in a format that is short and alphanumeric to support easy communication to the *Participant*.

Expiry

- D.** The System SHALL expire a **Mobile Linking Code****** after a configurable duration from the time of generation.
- E.** When a new **Mobile Linking Code****** is generated for a *Participant*, the System SHALL immediately invalidate any previously active **Mobile Linking Code****** for that *Participant*.

Single-Use

- F.** The System SHALL invalidate a **Mobile Linking Code****** immediately upon successful use.

Rejection

G. The System SHALL reject any attempt to link using a **Mobile Linking Code****** that is expired, already used, or does not exist.

Visibility

H. The System SHALL retain the ****Participant** **Linking Code**** against the *Participant* record after successful use for reference and troubleshooting purposes.

Rationale

The **Mobile Linking Code****** is the bridge between two systems that otherwise do not share a credential surface: the ****Sponsor** Portal** (operated by clinical staff with managed accounts) and the **Mobile Application** (operated by a **Participant** with no account). Three properties are essential to that bridge. Unpredictability prevents a code from being guessed or derived in the gap between *Study Coordinator* generation and **Participant** entry. Single-use enforcement prevents a code that has been written down, photographed, or otherwise leaked from being replayed by a second device. Expiry caps the window during which a leaked or stale code can be used at all. Keeping the code short and alphanumeric is a usability requirement — clinical staff dictate codes to **Participants** over phone or in person, and codes that require strict capitalization or special characters fail in practice. Retaining the ****Participant** **Linking Code**** after use (under the ****Participant** **Linking Code**** definition rather than the active **Mobile Linking Code******) lets clinical staff confirm which code was used for troubleshooting and audit purposes, without that retention re-enabling use of the spent code.

5.4.2 Linking Code Lifecycle Configuration

REQ ID: CAL-PRD-linking-code-lifecycle-configuration

Refines: DIARY-PRD-linking-code-lifecycle

Assertions

A. The **Mobile Linking Code****** expiry duration SHALL be configured to 72 hours from the time of generation.

Rationale

The 72-hour expiry window balances two operational realities: a **Participant** may receive their **Mobile** Linking Code**** from clinical staff at a *Site* visit and then have several days before they next have the opportunity to install the **Mobile Application** and complete the linking process; and the longer a code remains valid the larger the window in which a leaked or photographed code could be misused. Three days is sufficient time for the common *Participant* onboarding cadence (clinic visit on Monday, home setup by Thursday) without leaving the code valid for a full week, which would exceed any plausible legitimate use window.

5.4.3 Participant Registration

REQ ID: DIARY-PRD-participant-registration

Overview

Clinical *Trial* portals require a defined mechanism for making **Participant** records available to clinical staff. The platform exposes this as a *Sponsor*-configurable hook; concrete bindings (e.g. **Rave EDC** synchronization) live in *Sponsor* overlay requirements.

Participant

Participant An individual whose **Mobile Application** has been linked to the **Sponsor Portal** for the purpose of clinical trial data collection. A **Participant** has been registered in the **Sponsor Portal** as a clinical trial subject.

Assertions

A. The System SHALL support a *Sponsor*-configurable mechanism for adding **Participant** records to the ****Sponsor** Portal**.

B. When a **Participant** record is added to the ****Sponsor** Portal, the System SHALL assign an initial Participant** status as defined by the *Sponsor* configuration.

Rationale

Participant records originate outside the ****Sponsor** Portal** in the systems that own clinical *Trial* enrollment (EDC, IRB-approved enrollment workflows). Modelling registration as a *Sponsor*-configurable mechanism rather than as a platform-fixed hook lets each

Sponsor wire the portal to the system of record they actually use, while keeping the platform's downstream workflows — linking, disconnection, *Finalization* — agnostic to the upstream source. The *Sponsor*-configurable initial status accommodates protocols that begin participants in different states (paper-then-electronic, electronic-from-day-one) without hard-coding a single starting point.

5.4.4 Participant Registration Configuration

REQ ID: CAL-PRD-participant-registration-configuration

Refines: DIARY-PRD-participant-registration

Overview

The *Sponsor* portal uses **Rave EDC** as the *Participant* registration source. Near real-time synchronization ensures that *Participant* records are available in the *****Sponsor*** Portal** as soon as they are created in **Rave EDC**, without requiring manual intervention from clinical staff.

Rave EDC

Rave EDC The electronic data capture system used by the portal as the authoritative source of participant and site records.

Participant ID

Participant ID The unique identifier assigned to a **Participant** in **Rave EDC** and synchronized to the **Sponsor Portal**. The **Participant ID** is the primary reference used to identify a **Participant** across the System.

Assertions

A. The System SHALL synchronize **Participant** records from **Rave EDC** to the *****Sponsor*** Portal** in near real-time.

B. The System SHALL synchronize the **Participant ID** and assigned **Site** for each **Participant** record.

C. When a **Participant** record is synchronized from **Rave EDC** for the first time, the System SHALL assign an initial **Participant** status of **Not Connected**.

D. The System SHALL NOT permit **Participant** records to be created, edited, or deleted manually in the ****Sponsor** Portal**.

Rationale

Rave EDC is the clinical system of record for the Callisto deployment, and binding the ****Sponsor** Portal's **Participant** registration to it preserves the single-source-of-truth property: every **Participant** in the portal corresponds to a *Rave EDC* enrollment, and the **Participant ID** carries the same value across both systems. Near real-time synchronization removes the operational delay that would otherwise force clinical staff to wait for a manual sync after enrollment. Initial **Not Connected** status reflects the lifecycle reality that EDC enrollment precedes device linking by hours or days; the portal-side **Not Connected** state is what makes the *Participant* a candidate for the **Link New Participant Workflow**. Prohibiting manual create/edit/delete in the portal closes the divergence risk: if portal-side authorship were allowed, the portal could hold records that **Rave EDC** does not, breaking the cross-system identity match.

5.4.5 Link New Participant Workflow

REQ ID: DIARY-PRD-participant-link-new

Overview

Linking connects a **Participant** record in the ****Sponsor** Portal** to the **Participant's Mobile Application**, enabling data synchronization and *Questionnaire* distribution. The workflow is initiated by clinical staff and completed by the **Participant** entering the **Mobile Linking Code****** in the **Mobile Application**.

Assertions

A. The System SHALL allow a *Study Coordinator* to initiate the linking workflow for a **Participant** with **Not Connected** status.

B. When a *Study Coordinator* initiates the linking workflow, the System SHALL generate a **Mobile Linking Code******.

C. When a **Participant** successfully enters a valid **Mobile Linking Code****** in the **Mobile Application** for the first time, the System SHALL link the **Participant's** device to the ****Sponsor** Portal**.

Rationale

The first-link workflow has two halves separated by a human-physical handoff: the *Study Coordinator* generates a **Mobile Linking Code****** in the portal, and the **Participant** enters that code in the **Mobile Application**. The platform's responsibilities are bounded by that handoff: the portal generates an unguessable, single-use code (per DIARY-PRD-linking-code-lifecycle) and accepts the corresponding entry on the mobile side. Gating the initiation on **Not Connected** status keeps the workflow's precondition explicit — a **Participant** record must exist (typically via the *Sponsor* registration mechanism) and must not already be linked. The first-time qualifier on the **Mobile Application** entry distinguishes initial linking from subsequent reconnection, which uses the same mechanism but a different workflow (DIARY-PRD-participant

5.4.6 Participant Disconnection Workflow

REQ ID: DIARY-PRD-participant-disconnection

Overview

Disconnection temporarily severs the link between a **Participant's** device and the ****Sponsor** Portal** without removing the **Participant** record or their historical data. Clinical staff may disconnect a **Participant** when there are issues with the device, technical problems, or other circumstances prevent normal *Trial* participation.

Assertions

- A.** The System SHALL allow a *Study Coordinator* to disconnect a **Participant** whose current status permits disconnection.
- B.** The System SHALL require a reason before disconnection is applied.
- C.** The System SHALL support *Sponsor*-configurable reason format for disconnection, either as a free text field or a predefined list.
- D.** The System SHALL preserve all **Participant** data and history upon disconnection.
- E.** When a **Participant** is disconnected, the System SHALL stop synchronizing data from the **Participant's Mobile Application** to the ****Sponsor** Portal**.
- F.** When a **Participant** is disconnected, *Sponsor*-specific rules SHALL remain applied to the **Participant's Mobile Application**.

Rationale

Disconnection sits between linking (the **Participant** is in *Trial*) and mark-as-not-participating (the **Participant** has left the *Trial*). It encodes the case where the link is operationally broken — a device fault, a connectivity issue, a temporary withdrawal — but the **Participant** is still expected to resume. Preserving all data and history is the audit-trail requirement; the disconnection event must not erase the historical record. Continuing to apply *Sponsor*-specific rules to the **Mobile Application** is the operational requirement; the **Participant** should still see locked records, validation rules, and *Questionnaire* restrictions that apply to their *Trial Role*, because they may reconnect at any time and the **Mobile Application** must not silently revert to personal-use behavior in the interim. The reason format is *Sponsor*-configurable because some sponsors require a controlled vocabulary for downstream analysis (CAL- overlay encodes one such list) while others want free-text capture.

5.4.7 Disconnection Reason Options

REQ ID: CAL-PRD-participant-disconnection-reason-options

Refines: DIARY-PRD-participant-disconnection

Assertions

- A. The disconnection reason SHALL be selected from a predefined list.
- B. The predefined disconnection reason options SHALL be: **Device Issues**, **Technical Issues**, and **Other**.

Rationale

The Callisto deployment elects the predefined-list option for disconnection reasons (over the free-text alternative the platform supports) because operational reporting at *Sponsor* and *Site* level benefits from a controlled vocabulary: trend analysis of disconnection causes requires categories that aggregate consistently across many disconnect events. The three categories cover the realistic distribution of disconnect causes — hardware faults (**Device Issues**), connectivity or software faults (**Technical Issues**), and the unavoidable residual (**Other**) — without forcing the *Study Coordinator* to guess between fine-grained distinctions that would not survive downstream aggregation anyway.

Follow-up — configurability: This requirement currently encodes the only option implemented in code. Future sponsors may require different rules; introduce a configurable seam (e.g. a parameter on the CAL-PRD-* parent, or

a new platform-side template the CAL- REQ Satisfies) when the need arises. Until that seam exists, this REQ is normative for the Callisto deployment.

5.4.8 Participant Reconnection Workflow

REQ ID: DIARY-PRD-participant-reconnection

Overview

Reconnection restores a disconnected **Participant's** link to the ****Sponsor** Portal, **enabling them to resume *Trial* participation. A new Mobile Linking Code**** is generated to ensure the previous invalidated code cannot be reused.

Assertions

- A.** The System SHALL allow a *Study Coordinator* to reconnect a **Participant** with **Disconnected** status.
- B.** The System SHALL require a reason before reconnection is applied.
- C.** The reconnection reason SHALL be captured via a **Reason Dialog — Free Text** by default and is *Sponsor*-configurable.
- D.** When reconnection is confirmed, the System SHALL generate a new **Mobile Linking Code******.
- E.** When a **Participant** successfully enters the new **Mobile Linking Code******, the System SHALL restore the **Participant's** link to the ****Sponsor** Portal**.
- F.** When a **Participant's** link is restored, the System SHALL synchronize all data recorded on the **Participant's Mobile Application** during the disconnected period to the ****Sponsor** Portal**.

Rationale

Reconnection re-uses the link-code mechanism deliberately: the same unguessable, single-use, time-bounded code that establishes a first link is also the credential that re-establishes one. Generating a fresh code (rather than re-issuing the original) closes any window in which a leaked or remembered code from the prior link could be exploited; the code that was originally used has long since been invalidated by the single-use rule, and the new code carries its own independent expiry. Synchronizing the disconnected-period data on

link restoration is the principal value of the disconnect/reconnect distinction over mark-as-not-participating: the **Participant** continued recording *Diary* entries locally while disconnected, and reconnection promotes that buffered data to the portal so the *Trial*'s clinical record is complete. The free-text reason default with *Sponsor* override matches the pattern used by disconnection.

5.4.9 Mark as Not Participating

REQ ID: DIARY-PRD-participant-mark-not-participating

Overview

A *Study Coordinator* may mark a **Participant** as not participating when they complete or withdraw from the *Trial*. This is distinct from disconnection — *Sponsor*-specific rules are no longer applied to the **Participant's Mobile Application** and the **Participant** is not expected to resume participation unless explicitly reactivated.

Assertions

- A.** The System SHALL allow a *Study Coordinator* to mark a **Participant** with **Disconnected** status as **Not Participating**.
- B.** The System SHALL require a reason before the *Action* is applied.
- C.** The System SHALL support *Sponsor*-configurable reason format for marking as not participating, either as a free text field or a predefined list.
- D.** When the *Action* is confirmed, the System SHALL stop applying *Sponsor*-specific rules to the **Participant's Mobile Application**.

Rationale

Mark-as-not-participating is the off-*Trial* state: the **Participant** has either completed the protocol or withdrawn, and the platform no longer needs to enforce *Trial*-specific rules against their device. Routing the *Action* through **Disconnected** as a precondition keeps the lifecycle linear (Linked → Disconnected → Not Participating) and prevents the case where a still-actively-linked device suddenly loses its *Trial* constraints without the Coordinator first severing the link. Removing *Sponsor*-specific rules from the **Mobile Application** lets a former **Participant** retain personal use of the app post-*Trial* without remaining subject to record-locking, validation thresholds, or reminder schedules that were specific

to their *Trial Role*. Reason capture mirrors disconnection's pattern, with the controlled-vocabulary case being more common for end-of-*Trial* reporting (CAL- overlay encodes the predefined list this deployment uses).

5.4.10 Mark as Not Participating Reason Options

REQ ID: CAL-PRD-participant-not-participating-reason-options

Refines: DIARY-PRD-participant-mark-not-participating

Assertions

- A.** The reason SHALL be selected from a predefined list.
- B.** The predefined reason options SHALL be: **Subject Withdrawal**, **Death**, **Protocol Treatment/Study Complete**, and **Other**.

Rationale

End-of-*Trial* reporting is sensitive to the categorical distinction between *Participant*-driven exit (**Subject Withdrawal**), *Participant* death (**Death**, which carries distinct safety-reporting implications), planned protocol completion (**Protocol Treatment/Study Complete**), and the residual case (**Other**). Encoding these as a predefined list ensures the *Audit Trail* and downstream analyses can aggregate exit reasons consistently and meet the reporting obligations Callisto's regulatory submissions depend on. The categories are exhaustive enough that **Other** should be rare; when it does occur, the *Audit Trail*'s free-text reason narrative carries the specific explanation alongside the categorical tag.

Follow-up — configurability: This requirement currently encodes the only option implemented in code. Future sponsors may require different rules; introduce a configurable seam (e.g. a parameter on the CAL-PRD-* parent, or a new platform-side template the CAL- REQ Satisfies) when the need arises. Until that seam exists, this REQ is normative for the Callisto deployment.

5.4.11 Reactivate Participant

REQ ID: DIARY-PRD-participant-reactivate

Overview

A *Study Coordinator* may reactivate a **Participant** who was incorrectly marked as not participating or who has re-enrolled in the *Trial*. Reactivation restores *Sponsor*-specific rules to the **Participant's Mobile Application** and makes the standard reconnection workflow available.

Assertions

- A. The System SHALL allow a *Study Coordinator* to reactivate a **Participant** with **Not Participating** status.
- B. The System SHALL require a free text reason before the *Action* is applied.
- C. When the *Action* is confirmed, the System SHALL re-apply *Sponsor*-specific rules to the **Participant's Mobile Application**.

Rationale

Reactivation is the inverse of mark-as-not-participating: the **Participant** is returning to active *Trial* status, and the platform must restore the *Trial*-specific rules that were lifted at off-*Trial* time. Routing reactivation back through the standard reconnection workflow (rather than skipping straight to ******Trial** Active**) **means the device-side link must be re-established through the same link-code mechanism used initially; this is both an audit affordance and a defense against reactivating a Participant**** whose device is no longer in their possession. The free-text reason captures the rationale for what is operationally an unusual event (Mark-as-Not-Participating is intended to be terminal); requiring the reason here gives the *Audit Trail* the context reviewers need to interpret the reactivation.

5.4.12 Participant Dashboard

REQ ID: DIARY-GUI-participant-dashboard

Overview

The ******Participant** Dashboard**** is the primary surface for clinical staff to manage *Participant* linking, *Trial* status, and questionnaires. It consists of a *Participant* list organised by tabs, a search input, and a ******Participant** Actions Modal**** accessible from each *Participant* row.

Participant Actions Modal

Participant Actions Modal A modal dialog displayed when a Study Coordinator selects a participant row, presenting the **Participant** ID and the secondary actions available for that participant's current status.

Tab Organization

Assertions

- A. The System SHALL organise participants into tabs based on their current **Participant** status.
- B. Each tab SHALL display a count of participants matching its status grouping.

Search

- C. The System SHALL provide a search input that filters participants by **Participant** ID.
- D. The search SHALL apply across all tabs regardless of the currently selected tab.
- E. The search SHALL support partial matching.
- F. The search SHALL update results in real time as the *User* types.
- G. When the search is active, each tab count SHALL update to reflect matching participants within that tab's status grouping.
- H. When no participants match the search, the **System** SHALL display the message "No results found."

Participant List

- I. The interface SHALL display the **Participant** ID, **Site**, current status as a **Status Badge**, and a primary *Action* in the *Action* column for each *Participant* row.
- J. The interface SHALL display the currently active tab with a visual indicator.
- K. When a **Participant**'s status changes, the interface SHALL move the *Participant* row to the appropriate tab immediately.

Participant Actions Modal

- L. The interface SHALL display the ****Participant** Actions Modal** when a *Study Coordinator* selects a *Participant* row.

M. The ****Participant** Actions Modal** SHALL display the **Participant** ID.

N. The interface SHALL present the actions available in the ****Participant** Actions Modal** according to the *Action* availability table.

Action Availability

O. The interface SHALL display the primary *Action* in the *Action* column and the secondary actions in the ****Participant** Actions Modal** according to the *Action* availability table defined in CAL-GUI-Participant-dashboard-configuration.

Rationale

The ****Participant** Dashboard** is the *Study Coordinator*'s daily working surface, and its design choices favor speed and accuracy over visual variety. Tab-by-status organisation keeps the candidate set for any given *Action* small and self-consistent — a Coordinator looking to disconnect a **Participant** finds them under the Active tab, never mixed with **Not Connected** rows. Cross-tab partial-match search supports the recurring “find this specific **Participant** ID” workflow without forcing the Coordinator to first guess which tab they live under. Tab counts that update with the search reflect the same scoping rule, so the Coordinator can see at a glance whether the search matched within each status grouping. Row selection opens the modal rather than navigating away because the dashboard context (other **Participants**, current tab, search state) must remain visible behind the modal for the common workflow of consecutive lookups.

5.4.13 Participant Dashboard Configuration

REQ ID: CAL-GUI-participant-dashboard-configuration

Refines: DIARY-GUI-participant-dashboard

Overview

This requirement defines the Callisto-specific configuration of the ****Participant** Dashboard** — the concrete tab set and the per-status *Action* availability table. The platform-side dashboard scaffolding (tabs, search, modal) is established by DIARY-GUI-participant-dashboard-configuration; this requirement specifies how the Callisto deployment fills it in.

Participant Summary

Participant Summary The participant list section of the **Sponsor Portal** dashboard displaying all participants across the Study Coordinator's assigned sites.

Tabs

Assertions

- A. The interface SHALL display three tabs: **Not Connected**, **Active**, and **Inactive**.
- B. The **Not Connected** tab SHALL display participants with status **Not Connected**, **Pending**, or **Expired**.
- C. The **Active** tab SHALL display participants with status **Linked - Awaiting Start** or ******Trial** Active****.
- D. The **Inactive** tab SHALL display participants with status **Disconnected** or **Not Participating**.
- E. The interface SHALL display the **Not Connected** tab by default.

Action Availability Table

F. The interface SHALL display the primary *Action* in the Primary *Action* column and the secondary actions in the ******Participant** Actions Modal**** according to the following table:

Status	Primary <i>Action</i> Column	<i>Participant</i> Actions Modal
Not Connected	Link <i>Participant</i>	Link <i>Participant</i> Pending Show <i>Linking Code</i> Show <i>Linking Code</i>
Expired	Regenerate Code	Regenerate Code Linked - Awaiting Start <i>Start Trial</i> Show <i>Linking Code</i> , Disconnect <i>Participant</i> ****Trial** Active** Manage Questionnaires Show <i>Linking Code</i> , Disconnect <i>Participant</i>
Disconnected	Reconnect <i>Participant</i>	Reconnect <i>Participant</i> , Mark as Not Participating, Show <i>Linking Code</i> Not Participating Reactivate <i>Participant</i> Reactivate <i>Participant</i> , Show <i>Linking Code</i>

Rationale

The three-tab structure (**Not Connected**, **Active**, **Inactive**) groups participants by operational phase rather than by individual status, which keeps the dashboard scannable as the *Participant* population grows: a *Study Coordinator* looking for a *Participant* who is “somewhere in onboarding” finds them under one tab without first guessing whether they are Pending, Expired, or Not Connected. The *Action* availability table is the operational core of the Coordinator's workflow — it encodes which actions are valid in which state, and the

primary-*Action* column makes the next-expected *Action* reachable in a single click for the common path.

Follow-up — configurability: This requirement currently encodes the only option implemented in code. Future sponsors may require different rules; introduce a configurable seam (e.g. a parameter on the CAL-PRD-* parent, or a new platform-side template the CAL- REQ Satisfies) when the need arises. Until that seam exists, this REQ is normative for the Callisto deployment.

5.4.14 Show Linking Code

REQ ID: DIARY-GUI-show-linking-code

Refines: DIARY-GUI-participant-dashboard

Overview

Show *Linking Code* is not a new *Action* — **Participant** linking-code visibility is already governed by the view-*Participant* permission. This requirement specifies how the ****Participant** Dashboard** surfaces that visibility as a pseudo-*Action* and what the interface displays when a *Study Coordinator* selects it.

Linking Code Display

Assertions

A. When a *Study Coordinator* selects Show *Linking Code* for a **Participant** with **Pending** status, the interface SHALL display the **Mobile** Linking Code**** with a Copy *Action* and a Save as PDF *Action*.

B. The Save as PDF *Action* SHALL generate a PDF containing the **Mobile** Linking Code**** and *Participant* instructions.

C. When a *Study Coordinator* selects Show *Linking Code* for a **Participant** with any status other than **Pending**, the interface SHALL display the ****Participant** **Linking Code****.

Rationale

Show *Linking Code* is a pseudo-*Action*: it does not change *Participant* state, it surfaces the existing view-*Participant* permission in a place the Coordinator already works. The split between **Mobile** Linking Code**** (Pending) and ****Participant** **Linking Code**** (every

other status) reflects the linking-code lifecycle — Pending participants need the active code to complete linking; everyone else gets the historical reference for troubleshooting per DIARY-PRD-linking-code-lifecycle assertion H. The Save-as-PDF affordance supports the common workflow of giving the *Participant* a physical copy of their *Linking Code* at a *Site* visit.

5.4.15 Link Participant Flow

REQ ID: DIARY-GUI-link-participant-flow

Refines: DIARY-GUI-participant-dashboard

Overview

This requirement declares the Link *Participant Action* (ACT-PAT-001) and specifies the dialog flow a *Study Coordinator* follows to issue a **Mobile Linking Code****** for a **Participant** in **Not Connected** status.

ACT-PAT-001 — Link Participant

ACT-PAT-001 — Link Participant The Action a Study Coordinator performs to issue a **Mobile Linking Code** for a **Participant** in **Not Connected** status, transitioning the **Participant** to **Pending**.

Link Participant Flow

Assertions

A. When a *Study Coordinator* selects Link *Participant*, the interface SHALL display a Confirmation Dialog showing the **Participant** ID and the configured **Mobile Linking Code****** expiry duration.

B. When the *Study Coordinator* confirms, the interface SHALL display an Acknowledgement Dialog showing the generated **Mobile Linking Code******, a Copy *Action*, and the remaining time until expiry.

C. When the *Study Coordinator* dismisses the Acknowledgement Dialog, the interface SHALL update the **Participant's Status Badge** to **Pending**.

Rationale

The Confirmation/Acknowledgement two-step captures both halves of what the Coordinator must accomplish in a single workflow: the Confirmation Dialog records the Coordinator's deliberate intent to issue a code (with the expiry duration shown so they can set *Participant* expectations), and the Acknowledgement Dialog gives the visible delivery of the generated code together with a Copy affordance and a live expiry timer. Splitting the two means the code is only generated after explicit confirmation, and the Coordinator cannot leave the dashboard without having seen the code at least once.

5.5 Sponsor Portal Authentication

****Sponsor** Portal** authentication comprises *Password* composition and reuse rules, two-factor authentication, forgot-*Password* recovery (PRD plus the workflow GUI), and *Session* management.

5.5.1 Password Requirements

REQ ID: DIARY-PRD-password-requirements

Password

Password A secret string of characters used to authenticate a user's identity when accessing the **System**.

Password Reuse Limit

Password Reuse Limit The configurable number of the user's most recent **Passwords** that a new **Password** must not match.

Assertions

- A.** The **System** SHALL require a **Password** to be a minimum of 12 characters in length.
- B.** The **System** SHALL require a **Password** to contain at least one uppercase letter, one lowercase letter, one numeric character, and one special character.
- C.** The **System** SHALL reject a **Password** that is commonly used or easily guessable as per NIST SP 800-63B commonly used *Password* list.

D. The **System** SHALL require a **Password** to be changed after 90 days, unless a different interval has been configured for the deployment.

E. The **System** SHALL prevent a *User* from accessing the **System** until their **Password** has been changed upon expiry.

F. The **System** SHALL reject a new **Password** that matches any of the *User*'s previous ******Password** Reuse Limit** Passwords**, where ******Password** Reuse Limit**** is configurable per deployment.

Rationale

The composition rules (length, character classes) and the common-*Password* rejection are baseline defenses against credential-guessing attacks: each rule independently raises the cost of a successful brute-force or dictionary attempt, and together they place the minimum acceptable *Password* well above the threshold at which automated attacks succeed against unprotected accounts. The NIST SP 800-63B reference is the authoritative source for the common-*Password* list and is named explicitly so the deployment can update the list as NIST updates its guidance. The 90-day expiry is a *Sponsor*-overridable default; the override exists because some *Sponsor* deployments operate under regulatory regimes that mandate a different interval. The reuse-limit rule prevents the common operator behavior of cycling between two passwords (defeats the purpose of expiry); making the limit configurable lets a deployment choose how aggressive its reuse defense should be.

5.5.2 Two-Factor Authentication

REQ ID: DIARY-PRD-two-factor-authentication

Overview

Two-Factor Authentication adds a second independent factor beyond the **Password** to prevent unauthorized access in the event of credential compromise. The platform supports configurable second factors so each *Sponsor* deployment can select the method that best fits its operational and regulatory context.

Second Factor

Second Factor The independent authentication factor required in addition to the **Password** during login. The specific method is sponsor-configurable per deployment.

Verification Code

Verification Code A single-use, time-limited code presented as the **Second Factor** during login.

Code Expiry

Code Expiry The configurable duration after which an unused **Verification Code** becomes invalid.

Enforcement

Assertions

A. The **System** SHALL require Two-Factor Authentication for every login to the ****Sponsor** Portal**.

B. The **System** SHALL NOT grant access to the ****Sponsor** Portal** until both the **Password** and a valid **Verification Code** have been successfully validated.

Verification Code Lifecycle

C. When a ****User** Account** owner submits a valid **Password**, the **System** SHALL generate a **Verification Code** and deliver it via the configured **Second Factor** method.

D. The **System** SHALL ensure each **Verification Code** is single-use and is invalidated immediately upon successful use.

E. When a **Verification Code** has not been used within the **Code Expiry** duration, the **System** SHALL invalidate the **Verification Code**.

F. When a **Verification Code** has been invalidated, the **System** SHALL require the ****User** Account** owner to restart the login process to receive a new **Verification Code**.

Configuration

G. The **System** SHALL support *Sponsor*-configurable selection of the **Second Factor** method per deployment.

H. The **System** SHALL support *Sponsor*-configurable **Code Expiry** per deployment.

Rationale

The single *Password* is no longer a sufficient credential for clinical *Trial* portal access: credential leakage from unrelated services, phishing, and shared-workstation compromise are all common, and any of them can hand an attacker a working *Password* without the *User* noticing. The *Second Factor* breaks that single-credential failure mode by requiring possession of an independent channel (email, authenticator app, or SMS, depending on *Sponsor* configuration) before access is granted. The **Verification Code** is single-use and time-limited because a code that survived either property would inherit the same replay vulnerability the *Second Factor* exists to prevent. *Sponsor*-configurability of the method and expiry duration recognises that the operational tradeoffs vary by deployment: a *Sponsor* with strict email infrastructure may choose a longer expiry; a *Sponsor* with authenticator-app adoption may choose a much shorter one.

5.5.3 Two-Factor Authentication Configuration

REQ ID: CAL-PRD-two-factor-authentication-configuration

Refines: DIARY-PRD-two-factor-authentication

Assertions

A. The **Second Factor** method SHALL be configured to email delivery to the *****User*** Account** owner's registered **Email Address**.

B. The **Code Expiry** SHALL be configured to 10 minutes.

Rationale

Email delivery of the **Verification Code** is the Callisto deployment's chosen **Second Factor** because the registered **Email Address** is already established as the authoritative communication channel for every *****User*** Account** (it is the activation channel, the *Password*-reset channel, and the username), and using it as the 2FA channel keeps the authentication surface coherent without introducing additional credential infrastructure (authenticator apps, SMS gateway). The 10-minute **Code Expiry** is short enough that a leaked code becomes useless quickly while long enough to absorb realistic email-delivery latency (typical clinical-environment email lag is under 2 minutes; the 10-minute window accommodates the long-tail cases).

5.5.4 Forgot Password

REQ ID: DIARY-PRD-password-forgot

Overview

A ****User** Account** owner who has forgotten their **Password** must be able to reset it without *Administrator* intervention. The reset mechanism uses a time-limited, single-use **Verification Link** delivered to the registered **Email Address** to confirm the requester controls the account.

Initiation

Assertions

- A. The **System** SHALL allow a ****User** Account** owner to initiate a **Password** reset from the ****Sponsor** Portal** login interface by providing their **Email Address**.
- B. When a **Password** reset is initiated, the **System** SHALL generate a **Verification Link** and deliver it to the registered **Email Address**.
- C. The **System** SHALL display a confirmation that an email has been sent regardless of whether the **Email Address** matches an existing ****User** Account**.

Verification Link Behavior

- D. When a **Verification Link** issued for **Password** reset is used or 24 hours have passed from generation, whichever occurs first, the **System** SHALL invalidate the **Verification Link**.
- E. When a new **Password** reset **Verification Link** is issued for a ****User** Account, the **System** SHALL invalidate any previously issued **Password** reset **Verification Link** for that ****User** Account**.

Reset Completion

- F. When a ****User** Account** owner accesses a valid **Verification Link**, the **System** SHALL allow them to set a new **Password**.
- G. Upon successful **Password** reset, the **System** SHALL terminate all active sessions associated with that ****User** Account**.

H. The **System** SHALL require Two-Factor Authentication on the next login following a successful **Password** reset.

Rejection Behavior

I. When a ******User** Account**** owner attempts to access an invalidated **Verification Link**, the **System** SHALL reject the attempt and prompt the *User* to initiate a new **Password** reset.

Rationale

Self-service *Password* reset is a usability requirement (users who lose their **Password** must not be blocked from the system pending an *Administrator* escalation) and a security requirement (the reset mechanism must not become an attack channel). The verification-link mechanism mirrors the activation workflow: a single-use, time-bounded URL delivered to the registered *Email Address* is the credential that proves control of the account. The display-confirmation-regardless rule prevents *User* enumeration via the reset form — an attacker submitting addresses learns nothing about which ones exist in the system. Terminating all active sessions on successful reset and requiring 2FA on the next login closes the window in which a stolen *Session* or stolen 2FA token from the pre-reset interval could still operate against the now-changed account. The shorter expiry (24 hours, versus 14 days for activation) reflects the higher attack value of a *Password*-reset link compared to an activation link.

5.5.5 Forgot Password Workflow Interface

REQ ID: DIARY-GUI-password-forgot-workflow

Refines: DIARY-PRD-password-forgot

Overview

The Forgot *Password* workflow spans four screens: the request screen where the ******User** Account**** owner enters their **Email Address**, the confirmation screen shown after *Submission*, the reset screen reached through a valid **Verification Link**, and the invalid link screen reached through an invalidated **Verification Link**. Consistent screen behavior across the flow ensures the ******User** Account**** owner can complete recovery or recognize when to start over.

Entry Point

Assertions

A. The ****Sponsor** Portal** login interface SHALL present a *Forgot Password Action* that navigates to the *Forgot Password Request* screen.

Forgot Password Request Screen

B. The *Forgot Password Request* screen SHALL present a single **Email Address** input field and a *Submit Action*.

C. The *Forgot Password Request* screen SHALL present a *Back to Login Action* that returns to the login interface.

D. The interface SHALL not enable the *Submit Action* until a value has been entered in the **Email Address** field.

E. The interface SHALL validate that the entered value conforms to a valid *Email Address* format before *Submission* is accepted.

F. When the *Submit Action* is invoked, the interface SHALL navigate to the *Confirmation* screen.

Confirmation Screen

G. The *Confirmation* screen SHALL display a message indicating that an email has been sent if the submitted **Email Address** is associated with an account.

H. The *Confirmation* screen SHALL display the duration after which the **Verification Link** expires.

I. The *Confirmation* screen SHALL display guidance to check the spam folder if the email is not received.

J. The *Confirmation* screen SHALL present a *Back to Login Action* that returns to the login interface.

K. The *Confirmation* screen SHALL display the same content regardless of whether the submitted **Email Address** matches an existing ****User** Account**.

Reset Screen

L. The *Reset* screen SHALL be reachable only by accessing a valid **Verification Link** delivered to the ****User** Account** owner's registered **Email Address**.

M. The Reset screen SHALL present a New **Password** field and a Confirm **Password** field.

N. Each **Password** field SHALL present a show/hide toggle that controls whether the entered value is displayed in plain text or masked.

O. The Reset screen SHALL present a Submit *Action*.

P. The interface SHALL not enable the Submit *Action* until both **Password** fields have been populated and contain matching values.

Q. When the Submit *Action* is invoked and the **Password** is rejected for failing composition or reuse rules, the interface SHALL display an inline message identifying which rule was violated and SHALL not navigate away from the Reset screen.

R. When the Submit *Action* is invoked and the **Password** is accepted, the interface SHALL navigate to the ****Sponsor** Portal** login interface and display a confirmation that the **Password** has been changed.

Invalid Link Screen

S. When a ****User** Account** owner accesses an invalidated **Verification Link**, the interface SHALL display the Invalid Link screen.

T. The Invalid Link screen SHALL display a message indicating that the **Verification Link** is no longer valid.

U. The Invalid Link screen SHALL present an *Action* that navigates to the Forgot *Password* Request screen.

Rationale

The four-screen structure mirrors the four states the workflow can reach: requesting reset, awaiting email, completing reset, recovering from an invalidated link. Identical confirmation content regardless of whether the email matches is the GUI-level enforcement of the *User*-enumeration resistance established at the PRD level — divergent UI between matching and non-matching cases would leak the same information the PRD assertion is trying to hide. The inline composition-rule error on Submit is necessary because users who submitted an invalid **Password** must learn which rule failed without losing the typed values, otherwise the show/hide toggle gains a punitive UX where users repeatedly re-type the same long *Password*. The Invalid Link screen's link back to the request screen restarts the recovery loop in a single click, recognising that the most common reason for an invalidated link is the 24-hour expiry catching a *User* who opened the email belatedly.

5.5.6 Session Management

REQ ID: DIARY-PRD-session-management

Overview

The ****Sponsor** Portal** terminates inactive sessions to limit the window during which an unattended authenticated *Session* could be exploited. *Session* limits also ensure that *Role* and permission changes take effect within a bounded time.

Session

Session An authenticated period during which a **User Account** owner can access the **Sponsor Portal** without re-entering credentials.

Session Idle Timeout

Session Idle Timeout The configurable maximum duration of inactivity allowed during a **Session** before the **System** terminates it.

Session Establishment

Assertions

A. The **System** SHALL establish a **Session** when a ****User** Account** owner successfully completes Two-Factor Authentication.

Idle Timeout

B. The **System** SHALL track elapsed inactivity from the ****User** Account** owner's most recent interaction with the ****Sponsor** Portal**.

C. When the ****Session** Idle Timeout** is exceeded, the **System** SHALL terminate the **Session** and require re-authentication.

Termination

D. The **System** SHALL allow a ****User** Account** owner to explicitly terminate their **Session** by logging out.

E. When a ****User** Account** is deactivated, the **System** SHALL terminate all active **Sessions** associated with that ****User** Account** immediately.

F. When a ****User** Account's Role** or **Site** assignment is changed, the **System** SHALL terminate all active **Sessions** associated with that ****User** Account** immediately.

Configuration

G. The **System** SHALL support *Sponsor*-configurable ****Session** Idle Timeout** per deployment, with a default of 10 minutes.

Rationale

A **Session** in the ****Sponsor** Portal** is a high-value authentication artifact — it represents a successful two-factor login and confers access to clinical data and *User* Account management capabilities for its duration. The *Idle Timeout* caps the window in which an unattended workstation could be exploited; tracking inactivity from the *User*'s most recent interaction (rather than from *Session* creation) is the standard pattern that balances security against operational disruption. The cascade rules (*Deactivation*, *Role* change, *Site* change immediately terminate sessions) ensure that authorization changes take effect synchronously rather than waiting for the next login: a Coordinator who has lost their *Role* for cause cannot continue acting under the old *Role* until their **Session** happens to time out. *Sponsor*-configurability of the timeout duration acknowledges that the right tradeoff between security and operator disruption varies by deployment; the 10-minute default reflects clinical-portal industry baseline.

5.5.7 Login Attempt Rate Limiting Configuration

REQ ID: CAL-PRD-login-rate-limiting-configuration

Refines: DIARY-PRD-session-management

Assertions

A. The **Login** Rate Limit Threshold**** SHALL be configured to 5 consecutive failed login attempts.

B. The **Login** Rate Limit Cooldown**** SHALL be configured to 60 seconds.

C. The Login Rate Limit error message SHALL display the text: "Too many failed attempts. Please wait 60 seconds before trying again."

Rationale

Five consecutive failures is well above the rate at which a legitimate *User* mistyping their **Password** would trigger the rate limit (most legitimate users notice the mistake within two or three attempts), but well below the rate at which an automated brute-force attempt would be useful. The 60-second cooldown forces an attacker to amortize attempts across many waits, raising the cost of any brute-force campaign to impractical levels while imposing only a minor inconvenience on a legitimate *User* who has genuinely forgotten their *Password* (they would typically initiate a Forgot *Password* reset rather than retry). The exact-text error message is specified so that the *User*-visible behavior is consistent across the deployment and matches the cooldown duration.

5.6 Administrator Settings

This section defines the **Administrator Settings** surface, a read-only view available to Administrators that displays the current values of *Sponsor*-configured platform parameters. The surface provides Administrators with visibility into how the deployment is configured without granting modification capability.

5.6.1 Administrator Settings Surface

REQ ID: DIARY-PRD-administrator-settings

Overview

The ******Sponsor** Portal**** maintains a body of *Sponsor*-configured platform parameters that govern System behavior. These parameters are defined in individual requirements throughout the specification and are typically static for the duration of a deployment. **Administrators** require visibility into the current values of these parameters to support troubleshooting, audit response, and operational verification, without needing to consult the specification or contact CureHHT personnel. The **Administrator Settings** surface consolidates these values into a single read-only view scoped to the **Administrator Role**.

Configuration Parameter

Configuration Parameter A named, sponsor-configured value that governs a specific System behavior, defined in a single source requirement and surfaced to **Administrators** for visibility.

Configuration Category

Configuration Category A grouping of related **Configuration Parameters** presented together within the **Administrator Settings** surface.

Administrator Settings

Administrator Settings The read-only surface within the **Sponsor Portal** that displays **Configuration Parameters** to **Administrators**, organised by **Configuration Category**.

Availability

Assertions

A. The **System** SHALL provide an **Administrator Settings** surface within the ****Sponsor** Portal**.

Content

B. The **System** SHALL display each **Configuration Parameter** in **Administrator Settings** with its name, current value, and unit of measurement where applicable.

C. The **System** SHALL display each **Configuration Parameter** under exactly one **Configuration Category**.

D. The **System** SHALL display the current value of each **Configuration Parameter** as defined by the source requirement that establishes it.

Read-Only Behavior

E. The **System** SHALL NOT permit modification of any **Configuration Parameter** value from the **Administrator Settings** surface.

Configuration

F. The **System** SHALL support *Sponsor*-configurable selection of which **Configuration Parameters** are surfaced in **Administrator Settings** per deployment.

G. The **System** SHALL support *Sponsor*-configurable definition of **Configuration Categories** per deployment.

Rationale

Sponsor-configured parameters (*Session* timeouts, code expiries, threshold values, reminder schedules) shape the system's runtime behavior but are not visible to the **Administrator** who is operationally responsible for the deployment. Without a surface that exposes these values, troubleshooting and audit response require the **Administrator** to either read the specification or escalate to CureHHT, neither of which scales. Consolidating the visible parameters under the **Administrator Role**, with one **Configuration Category** per logical grouping and one source-requirement reference per parameter, gives the **Administrator** a single place to confirm "what is this deployment configured to do?" without granting modification capability. Modification stays out of band (the parameters are set during *Sponsor* onboarding and changed via CureHHT change-control) because their values are tightly coupled to compliance review; a runtime modification surface would bypass that review.

5.6.2 Administrator Settings Configuration Inventory

REQ ID: CAL-PRD-administrator-settings-inventory

Refines:

- DIARY-PRD-administrator-settings
- DIARY-PRD-configuration-precedence

Overview

This requirement defines the **Configuration Parameters** surfaced in **Administrator Settings** for the Callisto ****Sponsor** Portal** deployment, the **Configuration Categories** under which they are grouped, and the source requirement establishing each value.

Assertions

A. The **Administrator Settings** surface SHALL display the following **Configuration Categories** in the order listed: **Authentication and Sessions**, ****Mobile Application** Security, **Diary** Entry Rules, **Questionnaire** Sessions, Notifications and Reminders, and Rate Limiting**.

B. The **Administrator Settings** surface SHALL display the following **Configuration Parameters** under their respective **Configuration Categories** with the current values shown:

Configuration Category	Parameter	Source Requirement
Authentication and Sessions	Sponsor Portal Session Idle Timeout	Diary-PRD-Session-management
Authentication and Sessions	Password Expiry Interval	Diary-PRD-

Password-requirements | | Authentication and Sessions | Two-Factor Authentication *Code Expiry* | CAL-PRD-two-factor-authentication-configuration | | *Mobile Application Security* | *Mobile Linking Code Expiry* | CAL-PRD-linking-code-lifecycle-configuration | | *Mobile Application Security* | *Application Lock Idle Timeout* | CAL-PRD-application-lock-configuration | | *Mobile Application Security* | *Application Lock PIN Length* | CAL-PRD-application-lock-configuration | | *Mobile Application Security* | *Application Lock Failed Attempt Threshold* | CAL-PRD-application-lock-configuration | | *Diary Entry Rules* | *Justification Threshold* | CAL-PRD-entry-time-restrictions-configuration | | *Diary Entry Rules* | *Lock Threshold* | CAL-PRD-entry-time-restrictions-configuration | | *Diary Entry Rules* | *Short Duration Threshold* | CAL-PRD-entry-duration-check-configuration | | *Diary Entry Rules* | *Long Duration Threshold* | CAL-PRD-entry-duration-check-configuration | | *Questionnaire Sessions* | *NOSE HHT and HHT-QoL Session Timeout* | CAL-PRD-Questionnaire-Session-resume-timeout | | *Questionnaire Sessions* | *NOSE HHT and HHT-QoL Timeout Warning Threshold* | CAL-PRD-Questionnaire-Session-resume-timeout | | Notifications and Reminders | *Incomplete Record Lock Warning Offset* | CAL-PRD-notification-incomplete-record-lock-configuration | | Notifications and Reminders | *Yesterday Entry Reminder Time* | CAL-PRD-notification-yesterday-entry-configuration | | Notifications and Reminders | *Ongoing Epistaxis Event Reminder Interval* | CAL-PRD-notification-ongoing-epistaxis-configuration | | Rate Limiting | *Login Rate Limit Threshold* | CAL-PRD-login-rate-limiting-configuration | | Rate Limiting | *Login Rate Limit Cooldown* | CAL-PRD-login-rate-limiting-configuration | | Rate Limiting | *Linking Code Rate Limit Threshold* | CAL-PRD-entry-time-restrictions-configuration | | Rate Limiting | *Linking Code Rate Limit Cooldown* | CAL-PRD-entry-time-restrictions-configuration |

Rationale

The configuration inventory is the per-deployment realisation of the platform-level **Administrator Settings** surface: each row binds a *User*-visible parameter name to the source requirement that establishes its current value, so the *Administrator* surface can render the current value by reading the named requirement rather than maintaining a parallel value store. Six categories were chosen to reflect the operational domains an *Administrator* reasons about — authentication, mobile security, entry validation, *Questionnaire* timing, notifications, and rate limits — and the order from authentication outward to rate limiting follows the rough operational frequency with which an *Administrator* might consult each category. Cross-repo refines targets are used for the platform-side parents (*Session* management, *Password* rules, **Administrator Settings**, configuration precedence) and for the Callisto-side overlays in this and sibling files; binding the surface to the source requirements (rather than to a free-text value table) keeps the surface in sync with whatever values future change-control rounds adopt.

5.6.3 Administrator Settings Interface

REQ ID: DIARY-GUI-administrator-settings

Refines: DIARY-PRD-administrator-settings

Overview

The **Administrator Settings** surface is reached from the **Settings Action** in the ****Administrator** Dashboard** header. The surface presents **Configuration Parameters** as a grouped list, with each **Configuration Category** as a section heading and each **Configuration Parameter** as a row beneath it. The interface communicates the read-only nature of the view so the **Administrator** does not expect to edit values directly.

Display

Assertions

- A.** The interface SHALL display the **Administrator Settings** surface as a full-page view that replaces the ****Administrator** Dashboard** top-level tab content.
- B.** The interface SHALL display a header on the **Administrator Settings** surface containing the title **Settings** and a back *Action* that returns the **Administrator** to the previously active top-level tab.
- C.** The interface SHALL display each **Configuration Category** as a labeled section.
- D.** The interface SHALL display each **Configuration Parameter** as a row within its **Configuration Category** section, showing the parameter name, the current value, and the unit of measurement where applicable.
- E.** The interface SHALL display **Configuration Parameters** in the order defined by the deployment configuration.

Read-Only Indication

- F.** The interface SHALL display a notice on the **Administrator Settings** surface indicating that values are read-only and that changes require contacting CureHHT personnel.
- G.** The interface SHALL NOT present any input control, edit *Action*, or save *Action* on the **Administrator Settings** surface.

Rationale

Settings is a low-frequency surface — an **Administrator** opens it during troubleshooting or audit response, not during routine workflow — so it is reached via a single header *Action* rather than a tab. Presenting it as a full-page view that replaces the tab content (rather than a modal or a side-panel) reflects the surface's information density (multiple categories, many parameters per category) and lets the **Administrator** scan the entire configuration without scrolling between panels. The explicit read-only notice and the absence of any input control communicate the read-only contract at the GUI level: an **Administrator** who reaches this screen should not waste time looking for an edit affordance, and should know who to contact (CureHHT personnel) when a value needs to change. The back *Action* returns to the previously active tab rather than always defaulting to **Users** because Administrators frequently reach Settings from the audit log during an investigation and should be returned to the same investigation context.

MOBILE APPLICATION

6.1 Mobile Application Foundation

The **Mobile Application** foundation comprises the dual-mode (personal vs. linked) operating model, *Offline-First* data entry, the ******Diary** Start Day**** invariant, the *Sponsor*-configurable **Clinical Trial Privacy Policy**, and the **Application Lock**.

6.1.1 Diary Mobile Application

REQ ID: DIARY-PRD-mobile-application

Overview

The *Mobile Application* serves dual purposes: personal health tracking for individual **Users** and compliant data capture for clinical trials. In personal use mode the application requires no account and stores data locally. In linked use mode the application synchronizes data with the *Sponsor* portal for clinical *Trial* participation.

Mobile Application

Mobile Application The iOS and Android application provided by the System for participant-reported diary data capture and questionnaire completion. Operates in personal use mode without an account or in linked use mode connected to a **Sponsor Portal** deployment.

User

User An individual using the **Mobile Application** in personal use mode, without an account and without a link to a clinical trial. A User who subsequently links to a study becomes a **Participant**.

Assertions

A. The System SHALL provide a *Mobile Application* for iOS platforms, available via the iOS app store.

B. The System SHALL provide a *Mobile Application* for Android platforms, available via the Android app store.

C. The *Mobile Application* SHALL support full offline operation for core *Diary* functions in both personal use mode and linked use mode.

D. The *Mobile Application* SHALL NOT require account creation or login for personal use mode.

E. The **User** SHALL retain control over locally-entered data, including the right to delete it from the device while in personal use mode.

F. The *Mobile Application* SHALL obtain explicit **User** consent before synchronizing pre-existing local data to the ******Sponsor** Portal**** upon linking.

Rationale

The dual-mode design serves two distinct populations from a single codebase: individuals tracking nosebleeds for personal health reasons (no clinical-*Trial* context, no *Sponsor*, no account) and clinical-*Trial* participants whose data feeds the *Sponsor's* regulatory *Submission*. Personal mode is account-less by design — it removes onboarding friction for the first population, who would not benefit from an account they cannot use against any back-end, and it keeps the device the single point of control for their data. Linked mode adds the ******Sponsor** Portal**** synchronization path; the explicit-consent gate on first sync ensures the **User** transitioning to **Participant** affirmatively chooses to share their previously-private local entries with the *Sponsor*, rather than that data being silently uploaded on link. iOS and Android coverage is required because participants in any plausible clinical-*Trial* population will hold devices on both platforms; restricting to one would exclude participants without a fallback.

6.1.2 Offline-First Data Entry

REQ ID: DIARY-PRD-mobile-offline-first

Refines: DIARY-PRD-mobile-application

Overview

Offline-First architecture ensures reliable data collection regardless of network conditions. All **Users** benefit from local storage for immediate, reliable data entry. For **Participants** linked to clinical trials, automatic synchronization provides cloud backup and enables remote monitoring while maintaining the *Offline-First* experience.

Assertions

- A.** The System SHALL allow **Users** to create *Diary* entries without requiring internet connectivity.
- B.** The System SHALL allow **Users** to edit *Diary* entries without requiring internet connectivity.
- C.** The System SHALL allow **Users** to view their complete entry history without requiring internet connectivity.
- D.** For linked **Participants**, the System SHALL indicate which entries have not yet synchronized to the ****Sponsor** Portal**.
- E.** For linked **Participants**, the System SHALL automatically synchronize unsynchronized entries when network connectivity becomes available.

Rationale

Diary entries are time-sensitive: a nosebleed event must be captured as it occurs or shortly afterward to preserve recall accuracy and satisfy the ALCOA+ Contemporaneous principle. A network-required entry model would push participants toward either delayed entry (when connectivity is restored, by which time recall has degraded) or non-entry (when connectivity never recovers in the relevant window). *Offline-First* inverts that: every entry succeeds locally regardless of network state, and synchronization to the ****Sponsor** Portal** is a background concern handled by the platform whenever connectivity is available. The unsynchronized indicator preserves transparency for the *Participant* — they can see whether their data has reached the *Sponsor* — without making sync a gate on entry.

6.1.3 Diary Start Day Definition

REQ ID: DIARY-PRD-diary-start-day

Overview

Clinical *Trial Participants* may need to record nosebleeds that occurred before their first *Mobile Application* usage. The ****Diary** Start Day** establishes the earliest date for which *Diary* entries are valid, balancing the need for historical data capture with the requirement to maintain reliable data quality. The ****Diary** Start Day** is set automatically based on the **Participant's** actual entries, when a **Participant** records data for a date earlier than any prior entry, the ****Diary** Start Day** moves backward to that date. The ****Diary** Start Day** never moves forward, even if the earliest entry is subsequently

deleted, to preserve the historical scope of the *Diary* and ensure that documented gaps remain visible.

Diary Start Day

Diary Start Day The earliest date for which diary entries are valid for a given **User**.

Assertions

- A. The System SHALL establish and maintain a ****Diary** Start Day** for each **User**.
- B. The System SHALL set the ****Diary** Start Day** to the date of the earliest entry the **Participant** has ever recorded.
- C. When a **Participant** records an entry for a date earlier than the current ****Diary** Start Day, the **System SHALL move the Diary Start Day**** backward to that date.
- D. The System SHALL NOT allow the ****Diary** Start Day** to be set earlier than 365 days before *Mobile Application* installation on the current device.
- E. The ****Diary** Start Day** SHALL only move backward, never forward, once set.
- F. The System SHALL NOT prompt **Users** to set the ****Diary** Start Day** during on-boarding.
- G. Data entered for dates before the **Trial Start** date SHALL NOT synchronize to the ****Sponsor** Portal** or *Rave EDC*.
- H. The **System** SHALL NOT allow the **Participant** to record an entry for a date in the future.
- I. The **System** SHALL display each *Calendar* day between the ****Diary** Start Day** and the current day, exclusive of any day for which a **Daily Status** has been recorded, as a missing day in the *Calendar*.

Rationale

The ****Diary** Start Day** is the single boundary the **Mobile Application** uses to distinguish “no entry expected” from “missing entry” — every day from the ****Diary** Start Day** to today is part of the *Diary* period and therefore a candidate for the missing-day display in the *Calendar*. Automatic backward expansion (set to the earliest entry, can move backward but never forward) reflects two operational realities: participants discover the need to backfill historical events incrementally rather than declaring a start date up front, and once a date is recognized as part of the *Diary* period, the visible gaps on dates within it are evidence the audit and *Sponsor* reporting rely on — collapsing those gaps by

moving the start day forward when the earliest entry is deleted would silently erase that evidence. The 365-day floor below installation date caps the historical window at a clinically meaningful range while leaving room for retrospective capture early in a *Trial*. Future-date rejection is a contemporaneous-data integrity floor. The non-sync rule for pre-*Trial* dates keeps the ****Sponsor** Portal** dataset bounded to the *Trial* period regardless of how far back the personal *Diary* extends.

6.1.4 Clinical Trial Privacy Policy

REQ ID: DIARY-PRD-privacy-policy

Overview

The *Mobile Application* SHALL provide access to a **Clinical Trial Privacy Policy** governing *Sponsor*-side data handling for a linked study, distinct from the **Application Privacy Policy**.

Application Privacy Policy

Application Privacy Policy The privacy policy governing the Mobile Application itself, covering platform-level data handling.

Clinical Trial Privacy Policy

Clinical Trial Privacy Policy The privacy policy governing a Participant's participation in a specific clinical trial, covering sponsor-side data handling. Sponsor-configurable per deployment.

Assertions

- A.** The System SHALL support a *Sponsor*-configurable **Clinical Trial Privacy Policy** per deployment.
- B.** The System SHALL make the **Clinical Trial Privacy Policy** accessible to the *Participant* only when the *Participant* is linked to a study or is in the process of linking to a study.
- C.** The System SHALL retain the **Clinical Trial Privacy Policy** version that was in effect at the time of consent against the *Participant* record.

Rationale

Two privacy policies coexist in the **Mobile Application** because two distinct controllers handle distinct data flows: the **Application Privacy Policy** covers platform-level data handling (the **Mobile Application** itself, the platform vendor's data-processor *Role*), while the **Clinical Trial Privacy Policy** covers the *Sponsor's* clinical-*Trial* data handling for participants in a specific study. Surfacing the *Trial*-specific policy only when the *Participant* is linked or actively linking prevents the application from showing *Sponsor*-specific terms to **Users** who are using the app in personal mode and have no relationship with the *Sponsor*. Retaining the version in effect at time of consent against the *Participant* record satisfies the regulatory expectation that the document the *Participant* actually consented to (which may change over the life of the *Trial*) is preserved as evidence of informed consent.

6.1.5 Clinical Trial Privacy Policy Configuration

REQ ID: CAL-PRD-privacy-policy-configuration

Refines: DIARY-PRD-privacy-policy

Assertions

A. The *Clinical Trial** Privacy Policy* SHALL be made available at [URL placeholder].

Rationale

The Callisto deployment binds the platform-configurable **Clinical Trial Privacy Policy** to a single hosted URL. The URL placeholder will be replaced with the production policy location before deployment goes live; the obligation is that the policy is hosted at a stable, retrievable URL the **Mobile Application** can link to from the **Linking Consent** text on the **Join the Study** screen and from the **Participation Status Badge**. A platform-configurable URL (rather than embedded content) lets the legal text be updated independently of mobile-app release cycles, while the version-retention rule in the parent REQ ensures every *Participant's* consent is anchored to the specific version they read at the time of consent.

Follow-up — configurability: This requirement currently encodes the only option implemented in code. Future sponsors may require different rules; introduce a configurable seam (e.g. a parameter on the CAL-PRD-* parent, or a new platform-side template the CAL- REQ Satisfies) when the need arises. Until that seam exists, this REQ is normative for the Callisto deployment.

6.1.6 Application Lock

REQ ID: DIARY-PRD-application-lock

Overview

The *Mobile Application* contains *Participant*-reported clinical data and identifying information that must be protected from unauthorized access on the *Participant*'s device. An *Application Lock* requires the *Participant* to authenticate before each use, ensuring that someone who picks up an unattended device cannot view or modify *Diary* entries. The lock is configurable so each *Sponsor* deployment can select the *Authentication Method* appropriate to its risk profile and *Participant* population. When the configured method is unavailable on a *Participant*'s device, a fallback to *Device Authentication* ensures continuity of access without compromising the protective intent.

Application Lock

Application Lock The state in which the **Mobile Application** requires the **Participant** to authenticate before any **Participant**-facing screen, action, or data is accessible.

PIN

PIN A numeric secret of configurable length set by the **Participant** and used to release the **Application Lock**.

Device Authentication

Device Authentication Authentication performed by the device operating system using the credential the **Participant** has configured at the device level, including but not limited to device passcode, fingerprint, or face recognition.

Authentication Method

Authentication Method The mechanism required to release the **Application Lock**. The configured **Authentication Method** is one of: **PIN**, **Device Authentication**, or none.

Idle Timeout

Idle Timeout The configurable elapsed time the **Mobile Application** may remain in the background before the **System** re-applies the **Application Lock** on return to the foreground.

Lock Application

Assertions

- A.** The **System** SHALL apply the **Application Lock** when the **Mobile Application** is launched from a fully closed state.
- B.** The **System** SHALL apply the **Application Lock** when the **Mobile Application** returns to the foreground after spending more than the **Idle Timeout** in the background.
- C.** While the **Application Lock** is applied, the **System** SHALL NOT display **Participant** data and SHALL NOT permit any **Participant Action** other than authentication.

Authentication Method

- D.** The **System** SHALL release the **Application Lock** only upon successful authentication using the configured **Authentication Method**.
- E.** When the configured **Authentication Method** is **PIN**, the **System** SHALL require the **Participant** to enter their **PIN** to release the **Application Lock**.
- F.** When the configured **Authentication Method** is **Device Authentication**, the **System** SHALL invoke the device operating system's authentication prompt to release the **Application Lock**.
- G.** When the configured **Authentication Method** is none, the **System** SHALL NOT apply the **Application Lock**.

PIN Setup and Reset

- H.** When the configured **Authentication Method** is **PIN** and the **Participant** has not yet set a **PIN**, the **System** SHALL require the **Participant** to set a **PIN** before any **Participant** data is accessible.
- I.** The **System** SHALL require the **Participant** to enter the **PIN** twice during setup and SHALL reject the setup when the two entries do not match.
- J.** The **System** SHALL allow the **Participant** to change their **PIN** from the **Mobile Application** settings, after first authenticating with their existing **PIN** or **Device Authentication**.

Failed Attempt Handling

- K. The **System** SHALL track consecutive failed **PIN** entry attempts.
- L. When the number of consecutive failed **PIN** entry attempts reaches the configured **Failed Attempt Threshold**, the **System** SHALL fall back to **Device Authentication**.
- M. Upon successful **Device Authentication** following a fallback, the **System** SHALL require the **Participant** to reset their **PIN** before any **Participant** data is accessible.
- N. The **System** SHALL reset the failed attempt counter upon successful authentication.

Configuration

- O. The **System** SHALL support *Sponsor*-configurable selection of the **Authentication Method** per deployment.
- P. The **System** SHALL support *Sponsor*-configurable **PIN** length per deployment.
- Q. The **System** SHALL support *Sponsor*-configurable **Idle Timeout** per deployment.
- R. The **System** SHALL support *Sponsor*-configurable **Failed Attempt Threshold** per deployment.

Rationale

The **Application Lock** is the per-device gate that protects *Participant* clinical data when a device is left unattended, lost, or stolen. The lock applies at two boundaries — fresh launch and resume-from-background-after-idle — because both are realistic re-entry points after an interval in which the device could have changed hands. The “no data, no *Action* other than authentication” rule while locked closes the leakage channels that would otherwise exist (e.g., notification preview, deep-link routing into a partial workflow). The *Sponsor*-configurable **Authentication Method** lets each deployment choose between three security-posture options: **PIN** (cheapest, works on every device, controlled by the platform), **Device Authentication** (delegates to the OS-managed credential, which may include biometrics), or none (when the deployment determines a separate lock is not required). The failed-attempt fallback to **Device Authentication** rather than account lock-out preserves *Participant* access — a *Participant* who has forgotten their **PIN** can still recover by authenticating against the OS credential and resetting — while still raising the bar against a casual unauthorized attempt. Failed-attempt counter reset on success prevents accumulated rare typos from compounding into a fallback over normal use.

OPEN: Should the **Application Lock** be bypassed for **Push Notification** taps that lead to time-sensitive flows (e.g., Ongoing *Epistaxis Event* Reminder), or always enforced?

6.1.7 Application Lock Configuration

REQ ID: CAL-PRD-application-lock-configuration

Refines: DIARY-PRD-application-lock

Overview

These values configure the platform mechanism defined in *Diary*-PRD-application-lock for the Callisto deployment.

Assertions

- A.** The **Authentication Method** SHALL be configured to **PIN**.
- B.** The **PIN** length SHALL be configured to 4 digits.
- C.** The **Idle Timeout** SHALL be configured to 15 minutes.
- D.** The **Failed Attempt Threshold** SHALL be configured to 5 consecutive failed attempts.

Rationale

The Callisto deployment selects **PIN** as the **Authentication Method** because it works uniformly across every iOS and Android device the *Participant* population may carry, requires no device-level biometric or passcode configuration the *Participant* might not have set up, and keeps the unlock UX consistent regardless of device capabilities. A 4-digit **PIN** is the everyday-credential length participants encounter elsewhere (bank cards, transit, app-level locks) and balances memorability against the brute-force surface, which is further bounded by the **Failed Attempt Threshold** fallback to **Device Authentication** after 5 attempts. The 15-minute **Idle Timeout** is long enough to cover routine interruptions (a *Participant* putting the device down to answer a door, take a call, attend to a child) without forcing repeated re-authentication during an active *Diary Session*; it is short enough that an unattended device left in a public space cannot be picked up much later and still access *Participant* data without authentication. The 5-attempt **Failed Attempt Threshold** matches the **Login Rate Limit Threshold****** used on the *Sponsor Portal*, keeping the failed-attempt boundary consistent across the two authentication surfaces.

6.2 Questionnaires Overview

The platform implements three clinical questionnaires: the **Daily Epistaxis Record** (the daily eDiary instrument), the **NOSE HHT** survey, and the **HHT-QoL** survey. Each requirement binds the instrument to its validated source document and to the computer-readable data file that is the single implementation reference.

6.2.1 Daily Epistaxis Record Questionnaire

REQ ID: DIARY-PRD-questionnaire-daily-epistaxis

Overview

Daily epistaxis tracking is the core data collection activity in HHT clinical trials because nosebleed frequency, duration, and severity are the primary outcome measures for evaluating treatment efficacy. *Participant* self-reporting captures events as they occur rather than relying on retrospective recall during clinical visits, supporting the Contemporaneous principle of ALCOA+. “No nosebleeds” and “Don’t remember” entries are valid daily summaries that distinguish between confirmed absence of events and missing data, which is critical for data integrity in regulatory submissions.

Daily Epistaxis Record

Daily Epistaxis Record The primary nosebleed tracking instrument used in the HHT Clinical Diary, derived from Clark et al. (2018) with modifications.

Epistaxis Event

Epistaxis Event A single nosebleed occurrence recorded by the participant with timing, duration, and intensity data.

Assertions

A. The system SHALL implement the **Daily Epistaxis Record Questionnaire** for capturing *Participant*-reported nosebleed events.

B. The source instrument SHALL be documented with citation: Clark et al. “Nosebleeds in hereditary hemorrhagic telangiectasia: Development of a *Participant*-completed daily eDiary.” Laryngoscope Investig Otolaryngol. 2018. doi:10.1002/lio2.211.

C. All modifications to the source instrument SHALL be documented and traceable to their justification.

D. The instrument content, field definitions, and validation rules SHALL be implemented in a computer-readable data file that has been manually checked for accuracy.

Rationale

The **Daily Epistaxis Record** is the primary instrument the *Diary* platform exists to capture; every other surface (*Calendar*, *Day View*, recording flow, notifications, score calculations) is in service of getting reliable instances of this record into the clinical dataset. Binding the requirement to the Clark et al. (2018) source instrument anchors the *Diary* content to a validated reference so the platform's implementation can be audited against an external definition rather than re-derived locally. Any modification to the source is required to carry its own documented justification because clinical instruments derive their interpretive validity from the published version; undocumented deviations would break the chain back to the validated source and undermine the dataset's regulatory standing. The single computer-readable data file is the implementation reference — the same artifact the application loads and the specification references — which prevents drift between what the spec says and what the application runs.

6.2.2 NOSE HHT Questionnaire

REQ ID: DIARY-PRD-questionnaire-nose-hht

Overview

The *NOSE HHT* (Nasal Outcome Score for Epistaxis in Hereditary Hemorrhagic Telangiectasia) is a validated 29-question *Participant*-reported outcome measure assessing the physical, functional, and emotional impact of nosebleeds on HHT participants. The platform implements this instrument faithfully from the validated source. *Questionnaire* content is defined in the source document and transcribed once into a computer-readable data file — the data file is the single implementation reference, eliminating duplication and ensuring the application and the specification never diverge.

NOSE HHT

NOSE HHT The Nasal Outcome Score for Epistaxis in Hereditary Hemorrhagic Telangiectasia, a validated clinical instrument published in JAMA Otolaryngology — Head and Neck Surgery, 2020.

True Copy

True Copy A complete, unaltered reproduction of the source document obtained directly from the original publisher URL.

Assertions

A. The system SHALL implement the **NOSE HHT Questionnaire** as defined in the source document referenced in assertion B.

B. A **True Copy** of the source document SHALL have been obtained from: <https://jamanetwork.com/jour>

C. The **True Copy** SHALL be referenced by the computer-readable data file that implements this *Questionnaire*.

D. The source document SHALL be transcribed into a computer-readable data file that has been manually checked for accuracy. This transcribed version will serve as the official reference for all questions, answer choices, and scoring rules used in the system.

E. The System SHALL present the 29 **NOSE HHT** questions organized into the three categories defined in the source instrument: Physical, Functional, and Emotional.

F. The *Questionnaire* Display Name for the *NOSE HHT Questionnaire* SHALL be “*NOSE HHT Survey*”.

Rationale

The **NOSE HHT** is a validated clinical instrument; its interpretive validity depends on faithful reproduction of the published questions, answer choices, and scoring rules. The *True Copy* obligation anchors the platform’s implementation to the publisher’s authoritative version — the same document any auditor can independently retrieve from the cited URL — and removes any ambiguity about which variant of the instrument the platform uses. Transcription into a computer-readable data file is the bridge between the human-readable source and the running application: the application loads the data file directly, so the spec’s reference to the data file and the application’s runtime behavior are guaranteed to match. The three-category presentation (Physical, Functional, Emotional) matches the source instrument’s structure and is required for *Participant* comprehension and downstream score interpretation.

6.2.3 HHT-QoL Questionnaire

REQ ID: DIARY-PRD-questionnaire-hht-qol

Overview

The *HHT-QoL Questionnaire* is a validated 4-question *Participant*-reported outcome measure assessing how nosebleeds and HHT-related problems affect participants' daily activities and social engagement. The platform implements this instrument faithfully from the validated source. *Questionnaire* content is defined in the source document and transcribed once into a computer-readable data file — the data file is the single implementation reference, eliminating duplication and ensuring the application and the specification never diverge.

HHT-QoL

HHT-QoL A validated clinical instrument published in Blood Advances, 2022, measuring the impact of HHT symptoms on participants' daily and social activities.

Assertions

A. The system SHALL implement the **HHT-QoL Questionnaire** as defined in the source document referenced in assertion B.

B. A **True Copy** of the source document SHALL have been obtained from: <https://ashpublications.org/blood>

C. The **True Copy** SHALL be referenced by the computer-readable data file that implements this *Questionnaire*.

D. The source document SHALL be transcribed into a computer-readable data file that has been manually checked for accuracy. This transcribed version will serve as the official reference for all questions, answer choices, and scoring rules used in the system.

E. The system SHALL emphasize the key phrases — interrupted, avoided, had to miss, and other than nosebleeds — in the **HHT-QoL** questions, matching the formatting of the original validated instrument.

F. The *Questionnaire* Display Name for the *HHT-QoL Questionnaire* SHALL be “HHT Quality of Life Survey”.

Rationale

The **HHT-QoL** is a short (4-question) validated quality-of-life instrument complementing the *NOSE HHT*'s symptom focus with an activities-and-engagement perspective. The *True Copy* and transcription requirements track the same faithfulness obligation that applies to the *NOSE HHT* (assertion-for-assertion): the published source defines the instrument, and the platform's data file is the single reference the application consumes. The

key-phrase emphasis (italics on “interrupted”, “avoided”, “had to miss”, “other than nose-bleeds”) is a substantive part of the published instrument’s wording — these emphases are how the original instrument signals which words the *Participant* should be asked to weigh most carefully — and dropping them would silently re-engineer the question stems away from the validated form. Preserving them keeps the platform’s rendering aligned with the source.

6.3 Participant Questionnaire Workflow

The *Participant*-facing workflow over **Portal-Sent Questionnaires** comprises the rules that govern how a *Participant* moves through *Preamble*, questions, Review, and *Submission*, the corresponding interface behavior, and the *Session* Timeout / *Session* Expiry mechanism that bounds how long an in-progress *Questionnaire* can be left idle.

6.3.1 Portal-Sent Questionnaire Rules

REQ ID: DIARY-PRD-questionnaire-portal-sent-rules

Overview

Portal-Sent Questionnaires are initiated by a **Study Coordinator** from the ****Sponsor** Portal** and delivered to the *Participant* via push notification. The rules below define what the *Participant* sees (*Preamble*), how they progress through the *Questionnaire*, when their answers become a *Submission*, and the editing window between *Submission* and *Finalization*.

Portal-Sent Questionnaire

Portal-Sent Questionnaire A Questionnaire initiated by a Study Coordinator from the Sponsor Portal and delivered to the participant via push notification.

Preamble

Preamble The introductory content block presented to the participant before questionnaire questions begin informing the participant of the estimated completion time and that answers will not be saved until Submission.

Submission

Submission The participant action that signals all questions are answered and the Questionnaire is ready for Study Coordinator review.

Finalization

Finalization The Study Coordinator action that permanently locks participant answers, triggers score calculation and pushes the data to Rave EDC.

Preamble

Assertions

A. The System SHALL present the **Preamble** to the *Participant* each time the *Participant* opens a **Portal-Sent** Questionnaire****.

B. The **Preamble** SHALL inform the *Participant* of the estimated time required to complete the *Questionnaire*.

C. The **Preamble** SHALL inform the *Participant* that their progress will be retained while completing the *Questionnaire* and that answers are submitted only when they complete **Submission**.

D. The System SHALL require the *Participant* to confirm readiness before proceeding from the **Preamble** to the questions.

E. When the *Participant* indicates they are not ready, the System SHALL return the *Participant* to the Main home screen.

Completion Rules

F. The System SHALL present one question at a time during **Portal-Sent** Questionnaire**** completion.

G. The System SHALL NOT permit the *Participant* to skip any question in a **Portal-Sent** Questionnaire****.

H. The System SHALL preserve in-progress answers locally while the *Participant* is completing the *Questionnaire* and SHALL NOT commit answers as a *Submission* until the *Participant* completes **Submission**.

I. The System SHALL make completion progress available to the *Participant* throughout the *Questionnaire*.

J. The System SHALL allow the *Participant* to navigate back and forth between the questions before **Submission**.

K. The System SHALL allow the *Participant* to exit the *Questionnaire* at any point before **Submission** without losing in-progress answers, subject to the ****Session** Timeout** defined in *Diary-PRD-Questionnaire-Session-timeout*.

L. The System SHALL present a review of all answers to the *Participant* before **Submission**, allowing the *Participant* to modify any answer before proceeding.

Submission

M. The System SHALL require an explicit *Participant Action* - clicking the Submit button - to complete **Submission**.

Edit Rules

N. The System SHALL allow the *Participant* to edit their answers with no time limit after **Submission** until **Finalization**.

O. The System SHALL NOT permit the *Participant* to edit their answers after **Finalization**.

Rationale

The *Preamble* exists because a **Portal-Sent Questionnaire****** is a non-trivial commitment of *Participant* time (the *NOSE HHT* has 29 questions; an ad-hoc *Questionnaire* can be longer); telling the *Participant* up front how long it will take and that progress is preserved between sessions reduces the rate at which participants start and abandon mid-flow. One-question-at-a-time presentation matches the validated-instrument format (the source documents present questions one at a time on paper) and prevents the *Participant* from scanning ahead, which could bias later answers. Skipping is prohibited because the validated scoring algorithms require complete responses; partial questionnaires are not interpretable. The in-progress-preservation rule is the *Participant*-side guarantee that “Exit” is safe — combined with the ****Session** Timeout** override (which can discard in-progress answers if the *Participant* has been idle too long), it gives the *Participant* flexible but bounded continuation. Editing is open between *Submission* and *Finalization* because *Submission* signals “*Participant* is done”, but the **Study Coordinator** review may surface answer issues the *Participant* should be able to correct without resubmitting from scratch; *Finalization* is the irreversible boundary because that is when the score is computed and the data ships to **Rave EDC**.

Screen reference

< Quality of Life Survey



Quality of Life Survey

This questionnaire takes about 2-3 minutes. Please ensure you have enough uninterrupted time to complete it.

 Estimated time: 2-3 minutes

✓ I'm ready

Not now

6.3.2 Portal-Sent Questionnaire Workflow

REQ ID: DIARY-GUI-questionnaire-portal-sent-workflow

Refines: DIARY-PRD-questionnaire-portal-sent-rules

Overview

The interface for a **Portal-Sent Questionnaire****** spans four screens: the **Preamble**, the per-question screen, the **Review Screen** (after the final question), and the post-*Submission* Acknowledgement Dialog. The behavior on each screen tracks the PRD-level rules above and adds the visual affordances (*Progress Indicator*, navigation controls, *Action* labels) participants use to move through the flow.

Review Screen

Review Screen The screen presented to the participant after answering the final question, displaying all questions and selected answers before Submission.

Preamble

Assertions

- A.** The interface SHALL present the **Preamble** with two actions: an I'm Ready button and a Not Now button.
- B.** When the *Participant* selects Not Now, the interface SHALL navigate the *Participant* to the home screen.
- C.** When the *Participant* selects I'm Ready, the interface SHALL navigate the *Participant* to the first question.

Question Screen

- D.** The interface SHALL present a *Progress Indicator* showing the *Participant's* current position within the *Questionnaire* (Question #X out of Y).
- E.** The interface SHALL display the *Questionnaire* Display Name as the screen title on every question screen.
- F.** The interface SHALL present a back navigation control on every question screen.
- G.** The interface SHALL present a Next *Action* on every question screen.

- H. The Next *Action* SHALL be disabled until the *Participant* selects an answer.
- I. When the *Participant* selects an answer and selects Next, the interface SHALL advance to the next question.
- J. When the *Participant* navigates back to a previously answered question, the interface SHALL display the previously selected answer.

Review Screen

- K. After the *Participant* answers the final question, the interface SHALL present the **Review Screen**.
- L. The **Review Screen** SHALL present all questions and the *Participant's* selected answers.
- M. The **Review Screen** SHALL allow the *Participant* to navigate to any individual question to change their answer.
- N. The **Review Screen** SHALL present a submit *Action*.

Editing an Answer

- O. When the *Participant* navigates to an individual question from the **Review Screen** and changes an answer, the interface SHALL present a Save button.
- P. When the *Participant* selects Save, the interface SHALL return the *Participant* to the **Review Screen**.

Submission

- Q. When the *Participant* confirms **Submission**, the interface SHALL display an Acknowledgement Dialog confirming the *Questionnaire* has been submitted successfully.

Post-Submission Editing

- R. When the *Participant* re-opens a submitted *Questionnaire* before **Finalization**, the interface SHALL present the **Review Screen**.

Finalization

- S. When the *Participant* opens a finalized *Questionnaire*, the interface SHALL present the *Questionnaire* in a read-only state with no edit or submit actions available.

Rationale

The four-screen structure (*Preamble*, Question, Review, Acknowledgement) makes the *Questionnaire*'s logical structure visible to the *Participant*: a clearly demarcated start (*Preamble* with I'm Ready / Not Now), per-question progress visibility (Question #X out of Y title), a final aggregated review before commit (*Review Screen* with per-question edit affordance), and an explicit confirmation that the *Submission* landed (post-*Submission* Acknowledgement Dialog). The Next-disabled-until-answered rule combined with the prohibition on skipping is how the platform enforces the no-skipped-questions PRD assertion at the GUI layer. Returning to the **Review Screen** on re-open between *Submission* and *Finalization* keeps the *Participant*'s mental model aligned with the PRD-level edit window — they always re-enter through the aggregated review, not into a partial-flow ambiguity, so the next *Action* is either “Submit again” or “I’m finished, close this”. The read-only state after *Finalization* is the GUI-side counterpart of the PRD-level “no edit after *Finalization*” rule.

Follow-up — configurability: This requirement currently encodes the only option implemented in code. Future sponsors may require different rules; introduce a configurable seam (e.g. a parameter on the CAL-PRD-* parent, or a new platform-side template the CAL- REQ Satisfies) when the need arises. Until that seam exists, this REQ is normative for the Callisto deployment.

Screen reference

See:


QA 12:39 5Gw

Quality of Life Survey

Review Your Answers

1. How often in the past 4 weeks has an activity for your work, school, or regularly scheduled commitments been interrupted by a nose bleed?
Sometimes
2. How often in the past 4 weeks has an activity with your partner, family, or friends been interrupted by a nose bleed?
Always
3. How often in the past 4 weeks have you avoided social activities because you were worried about having a nose bleed?
Often
4. How often in the past 4 weeks have you had to miss your work, school, or regularly scheduled commitments because of HHT-related problems other than nosebleeds?
Often

> Submit

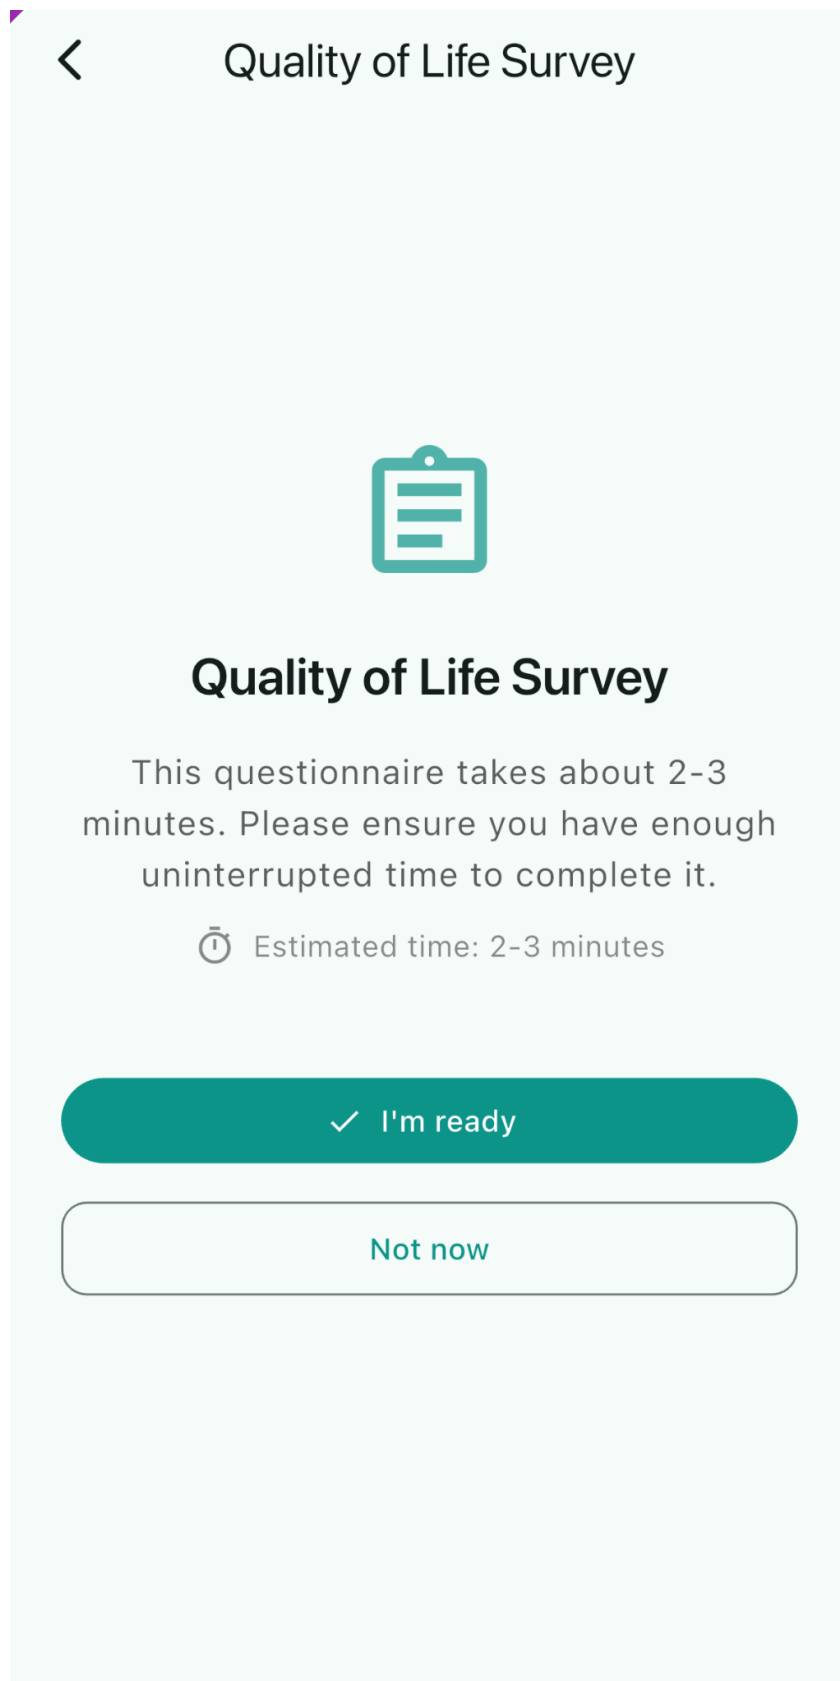

The screenshot shows a mobile application screen titled "Quality of Life Survey". At the top left is a back arrow icon. Below the title is a teal clipboard icon. The title "Quality of Life Survey" is centered in bold. Below it, a paragraph states: "This questionnaire takes about 2-3 minutes. Please ensure you have enough uninterrupted time to complete it." Underneath this is a clock icon followed by the text "Estimated time: 2-3 minutes". At the bottom are two buttons: a teal button with a white checkmark and the text "I'm ready", and a white button with a teal border and the text "Not now".

< Quality of Life Survey



Quality of Life Survey

This questionnaire takes about 2-3 minutes. Please ensure you have enough uninterrupted time to complete it.

 Estimated time: 2-3 minutes

✓ I'm ready

Not now



Questionnaire Submitted

Your questionnaire has been submitted successfully. Your Study Coordinator will review your responses.

OK

6.3.3 Portal-Sent Questionnaire Call-Back — Participant Experience

REQ ID: CAL-GUI-questionnaire-call-back-participant

Refines: DIARY-GUI-questionnaire-portal-sent-workflow

Overview

Participants need clear, immediate feedback when a Portal-Sent *Questionnaire* is called back so they do not waste effort on an inactive *Questionnaire* or become confused about its disappearance.

Call-Back Notice

Call-Back Notice An Acknowledgement Dialog informing the **Participant** that a **Portal-Sent Questionnaire** assigned to them has been called back by the study team.

Open Questionnaire Interruption

Assertions

- A.** When a **Portal-Sent Questionnaire****** is called back while the **Participant** has it open, the interface SHALL display the *Call-Back Notice*.
- B.** The *Call-Back Notice* SHALL NOT be dismissible by tapping outside the dialog.
- C.** When the **Participant** acknowledges the *Call-Back Notice*, the interface SHALL navigate the **Participant** to the **Main Screen**.

Task List

- D.** When a **Portal-Sent Questionnaire****** has been called back, the interface SHALL remove the corresponding *Questionnaire Task* from the *Task List*.

Next Session Notification

- E.** When a **Portal-Sent Questionnaire****** has been called back and the **Participant** did not have it open at the time of call-back, the interface SHALL display the *Call-Back Notice* on the ****Participant's next Application Session.

Offline Submission Attempt


F. When the **Participant** attempts to submit a **Portal-Sent Questionnaire****** that has been called back, the interface SHALL display the *Call-Back Notice*.

Rationale

A call-back removes the *Questionnaire* from the *Participant's* active task set, but if the *Participant* has the *Questionnaire* open at the moment of call-back (or attempts to submit one whose call-back happened while they were offline), they need explicit feedback that the *Questionnaire* is no longer assigned to them. The *Call-Back Notice* provides that feedback in three contexts: live interruption (open now, called back now), deferred notification (called back while not open, surface on next *Session*), and offline *Submission* attempt (called back while offline, surface when *Submission* tries to land). The non-dismissible-by-outside-tap rule (assertion B) prevents the *Participant* from accidentally clearing the notice without reading it. Removing the **Questionnaire Task** from the *Task List* immediately on call-back closes the entry point on the **Main Screen** so the *Participant* does not navigate into the called-back *Questionnaire* from there. Routing acknowledgement to the **Main Screen** rather than back into the now-defunct *Questionnaire* flow is the only sensible destination — the *Questionnaire* is no longer interactable, so returning the *Participant* to it would be a dead end.

Follow-up — configurability: This requirement currently encodes the only option implemented in code. Future sponsors may require different rules; introduce a configurable seam (e.g. a parameter on the CAL-PRD-* parent, or a new platform-side template the CAL- REQ Satisfies) when the need arises. Until that seam exists, this REQ is normative for the Callisto deployment.

Screen reference

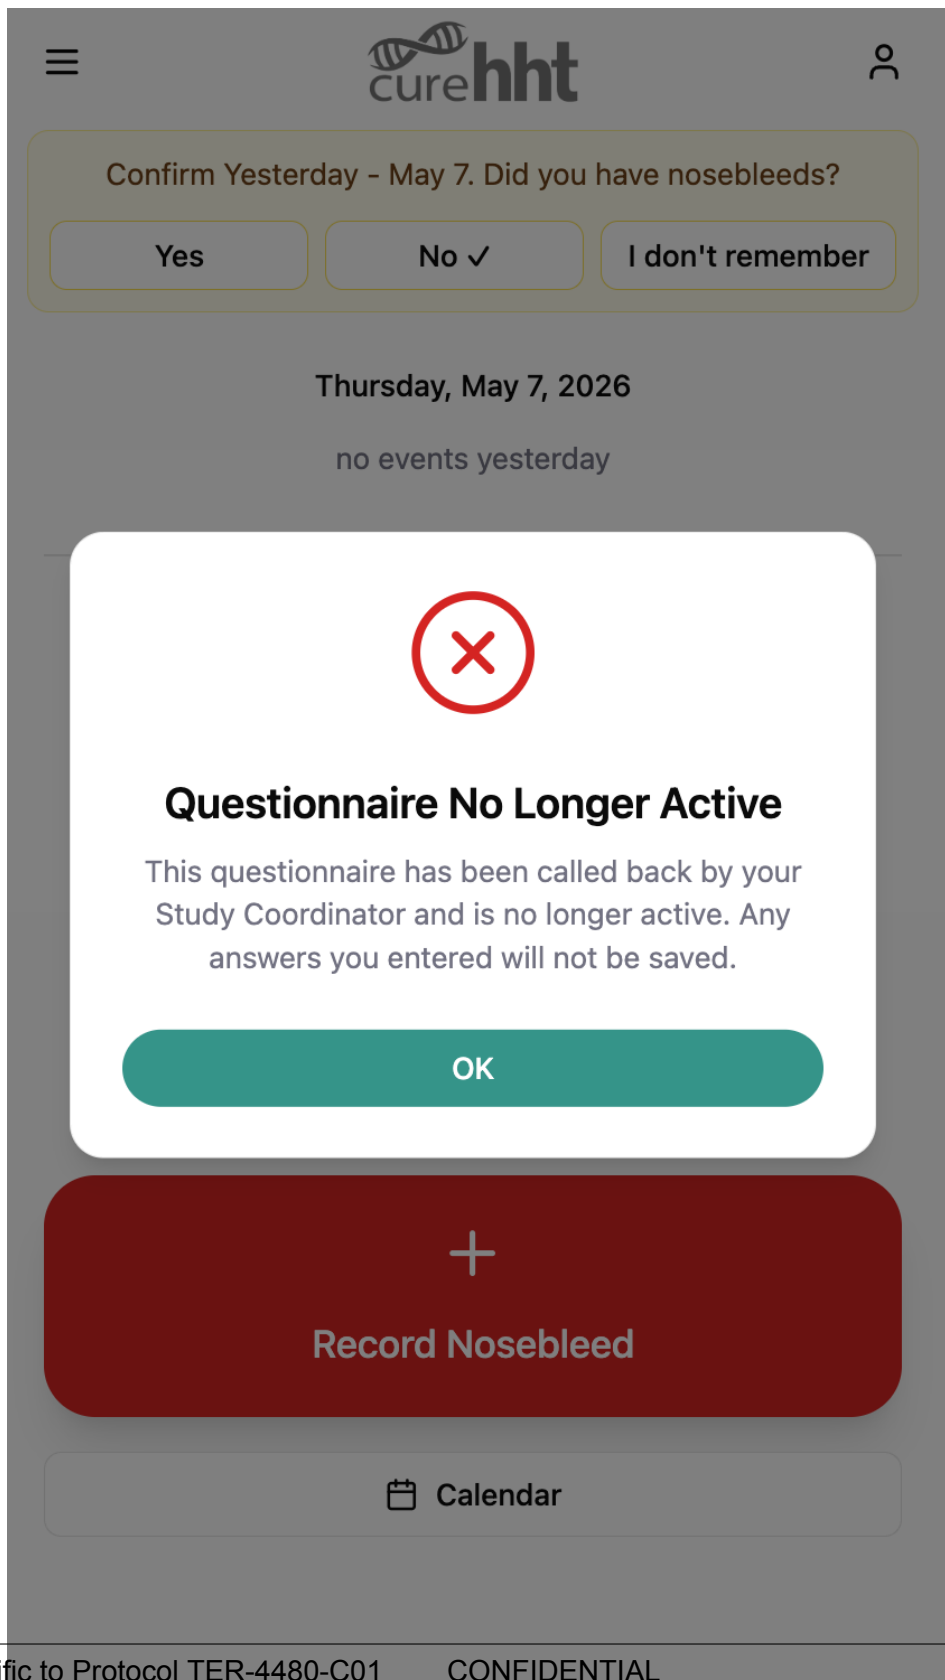

6.3.4 Questionnaire Session Timeout

REQ ID: DIARY-PRD-questionnaire-session-timeout

Refines: DIARY-PRD-questionnaire-portal-sent-rules

Overview

A configurable *Session* timeout allows each *Questionnaire* to enforce appropriate completion constraints based on its length and clinical requirements.

Session Timeout

Session Timeout The configurable maximum duration of inactivity allowed during questionnaire completion. When exceeded, the session expires and the answers selected so far are not retained.

Session Expiry

Session Expiry The state reached when a participant has not completed a questionnaire within the configured Session Timeout duration.

Timeout Warning Notification

Timeout Warning Notification Push notification delivered to the participant when the Session Timeout is approaching.

Session Expiry Notification

Session Expiry Notification Push notification delivered to the participant when Session Expiry has occurred.

Timeout Tracking

Assertions

A. When a *Questionnaire* is configured with a ******Session** Timeout****, the System SHALL track elapsed inactivity from the *Participant's* most recent interaction with the *Questionnaire*.

B. The System SHALL only advance the inactivity timer while the *Participant* is not actively interacting with the *Questionnaire*.

C. When the ******Session** Timeout**** is exceeded before the *Participant* submits the *Questionnaire*, the System SHALL discard all answers selected so far.

Expiry Behavior

D. When a *Participant* returns to a *Questionnaire* in a state of ******Session** Expiry**, the System SHALL present the *Questionnaire* from the beginning including the Preamble**.

Notifications

E. When a *Questionnaire* is configured with a ******Session** Timeout**, the System SHALL deliver a **Timeout Warning Notification**** to the *Participant* when the ******Session** Timeout**** is approaching.

F. When a *Questionnaire* is configured with a ******Session** Timeout**, the System SHALL deliver a **Session Expiry Notification**** to the *Participant* when ******Session** Expiry**** has occurred.

State Preservation

G. When a *Questionnaire* is not configured with a ******Session** Timeout****, the System SHALL preserve and restore the *Participant*'s in-progress answers on return with no time-out constraint.

H. When a *Questionnaire* with a ******Session** Timeout**** has not yet expired, the System SHALL return the *Participant* to their in-progress *Questionnaire* on return.

Configuration

I. Each *Questionnaire* definition SHALL support optional configuration of ******Session** Timeout**** duration.

J. Each *Questionnaire* definition SHALL support configuration of the threshold before expiry at which the **Timeout Warning Notification** is delivered.

Rationale

Some clinical questionnaires (e.g. the *NOSE HHT*, the *HHT-QoL*) require contemporaneous answering — a *Participant*'s frame of reference shifts measurably if they pause for hours between questions, and the resulting answers no longer reflect a single moment of self-report. A configurable ******Session** Timeout**** lets each *Questionnaire* enforce a “complete this in one sitting” constraint without baking a single duration into the platform. Discarding in-progress answers on expiry rather than retaining them is what gives the timeout its clinical meaning: the next attempt starts fresh from the **Preamble**, with a *Participant* frame of reference that the *Sponsor* can interpret. The opt-out (no ******Session** Timeout**** configured) covers the case where in-progress preservation is fine (e.g. an ad-hoc *Questionnaire* with no contemporaneous requirement). The two notifications — Warning before expiry, Expiry on the event — give the *Participant* a chance to return before answers are discarded (Warning) and clear feedback when answers have already been discarded (Expiry).

Screen reference

See:

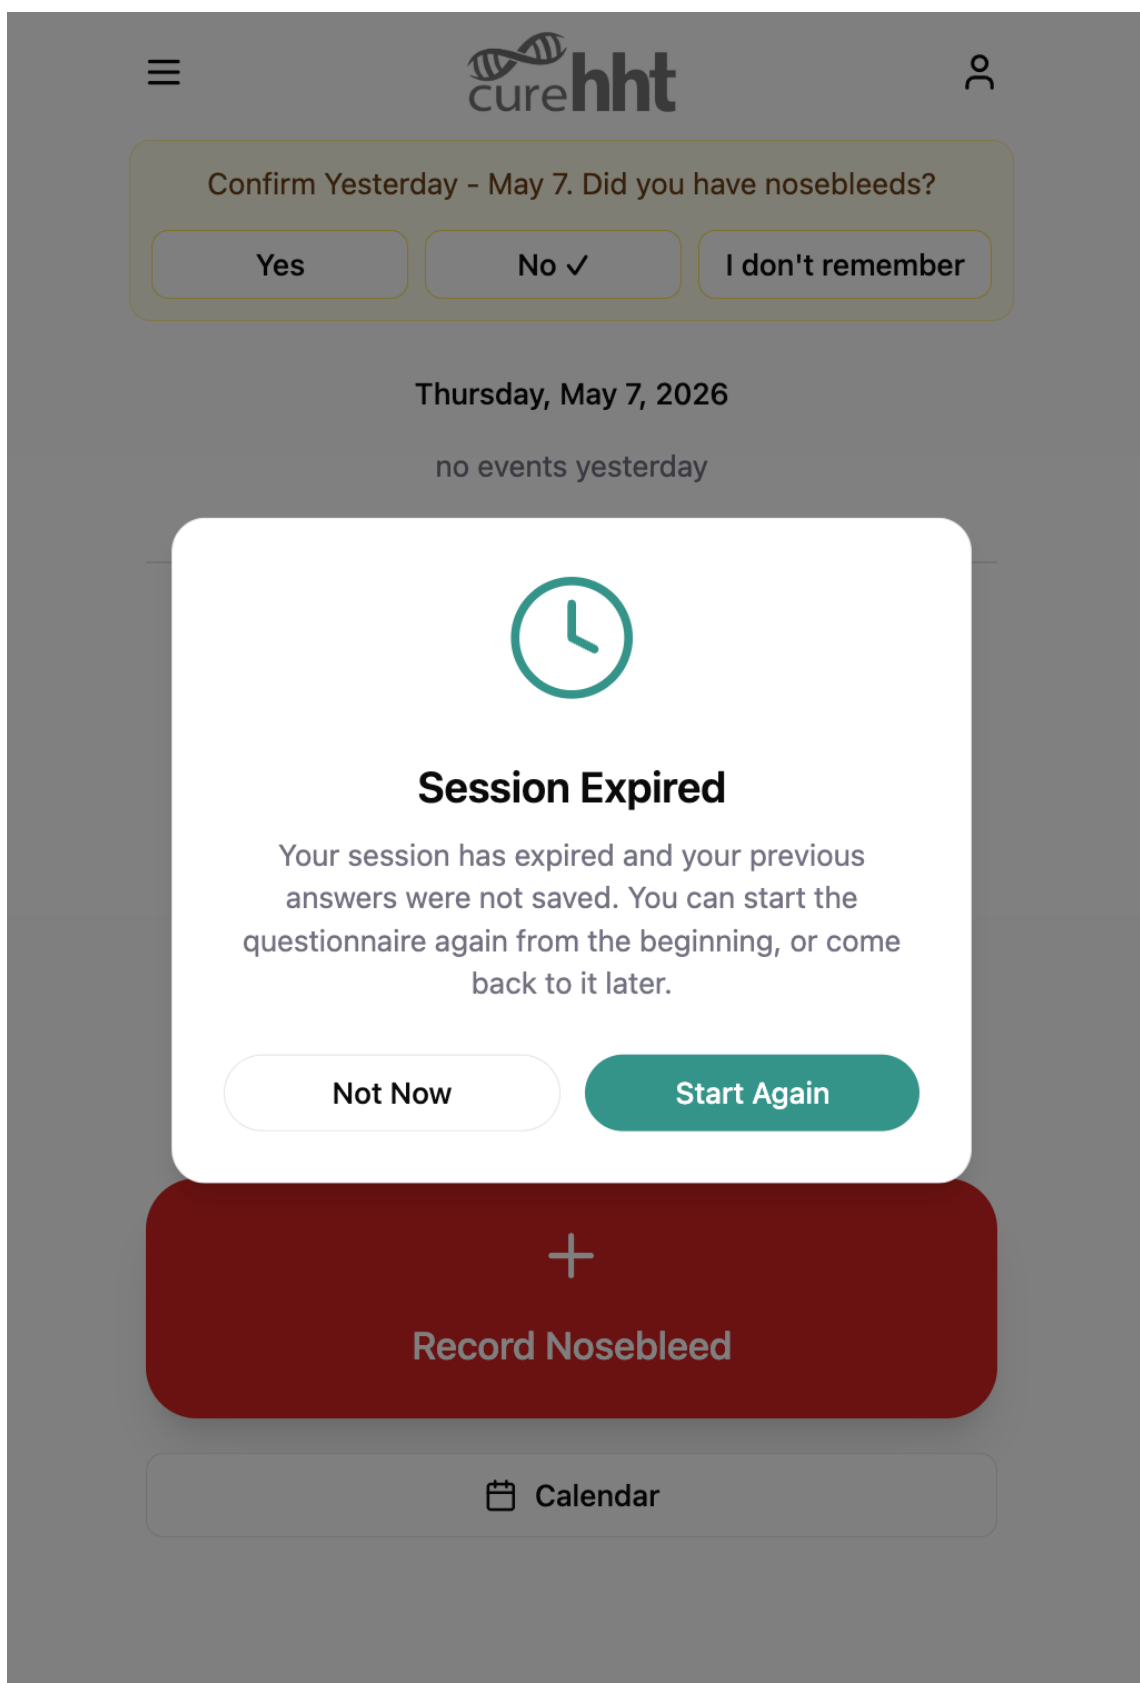


Figure 6.4: Session Expiry Dialog

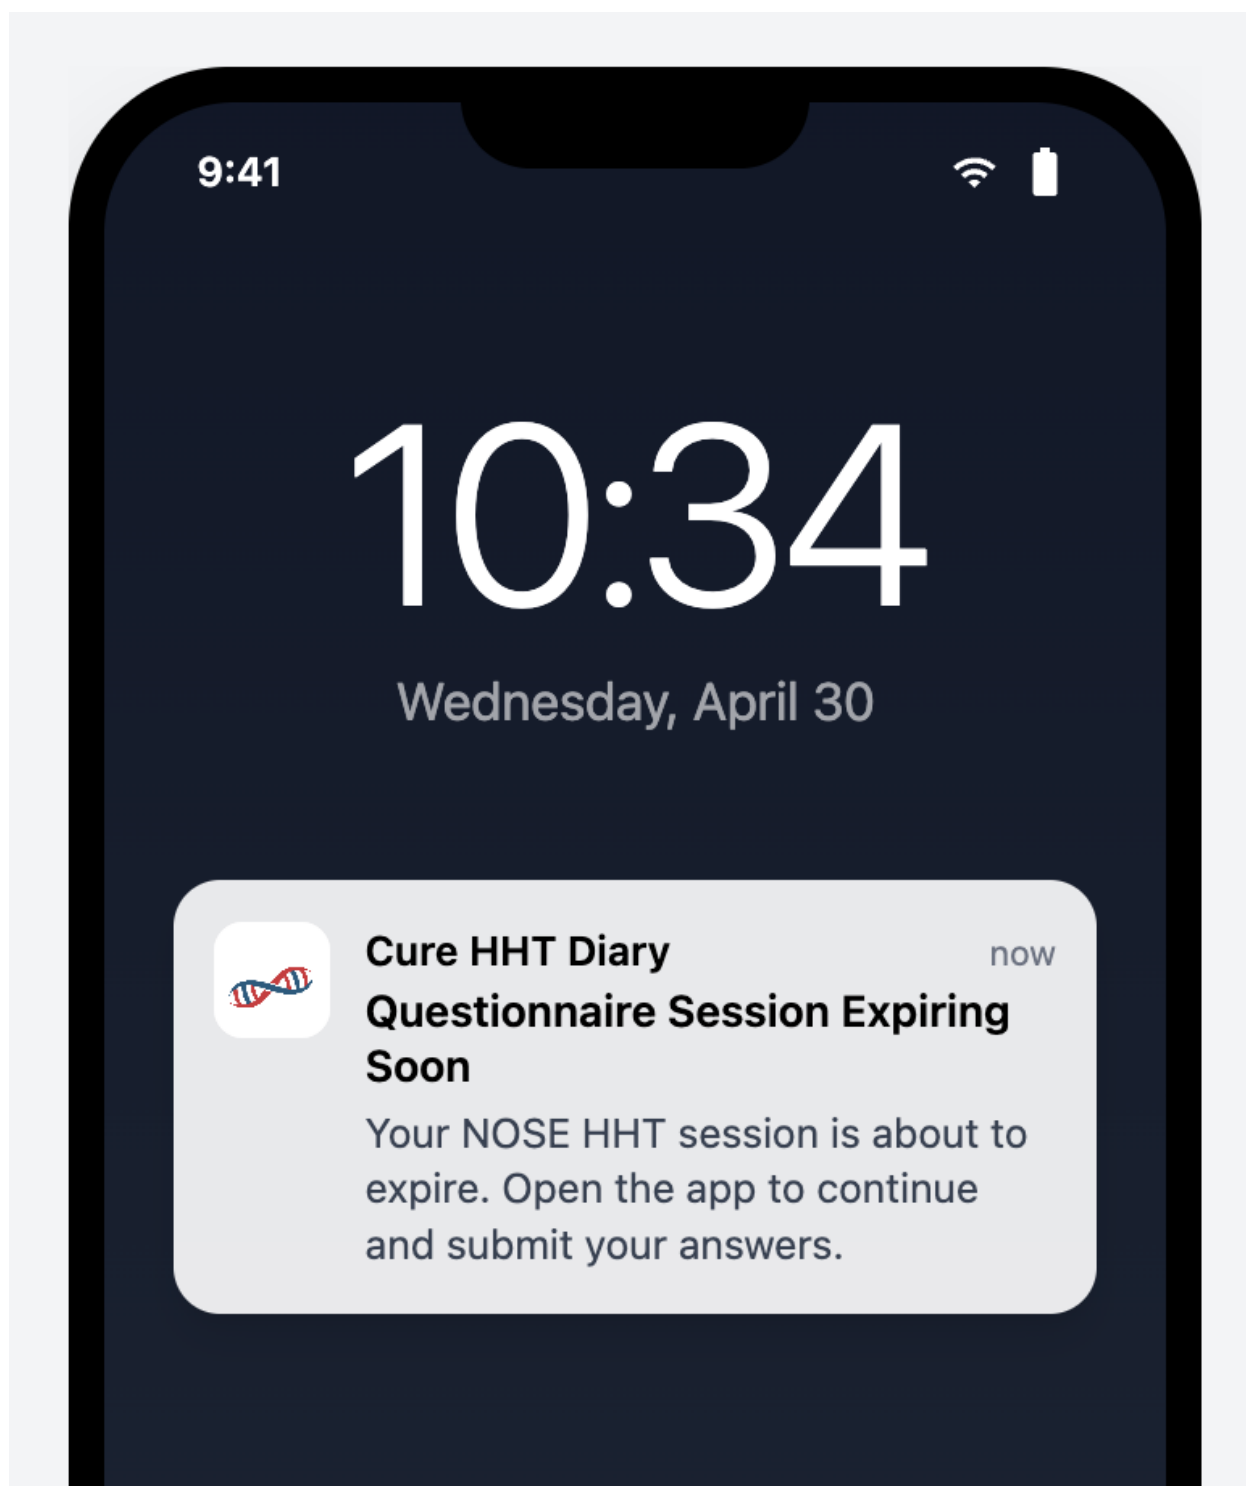


Figure 6.5: *Timeout Warning Notification*

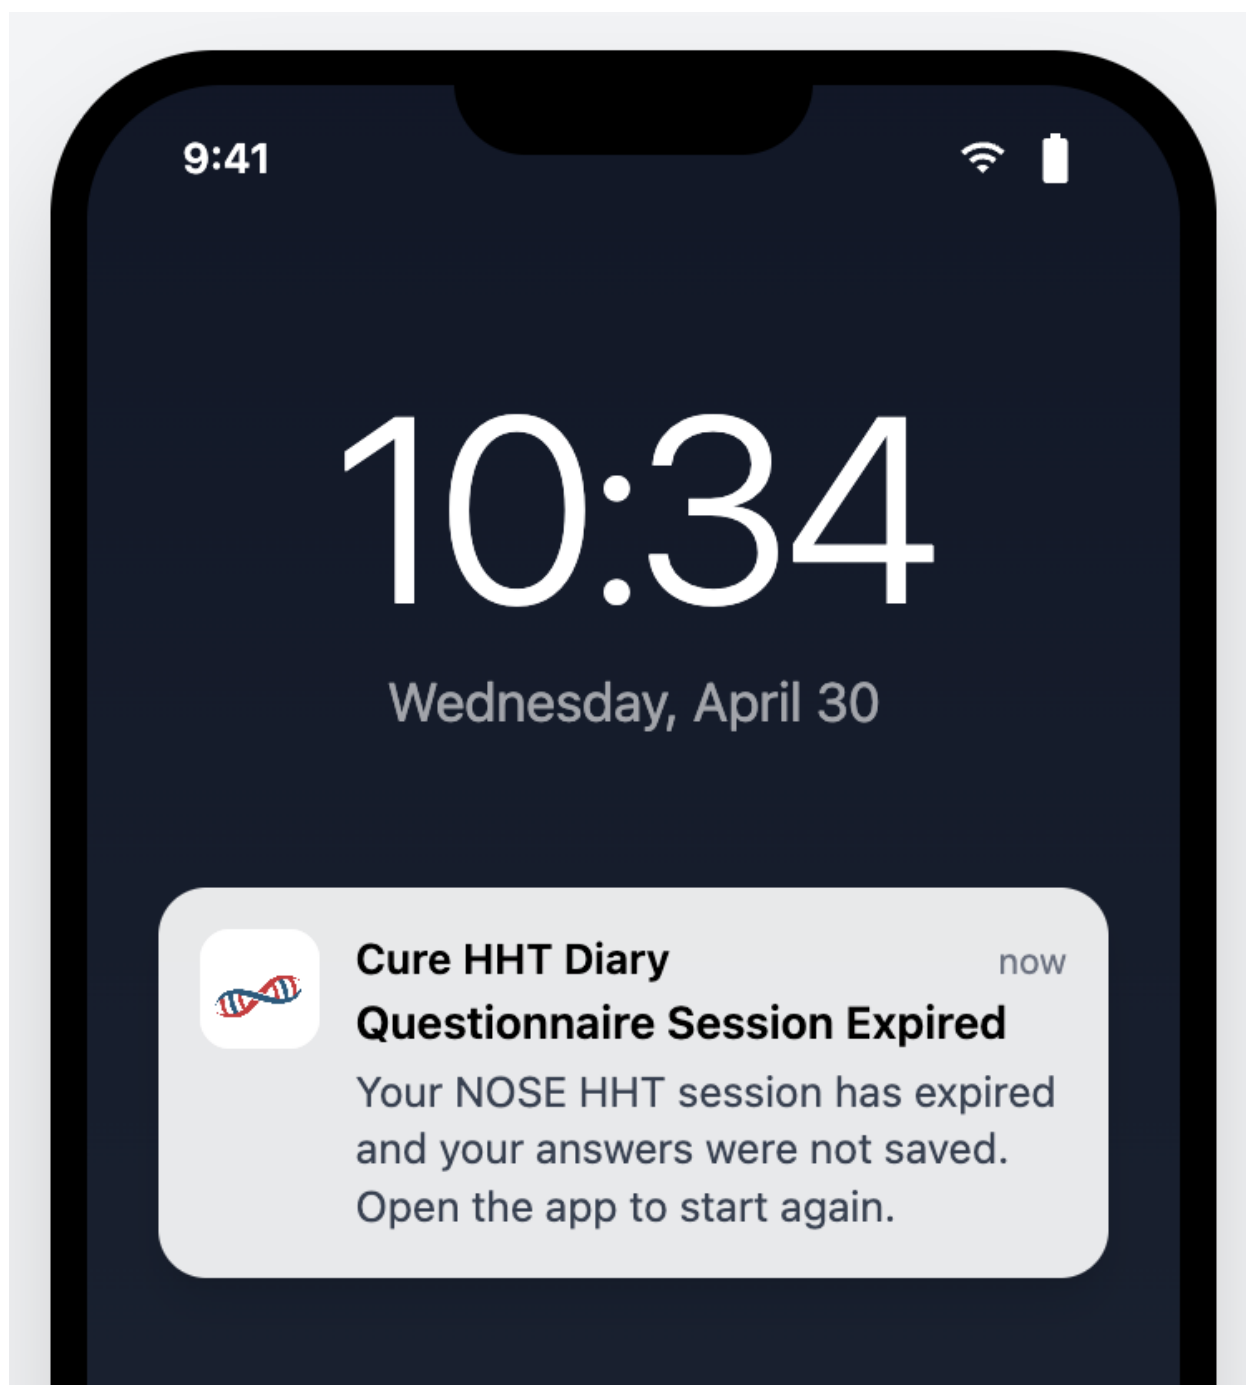


Figure 6.6: Session Expiry Notification

6.3.5 Questionnaire Session Expiry

REQ ID: DIARY-GUI-questionnaire-session-expiry

Refines: DIARY-PRD-questionnaire-session-timeout

Overview

The interface for ******Session** Expiry**** consists of three surfaces: the **Timeout Warning Notification** (push notification before expiry), the ******Session** Expiry Dialog**** (in-app dialog on return after expiry), and the ******Session** Expiry Notification**** (push notification when expiry occurs). On return to an active (not-yet-expired) *Session*, the interface restores the *Participant* to where they left off.

Session Expiry Dialog

Session Expiry Dialog The Acknowledgement Dialog displayed to the participant when they open a questionnaire that has reached Session Expiry.

Timeout Warning

Assertions

A. When a **Timeout Warning Notification** is delivered, the interface SHALL present it as a push notification indicating that the *Questionnaire Session* is approaching expiry.

Expired Session on Return

B. When the *Participant* opens a *Questionnaire* that has reached ******Session** Expiry**, **the interface SHALL display a Session Expiry Dialog**** informing the *Participant* that their *Session* has expired and their previous answers were not saved.

C. The ******Session** Expiry Dialog**** SHALL present a Start Again button and a Not Now button.

D. When the *Participant* selects Start Again, the interface SHALL dismiss the ******Session** Expiry Dialog**** and present the **Preamble**.

E. When the *Participant* selects Not Now, the interface SHALL navigate the *Participant* to the home screen.

Session Expiry Notification

F. When a ****Session** Expiry Notification** is delivered, the interface SHALL present it as a push notification indicating that the *Questionnaire Session* has expired.

Active Session on Return

G. When the *Participant* returns to a *Questionnaire* with a *Session* that has not yet reached ****Session** Expiry**, the interface SHALL restore the *Participant* to the question they were on when they left, with their in-progress answers intact.

Rationale

The ****Session** Expiry Dialog** is the in-app companion to the ****Session** Expiry Notification**: the notification tells the *Participant* the *Session* expired while they were away from the app; the dialog confirms it when they return and tells them their prior answers are gone. Start Again / Not Now are the two realistic next-actions — restart now from the *Preamble*, or defer until later — and both are made explicit so the *Participant* does not face a silent reset on next open. Restoring the active-*Session Participant* to their last question (with in-progress answers intact) is the GUI-side guarantee that the PRD's in-progress-preservation rule actually surfaces to the *Participant*; if the interface always re-entered through the *Preamble*, the preservation would be invisible and the *Participant* would lose confidence that pausing is safe.

Follow-up — configurability: This requirement currently encodes the only option implemented in code. Future sponsors may require different rules; introduce a configurable seam (e.g. a parameter on the CAL-PRD-* parent, or a new platform-side template the CAL- REQ Satisfies) when the need arises. Until that seam exists, this REQ is normative for the Callisto deployment.

Screen reference

The screenshot displays the curehht mobile application interface. At the top, there is a navigation bar with a hamburger menu icon on the left, the curehht logo in the center, and a user profile icon on the right. Below the navigation bar, a confirmation prompt asks, "Confirm Yesterday - May 7. Did you have nosebleeds?". This prompt includes three buttons: "Yes", "No ✓", and "I don't remember". Below the confirmation prompt, the date "Thursday, May 7, 2026" is displayed, followed by the text "no events yesterday". A large white modal box is centered on the screen, indicating that the "Session Expired". The modal contains a clock icon, a message stating that the session has expired and answers were not saved, and two buttons: "Not Now" and "Start Again". Below the modal, there is a prominent red button with a white plus sign and the text "Record Nosebleed". At the bottom of the screen, there is a button with a calendar icon and the text "Calendar".

Menu icon

curehht

User icon

Confirm Yesterday - May 7. Did you have nosebleeds?

Yes No ✓ I don't remember

Thursday, May 7, 2026

no events yesterday



Session Expired

Your session has expired and your previous answers were not saved. You can start the questionnaire again from the beginning, or come back to it later.

Not Now Start Again



Record Nosebleed

 Calendar

6.4 Daily eDiary: HHT Epistaxis Data Capture

The daily eDiary data-capture flow for **Epistaxis Events** comprises the platform-level data capture standard, the *Participant*-facing recording flow (Start, Max *Intensity*, End), and the deletion flow (in-flight during recording and post-save from event history).

6.4.1 HHT Epistaxis Data Capture Standard

REQ ID: DIARY-PRD-epistaxis-capture-standard

Overview

The HHT Epistaxis Data Capture Standard defines the requirements for *Participant*-reported nosebleed event collection in HHT clinical trials. Epistaxis frequency, duration, and severity are primary outcome measures for evaluating treatment efficacy. Timezone-aware timestamps ensure precise duration calculation regardless of *Participant* location.

Daily Status

Daily Status The participant's self-reported summary of nosebleed activity for a given day. Valid values are Had Nosebleed, No Nosebleed, and Don't Remember.

Intensity

Intensity A participant-reported measure of nosebleed severity captured on a defined six-level scale ordered from least to most severe.

Incomplete Record

Incomplete Record An **Epistaxis Event** that has been saved but is missing one or more required fields: start time, **Intensity**, or end time.

Assertions

A. The System SHALL require a *Participant* to record a **Daily Status** for each *Calendar* day within the *Diary* period.

B. The System SHALL enforce mutual exclusivity of the three **Daily Status** values — a *Participant* SHALL NOT record more than one **Daily Status** per *Diary* entry.

C. When a *Participant* records a **Daily Status** of Had Nosebleed, the System SHALL require the *Participant* to provide start time and end time for the **Epistaxis Event** with timezone information.

D. The System SHALL calculate the duration of an **Epistaxis Event** from the recorded start time and end time, accounting for timezone differences.

E. The System SHALL require the *Participant* to record an **Intensity** value for each **Epistaxis Event**.

F. The System SHALL present notes options from a predefined list (defined in CAL-PRD-entry-time-restrictions-configuration) for each **Epistaxis Event**; the available options SHALL be *Sponsor*-configurable per study protocol.

G. The System SHALL classify an **Epistaxis Event** as an **Incomplete Record** when it has been saved with one or more required fields not recorded.

Rationale

The *Daily Status / Epistaxis Event* two-level structure exists because the clinical question is two-leveled: “Did anything happen today?” (a daily-grain answer that can be Had Nosebleed, No Nosebleed, or Don’t Remember) and, when something did happen, “What were the events?” (per-event start, end, *Intensity*). Mutually exclusive **Daily Status** values prevent contradictory records (a *Participant* cannot simultaneously have had a nosebleed and not had one). Required start, end, and **Intensity** on each **Epistaxis Event** capture the three primary outcome measures (frequency by count, duration by interval, severity by *Intensity*); allowing any of these to be missing without an explicit incomplete-*Record State* would silently downgrade dataset quality. Timezone-aware capture is essential because participants travel and durations computed from naive timestamps across a DST boundary or international move can be off by an hour or more. The **Incomplete Record** classification lets the platform distinguish “in progress, missing data” from “fully captured” so the *Participant* can be prompted to finish and the dataset can flag what is not yet complete.

6.4.2 Record Nosebleed Event

REQ ID: DIARY-GUI-epistaxis-record

Refines: DIARY-PRD-epistaxis-capture-standard

Overview

The nosebleed recording flow walks the *Participant* through three steps — **Start** time, **Max Intensity******, **End** time — visible at all times in a persistent **Progress Indicator** at the top of every screen. The *Participant* can revisit any completed step. Validation at the End Time step prevents impossible records (end before start, end after current real time) and prompts for confirmation on entries that look like they may have been recorded too quickly after the event.

Progress Indicator

Progress Indicator The persistent bar displayed at the top of every screen in the recording flow showing the three steps — Start, Max Intensity, and End — and their completion state.

Time Picker

Time Picker The time selection component presenting the current time as default, a date selector, a timezone selector, and minute adjustment controls of -15, -5, -1, +1, +5, and +15 minutes.

Flow Structure

Assertions

- A.** The interface SHALL display the **Progress Indicator** on every screen throughout the recording flow showing the Start, Max *Intensity*, and End steps.
- B.** The interface SHALL highlight the active step in the **Progress Indicator** and show the recorded value for each completed step.
- C.** The interface SHALL allow the *Participant* to navigate to any previously completed step by tapping it in the **Progress Indicator**.
- D.** The interface SHALL present a Back navigation *Action* on every screen throughout the recording flow.

Nosebleed Start Time

- E.** The interface SHALL present a **Time Picker** for the *Participant* to set the nosebleed start time.

F. The interface SHALL present a Set Start Time button that confirms the start time and advances to the Max *Intensity* screen.

Max Intensity

G. The interface SHALL present the six *Intensity* options as a selectable grid: Spotting, Dripping, Dripping quickly, Steady stream, Pouring, and Gushing.

H. The interface SHALL NOT advance to the End Time screen until the *Participant* has selected one of the *Intensity* options.

I. When the *Participant* selects an *Intensity* option, the interface SHALL highlight the selected option and automatically advance to the End Time screen.

Nosebleed End Time

J. The interface SHALL present a **Time Picker** for the *Participant* to set the nosebleed end time.

K. When the *Participant* selects Set End Time, the interface SHALL save the record and return the *Participant* to the home screen.

L. The System SHALL validate that end time is greater than or equal to start time.

M. The System SHALL restrict end time selection to times not exceeding the current real time.

N. The System SHALL require confirmation when creating entries less than 2 minutes old.

Rationale

The three-step structure (Start, Max *Intensity*, End) matches the clinical model of an event (when it began, how bad it got, when it ended); making the **Progress Indicator** persistent across every screen of the flow keeps the *Participant* oriented and allows direct navigation to any completed step without back-tracking. The **Time Picker**'s minute-adjustment chips (-15/-5/-1/+1/+5/+15) target the realistic adjustment granularity for recording a recently-completed event and avoid the precision-mismatch of a free-text time entry. The auto-advance on *Intensity* selection (vs. requiring a separate Next tap) shaves friction from the most common path (set start, pick *Intensity*, set end) while still letting the *Participant* revisit via the **Progress Indicator** if they want to change their *Intensity* choice. End-time validation (no earlier than start, no later than now) catches the two impossible-time inputs at the GUI layer rather than relying on later data validation. The two-minute confirmation prompt is a soft-stop against premature *Finalization* — a *Participant* who is still actively having a nosebleed when they set the end time is reminded to check before committing.

Follow-up — configurability: This requirement currently encodes the only option implemented in code. Future sponsors may require different rules; introduce a configurable seam (e.g. a parameter on the CAL-PRD-* parent, or a new platform-side template the CAL- REQ Satisfies) when the need arises. Until that seam exists, this REQ is normative for the Callisto deployment.

6.4.3 Nosebleed Event Delete

REQ ID: DIARY-GUI-epistaxis-delete

Refines: DIARY-PRD-epistaxis-capture-standard

Overview

Deletion of a nosebleed event can happen in two contexts: in-flight during the recording flow (before the record has been saved) and post-save from event history. Both paths require a **Reason Dialog — Predefined List** before the deletion is applied, and the *Participant* may cancel at any point.

Delete During Recording Flow

Assertions

- A.** The interface SHALL present a delete *Action* on every screen throughout the recording flow.
- B.** When the *Participant* selects the delete *Action* during the recording flow, the interface SHALL display a **Reason Dialog — Predefined List** before proceeding.
- C.** When the *Participant* confirms the delete reason, the interface SHALL discard the in-progress record and return the *Participant* to the home screen.
- D.** When the *Participant* cancels the Reason Dialog, the interface SHALL return the *Participant* to the screen they were on.

Delete From Event History

- E.** When the *Participant* selects the delete *Action* on a saved **Epistaxis Event**, the interface SHALL display a **Reason Dialog — Predefined List** before proceeding.
- F.** When the *Participant* confirms the delete reason, the interface SHALL remove the event from the *Participant's Diary* and return the *Participant* to the previous screen.


G. When the *Participant* cancels the Reason Dialog, the **Epistaxis Event** SHALL remain unchanged.

Rationale

The delete *Action* is exposed on every screen of the recording flow because the *Participant* may realize partway through that they started the record by mistake (wrong date, wrong event, accidental tap) and there is no benefit to forcing them to complete the flow before deleting. Routing both in-flight delete and post-save delete through a **Reason Dialog — Predefined List** keeps the *Audit Trail*'s deletion-reason capture consistent across both contexts — a deletion at any point produces a categorized reason record. Predefined-list (rather than free-text) reasons match the dataset analyzability goal: deletion reasons are the kind of metadata downstream analysis aggregates over, and a controlled vocabulary makes that analysis tractable. The cancel path on either delete returns the *Participant* to where they were (in-flight: the same screen; post-save: the previous screen, with the record unchanged) so an accidental delete-tap is fully recoverable.

Follow-up — configurability: This requirement currently encodes the only option implemented in code. Future sponsors may require different rules; introduce a configurable seam (e.g. a parameter on the CAL-PRD-* parent, or a new platform-side template the CAL- REQ Satisfies) when the need arises. Until that seam exists, this REQ is normative for the Callisto deployment.

Screen reference

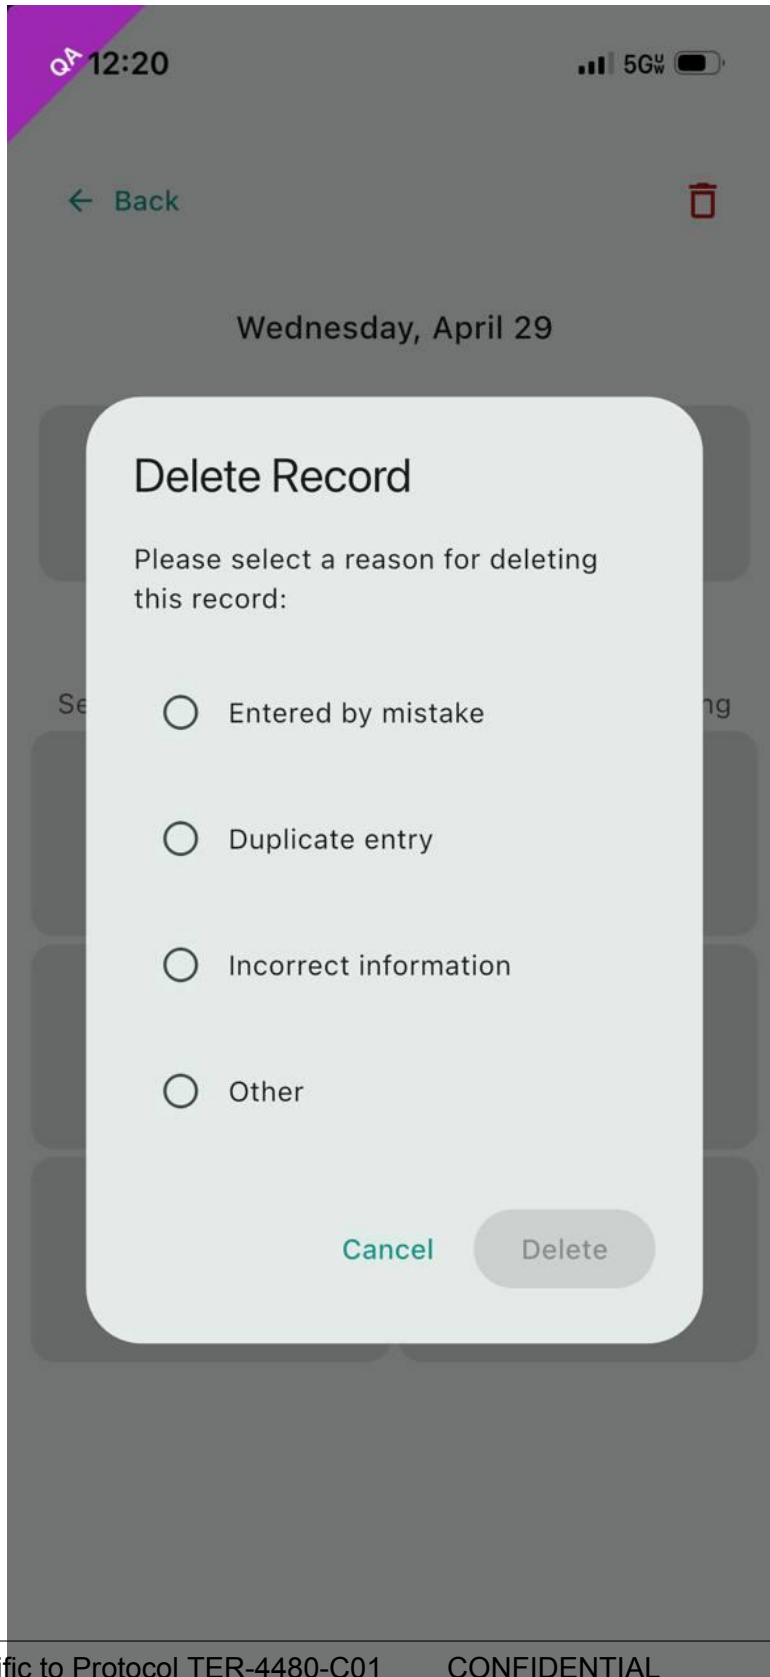

6.5 Score Calculation

The platform's score-calculation obligations comprise the general rule that scores are computed per a validated algorithm and stored with the *Questionnaire* record, plus the specific algorithm bindings for the **HHT-QoL** and **NOSE HHT** instruments.

6.5.1 Questionnaire Score Calculation

REQ ID: DIARY-PRD-questionnaire-score-calculation

Overview

Validated clinical questionnaires require scoring according to published, protocol-defined algorithms to ensure data integrity and comparability across participants and studies. Storing scores with survey records ensures traceability and supports downstream *Rave EDC* synchronization and clinical analysis.

Assertions

- A.** The System SHALL calculate **Questionnaire** scores according to the validated algorithm defined for each **Questionnaire**.
- B.** The System SHALL store the calculated score with the associated *Questionnaire* record.
- C.** The scoring algorithm SHALL be traceable to its source definition for each *****Questionnaire*** Type**.

Rationale

Scores are the analytical artifact downstream clinical research derives outcomes from — frequency, severity, quality-of-life impact. Computing scores per the validated published algorithm rather than per a platform-local re-derivation is what gives the resulting numbers their interpretive validity: a *NOSE HHT* score from this platform is comparable to a *NOSE HHT* score from any other study only because both implement the published JAMA Otolaryngology algorithm faithfully. Storing the score with the *Questionnaire* record (rather than recomputing on demand) preserves the value the *Participant*'s answers actually produced at the time of *Submission* — even if the algorithm reference is later updated, the historical record reflects what was computed and shipped to **Rave EDC** for that *Participant*. Traceability to source for each *****Questionnaire*** Type** is the audit-trail counterpart of

the *True Copy* obligation on the *Questionnaire* definitions: any auditor must be able to follow the chain from a stored score back to the published algorithm that produced it.

6.5.2 HHT-QoL Score Calculation

REQ ID: DIARY-PRD-score-hht-qol

Refines: DIARY-PRD-questionnaire-score-calculation

Assertions

A. The System SHALL calculate the **HHT-QoL Questionnaire** score according to the algorithm defined in: Development and performance of a hereditary hemorrhagic telangiectasia-specific quality-of-life instrument, Blood Advances, 26 July 2022, Volume 6, Number 14, DOI 10.1182/bloodadvances.2022007748.

Rationale

The **HHT-QoL** scoring algorithm is fully specified by the cited Blood Advances 2022 publication; the platform's *Role* is to implement that algorithm faithfully against the *Questionnaire*'s four answer fields. Anchoring the requirement to the DOI rather than restating the algorithm here preserves the property that the published reference is the single source of truth — any platform-side restatement would create a second authority that could drift from the original. The DOI is stable across editorial revisions, so an auditor can retrieve exactly the version the platform's implementation was checked against.

6.5.3 NOSE HHT Score Calculation

REQ ID: DIARY-PRD-score-nose-hht

Refines: DIARY-PRD-questionnaire-score-calculation

Assertions

A. The System SHALL calculate the **NOSE HHT Questionnaire** score according to the algorithm defined in: Development and Validation of the Nasal Outcome Score for Epistaxis in Hereditary Hemorrhagic Telangiectasia (*NOSE HHT*), JAMA Otolaryngology – Head & Neck Surgery, November 1, 2020, Volume 146, Number 11, DOI 10.1001/jamaoto.2020.3040.

Rationale

The **NOSE HHT** scoring algorithm is fully specified by the cited JAMA Otolaryngology 2020 publication, which is the same publication the *Questionnaire* definition itself cites for the question and answer choices. Anchoring the score requirement to the same DOI keeps the *Questionnaire* and its score on a single source-of-truth chain: the published instrument defines what to ask and how to score the answers, and the platform's two requirements (one for the *Questionnaire* content, one for the score) both reference it. As with **HHT-QoL**, the DOI is the stable retrieval handle an auditor uses to confirm the platform's implementation matches the validated reference.

6.6 Diary Entry Rules

The platform-level validation rules that apply to every *Diary* entry comprise the two-tier (justification, lock) time-based restrictions, the *Duration Reasonableness Check*, and the overlapping-event detection-and-*Resolution* flow.

6.6.1 Time-Based Entry Restrictions

REQ ID: DIARY-PRD-entry-time-restrictions

Overview

Clinical *Trial* data integrity requires that *Participant*-reported data be contemporaneous. As time passes after an event, recall accuracy degrades and the risk of unreliable data increases. A two-tier restriction model balances the need for late data capture (with documented justification) against the need to prevent entries that are too old to be clinically reliable. The justification tier preserves ALCOA+ compliance by requiring documented reasons for non-contemporaneous entries. The lock tier enforces a hard boundary beyond which no data modification is permitted.

Justification Threshold

Justification Threshold The configurable elapsed time from midnight (00:00) of the event date in the **Participant's** local timezone after which the **Participant** must provide a reason before creating or editing an entry for that date.

Lock Threshold

Lock Threshold The configurable elapsed time from midnight (00:00) of the event date in the **Participant's** local timezone after which the date is fully locked and no creation, editing, or deletion of entries is permitted.

Entry Justification

Entry Justification A reason selected from a sponsor-defined predefined list that the **Participant** must provide when creating or editing an entry that has exceeded the **Justification Threshold**.

Justification Tier

Assertions

- A.** When the elapsed time for an event date exceeds the **Justification Threshold** but has not exceeded the **Lock Threshold**, the System SHALL require the **Participant** to select an **Entry Justification** before saving a new entry or an edit to an existing entry for that date.
- B.** The System SHALL NOT require an **Entry Justification** when the **Participant** deletes an entry within the justification window.
- C.** The System SHALL NOT allow free-text entry for **Entry Justification**.
- D.** The System SHALL store the selected **Entry Justification** with the entry record.

Lock Tier

- E.** When the elapsed time for an event date exceeds the **Lock Threshold**, the System SHALL NOT permit creation of new entries for that date.
- F.** When the elapsed time for an event date exceeds the **Lock Threshold**, the System SHALL NOT permit editing of existing entries on that date.
- G.** When the elapsed time for an event date exceeds the **Lock Threshold**, the System SHALL NOT permit deletion of existing entries on that date.

Configuration

- H.** The System SHALL support *Sponsor*-configurable **Justification Threshold** per deployment.

- I. The System SHALL support *Sponsor*-configurable **Lock Threshold** per deployment.
- J. The **Lock Threshold** SHALL be greater than or equal to the **Justification Threshold**.
- K. The System SHALL support *Sponsor*-configurable definition of the **Entry Justification** predefined list per deployment.
- L. When neither threshold is configured for a deployment, the System SHALL NOT apply time-based entry restrictions.
- M. The **Lock Threshold** SHALL apply only to event dates on or after the ***Trial Start*** date.

Rationale

The two-tier model exists because two distinct integrity concerns argue for two distinct boundaries. Recall accuracy degrades gradually after an event, so for some window after the event date the data is still useful but the *Participant* should explicitly acknowledge they are entering it late (this is the **Justification Threshold** — a soft boundary that captures a categorical reason on the record). Beyond a longer window, the data is no longer clinically reliable regardless of justification, so the platform makes it impossible to modify (the **Lock Threshold** — a hard boundary that disables create/edit/delete). Predefined-list justifications (rather than free-text) match the analyzability goal: the *Audit Trail* aggregates over a controlled vocabulary of reasons rather than over unbounded prose. Deletion within the justification window does not require justification because the *Participant* is removing data they reported, not modifying it; the *Audit Trail* still captures the deletion event and its own reason via the standard delete flow. The `Lock >= Justification` invariant ensures the two tiers compose correctly (a Justification-required state always precedes a Lock state for the same date). The “only after ***Trial Start*** date” qualifier on the **Lock Threshold** means pre-*Trial* historical entries (covered by the ******Diary** Start Day****) are not subject to the lock, since those entries are explicitly retrospective and the lock semantics don’t apply.

6.6.2 Time-Based Entry Restrictions Configuration

REQ ID: CAL-PRD-entry-time-restrictions-configuration

Refines: DIARY-PRD-entry-time-restrictions

Overview

The Callisto clinical protocol requires that nosebleed event entries older than one *Calendar* day include documented justification for the timing discrepancy, and that entries older than 48 hours are locked entirely to maintain data reliability. These values configure the platform mechanism defined in *Diary-PRD-entry-time-restrictions*.

Assertions

- A. The **Justification Threshold** SHALL be configured to 24 hours.
- B. The **Lock Threshold** SHALL be configured to 48 hours.
- C. The **Entry Justification** predefined list SHALL contain exactly four options: “Entered from paper records,” “Remembered specific event,” “Estimated event,” and “Other.”
- D. The **Entry Justification** prompt SHALL display the text: “This is an event more than one day old. Please explain why you are adding/changing it now.”

Rationale

The 24-hour **Justification Threshold** binds the soft “explain why this is late” boundary to one *Calendar* day, matching the Yesterday Entry Reminder’s daily-cadence prompt — a *Participant* who has not entered yesterday’s data within 24 hours has crossed into territory where the protocol requires a documented reason for the delay. The 48-hour **Lock Threshold** doubles the justification window, recognizing that some justifiable-late entries take an additional day to surface (a *Participant* who was traveling or unwell at the 24-hour mark gets a further day to backfill with justification) while still capping the editable window at two days for reliability. The four-option predefined list covers the realistic operational distribution of late-entry causes: transferring from paper records during onboarding, retrospective recall of a specific event, retrospective estimation when specifics are not recalled, and the residual “Other” for cases the three categories do not cover. The prompt text frames the obligation in plain language so the *Participant* understands what they are being asked to explain.

6.6.3 Duration Reasonableness Check

REQ ID: DIARY-PRD-entry-duration-check

Overview

Unusually short or long event durations may indicate data entry errors. Confirmation prompts at configurable thresholds help ensure data accuracy while allowing legitimate outlier events to be recorded.

Duration Reasonableness Check

Duration Reasonableness Check A configurable validation rule that prompts the **Participant** to confirm the recorded duration of an event when it falls outside expected

boundaries.

Short Duration Threshold

Short Duration Threshold The configurable minimum duration below which a confirmation prompt is triggered.

Long Duration Threshold

Long Duration Threshold The configurable maximum duration above which a confirmation prompt is triggered.

Short Duration Check

Assertions

A. When the duration of an event is less than the **Short Duration Threshold**, the System SHALL prompt the **Participant** to confirm the duration before saving.

B. The confirmation prompt SHALL provide a confirm option that saves the entry as entered and a reject option that returns the **Participant** to edit the duration.

Long Duration Check

C. When the duration of an event is greater than the **Long Duration Threshold**, the System SHALL prompt the **Participant** to confirm the duration before saving.

D. The confirmation prompt SHALL provide a confirm option that saves the entry as entered and a reject option that returns the **Participant** to edit the duration.

Prompt Timing

E. The System SHALL display the confirmation prompt before the save operation completes.

Configuration

F. The System SHALL support *Sponsor*-configurable **Short Duration Threshold** per deployment.

G. The System SHALL support *Sponsor*-configurable **Long Duration Threshold** per deployment.

H. The System SHALL support *Sponsor*-configurable enablement of each check independently per deployment.

I. When a check is not enabled for a deployment, the System SHALL NOT display the corresponding confirmation prompt.

Rationale

Duration outliers are a common data-entry-error signal: a typo or wrong-timezone selection can produce a one-second or twelve-hour nosebleed that the *Participant* did not actually have. A soft confirmation prompt at configured boundaries catches these without rejecting legitimately-outlying events (a multi-hour nosebleed can be real for certain HHT participants). The two checks are independently enableable because a deployment may want only one direction (e.g. only the short-duration check, if long durations are clinically plausible in the protocol). The pre-save timing rule (assertion E) ensures the *Participant* sees the prompt at the moment of decision rather than discovering after the fact that their entry was flagged. Reject-and-edit is the inverse of confirm-and-save and gives the *Participant* a direct path to correct a typo without re-entering the event from scratch.

6.6.4 Duration Reasonableness Check Configuration

REQ ID: CAL-PRD-entry-duration-check-configuration

Refines: DIARY-PRD-entry-duration-check

Overview

The Callisto clinical protocol defines specific duration boundaries for nosebleed events to flag potential data entry errors. These values configure the platform mechanism defined in *Diary-PRD-entry-duration-check*.

Assertions

A. The **Short Duration Threshold** SHALL be configured to 1 minute.

B. The **Long Duration Threshold** SHALL be configured to 60 minutes.

C. Both the short duration check and the long duration check SHALL be enabled.

D. The short duration confirmation prompt SHALL display the text: “Duration is under 1 minute, is that correct?”

E. The long duration confirmation prompt SHALL display the text: “Duration is over 1 hour, is that correct?”

Rationale

The 1-minute **Short Duration Threshold** catches the most likely short-side data-entry error — a *Participant* who tapped Set End Time immediately after Set Start Time, producing a near-zero duration that almost certainly reflects a misclick rather than a real event. The 60-minute **Long Duration Threshold** flags the long-side counterpart — a duration over an hour is clinically possible for some HHT participants but unusual enough that a confirmation prompt is worthwhile against the much more common case of a wrong end-date or wrong-timezone entry producing a multi-hour or multi-day duration. Both checks are enabled for the Callisto deployment because the cost of an undetected outlier (a corrupted primary outcome measure) substantially exceeds the friction cost of a one-tap confirmation when a real outlier event occurs. The prompt text is phrased as a question (“is that correct?”) rather than a warning, matching the soft-confirmation intent — the *Participant* is invited to confirm or correct, not blocked.

6.6.5 Overlapping Event Detection and Resolution

REQ ID: DIARY-PRD-entry-overlap-resolution

Overview

Nosebleed events cannot physically *Overlap* — a *Participant* cannot have two simultaneous, independent nosebleeds. When a new record’s time range intersects with an existing record, the system must detect the conflict and guide the *Participant* through *Resolution* before the record is committed. This ensures data integrity and prevents logically impossible entries from reaching the clinical dataset.

Overlap

Overlap A state in which the time range of a new or edited entry intersects with the time range of one or more existing entries for the same **Participant**.

Conflicting Record

Conflicting Record An existing entry whose time range intersects with the entry being created or edited.

Resolution

Resolution The **Participant's** choice of how to handle an **Overlap** between two entries.

Detection

Assertions

A. The System SHALL evaluate for potential **Overlap** when the **Participant** sets the start time of a new or edited entry, and SHALL confirm the **Overlap** when the **Participant** sets the end time.

B. The System SHALL evaluate **Overlap** by comparing the actual start and end timestamps of the new or edited entry against all existing entries for the same **Participant**.

C. The System SHALL evaluate **Overlap** against both completed entries and ongoing entries.

Pre-Resolution State

D. When an **Overlap** is detected, the System SHALL save the new entry to persistent storage immediately upon creation.

E. When an **Overlap** is detected, the System SHALL NOT display the new entry in the ****Participant's *Diary* history until **Resolution** is complete.

Resolution Sequencing

F. The System SHALL present the **Participant** with one **Conflicting Record** at a time, starting with the oldest.

G. After each **Resolution** step, the System SHALL evaluate the resulting entry for further **Overlaps**.

H. The System SHALL repeat the **Resolution** flow until no **Overlaps** remain.

I. When all **Overlaps** are resolved, the System SHALL commit all resulting changes as a single transaction.

Resolution Options

J. For each **Overlap**, the System SHALL offer three *Resolution* options: keep the new entry and discard the **Conflicting Record**, keep the **Conflicting Record** and discard the new entry, or merge both entries into one.

Merge Behavior

K. When the **Participant** selects merge, the System SHALL construct the merged entry using the earliest start time and the latest end time across both entries.

L. When either entry in a merge is ongoing, the merged entry SHALL be ongoing.

M. When the **Participant** selects merge, the System SHALL assign the higher severity value from the two original entries to the merged entry.

Post-Resolution Confirmation

N. After any *Resolution* choice, the System SHALL present the resulting entry to the **Participant** for review and confirmation before committing.

O. The **Participant** SHALL be able to edit the resulting entry before confirming.

Rationale

Two nosebleeds cannot physically *Overlap*; allowing overlapping records into the dataset would be silent data corruption. The two-stage detection (predictive on start-time, confirmatory on end-time) gives the *Participant* early notice that an *Overlap* is forming without interrupting them mid-record, then escalates to mandatory *Resolution* at the moment the conflict becomes a hard reality. Saving the new entry to persistent storage immediately on creation (assertion D) is the durability guarantee that the *Participant*'s work is not lost if the application crashes mid-*Resolution*; hiding it from the *Diary* history until *Resolution* completes (assertion E) keeps the *Participant*'s view consistent with what has actually been resolved. One-conflict-at-a-time *Resolution* starting with the oldest, repeated until no overlaps remain, is the only sequencing that handles the cascade case (a new record overlaps two existing records that themselves *Overlap* each other once merged). Three *Resolution* options cover the realistic choices: the new record was right and the old one was wrong (keep-new), the old record was right and the new one is a duplicate (keep-existing), or both were partial captures of one continuous event (merge). Merge using earliest-start / latest-end with the higher severity captures the union-by-time and max-by-severity that best represents one continuous event reconstructed from two partial captures. Pre-commit review is the final integrity gate — the *Participant* sees the resulting entry as the platform will save it and can edit any field before confirming.

Screen reference

Resolve Conflict

Two records overlap. Choose how to handle them.

New Record

Time

12:28 PM - 12:43 PM

Duration

15m

Severity



Dripping quickly

Existing Record

Time

12:27 PM - 12:43 PM

Duration

15m

Severity



Dripping quickly

Keep New

Keep Existing



Merge Records

Combine both into one event with the longest duration

See:

6.6.6 Overlapping Event Resolution Flow

REQ ID: DIARY-GUI-entry-overlap-resolution

Refines: DIARY-PRD-entry-overlap-resolution

Overview

When an *Overlap* is detected, the **Participant** needs early warning and a clear *Resolution* path. Displaying a warning as soon as the start time indicates a potential conflict gives the **Participant** awareness without interrupting their recording flow. Once the full time range is established, the *Resolution* screen provides a side-by-side comparison and straightforward actions to resolve the conflict.

Resolution Screen

Resolution Screen The screen presented to the **Participant** when an **Overlap** is confirmed, displaying the new entry and the **Conflicting Record** side by side with available resolution actions.

Early Warning

Assertions

A. When a potential **Overlap** is detected after the **Participant** sets the start time, the interface SHALL display a warning indicating that overlapping events have been detected and the number of conflicting records.

B. The warning SHALL NOT prevent the **Participant** from continuing the recording flow.

Resolution Trigger

C. When the **Participant** sets the end time and the **Overlap** is confirmed, the interface SHALL navigate the **Participant** to the ****Resolution** Screen**.

Resolution Screen

D. The interface SHALL present the ****Resolution** Screen** displaying the new entry and the **Conflicting Record** side by side.

E. Each entry on the ******Resolution** Screen**** SHALL display the time range, duration, and severity.

F. When the **Conflicting Record** is older than the **Justification Threshold**, the System SHALL require an **Entry Justification** before saving the *Resolution*.

G. The ******Resolution** Screen**** SHALL present a *Keep New Action* and a *Keep Existing Action*. The *Resolution Screen* SHALL present a *Merge Records Action* only when the *Conflicting Record's* event date has not exceeded the **Lock Threshold**.

H. The *Merge Records Action* SHALL display a description indicating that both records will be combined into one event.

Post-Resolution

I. When the *Merge Records Action* is unavailable due to the **Lock Threshold**, the *Resolution Screen* SHALL display a message indicating that the *Conflicting Record* is locked and cannot be merged.

J. After the **Participant** selects any *Resolution* option (*Keep New*, *Keep Existing*, or *Merge Records*), the interface SHALL navigate to the standard **Record Nosebleed** screen pre-filled with the resulting entry data.

K. The **Record Nosebleed** screen SHALL allow the **Participant** to review and edit any field of the resulting entry before confirming.

Multiple Conflicts

L. When multiple **Overlaps** exist, the interface SHALL present one ******Resolution** Screen**** at a time.

M. When all **Overlaps** are resolved and the **Participant** confirms the final entry, the interface SHALL return the **Participant** to the *Main Screen*.

Rationale

The early warning on start-time is a non-blocking signal: the *Participant* sees that something is going to need *Resolution* but is not pushed into the *Resolution* flow yet, because the end-time may still make the *Overlap* go away (e.g. the *Participant* moves the end time earlier than the *Conflicting Record's* start). Only when the end-time confirms the conflict does the GUI commit the *Participant* to the ******Resolution** Screen**. **The side-by-side display makes the comparison legible — same time-range / duration / severity rows for both entries — so the Participant can make an informed choice between Keep New, Keep Existing, and Merge. The Merge-availability check against the Lock Thresh-**

old** is required because merging would produce edits to the *Conflicting Record*'s date, which the lock prohibits; surfacing the unavailability with an explanatory message (rather than silently disabling) keeps the *Participant* oriented. Routing the post-*Resolution* result through the standard **Record Nosebleed** screen (pre-filled) gives the *Participant* a final edit-and-confirm opportunity on the same surface they used to enter the original record — a single interaction model end-to-end rather than a *Resolution*-specific screen the *Participant* has to learn separately. One-at-a-time presentation for multiple overlaps matches the PRD-level *Resolution* sequencing rule, and the return-to-Main-Screen on completion closes the recording journey at its natural endpoint.

Follow-up — configurability: This requirement currently encodes the only option implemented in code. Future sponsors may require different rules; introduce a configurable seam (e.g. a parameter on the CAL-PRD-* parent, or a new platform-side template the CAL- REQ Satisfies) when the need arises. Until that seam exists, this REQ is normative for the Callisto deployment.

Screen reference

Resolve Conflict

Two records overlap. Choose how to handle them.

New Record

Time

12:28 PM - 12:43 PM

Duration

15m

Severity



Dripping quickly

Existing Record

Time

12:27 PM - 12:43 PM

Duration

15m

Severity



Dripping quickly

Keep New

Keep Existing



Merge Records

Combine both into one event with the longest duration

See:

6.7 Mobile Application Navigation and Screens

The foundational navigation surfaces of the **Mobile Application** comprise the **Main Screen** layout (zones, task area, content area, fixed bottom actions), the two top-navigation-bar menus (*User Menu*, *Application Menu*) and their dependent screens, and the *Calendar / Day View* pair the *Participant* uses to navigate to any past date.

6.7.1 Main Screen Layout

REQ ID: DIARY-GUI-main-screen-layout

Overview

The **Main Screen** is the ****Participant's primary interface for daily *Diary* use. Organizing the screen into distinct zones ensures that urgent items (disconnection alerts and tasks) are always visible, *Diary* content is scrollable, and the primary recording *Action* is always accessible. When no tasks or alerts are active, the content area expands to use the full available space.

Main Screen

Main Screen The default screen displayed to the **Participant** upon opening the mobile application.

System Notice Area

System Notice Area A dedicated zone at the top of the Main Screen reserved for persistent, non-dismissable system notices that require the Participant's attention.

Screen Zones

Assertions

A. The *Main Screen* SHALL display the following zones in order from top to bottom: *System Notice Area* (when applicable), top navigation bar, *Task List* (when tasks are active), content area, and fixed bottom actions.

B. The *System Notice Area* SHALL appear above the top navigation bar.

C. When the *System Notice Area* is displayed, it SHALL NOT reduce the space available for any other *Main Screen* zone.

Task List Area

D. When the **Task List** contains more tasks than the available space allows, the **Task List** SHALL scroll within its allocated area.

E. When no tasks are active and no **Disconnection Notification** is displayed, the content area SHALL expand to fill the available space.

Content Area

F. The content area SHALL display *Diary* entries grouped by date, showing Yesterday and Today sections.

G. The content area SHALL be scrollable between the task area and the fixed bottom actions.

H. When a date section contains no entries, the content area SHALL display a message indicating no events for that date.

Fixed Bottom Actions

I. The **Main Screen** SHALL display a Record Nosebleed button fixed at the bottom, regardless of scroll position.

J. The **Main Screen** SHALL display a *Calendar* button fixed at the bottom below the Record Nosebleed button, regardless of scroll position.

Rationale

The five-zone structure (*System Notice Area*, top navigation bar, *Task List*, content area, fixed bottom actions) reflects an attention-priority ordering: persistent system notices appear above everything because they typically encode a state the *Participant* must acknowledge (e.g. **Disconnection Notification**), and the fixed bottom actions appear at the most-reachable thumb position because they are the two highest-frequency *Participant* actions (Record Nosebleed, open *Calendar*). The *Task List* zone collapsing when empty (with the content area expanding to fill the space) keeps the screen from carrying empty chrome for participants in a quiet stretch of the *Trial* — most days, when there are no incomplete records or pending portal-sent questionnaires, the content area uses the full middle of the

screen. Yesterday / Today grouping in the content area matches the everyday read pattern: the most recent days are what the *Participant* actually wants to see; the *Calendar* is the path to anything older.

Follow-up — configurability: This requirement currently encodes the only option implemented in code. Future sponsors may require different rules; introduce a configurable seam (e.g. a parameter on the CAL-PRD-* parent, or a new platform-side template the CAL- REQ Satisfies) when the need arises. Until that seam exists, this REQ is normative for the Callisto deployment.

6.7.2 Mobile Application Navigation and Screens

REQ ID: DIARY-GUI-mobile-navigation

Overview

The *Mobile Application* provides two menus accessible from the top navigation bar: a ****User** Menu** for account and study-related actions, and an **Application Menu** for application-level functions. Each menu leads to dedicated screens. The top navigation bar is visible on the **Main Screen** at all times.

User Menu

User Menu The menu accessed from the right side of the top navigation bar, grouping account and study-related actions.

Application Menu

Application Menu The menu accessed from the left side of the top navigation bar, grouping application-level functions.

Top Navigation Bar

Assertions

A. The **Main Screen** SHALL display a top navigation bar containing the **Application Menu** access on the left, the *Sponsor* or Application logo in the center, and the ****User** Menu** access on the right.

- B. The top navigation bar SHALL remain visible on the **Main Screen** at all times.
- C. Only one menu SHALL be open at a time. Opening one menu SHALL close the other if it is open.
- D. Tapping anywhere outside an open menu SHALL dismiss it.

User Menu

- E. The **User Menu** SHALL contain the following items: Join the Study, *User Profile*, and Help Center.
- F. When the **User** clicks the “Join the Study” button SHALL navigate to the *Linking Code* entry screen.
- G. When the **Participant** is linked to a study, “Join the Study” button SHALL not be visible on the menu.
- H. The Help Center screen SHALL display contact information for support.

User Profile Screen

- I. When the **User** is not linked to any study, the Clinical *Trial* section SHALL display a message indicating no active study link and guidance on how to join.
- J. When the **Participant** is linked to a study, the Clinical *Trial* section SHALL display the **Participation Status Badge**.

Application Menu

- K. The **Application Menu** SHALL contain the following items: Accessibility and Preferences, **Application Privacy Policy**, and Licenses.
- L. The **Application Privacy Policy** screen SHALL display or link to the **Application Privacy Policy**.
- M. The Licenses screen SHALL display open-source and third-party license information.

Rationale

The two-menu split (*User Menu* on the right, *Application Menu* on the left) groups actions by the question the *Participant* is asking: “something about my study” (*User Menu*: Join the Study, *User Profile*, Help Center) vs. “something about the app itself” (*Application Menu*: Accessibility, *Application Privacy Policy*, Licenses). Single-menu-open-at-a-time is a standard mobile-UX safety (opening one menu closes the other) so the *Participant*

never sees two competing surfaces *Overlap*. Hiding Join the Study when already linked (assertion G) removes the no-op *Action* from the menu — once the *Participant* is a **Participant**, the *Action* that converted them from **User** to **Participant** is no longer meaningful. The *User Profile's Clinical Trial* section is the *Participant's* anchor for their study status: empty + guidance when unlinked, **Participation Status Badge** when linked. The *Application Menu's* three items are the standard app-level metadata participants may need to reach but rarely do (privacy, accessibility, licenses).

Follow-up — configurability: This requirement currently encodes the only option implemented in code. Future sponsors may require different rules; introduce a configurable seam (e.g. a parameter on the CAL-PRD-* parent, or a new platform-side template the CAL- REQ Satisfies) when the need arises. Until that seam exists, this REQ is normative for the Callisto deployment.

6.7.3 Calendar and Day View

REQ ID: DIARY-GUI-calendar-day-view

Overview

The **Calendar** provides **Participants** with a monthly overview of their *Diary* activity and a way to navigate to any past date to view, add, or edit entries. The **Day View** is the screen displayed when a **Participant** selects a date from the **Calendar**.

Calendar

Calendar The monthly view modal displaying date states and allowing the **Participant** to navigate to a specific date.

Day View

Day View The screen displayed when the **Participant** selects a date from the **Calendar**, showing the entries for that date or prompting the **Participant** to record a **Daily Status**.

Calendar Modal

Assertions

- A. When the **Participant** selects the *Calendar* button, the interface SHALL display the **Calendar** as a modal overlay.
- B. The **Calendar** SHALL display a monthly view with navigation arrows to move between months.
- C. Each date in the **Calendar** SHALL display a visual indicator representing its *Diary* state.
- D. The **Calendar** SHALL display a legend identifying each visual indicator state.
- E. The **Calendar** SHALL display the following date states: nosebleed events recorded, no nosebleeds confirmed, unknown / don't remember, incomplete or missing data, not recorded, **locked**, and **today**.
- F. A date SHALL display the incomplete state when the **Participant** has one or more **Incomplete Records** for that date.
- G. A date SHALL display the missing state when the date is within the *Diary* period (from *Diary* Start Day to yesterday) and the *Participant* has not recorded any *Daily Status* for that date.
- H. The **Calendar** SHALL present a close *Action* that dismisses the modal and returns the **Participant** to the **Main Screen**.

Day View — No Daily Status Recorded

- I. When the selected date has no **Daily Status** recorded, the **Day View** SHALL display the date and the prompt "What happened on this day?" with three actions: Add nosebleed event, No nosebleed events, and I don't recall / unknown.
- J. When the **Participant** selects No nosebleed events, the interface SHALL record a **Daily Status** of No Nosebleed for that date.
- K. When the **Participant** selects I don't recall / unknown, the interface SHALL record a **Daily Status** of Don't Remember for that date.
- L. When the **Participant** selects Add nosebleed event, the interface SHALL navigate the **Participant** to the nosebleed recording flow with the date set to the selected date.

Day View — Daily Status Recorded

- M. When the selected date has a **Daily Status** recorded, the **Day View** SHALL display the date, the total event count, an Add new event *Action*, and a list of all entries for that

date.

N. Each nosebleed entry in the list SHALL display the start time, timezone, severity, and duration.

O. Each entry in the list SHALL be selectable.

P. Submitted **Portal-Sent Questionnaires** SHALL appear in the entries list on the date they were submitted.

Entry Selection

Q. When the **Participant** selects an entry, the interface SHALL navigate to the nosebleed recording flow for editing if the entry has not exceeded the **Lock Threshold**, or display the entry details in a read-only state if it has.

Day View Navigation

R. The **Day View** SHALL present a back *Action* that returns the **Participant** to the **Calendar**.

Locked Dates

S. When a date has exceeded the **Lock Threshold**, the **Calendar** SHALL display that date in a greyed-out visual style distinct from other date states.

T. When the **Participant** selects a locked date with no **Daily Status** recorded, the **Day View** SHALL display a message indicating no record exists for that date and that the date can no longer be edited. The three *Action* buttons (Add nosebleed event, No nosebleed events, I don't recall / unknown) SHALL NOT be displayed.

U. When the **Participant** selects a locked date with a **Daily Status** recorded, the **Day View** SHALL display the existing entries in a read-only state and SHALL display a message indicating the date can no longer be edited. The Add new event *Action* SHALL NOT be displayed.

Rationale

The *Calendar* is the *Participant's* at-a-glance survey of their *Diary* period: every date's visual indicator answers "have I recorded for this day, and if so, what?" without forcing the *Participant* to drill into each date. The seven-state legend (recorded events, confirmed no-events, don't-remember, incomplete-or-missing, not-recorded, locked, today) covers every *Diary*-state distinction the platform tracks; collapsing two states into one indicator

would hide either incomplete-record warnings or locked-date evidence that the *Participant* needs to see. The *Day View* bifurcation (no-status-recorded prompt vs. status-recorded list) reflects two distinct *Participant* journeys — first-time entry for a date (Add / No / Don't recall three-*Action* prompt) vs. revisiting an already-recorded date (entry list with Add new event affordance). Lock-state handling on a locked date suppresses every *Action* that would attempt to modify the date, surfacing the lock explicitly rather than letting the *Participant* tap an *Action* and discover the rejection — the explanatory message (“can no longer be edited”) is what makes the lock comprehensible. Submitted **Portal-Sent Questionnaires** appearing in the date's entry list grounds the *Questionnaire* as a part of the *Diary* record on the date it landed, rather than as an out-of-band artifact the *Participant* has to navigate separately to find.

Follow-up — configurability: This requirement currently encodes the only option implemented in code. Future sponsors may require different rules; introduce a configurable seam (e.g. a parameter on the CAL-PRD-* parent, or a new platform-side template the CAL- REQ Satisfies) when the need arises. Until that seam exists, this REQ is normative for the Callisto deployment.

6.8 Participant Tasks and Notifications

The **Mobile Application** delivers a set of push notifications and reminders to the **Participant**, together with the on-screen **Task List** and **Participation Status Badge** that surface task-state information in the app itself. The push notifications defined here all conform to the cross-cutting DIARY-PRD-notification-behavior template (tap behavior, no in-notification actions, offline-deferred delivery).

6.8.1 Participant Task List

REQ ID: DIARY-GUI-participant-task-list

Overview

The *Task List* provides **Participants** with a prioritized set of actions requiring their attention. Displaying tasks prominently on the **Main Screen** and linking directly to the relevant flows reduces friction and encourages timely data entry. Tasks are automatically resolved as the **Participant** addresses them, keeping the list current.

Task List

Task List The prioritized set of actionable items displayed on the **Participant's Main Screen** requiring **Participant** attention.

Incomplete Records Task

Incomplete Records Task A task indicating the **Participant** has one or more saved entries with missing required data.

Questionnaire Task

Questionnaire Task A task indicating a **Portal-Sent Questionnaire** has been sent to the **Participant** and has not yet been submitted.

Yesterday Reminder Task

Yesterday Reminder Task A task prompting the **Participant** to record a **Daily Status** for the previous day.

Task Types and Priority

Assertions

A. The **Task List** SHALL support the following task types, displayed in the priority order listed: | Priority | Task Type | Trigger | Removal | | :— | :— | :— | :— | | 1 | **Incomplete Records Task** | **Participant** has one or more saved entries with missing required data | All incomplete entries are completed or deleted | | 2 | **Questionnaire Task** | *Study Coordinator* sends a **Portal-Sent Questionnaire****** | *Sponsor* finalizes the *Questionnaire* | | 3 | **Yesterday Reminder Task** | New day begins and the **Participant** has not recorded a **Daily Status** for the previous day | **Participant** records a **Daily Status** for the previous day |

Incomplete Records Task

B. The **Incomplete Records Task** SHALL display the count of incomplete entries.

C. When the **Participant** selects the **Incomplete Records Task**, the interface SHALL navigate to a screen listing all incomplete entries.

D. From the incomplete entries screen, the **Participant** SHALL be able to complete or delete each entry.

E. The **Incomplete Records Task** SHALL persist regardless of the age of the incomplete entries.

Questionnaire Task

F. The interface SHALL display one **Questionnaire Task** per ****Questionnaire** Type**.

G. When the **Participant** selects a **Questionnaire Task**, the interface SHALL navigate to the *Questionnaire* flow for that **Portal-Sent Questionnaire******.

H. After the *Participant* submits a **Portal-Sent Questionnaire******, the *Questionnaire* SHALL be accessible as a record on the day it was submitted via the **Calendar**.

I. After the *Sponsor* finalizes the **Portal-Sent Questionnaire******, the **Questionnaire Task** SHALL be removed from the **Task List**.

J. After **Submission**, the **Questionnaire Task** SHALL display a completed visual state indicating the *Questionnaire* has been submitted and is awaiting *Sponsor* review.

K. While the **Questionnaire Task** is in a submitted state, the *Participant* SHALL be able to select it to review and edit their answers.

Yesterday Reminder Task

L. The **Yesterday Reminder Task** SHALL present three response actions: Yes, No, and Don't Remember.

M. When the **Participant** selects No, the interface SHALL record a **Daily Status** of No Nosebleed for the previous day and remove the task.

N. When the **Participant** selects Don't Remember, the interface SHALL record a **Daily Status** of Don't Remember for the previous day and remove the task.

O. When the **Participant** selects Yes, the interface SHALL navigate the **Participant** to the nosebleed recording flow with the date set to the previous day.

P. The **Yesterday Reminder Task** SHALL NOT appear if the **Participant** has already recorded a **Daily Status** for the previous day.

General Behavior

Q. Tasks SHALL be removed from the **Task List** when their removal condition is met.

R. The **Task List** SHALL update as conditions change without requiring the **Participant** to refresh.

Rationale

The three task types correspond to the three categories of follow-up the platform needs to surface to the *Participant*: data the *Participant* already entered that is missing required fields (**Incomplete Records Task**), questionnaires the **Study Coordinator** has assigned that have not been submitted (**Questionnaire Task**), and the daily-status prompt for yesterday (**Yesterday Reminder Task**). The priority ordering reflects intervention urgency: incomplete records are at risk of becoming permanently locked (highest priority), questionnaires are due but not yet on a hard deadline (middle), and yesterday's status is a soft prompt that auto-resolves over time (lowest). The **Yesterday Reminder Task's** three-*Action* surface (Yes / No / Don't Remember) lets the *Participant* resolve the task without leaving the *Main Screen* for the common case (Yes navigates to recording; No and Don't Remember commit the **Daily Status** in place). Removing tasks the moment their removal condition is met (and not requiring a refresh) keeps the list honest — a *Participant* who completes their incomplete records sees the task disappear immediately, rather than being told to refresh or re-open the app. **Incomplete Records Task** persistence regardless of age (assertion E) is the operational counterpart of the **Lock Threshold**: even after the underlying record is locked and can no longer be completed, the task stays visible so the *Participant* is aware of the now-permanently-incomplete state.

Follow-up — configurability: This requirement currently encodes the only option implemented in code. Future sponsors may require different rules; introduce a configurable seam (e.g. a parameter on the CAL-PRD-* parent, or a new platform-side template the CAL- REQ Satisfies) when the need arises. Until that seam exists, this REQ is normative for the Callisto deployment.

6.8.2 Disconnection Notification

REQ ID: DIARY-PRD-notification-disconnection

Overview

Participants need immediate, clear notification when their *Mobile Application* is disconnected from the *Sponsor* portal. A persistent, non-dismissible notification ensures the **Participant** is always aware of their disconnected state and cannot accidentally or intentionally hide it.

Disconnection Notification

Disconnection Notification A persistent, non-dismissible notification displayed to the **Participant** when their mobile Application is disconnected from the **Sponsor Portal**.

Assertions

A. When a **Participant's** status is **Disconnected**, the System SHALL display a **Disconnection Notification** on the **Main Screen**.

B. The **Disconnection Notification** SHALL persist until the **Participant** is reconnected to the **Sponsor Portal**.

C. The **Disconnection Notification** SHALL NOT be dismissible by the **Participant**.


D. The System SHALL support *Sponsor*-configurable message content for the **Disconnection Notification**.

E. When no *Sponsor*-specific message content is configured, the **Disconnection Notification** SHALL display the following default message: "Your connection with the study has been interrupted. Please contact your study *Site* for assistance."

Rationale

Disconnection is an operational state with clinical-data consequences: data the *Participant* enters while disconnected does not reach the *Sponsor* and may sit unsynced for an indeterminate period. The *Participant* needs to know they are disconnected so they can either resolve it (contact their *Site* for a new *Linking Code*) or at minimum understand why their data is not visible to the *Sponsor*. Persistent + non-dismissible is the only display mode that survives the *Participant's* natural impulse to clear unfamiliar notifications: a dismissible disconnection banner would be cleared within minutes by most participants, and the disconnection would then be invisible to them on every subsequent app open. The *Sponsor*-configurable message + default text lets each deployment customize the language (e.g. *Site* contact phone numbers, terminology consistent with the *Sponsor's* other communications) while keeping a working default for deployments that don't configure it.

Screen reference

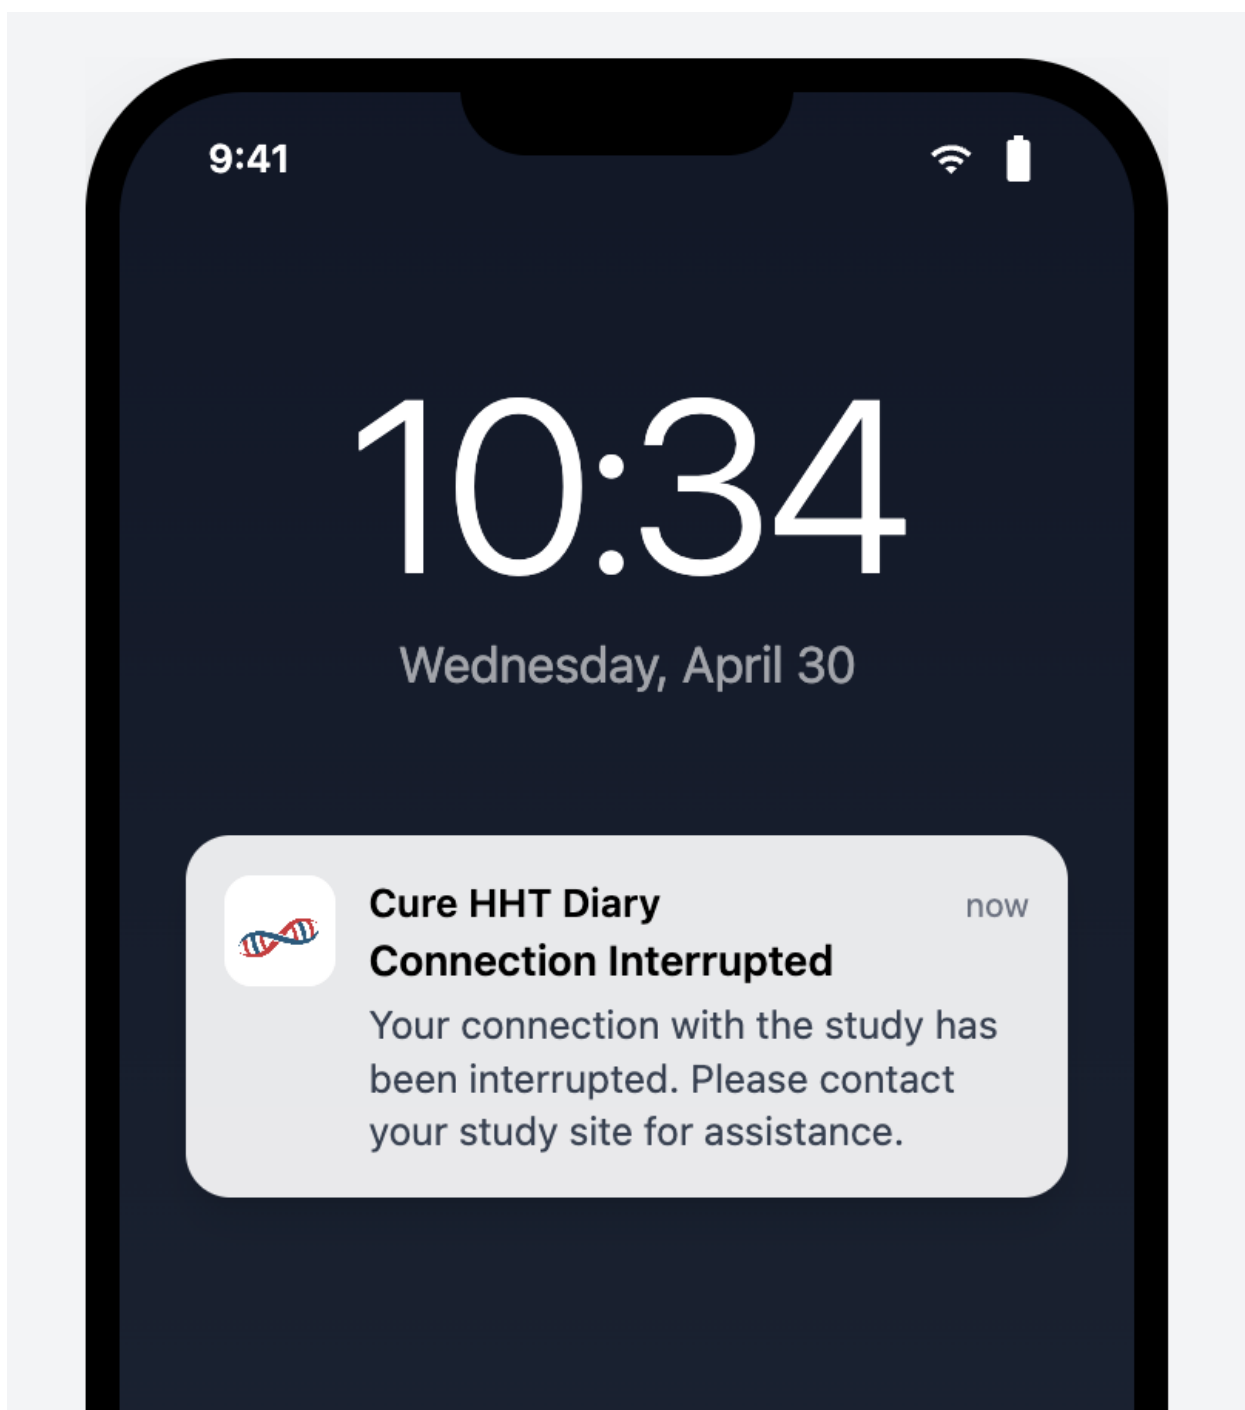

See:

6.8.3 Participation Status Badge

REQ ID: DIARY-GUI-participation-status-badge

Refines: DIARY-PRD-notification-disconnection

Overview

The **Participation Status Badge** gives **Participants** a persistent, at-a-glance view of their clinical *Trial* involvement. The badge adapts its display based on the ****Participant's current status so they always know whether they are connected, disconnected, or no longer participating in a study.

Participation Status Badge

Participation Status Badge The visual component displayed in the Clinical Trial section of the user profile screen showing the **Participant's** current study participation state and associated details.

Placement

Assertions

A. The interface SHALL display the **Participation Status Badge** in the Clinical *Trial* section of the *User* profile screen.

Linked State

B. When the ****Participant's status is **Linked - Awaiting Start** or ****Trial** Active, the Participation Status Badge** SHALL display the *Sponsor* logo, the ****Participant's *Linking Code*, and the date and time the **Participant** joined.

C. The **Participation Status Badge** SHALL include a link to the **Clinical Trial Privacy Policy** from the moment the *Participant* links to the study, and the link SHALL remain available thereafter regardless of subsequent status changes.

Disconnected State

D. When the ****Participant's status is **Disconnected**, the **Participation Status Badge** SHALL display a warning indicator, the ****Participant's current *Linking Code*, and a mes-

sage that the connection has been interrupted.

E. When the ****Participant's status is **Disconnected**, the **Participation Status Badge** SHALL present an Enter New *Linking Code Action* that navigates the **Participant** to the *Linking Code* entry screen.

Not Participating State

F. When the ****Participant's status is **Not Participating**, the **Participation Status Badge** SHALL display in an inactive visual style with the end date of participation.

Automatic Update

G. The **Participation Status Badge** SHALL update automatically when the ****Participant's status changes.

H. The System SHALL support *Sponsor*-configurable display of the *Sponsor* logo on the **Participation Status Badge** when the ****Participant's status is **Not Participating**.

Rationale

The badge consolidates “where do I stand with this study” into a single visual the *Participant* always finds in the same place (Clinical *Trial* section of the *User Profile*). Three state variants cover the three operational situations: actively-linked (*Sponsor* logo, *Linking Code*, join date — full participation context), disconnected (warning indicator, *Linking Code*, Enter New *Linking Code Action* — the recovery path is reachable from the badge itself), and not-participating (inactive style with end date — the badge persists as historical evidence of past participation without competing for attention against current state). The *Clinical Trial** *Privacy Policy** link persists across status changes because the policy version the *Participant* consented to is part of their permanent record, and they have a continuing right to retrieve it. Automatic update on status change is the standard freshness guarantee; *Sponsor*-configurable logo display in the Not Participating state lets the deployment decide whether the badge in its end-of-participation state still carries *Sponsor* branding (an end-of-*Trial* communication preference).

Follow-up — configurability: This requirement currently encodes the only option implemented in code. Future sponsors may require different rules; introduce a configurable seam (e.g. a parameter on the CAL-PRD-* parent, or a new platform-side template the CAL- REQ Satisfies) when the need arises. Until that seam exists, this REQ is normative for the Callisto deployment.

6.8.4 Incomplete Record Lock Warning Notification

REQ ID: DIARY-PRD-notification-incomplete-record-lock

Overview

Once an **Incomplete Record** reaches the *Lock Threshold* defined in *Diary-PRD-entry-time-restrictions*, the *Participant* cannot complete, edit, or delete it — the record is permanently retained in its incomplete state. To give Participants a final opportunity to act before this irreversible lock, the **System** sends a push notification at a configurable time before the lock fires. This requirement defines the platform mechanism; the trigger offset and notification text are *Sponsor-configurable*.

Lock Warning Offset

Lock Warning Offset The configurable elapsed time before the Lock Threshold at which the **System** sends a push notification to the Participant about an **Incomplete Record** that has not been completed or deleted.

Notification Behavior

Assertions

- A.** The **System** SHALL send a push notification to the *Participant* when an **Incomplete Record** reaches the *Lock Warning Offset* before the *Lock Threshold* defined in *Diary-PRD-entry-time-restrictions*.
- B.** The **System** SHALL send the notification only once per **Incomplete Record**.
- C.** When a *Participant* completes or deletes an **Incomplete Record** before the *Lock Warning Offset* is reached, the **System** SHALL NOT send the notification for that record.

Configuration

- D.** The **System** SHALL support a *Sponsor-configurable Lock Warning Offset* per deployment.
- E.** The **System** SHALL support *Sponsor-configurable* notification text per deployment.
- F.** When the *Lock Warning Offset* is not configured for a deployment, the **System** SHALL NOT send the notification.

G. The *Lock Warning Offset* SHALL be less than the *Lock Threshold* defined in *Diary-PRD-entry-time-restrictions*.

Rationale

The **Lock Threshold** produces an irreversible state — once exceeded, the **Incomplete Record** is permanently retained in its missing-field state and cannot be completed, edited, or deleted. The lock-warning notification exists because that irreversible outcome benefits from one final *Participant* nudge before it lands; without the warning, a *Participant* who simply forgot about an *Incomplete Record* discovers the permanent lock only on next app open, long after they could have done anything about it. Once-per-record (assertion B) prevents notification spam from a single long-lingering record; suppression on completion or deletion before the warning offset (assertion C) avoids notifying about records the *Participant* has already resolved. The opt-out semantics (not configured = no notification) and the Lock-Warning-less-than-Lock-Threshold invariant compose with the parent **Entry Time Restrictions** REQ — if a deployment hasn't configured the parent thresholds, the warning has no boundary to anchor to and is therefore not sent.

6.8.5 Incomplete Record Lock Warning Notification Configuration

REQ ID: CAL-PRD-notification-incomplete-record-lock-configuration

Refines: DIARY-PRD-notification-incomplete-record-lock

Overview

The clinical protocol defines a 48-hour lock on *Diary* entries (CAL-PRD-entry-time-restrictions-configuration). To give Participants a final opportunity to complete or delete an **Incomplete Record** before the lock fires, a warning notification is 24 hours prior. These values configure the platform mechanism defined in *Diary-PRD-notification-incomplete-record-lock*.

Assertions

A. The *Lock Warning Offset* SHALL be configured to 24 hours.

B. The notification text SHALL be: “You have an incomplete nosebleed record from [date]. Complete or delete it within the next 24 hours, otherwise it will be permanently locked and you will not be able to change or remove it.”

Rationale

The 24-hour *Lock Warning Offset* places the warning notification at the midpoint of the 48-hour *Lock Threshold* window (CAL-PRD-entry-time-restrictions-configuration) — early enough that the *Participant* has a full day to act, late enough that the record has been in incomplete state long enough for the warning to be useful rather than premature. The notification text names the dated record explicitly so the *Participant* knows which entry needs *Action*, states the 24-hour deadline so the *Participant* understands the urgency, and spells out the consequence (permanent lock, no further changes) so the *Action's* importance is clear without medicalized hedging.

6.8.6 Portal-Sent Questionnaire Notification

REQ ID: DIARY-PRD-notification-portal-sent-questionnaire

Overview

When a **Study Coordinator** sends a **Portal-Sent Questionnaire****** from the *Sponsor Portal*, the **Participant** must be made aware that a new *Questionnaire* is available for completion. A push notification serves as the awareness mechanism. The **Questionnaire Task** on the **Main Screen** provides the **Participant's** entry point into the *Questionnaire* flow once the application is open.

Trigger

Assertions

A. When a **Portal-Sent Questionnaire****** is successfully delivered to the **Mobile Application**, the System SHALL deliver a **Push Notification** to the **Participant**.

Offline Delivery

B. When the **Mobile Application** is offline at the time a **Portal-Sent Questionnaire****** is sent, the System SHALL deliver the **Push Notification** when the **Mobile Application** next establishes connectivity.

Suppression


C. The System SHALL NOT deliver a **Push Notification** for a **Portal-Sent** Questionnaire**** that has already been submitted by the **Participant**.

D. The System SHALL NOT deliver a **Push Notification** for a **Portal-Sent** Questionnaire**** that has been called back by the **Study Coordinator**.

Rationale

The push notification is the *Participant's* awareness signal that a new **Portal-Sent** Questionnaire**** is waiting; without it, the *Participant* would discover the *Questionnaire* only when they happen to open the app, which can extend the response window beyond what the **Study Coordinator** intended. Trigger-on-delivery (rather than trigger-on-send-from-portal) is the correct boundary because delivery is what actually puts the *Questionnaire* on the *Participant's* device; sending from the portal to an offline device is a *Sponsor-side Action* that has no *Participant-side* effect yet. Offline-deferred delivery follows the cross-cutting notification template — the OS deferred-delivery mechanism is sufficient for the nudge purpose. *Submission* and call-back suppression closes the two cases where the notification would be misleading: a *Questionnaire* already submitted no longer needs the *Participant's* attention, and a called-back *Questionnaire* is no longer assigned to them and a notification would invite wasted effort on an inactive *Questionnaire*.

Screen reference

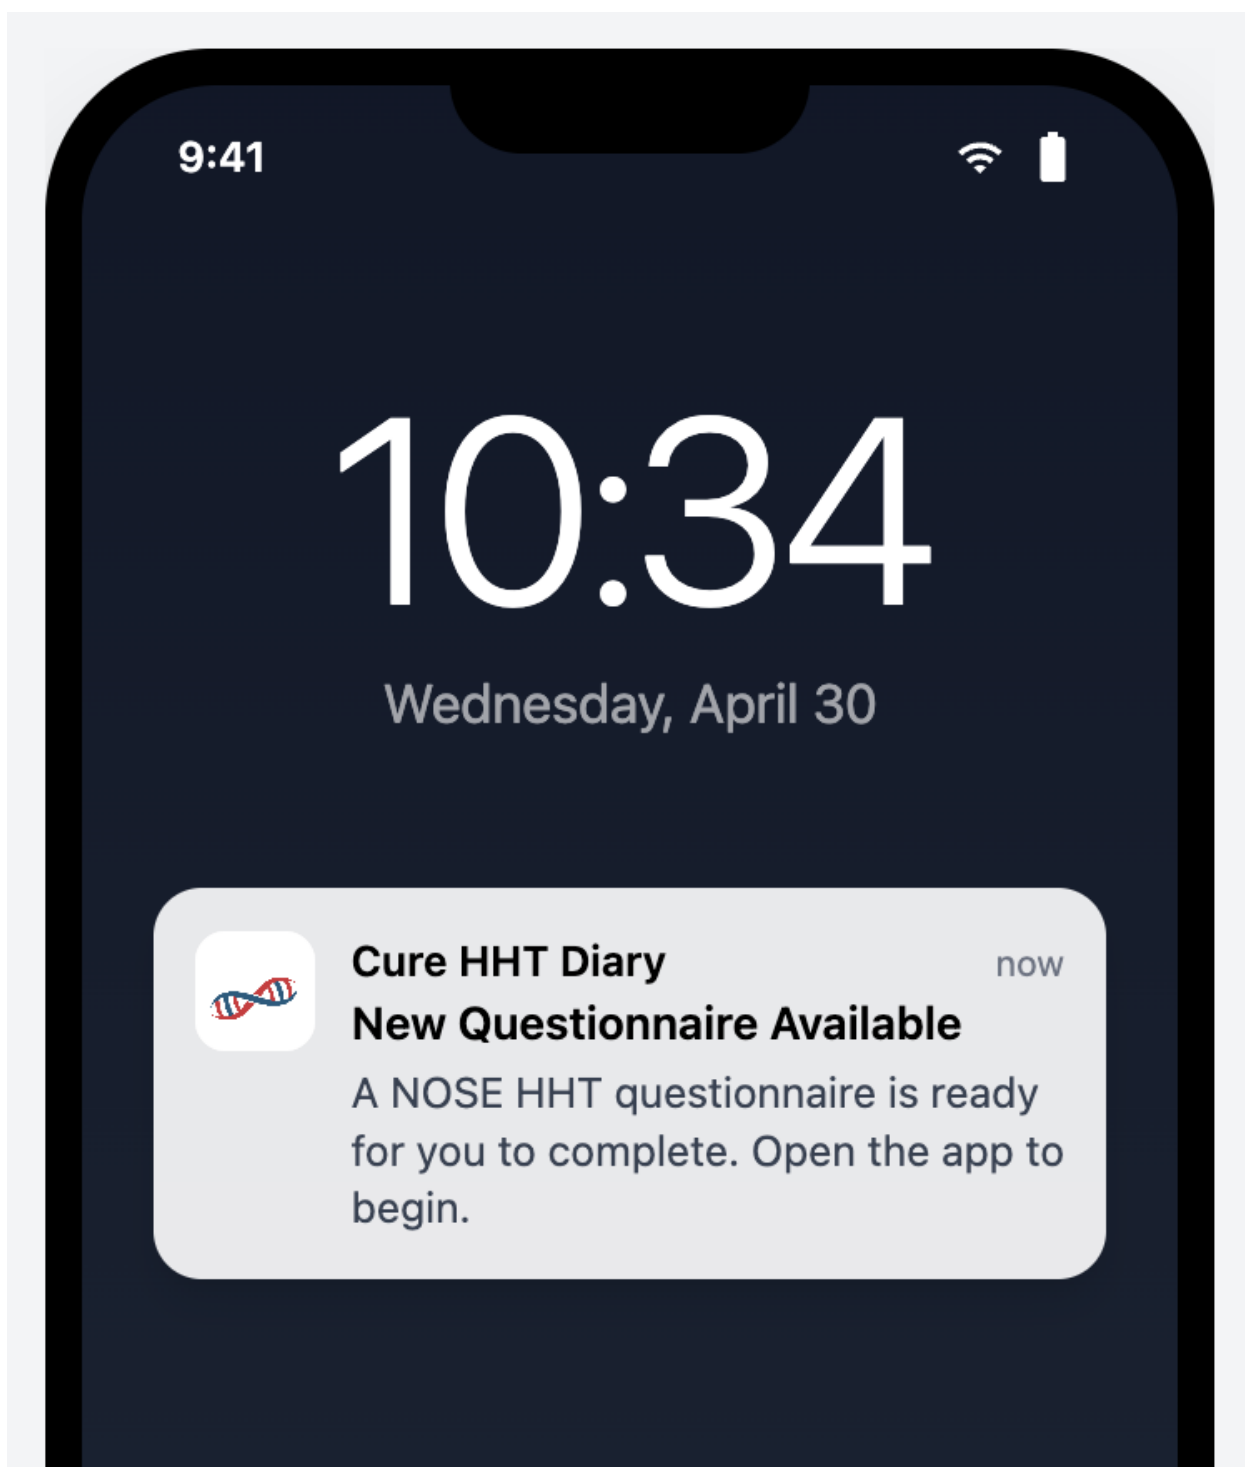

See:

6.8.7 Yesterday Entry Reminder Notification

REQ ID: DIARY-PRD-notification-yesterday-entry

Overview

Clinical *Trial* data completeness under ALCOA+ principles requires a **Daily Status** for each *Calendar* day in the *Diary* period. A daily reminder fired at a configured time of day prompts the **Participant** to review the previous day and respond via the *Yesterday Reminder Task* on the **Main Screen**.

Reminder Time

Reminder Time The configurable time of day, in the **Participant's** local timezone, at which the Yesterday Entry Reminder Notification is delivered.

Trigger

Assertions

A. The System SHALL deliver a **Push Notification** at the **Reminder Time** when no **Daily Status** has been recorded for the previous *Calendar* day.

Timezone

B. The System SHALL evaluate the **Reminder Time** against the **Participant's** device local timezone.

C. The System SHALL evaluate “the previous *Calendar* day” against the **Participant's** device local timezone.

Suppression

D. The System SHALL NOT deliver the **Push Notification** when a **Daily Status** has been recorded for the previous *Calendar* day.

E. The System SHALL deliver at most one Yesterday Entry Reminder Notification per *Calendar* day.


Configuration

F. The System SHALL support *Sponsor*-configurable **Reminder Time** per deployment.

Rationale

ALCOA+ Complete principle requires a **Daily Status** for every day in the *Diary* period; the Yesterday Entry Reminder is the platform's mechanism for prompting participants to maintain completeness day-by-day rather than discovering large gaps weeks later. Local-timezone evaluation (both for the **Reminder Time** and for "previous *Calendar* day") is essential because participants travel — a UTC-anchored reminder would fire at unpredictable local times for a *Participant* who has moved across timezones, undermining the time-of-day intent. *Sponsor*-configurable **Reminder Time** lets each deployment select a delivery time appropriate to its *Participant* population (e.g. morning for a working-age population). Once-per-day cap (assertion E) prevents pathological repeat-fires; suppression-on-status-recorded prevents the notification from arriving after the *Participant* has already addressed the yesterday gap via the *Task List* or *Calendar*.

Screen reference

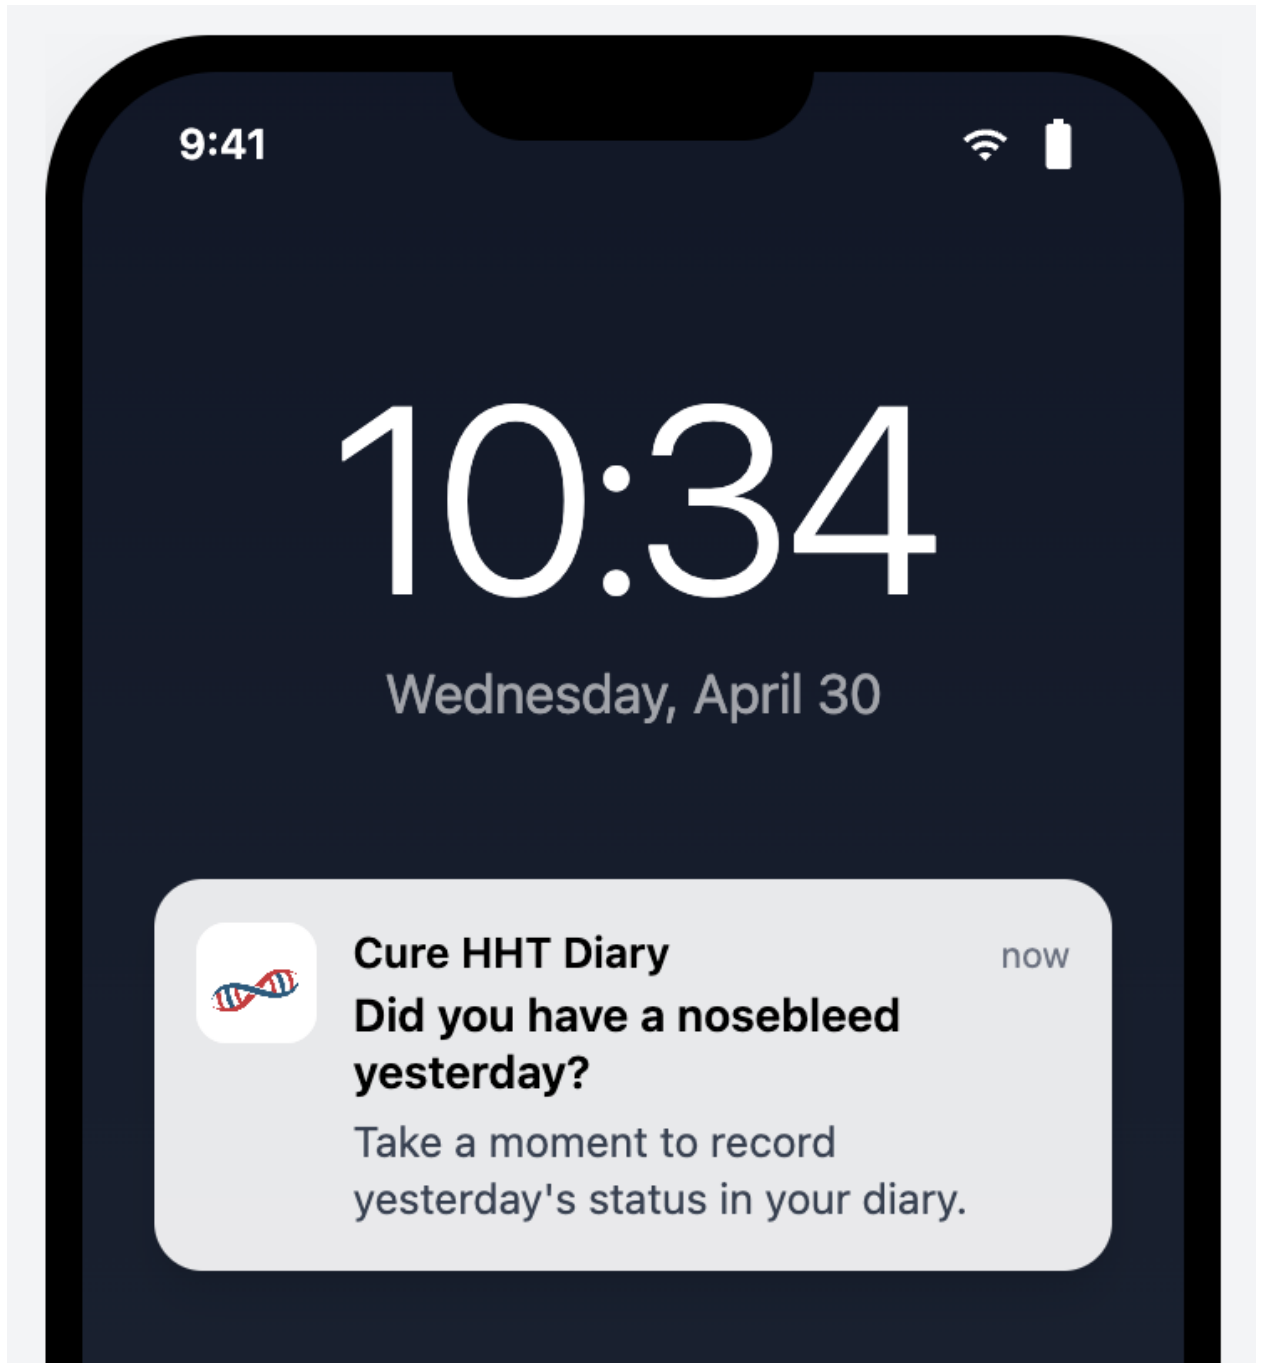

See:

6.8.8 Yesterday Entry Reminder Configuration

REQ ID: CAL-PRD-notification-yesterday-entry-configuration

Refines: DIARY-PRD-notification-yesterday-entry

Assertions

A. The **Reminder Time** for the Yesterday Entry Reminder Notification SHALL be configured to 09:00 (24H format) in the **Participant's** local timezone.

Rationale

The 09:00 **Reminder Time** for the Yesterday Entry Reminder targets a morning-routine delivery window: the *Participant* is likely awake, has finished the previous day, and is at a natural reflect-and-record point before the day's activities begin. A morning fire is more reliable than evening for daily-status capture because the *Participant* has full memory of yesterday and the day is not yet competing for their attention. Evaluating the time against the *Participant's* device local timezone (per the parent REQ) keeps the 09:00 delivery consistent regardless of *Participant* travel.

6.8.9 Ongoing Epistaxis Event Reminder

REQ ID: DIARY-PRD-notification-ongoing-epistaxis

Overview

A **Participant** who starts recording an **Epistaxis Event** but does not complete the record may forget to return and capture the end time, resulting in inaccurate duration data. A configured sequence of escalating reminders prompts the **Participant** to complete the record or confirm it is still ongoing. Once the sequence has fired, no further reminders are sent.

The **Participant** may configure their own *Reminder Schedule* for personal use. A *Sponsor*-configured schedule overrides the personal setting for the duration of a clinical *Trial*.

Reminder Schedule

Reminder Schedule An ordered list of elapsed-time intervals defining the timing of successive reminder notifications for an Incomplete Record. Each interval is measured from the time of the previous notification, with the first interval measured from the *Participant's* most recent interaction with the record.

Trigger and Sequence

Assertions

- A. The **System** SHALL track the elapsed time since the **Participant's** most recent interaction with each **Incomplete Record**.
- B. The **System** SHALL deliver a **Push Notification** to the **Participant** at each interval in the **Reminder Schedule**.
- C. After the final interval in the **Reminder Schedule** has elapsed, the **System** SHALL NOT deliver further reminders for that **Incomplete Record**.

Reset on Interaction

- D. When the **Participant** interacts with an **Incomplete Record**, the **System** SHALL restart the **Reminder Schedule** from the first interval.

Termination

- E. When an **Incomplete Record** is completed, the **System** SHALL stop delivering reminders for that record.
- F. When an **Incomplete Record** is deleted, the **System** SHALL stop delivering reminders for that record.


Configuration

- G. The default **Reminder Schedule** for the **Mobile Application** SHALL be empty, resulting in no reminders being delivered.
- H. The **System** SHALL allow a **Participant** to configure their own **Reminder Schedule** in **Mobile Application** settings.
- I. The **System** SHALL support *Sponsor*-configurable **Reminder Schedule** per deployment.
- J. When a *Sponsor*-configured **Reminder Schedule** is in effect, the **System** SHALL apply the *Sponsor*-configured schedule and SHALL NOT apply the **Participant's** personally configured schedule.

Rationale

A nosebleed event captured with an accurate start time but a missing or wildly-late end time produces unreliable duration data — one of the three primary outcome measures. The On-going *Epistaxis Event* Reminder addresses the natural failure mode where the *Participant* starts the record at the moment the nosebleed begins, then forgets to return when it stops because their attention has moved on. An escalating schedule (intervals measured from previous notification) gives the *Participant* a reasonable chance to respond without saturating their notification surface — once the final interval has fired and no response landed, further nudging is unlikely to help and the data will be flagged via the **Incomplete Records Task** anyway. Reset-on-interaction (assertion D) restarts the schedule when the *Participant* touches the record, on the inference that they are now engaged again and a fresh sequence is the right cadence. *Sponsor* override of the *Participant*'s personal schedule (assertion J) reflects the clinical-*Trial* priority: while participating in a study, the *Sponsor*'s clinical protocol drives the reminder cadence; outside a *Trial*, the *Participant* controls their own experience. Empty default (assertion G) is the right “no policy yet” state — a deployment that has not configured a schedule produces no reminders rather than guessing at intervals.

Screen reference

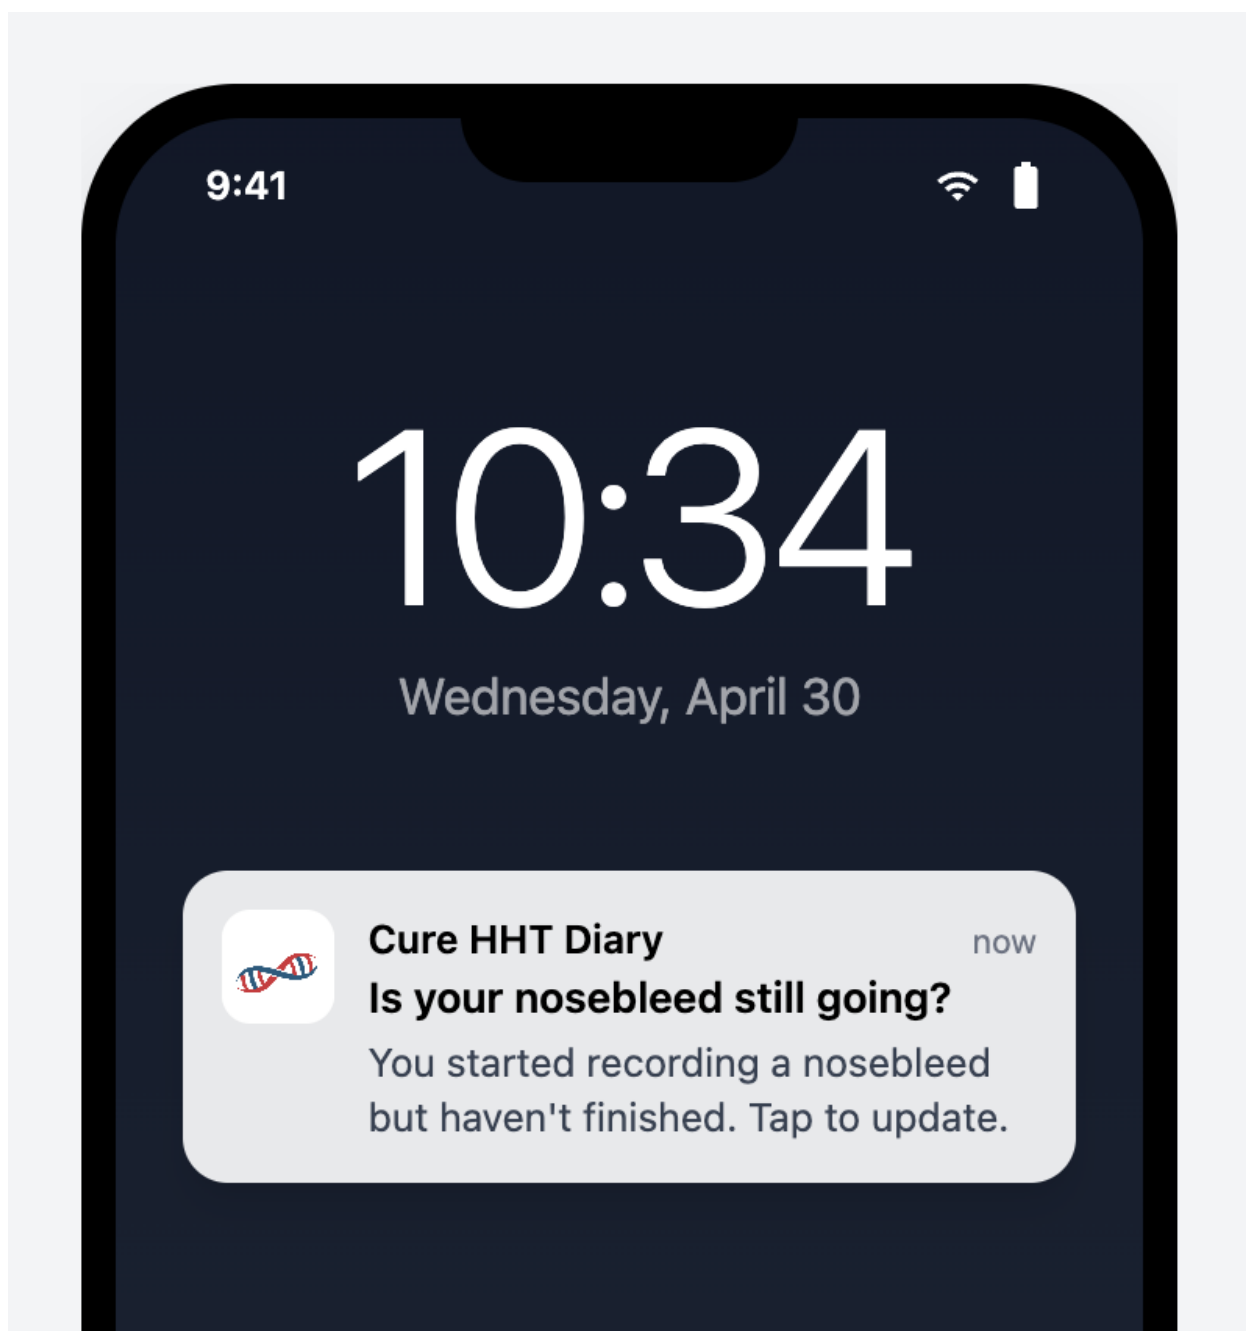

See:

6.8.10 Ongoing Epistaxis Event Reminder Configuration

REQ ID: CAL-PRD-notification-ongoing-epistaxis-configuration

Refines: DIARY-PRD-notification-ongoing-epistaxis

Assertions

A. The **Reminder Schedule** for the Ongoing *Epistaxis Event* Reminder SHALL be configured to deliver notifications at the following intervals: 5 minutes, 10 minutes, 15 minutes, 30 minutes.

Rationale

The Ongoing *Epistaxis Event Reminder Schedule* (5/10/15/30 minutes) is a deliberate escalation: the first three reminders fire in the window where a typical nosebleed is still resolving (5-15 minutes) — most events end within this window, and the reminders help the *Participant* remember to capture the end time as it happens. The 30-minute interval is the final attempt: if the *Participant* has not responded by then, they are likely engaged with something else or the event has ended without active capture, and further reminders would saturate without informing. The four-interval cap respects the parent REQ's terminating-sequence rule.

6.8.11 Historical Gap Reminder

REQ ID: DIARY-PRD-notification-historical-gap

Overview

The *Historical Gap* Reminder addresses missing **Daily Status** entries on days older than yesterday but still within the editable window.

Historical Gap

Historical Gap A calendar day between the **Diary Start Day** and the current day, exclusive of the current day and the previous day, for which the **Participant** has not recorded a **Daily Status**.

Historical Gap Reminder

Historical Gap Reminder A daily **Push Notification** delivered to the **Participant** prompting them to address one or more **Historical Gaps**.

Trigger

Assertions

- A. The **System** SHALL evaluate, once per *Calendar* day at the configured **Reminder Time**, whether the **Participant** has any **Historical Gap** within the editable window.
- B. When the **Participant** has at least one **Historical Gap** within the editable window, the **System** SHALL deliver a ******Historical Gap** Reminder**** to the **Participant**.
- C. The **System** SHALL deliver at most one ******Historical Gap** Reminder**** per *Calendar* day.

Editable Window

- D. The **System** SHALL exclude from the **Historical Gap** evaluation any day for which the elapsed time has exceeded the **Lock Threshold**.
- E. In linked use mode, the **System** SHALL exclude from the **Historical Gap** evaluation any day before the **Trial Start** date.

Mode-Dependent Default

- F. In personal use mode, the ******Historical Gap** Reminder**** SHALL be disabled by default.
- G. In personal use mode, the **System** SHALL allow the **User** to enable or disable the ******Historical Gap** Reminder**** from the *Mobile Application* settings.
- H. In linked use mode, the ******Historical Gap** Reminder**** SHALL be enabled by default.

Configuration


- I. The **System** SHALL support *Sponsor*-configurable **Reminder Time** per deployment.
- J. The **System** SHALL support *Sponsor*-configurable notification text per deployment.

Rationale

Historical gaps (days within the *Diary* period that have no **Daily Status**) accumulate when a *Participant* misses the Yesterday Entry Reminder window across multiple days; without a separate prompt, those gaps stay invisible to the *Participant* unless they happen to open the *Calendar*. The *Historical Gap* Reminder is the platform's once-daily nudge to address

them, evaluated at the same configured **Reminder Time** as the Yesterday reminder so the *Participant* gets a coherent daily reminder cadence. The editable-window exclusion (assertions D and E) prevents the reminder from prompting *Action* on dates the *Participant* can no longer modify — locked dates and pre-*Trial*-start dates have no *Action* available. The mode-dependent default (disabled in personal use, enabled in linked use) reflects the difference in motivation: a personal-use *User* has no external party expecting their data and may not want pressure to backfill; a linked **Participant** is held to a clinical-*Trial* completeness standard. The *Participant* retains the ability to override the default in personal mode (assertion G), while linked mode applies the *Sponsor*-configured behavior.

Screen reference

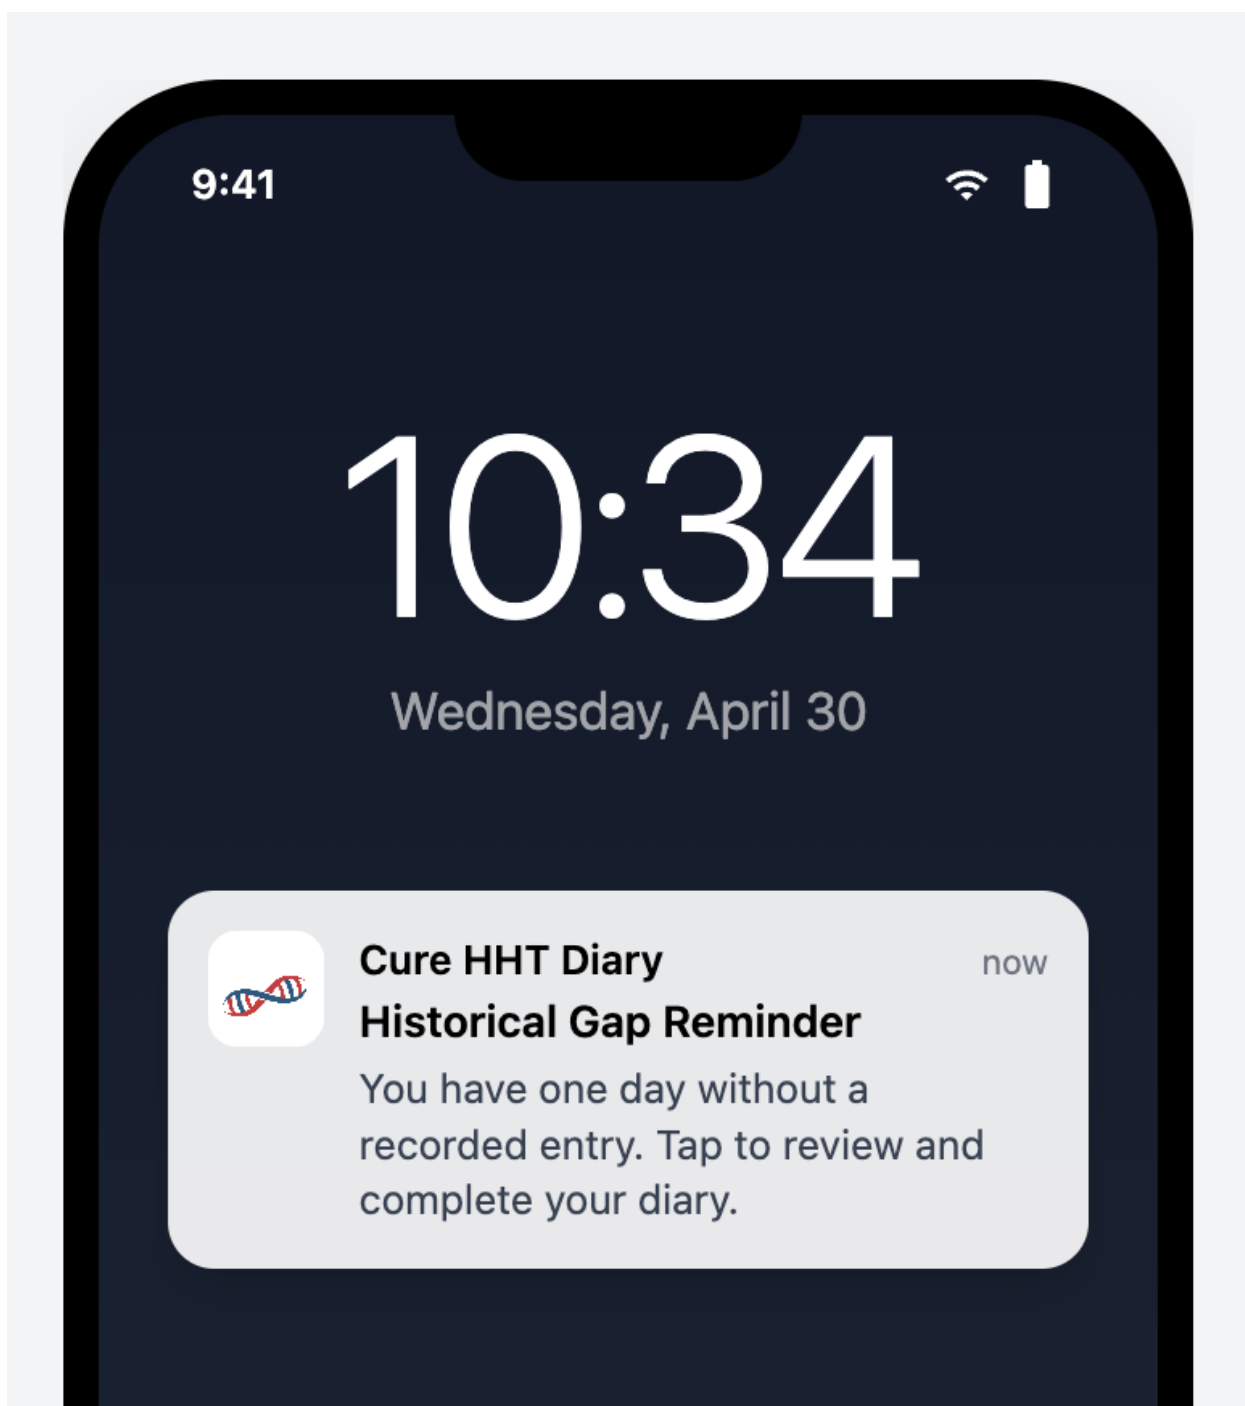

See:

6.8.12 Historical Gap Reminder Configuration

REQ ID: CAL-PRD-notification-historical-gap-configuration

Refines: DIARY-PRD-notification-historical-gap

Assertions

A. The **Reminder Time** for the *Historical Gap* Reminder SHALL be configured to 09:00 (24H format) in the **Participant**'s local timezone.

B. The *****Historical Gap*** Reminder** notification text SHALL be: "You have one day without a recorded entry. Tap to review and complete your *Diary*."

Rationale

The 09:00 **Reminder Time** matches the Yesterday Entry *Reminder Time* so the *Participant* receives a single coherent daily-reminder cadence at the same hour rather than two notifications at unrelated times. The platform's once-per-day cap on each reminder type ensures the *Participant* sees at most one *Historical Gap* Reminder per day even if multiple historical gaps exist; the notification text is therefore phrased to direct the *Participant* to the *Diary* (where they can address whichever gaps they choose) rather than naming any specific date. The "Tap to review and complete your *Diary*" call-to-Action sends the *Participant* to the *Calendar* where they can see every gap visually and choose how to backfill.

6.9 Device Linking

The *Participant*-side linking flow comprises the platform-level rules for error handling and rate limiting on linking-code entry, the **Join the Study** screen the *Participant* uses to enter a code and consent to the **Clinical Trial Privacy Policy**, and the **Successful Linking Confirmation** that completes the transition from **User** to **Participant**.

6.9.1 Linking Code Entry Error Handling

REQ ID: DIARY-PRD-linking-code-entry-errors

Overview

Security best practices require generic error messages that do not reveal whether a *Linking Code* exists, is expired, or has been used. This prevents malicious actors from enumerating valid codes or determining code status. Rate limiting protects against brute-force attacks while a configurable cooldown balances security with usability.

Linking Code Validation Failure

Linking Code Validation Failure Any unsuccessful attempt to enter a linking code, regardless of the specific reason for failure.

Rate Limit Threshold

Rate Limit Threshold The configurable maximum number of consecutive **Linking Code Validation Failures** permitted within a single rate limit window before further attempts are temporarily blocked.

Rate Limit Cooldown

Rate Limit Cooldown The configurable duration after which the rate limit counter resets and the **User** may attempt linking again.

Error Messaging

Assertions

- A.** When a ******Linking Code** Validation Failure**** occurs, the System SHALL display a single generic error message regardless of the specific reason for failure.
- B.** The error message SHALL NOT reveal the specific reason for failure.
- C.** When a ******Linking Code** Validation Failure**** occurs, the System SHALL provide guidance to contact the *Site* for a new code.

Rate Limiting

- D.** When the number of consecutive ******Linking Code** Validation Failures**** reaches the **Rate Limit Threshold**, the System SHALL block further linking attempts and display the **Rate Limit** error message until the **Rate Limit Cooldown** has elapsed.
- E.** The **Rate Limit Cooldown** SHALL be calculated from the first failed attempt in the current window.

Configuration

- F.** The System SHALL support *Sponsor*-configurable **Rate Limit Threshold** per deployment.

G. The System SHALL support *Sponsor*-configurable **Rate Limit Cooldown** per deployment.

H. The System SHALL support *Sponsor*-configurable error message text per deployment.

Rationale

Linking codes are short, human-typeable secrets that confer access to a clinical-*Trial Participant* identity; the platform's threat model has to assume that someone may attempt to guess or enumerate valid codes. Two mitigations compose: a generic error message that does not distinguish "code does not exist" from "code expired" from "code already used" (assertions A and B — distinguishing them would tell an attacker exactly which guesses are worth pursuing), and a rate limit that caps the number of attempts in a window. The *Site*-contact guidance (assertion C) is the legitimate-*User* recovery path that survives the genericity rule — a real *Participant* who has mistyped their code gets the same message as an enumerator, but they also get the actionable next step (contact the *Site*). The cooldown anchored at the first failed attempt in the window (assertion E) prevents the trivial workaround of attempting just below the threshold, waiting one second, and continuing — the window is a fixed time interval from the first miss. *Sponsor*-configurable threshold, cooldown, and text let each deployment tune the security/usability trade-off and customize the message.

6.9.2 Linking Code Entry Error Handling Configuration

REQ ID: CAL-PRD-linking-code-entry-errors-configuration

Refines: DIARY-PRD-linking-code-entry-errors

Overview

These values configure the platform *Linking Code* error handling mechanism defined in *Diary-PRD-linking-code-entry-errors*.

Assertions

A. The **Rate Limit Threshold** SHALL be configured to 10 attempts.

B. The **Rate Limit Cooldown** SHALL be configured to 1 hour.

C. The *****Linking Code*** Validation Failure** error message SHALL display the text: "Invalid *Linking Code*."

D. The Rate Limit error message SHALL display the text: “Too many attempts. Please wait an hour.”

Rationale

The 10-attempt **Rate Limit Threshold** is calibrated for the linking-code surface — a longer typeable code than a *Password*, where a *Participant* making honest typos may go through several attempts on a single onboarding *Session* before getting the code right. Setting the threshold below 10 (e.g. the *Sponsor Portal*’s 5) would too often lock out legitimate participants on first-time linking; setting it much higher would give enumeration attempts useful headroom. The 1-hour **Rate Limit Cooldown** is long enough to make brute-force enumeration impractical at the platform’s code-space (an attacker hitting the limit gets at most ~240 attempts/day against a single device, against a code space measured in millions) while keeping a realistic recovery window for a legitimate *Participant* who has hit the limit through honest typos — they can return after lunch or after contacting their *Site* for a fresh code. The generic error message “Invalid *Linking Code*.” satisfies the parent REQ’s no-information-leakage rule (the same text fires regardless of whether the code is unknown, expired, or used), and the Rate Limit message names the specific delay so the *Participant* knows when they may try again rather than retrying indefinitely.

6.9.3 Join the Study Screen

REQ ID: DIARY-GUI-join-study-screen

Refines: DIARY-PRD-linking-code-entry-errors

Overview

The **Join the Study** screen is presented to the *User* when initiating the linking workflow. It captures the **Mobile Linking Code****** and the *Participant*’s explicit consent to the **Clinical Trial Privacy Policy** before any link is established.

Linking Consent

Linking Consent The explicit acknowledgement by the *Participant* that they have read and consent to the Clinical Trial Privacy Policy. This consent must be captured before the linking code submission is permitted.

Assertions

- A.** The **Join the Study** screen SHALL display a **Mobile** Linking Code**** entry field formatted according to the configured code format.
- B.** The screen SHALL display a **Linking Consent** checkbox with text confirming the *Participant* has read, understood, and consents to the **Clinical Trial Privacy Policy**.
- C.** The **Linking Consent** text SHALL include a link that opens the **Clinical Trial Privacy Policy**.
- D.** The **Submit Action** SHALL be disabled until both a complete **Mobile** Linking Code**** is entered and the **Linking Consent** checkbox is checked.
- E.** The System SHALL retain the **Linking Consent** acknowledgement, including the **Clinical Trial Privacy Policy** version, against the **Participant** record upon successful link.

Rationale

The **Join the Study** screen has to do two things at once: capture the *Linking Code* (the technical secret that binds device to *Participant*) and capture **Linking Consent** (the regulatory acknowledgement that the *Participant* has read the **Clinical Trial Privacy Policy**). Co-locating them on a single screen rather than splitting across two screens reflects that both are required before linking can proceed, and a two-step split would invite the *Participant* to complete one without the other. The Submit-disabled-until-both-present rule is the GUI-side enforcement of the dual gate — there is no path forward without both. Retaining the consent record with the policy version against the *Participant* record is the audit-trail requirement: the platform must be able to demonstrate which version of the policy each *Participant* consented to, separately from the current version, for the lifetime of their participation. The configurable code format on the entry field is the platform-side accommodation for *Sponsor*-specific code shapes (length, separator characters) without imposing a single format across deployments.

Follow-up — configurability: This requirement currently encodes the only option implemented in code. Future sponsors may require different rules; introduce a configurable seam (e.g. a parameter on the CAL-PRD-* parent, or a new platform-side template the CAL- REQ Satisfies) when the need arises. Until that seam exists, this REQ is normative for the Callisto deployment.

6.9.4 Successful Linking Confirmation

REQ ID: DIARY-GUI-linking-confirmation

Refines: DIARY-PRD-linking-code-entry-errors

Overview

When a *Participant* successfully enters a valid Mobile *Linking Code* on the Join the Study screen, the interface needs to clearly confirm that the link was established and transition the *Participant* from personal use mode into linked use mode.

Assertions

- A. When the **Participant** successfully submits a valid **Mobile Linking Code******, the interface SHALL display an **Acknowledgement Dialog** confirming that the device has been linked to the study.
- B. When the **Participant** acknowledges the dialog, the interface SHALL navigate the **Participant** to the ****User** Profile** screen.

Rationale

A successful link transitions the *Participant* from a personal-use **User** to a clinical-Trial **Participant** — a state change that affects what data syncs, which notifications fire, and which screens display the *Sponsor* logo. The Acknowledgement Dialog makes the transition explicit so the *Participant* has a clear before/after rather than discovering the change passively. Routing to the ****User** Profile** screen after acknowledgement (rather than back to the **Main Screen**) lands the *Participant* on the screen where the new linked state is most visible: the Clinical *Trial* section now displays the **Participation Status Badge** instead of the unlinked-state guidance, which serves as the visible confirmation of the new state.

Follow-up — configurability: This requirement currently encodes the only option implemented in code. Future sponsors may require different rules; introduce a configurable seam (e.g. a parameter on the CAL-PRD-* parent, or a new platform-side template the CAL- REQ Satisfies) when the need arises. Until that seam exists, this REQ is normative for the Callisto deployment.

Screen reference



Device Linked Successfully

Your device has been successfully linked to the study.

OK

Appendices

7.1 Screens

7.1.1 Questionnaire Review Screen

Trigger: **Participant** answers the final question of a **Portal-Sent Questionnaire**, before **Submission**.

Displays: **Questionnaire Display Name**, every question in original order, the **Participant's** selected response beneath each question, an Edit affordance per question, and a **Submit** action.

Outcome: Selecting **Submit** completes **Submission**.

Reference: GUI-p00001.

QA 12:39

5G

Quality of Life Survey

Review Your Answers

1. How often in the past 4 weeks has an activity for your work, school, or regularly scheduled commitments been interrupted by a nose bleed?
Sometimes
2. How often in the past 4 weeks has an activity with your partner, family, or friends been interrupted by a nose bleed?
Always
3. How often in the past 4 weeks have you avoided social activities because you were worried about having a nose bleed?
Often
4. How often in the past 4 weeks have you had to miss your work, school, or regularly scheduled commitments because of HHT-related problems other than nosebleeds?
Often

➤ Submit

7.1.2 Questionnaire Preamble Screen

Trigger: **Participant** opens a **Portal-Sent Questionnaire**.

Displays: **Questionnaire Display Name**, estimated time to complete.

Actions: **I'm Ready** (proceed to first question), **Not Now** (return to **Main Screen**). *Reference:* REQ-p02065, GUI-p00001.



Quality of Life Survey



Quality of Life Survey

This questionnaire takes about 2-3 minutes. Please ensure you have enough uninterrupted time to complete it.

 Estimated time: 2-3 minutes

✓ I'm ready

Not now

7.1.3 Resolve Conflict — Resolution Screen

Trigger: New or edited entry **Overlaps** with one or more **Conflicting Records**. **Displays:** New entry and **Conflicting Record** side by side, showing time range, duration, and severity for each.

Actions: **Keep New** (retain new entry, discard **Conflicting Record**), **Keep Existing** (retain **Conflicting Record**, discard new entry), **Merge Records** (combine both using earliest start time, latest end time, and higher severity). **Conditional behavior:**

- **Merge Records** is presented only when the **Conflicting Record**'s event date has not exceeded the **Lock Threshold**.
- When the **Conflicting Record** is older than the **Justification Threshold**, an **Entry Justification** is required before saving the resolution.

Outcome: **Participant** is navigated to the **Record Nosebleed** screen pre-filled with the resulting entry data for review and confirmation.

Reference: REQ-p05008, GUI-p05009.

Resolve Conflict

Two records overlap. Choose how to handle them.

New Record

Time

12:28 PM - 12:43 PM

Duration

15m

Severity



Dripping quickly

Keep New

Existing Record

Time

12:27 PM - 12:43 PM

Duration

15m

Severity



Dripping quickly

Keep Existing



Merge Records

Combine both into one event with the longest duration

7.1

7.1.4 Troubleshooting Popover

Trigger: **Study Coordinator** selects the information icon adjacent to the **Status Badge** on a **Questionnaire Card** in **Delivery Failed** status.

Displays: Guidance for resolving delivery issues for the affected **Questionnaire**.

Dismissal: Click outside the popover.

Reference: GUI-CAL-p00006.



Immediate Troubleshooting Steps

1. Check the patient's phone is online — confirm Wi-Fi or cellular connection is active.
2. Check for a captive portal — if on hospital/hotel Wi-Fi, the phone may appear "connected" but require logging in through a browser page (accepting terms, entering a code, etc.). Open a browser and complete any login page.
3. Wait ~1 minute after connectivity is restored — the system will automatically retry delivery.
4. Check the app itself — confirm the app launches, isn't crashing, and the phone isn't out of storage (the app should surface these itself, but worth verifying).
5. If still failing after the above — fall back to a paper form and contact support / the study team per escalation protocol.

7.2 Modals

7.2.1 User Information Modal

Trigger: **Administrator** selects a **User Account** row from the User Management interface.

Target identification: **Full Name, Email Address, Status.**

Displays: Assigned **Role(s)** and **Site** assignments. When the **User Account** holds one or more non-**Administrator Roles**, the **Administrator** may select a single **Role** to scope the displayed **Site** list. When the **User Account** is an **Administrator**, the modal indicates access to all **Sites**. *Actions (Active Users tab):* **Edit User, Deactivate User, Close**. The **Deactivate User** action is not presented for the currently authenticated user's own account.

Actions (Inactive Users tab): **Reactivate User, Close**.

Reference: GUI-p00033.

User Information

View and manage user details, roles, and assigned sites.

Dr. Sarah Johnson

sjohnson@clinicaltrial.com

✓ Active

Roles

Study Coordinator

📍 Assigned Sites (2)

001 - Memorial Hospital

002 - Stanford Medical Center

Actions

✎ Edit User

⊘ Deactivate User

Close

7.1.1

7.2.2 Show Linking Code

Trigger: **Study Coordinator** selects **Show Linking Code** for a **Participant**.

Target identification: **Participant ID**.


Variants:

- **Pending** status: displays the active **Mobile Linking Code** with **Copy** and **Save as PDF** actions. **Save as PDF** generates a PDF containing the **Mobile Linking Code** and **Participant** instructions.
- Any other status: displays the **Participant Linking Code** (the code previously used to establish the connection) with a **Copy** action, and indicates the code is shown for reference only.


Dismissal: **Close**.

Reference: GUI-p03001.

Pending Status

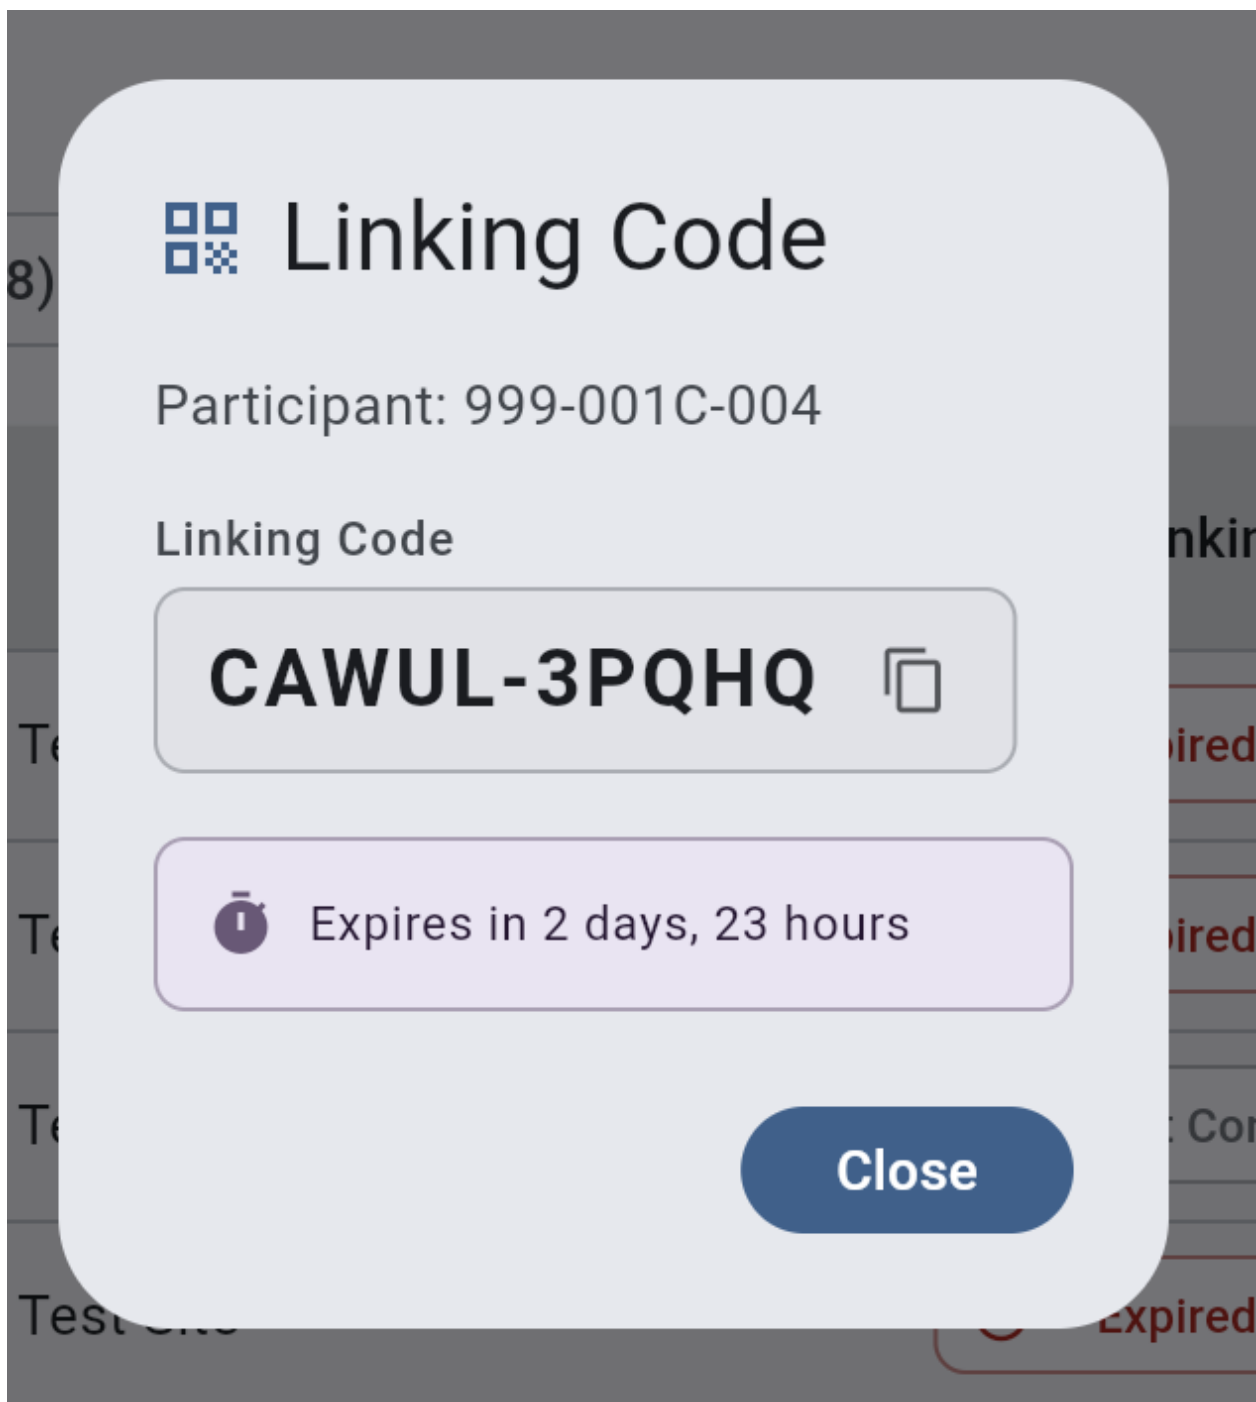

After Participant was linked to the Mobile Application

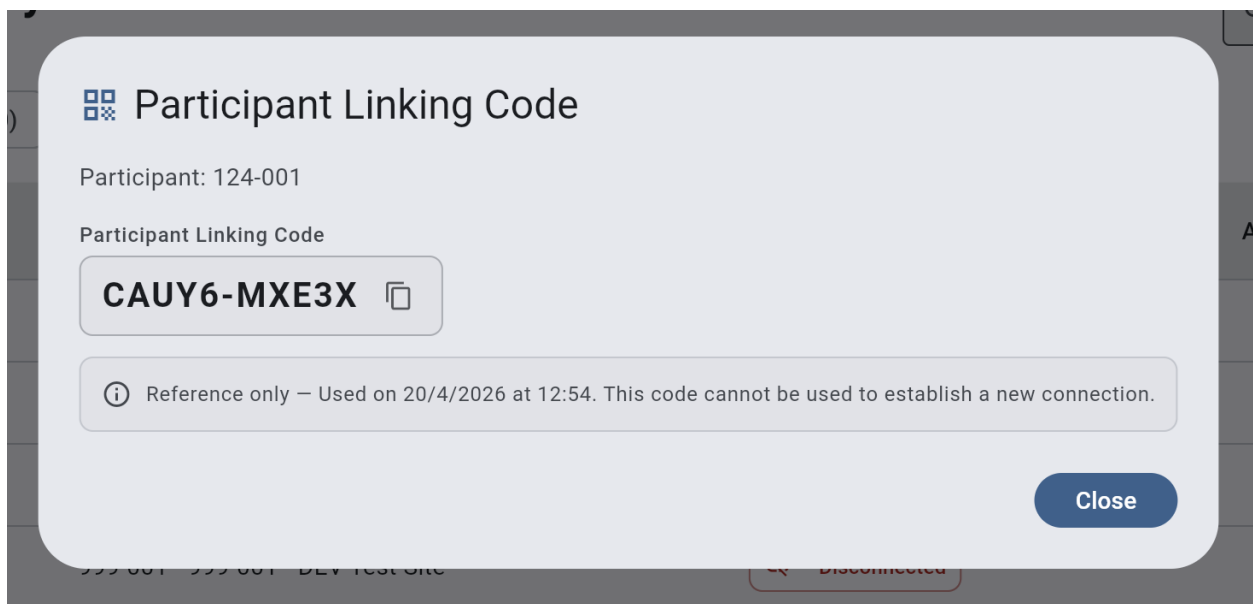

7.2.3 Manage Questionnaires Modal


Trigger: Study Coordinator selects **Manage Questionnaires** for a **Participant** with **Trial Active** status.

Target identification: **Participant** ID in the modal header.

Displays: One **Questionnaire Card** per **Questionnaire Type** enabled for the deployment. Each card shows the **Questionnaire Type** name and current **Questionnaire Status**, with content and actions varying by status and **Cycle** state (e.g., **Send Now**, **Start Next Cycle**, **Finalize**, call back).

Dismissal: Close action.

Reference: GUI-CAL-p00006.

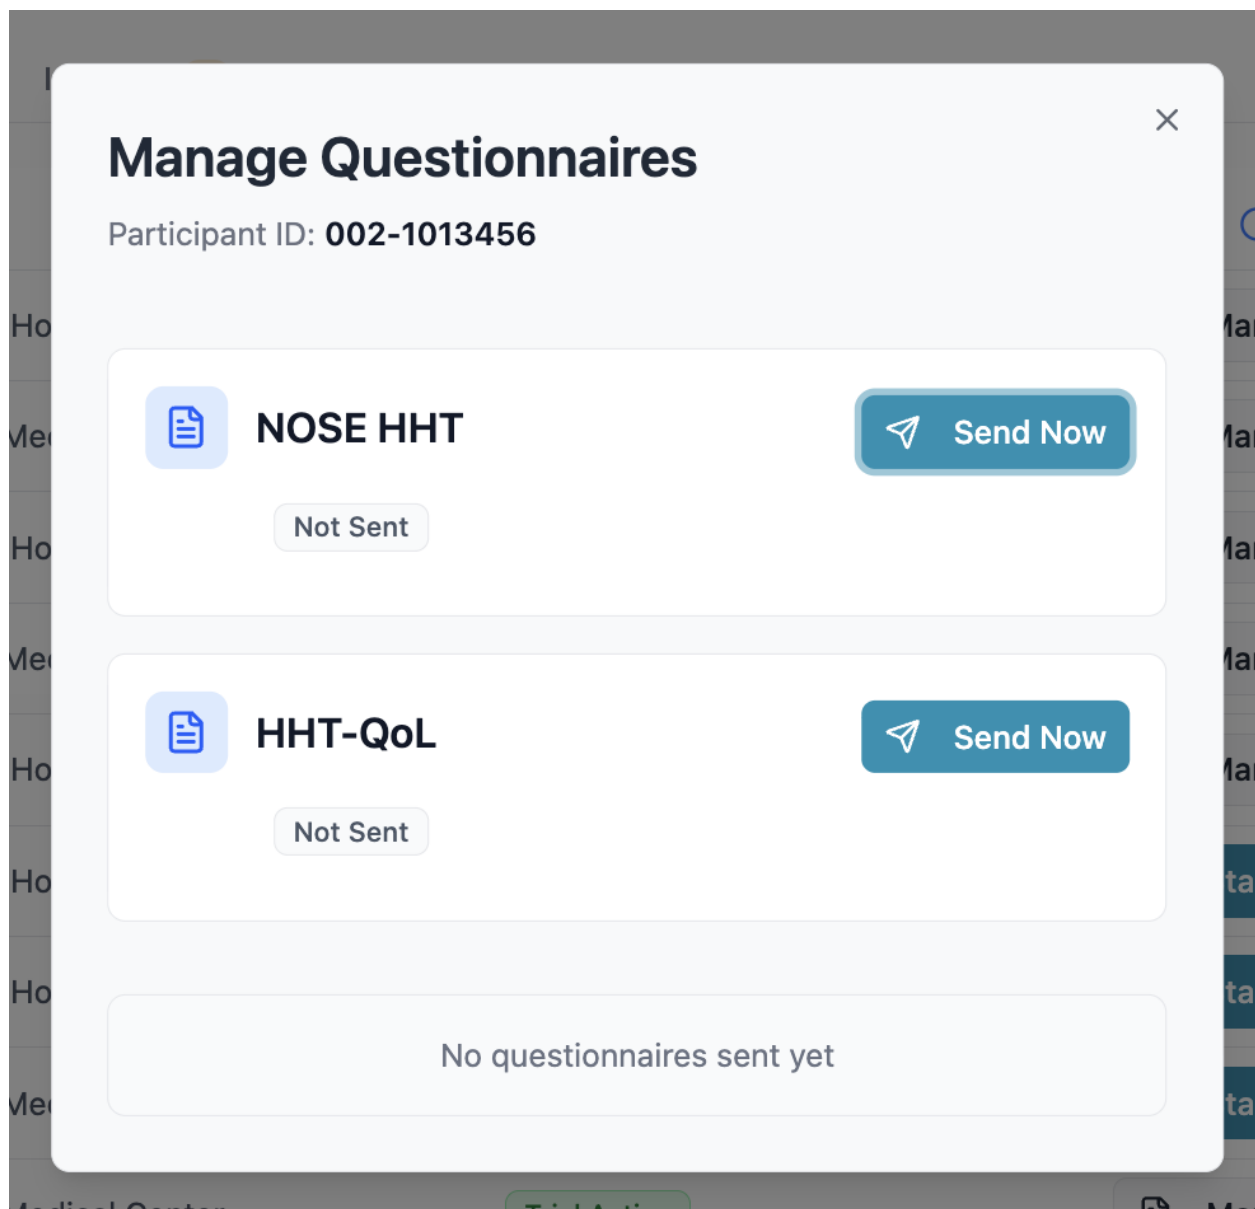

7.3 Dialogs

7.3.1 Deactivate User Account — Reason Dialog (Free Text)

Trigger: **Administrator** initiates deactivation of a **User Account** from the **Active Users** tab. *Target identification:* **Full Name**.

Consequence summary: The **User Account** will be deactivated and the user will no longer be able to access the **System**.

Pattern: Reason Dialog — Free Text (see §4.1).

Reference: REQ-p20031, GUI-p00031.

Deactivate User Account

You are about to deactivate the account for "**Dr. Sarah Johnson**".

Effects of this action:

- Terminate all active sessions immediately
- Prevent the user from logging in
- Move the user to the Inactive Users tab

This action can be reversed by reactivating the user.

Reason for deactivation *

Enter the reason for deactivating this user...

0/100

Cancel

Confirm

7.3.2 Reactivate User Account — Reason Dialog (Free Text)

Trigger: **Administrator** initiates reactivation of a **User Account** from the **Inactive Users** tab.

Target identification: **Full Name**.

Consequence summary: The **User Account** will be set to **Pending Activation** and the user will be required to complete the activation workflow before regaining access.

Pattern: Reason Dialog — Free Text (see §4.1).

Reference: REQ-p20032, GUI-p00032.

Reactivate User Account

You are about to reactivate the account for "**Dr. Michael Chen**".

Effects of this action:

- Restore previously assigned roles and site assignments
- Set account status to Pending Activation
- Send a new activation email to the user
- Require the user to set a new password and complete 2FA setup

The user will not be able to log in until they complete the activation workflow.

Reason for reactivation *

Enter the reason for reactivating this user...

0/100

Cancel

Confirm

7.3.3 Link Participant — Confirmation Dialog


Trigger: Study Coordinator initiates **Link Participant** for a **Participant** with **Not Connected** status.

Target identification: Participant ID.

Consequence summary: A **Mobile Linking Code** will be generated for the **Participant** and will expire after the configured duration.

Pattern: Confirmation Dialog (see §4.1).

Reference: REQ-p70009, GUI-p03001.

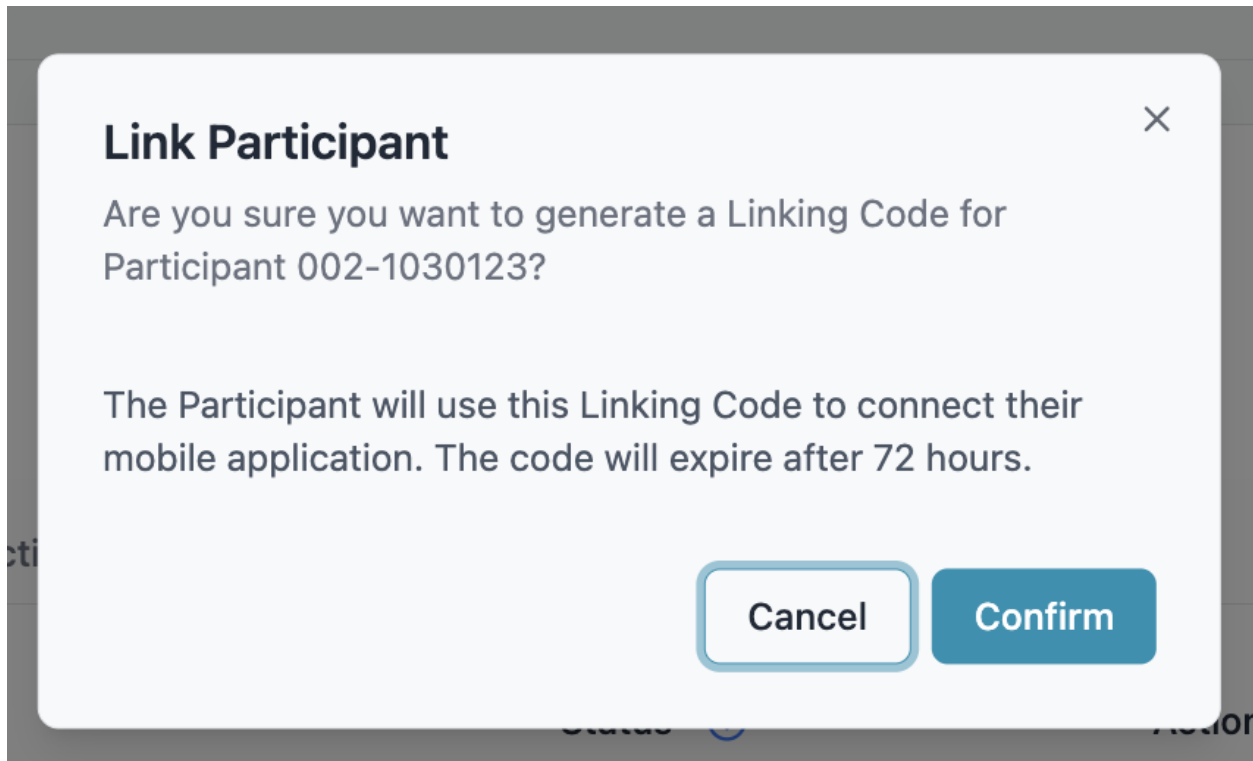

7.1.2

7.3.4 Linking Code Generated — Acknowledgement Dialog

Trigger: **Study Coordinator** confirms generation of a **Mobile Linking Code** from the Link Participant Confirmation Dialog (§7.3.3).

Target identification: **Participant ID**.

Displays: Generated **Mobile Linking Code** with a **Copy** action, and remaining time until expiry. *Outcome:* On dismissal, the **Participant's Status Badge** updates to **Pending**.

Pattern: Acknowledgement Dialog (see §4.1).

Reference: GUI-p03001.

Linking Code Generated

The Linking Code has been generated successfully. Share it with the Participant to connect their Mobile Application.

Participant: 001-1028901

IHVI7-SSS36



Expires in 3 days, 0 hours

OK

7.3.5 Start Trial — Confirmation Dialog


Trigger: **Study Coordinator** selects **Start Trial** for a **Participant** with **Linked - Awaiting Start** status.

Target identification: **Participant ID**.

Consequence summary: **Diary Data Synchronization** will be activated, transmitting diary entries to the **Sponsor Portal** and **Rave EDC**. The **Participant's** status will update to **Trial Active**.

Pattern: Confirmation Dialog (see §4.1).

Reference: REQ-CAL-p00022, GUI-CAL-p00005.

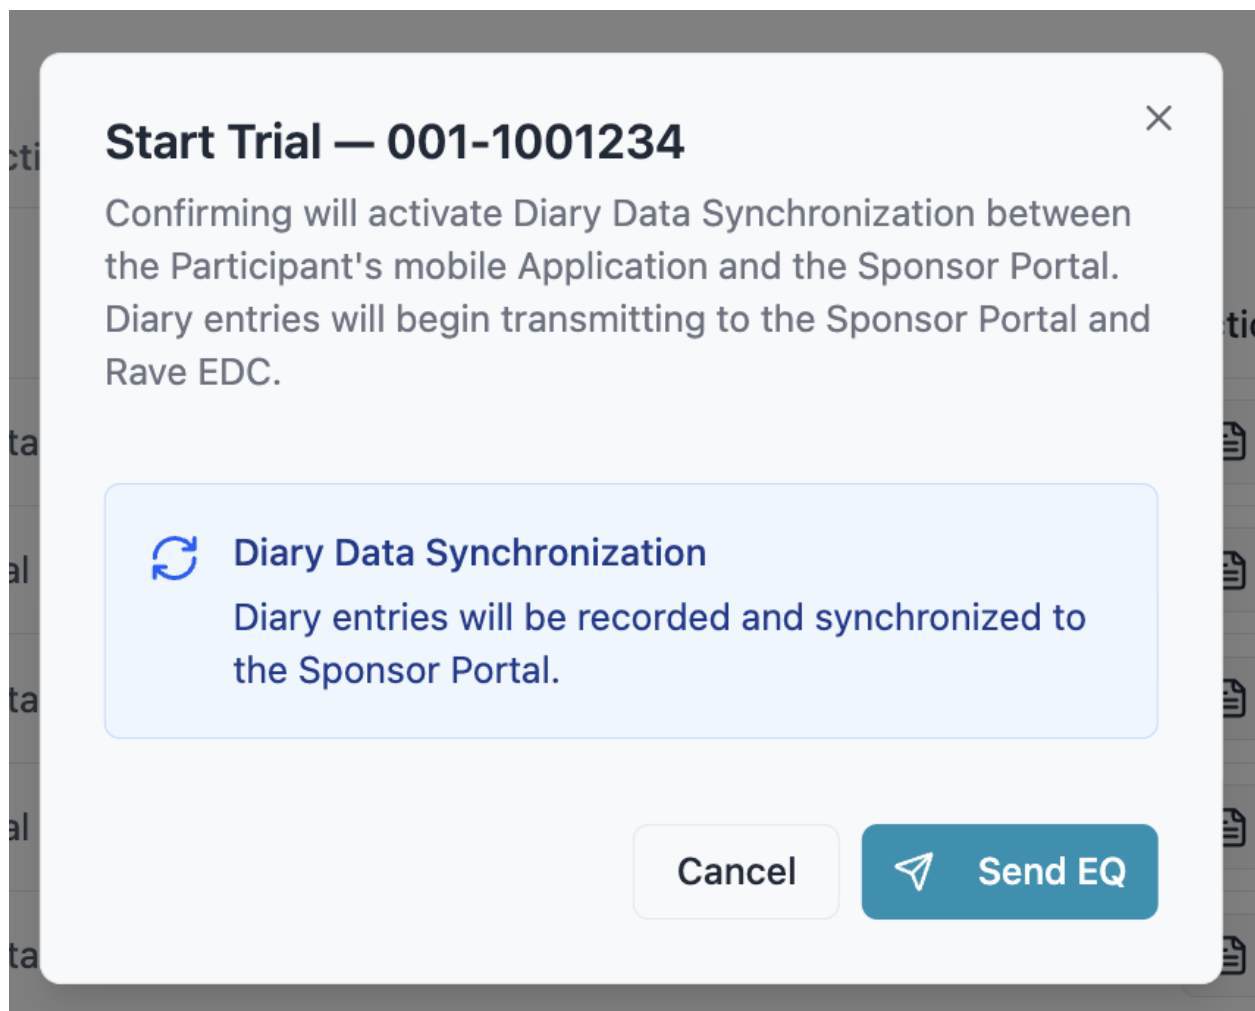

7.1.3

7.3.6 Disconnect Participant — Reason Dialog

Trigger: Study Coordinator selects **Disconnect Participant** from the **Participant Actions Modal** for a **Participant** with **Linked - Awaiting Start** or **Trial Active** status.

Target identification: Participant ID.

Consequence summary: Data synchronization between the **Mobile Application** and the **Sponsor Portal** will stop. All **Participant** data will be preserved.

Reason options: Device Issues, Technical Issues, Other.

Pattern: Reason Dialog — Predefined List (see §4.1).

Reference: REQ-p70010, REQ-CAL-p00020.

Disconnect Participant

Participant ID: 002-1006789

Effects of this action:

- Stop data synchronization between the Participant's Mobile Application and the Sponsor Portal
- Continue applying sponsor-specific rules to the Participant's Mobile Application
- Preserve all Participant data and history

This action can be reversed by reconnecting the Participant.

Reason for disconnection *

Select a reason



Cancel

Confirm

7.1.4

7.3.7 Reconnect Participant — Reason Dialog (Free Text)


Trigger: **Study Coordinator** selects **Reconnect Participant** from the **Participant Actions Modal** for a **Participant** with **Disconnected** status.

Target identification: **Participant ID**.

Consequence summary: A new **Mobile Linking Code** will be generated. The **Participant** must enter the new code to restore the connection.

Pattern: Reason Dialog — Free Text (see §4.1).

Reference: REQ-p70011.

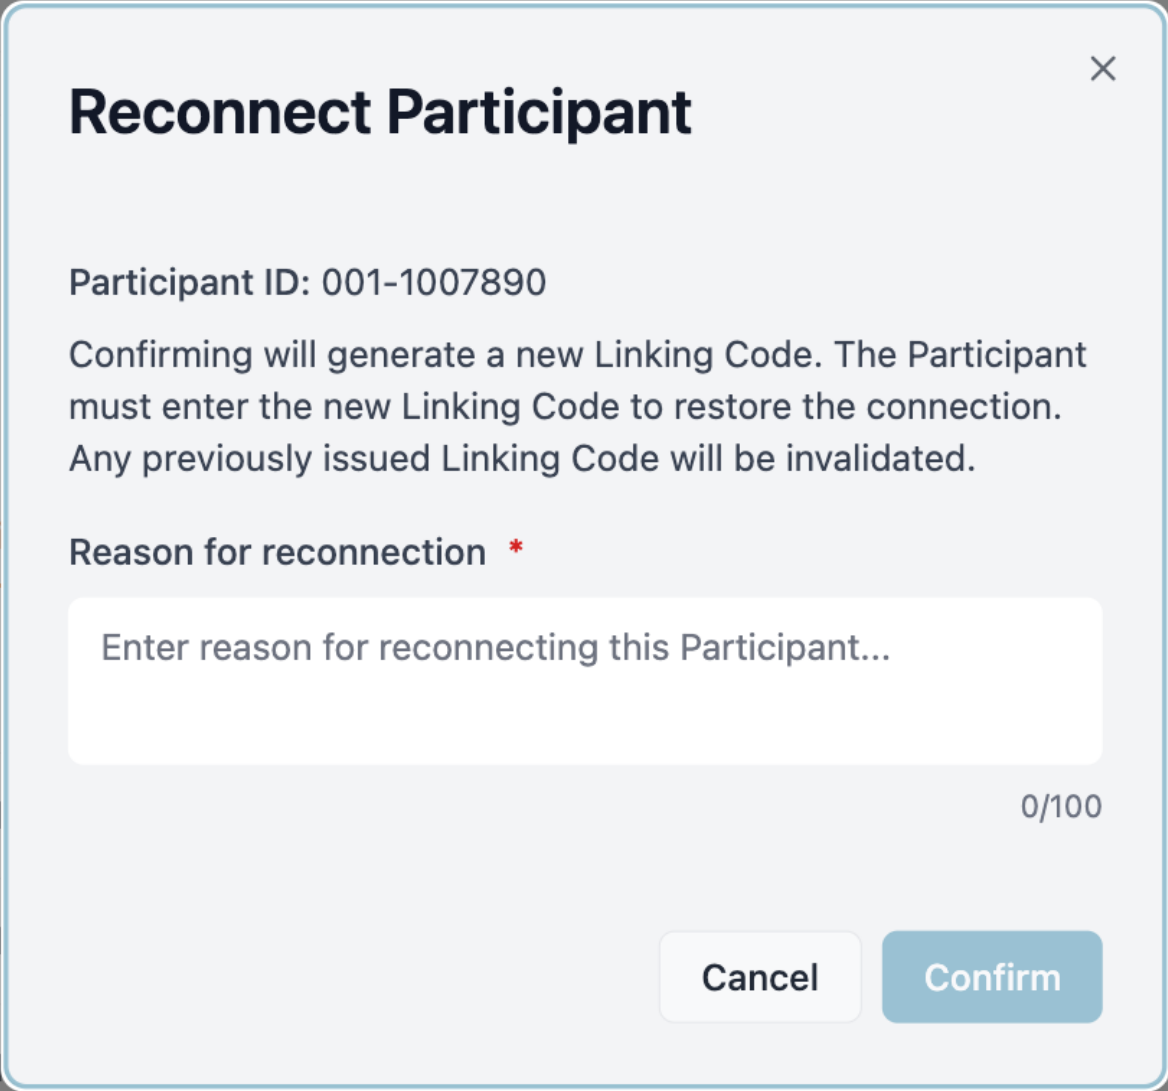

The image shows a 'Reconnect Participant' dialog box. It has a title bar with a close button (X). The main content area contains the following text: 'Participant ID: 001-1007890', 'Confirming will generate a new Linking Code. The Participant must enter the new Linking Code to restore the connection. Any previously issued Linking Code will be invalidated.', and 'Reason for reconnection *'. Below this is a text input field with the placeholder text 'Enter reason for reconnecting this Participant...'. To the right of the input field is a character count '0/100'. At the bottom right are two buttons: 'Cancel' and 'Confirm'.

Reconnect Participant

Participant ID: 001-1007890

Confirming will generate a new Linking Code. The Participant must enter the new Linking Code to restore the connection. Any previously issued Linking Code will be invalidated.

Reason for reconnection *

Enter reason for reconnecting this Participant...

0/100

Cancel Confirm

7.3.8 Mark as Not Participating — Reason Dialog (Predefined)

Trigger: **Study Coordinator** selects **Mark as Not Participating** for a **Participant** with **Disconnected** status.

Target identification: **Participant ID**.

Consequence summary: Sponsor-specific rules will no longer be applied to the **Participant's Mobile Application**. *Reason options:* Subject Withdrawal, Death, Protocol Treatment/Study Complete, Other.

Pattern: Reason Dialog — Predefined List (see §4.1).

Reference: REQ-p70017, REQ-CAL-p00064.

Mark Participant as Not Participating

Participant ID: 001-1023456

Effects of this action:

- Stop applying sponsor-specific rules to the Mobile Application
- Preserve all Participant data and history

This action can be reversed by reactivating the Participant.

Reason for marking as not participating *

Cancel

Confirm

7.1.5

7.3.9 Reactivate Participant — Reason Dialog (Free Text)


Trigger: **Study Coordinator** selects **Reactivate Participant** from the **Participant Actions Modal** for a **Participant** with **Not Participating** status.

Target identification: **Participant ID**.

Consequence summary: Sponsor-specific rules will be re-applied to the **Participant's Mobile Application** and the standard reconnection workflow will become available.

Pattern: Reason Dialog — Free Text (see §4.1).

Reference: REQ-p70016.

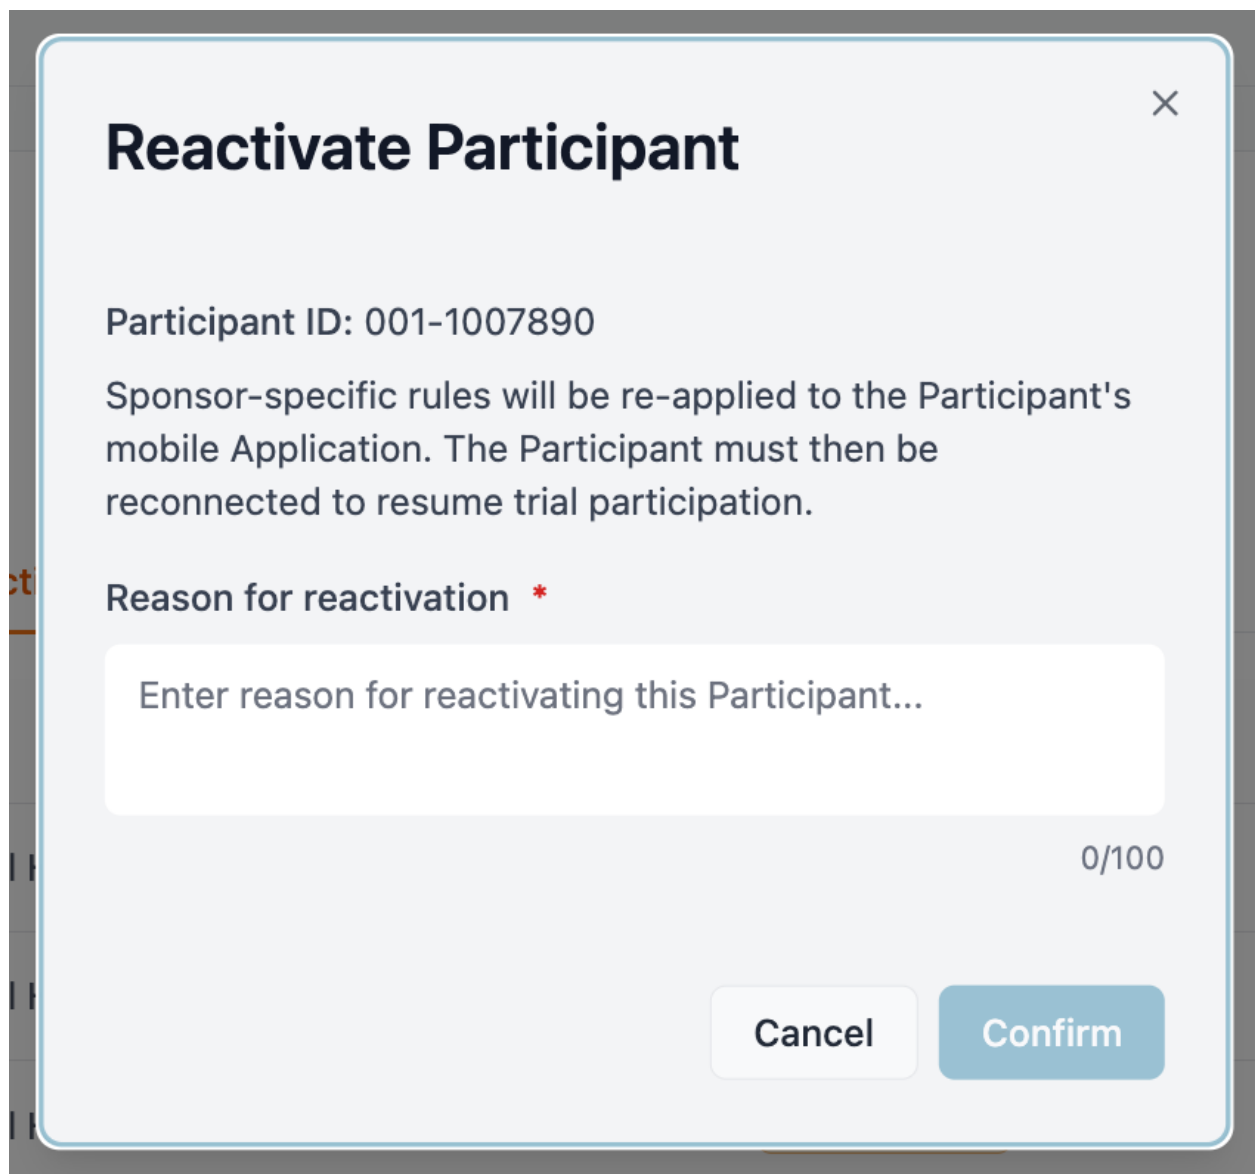

The image shows a 'Reactivate Participant' dialog box. It has a title bar with a close button (X) in the top right corner. The main content area contains the following text: 'Participant ID: 001-1007890', 'Sponsor-specific rules will be re-applied to the Participant's mobile Application. The Participant must then be reconnected to resume trial participation.', and 'Reason for reactivation *'. Below this is a text input field with the placeholder text 'Enter reason for reactivating this Participant...'. To the right of the input field is a character count '0/100'. At the bottom right are two buttons: 'Cancel' and 'Confirm'.

Reactivate Participant

Participant ID: 001-1007890

Sponsor-specific rules will be re-applied to the Participant's mobile Application. The Participant must then be reconnected to resume trial participation.

Reason for reactivation *

Enter reason for reactivating this Participant...

0/100

Cancel Confirm


7.3.10 Delete Record — Reason Dialog — Predefined List

Trigger: **Participant** initiates the delete action on an **Epistaxis Event**, either during the recording flow or from event history.

Consequence summary: The **Epistaxis Event** will be removed from the **Participant's** diary. **Reason options:** Entered by mistake, Duplicate entry, Incorrect information, Other.

Pattern: Reason Dialog — Predefined List (see §4.1).

Reference: GUI-p00003.

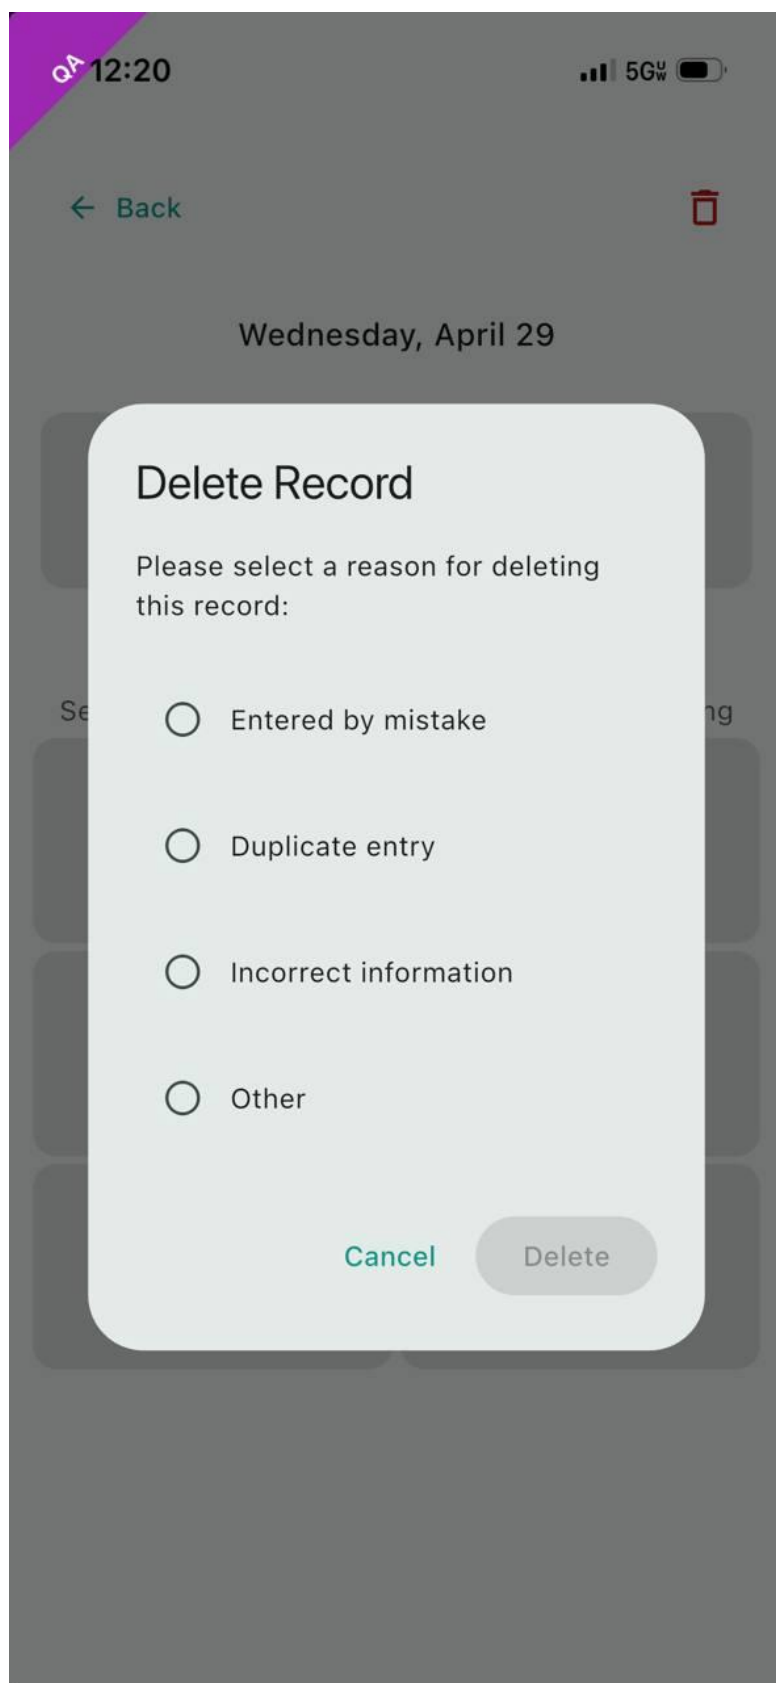

7.3.11 Post-Submission Acknowledgement Dialog

Trigger: **Participant** confirms **Submission** of a **Portal-Sent Questionnaire**.

Consequence summary: Confirms the **Questionnaire** has been submitted and informs the **Participant** that the **Study Coordinator** will review the responses.

Pattern: Acknowledgement Dialog (see §4.1).

Reference: GUI-p00001.



Questionnaire Submitted

Your questionnaire has been submitted successfully. Your Study Coordinator will review your responses.

OK

7.1.6

7.1.7 7.3.12 Session Expiry Dialog

Trigger: **Participant** opens a **Portal-Sent Questionnaire** that has reached **Session Expiry**.

Consequence summary: Informs the **Participant** that the session has expired and previous answers were not saved.

Actions: **Start Again** (begin the **Questionnaire** from the **Preamble**), **Not Now** (return to **Main Screen**).

Pattern: Acknowledgement Dialog (see §4.1).

Reference: REQ-p01073, GUI-p00004.



Confirm Yesterday - May 7. Did you have nosebleeds?

Yes

No ✓

I don't remember

Thursday, May 7, 2026

no events yesterday



Session Expired

Your session has expired and your previous answers were not saved. You can start the questionnaire again from the beginning, or come back to it later.

Not Now

Start Again



Record Nosebleed

 Calendar

7.3.13 Questionnaire Finalization Dialog

Trigger: Study Coordinator selects **Finalize** on a **Questionnaire Card** with **Delivery Failed** or **Ready to Review** status.

Consequence summary: Finalizes the Questionnaire — locks all Participant responses permanently, calculates the score, transmits it to Rave EDC, and prevents the Participant from editing their answers in the Mobile Application.

Actions: Finalize Questionnaire (apply finalization with the selected Cycle), Cancel (close the dialog with no changes).

Inputs: Cycle dropdown — selectable values are the Current Cycle N Day 1 value, End of Treatment, and End of Study.

Cross-flow: When a Terminal Cycle value (End of Treatment or End of Study) is selected, confirming opens the Terminal Cycle Warning Dialog before finalization is applied.

Pattern: Confirmation Dialog (see §4.1).

Reference: REQ-CAL-p00023 I–M, GUI-CAL-p00007 A–F.

Finalize Questionnaire?

Participant ID: 002-1009012

Are you sure you want to finalize the NOSE HHT Questionnaire?

Cycle

Cycle 4 Day 1



This questionnaire will be finalized as: **Cycle 4 Day 1**

Effects of this action:

- Finalize this Questionnaire
- Calculate the score and send it to EDC
- Lock all Participant responses permanently

After finalization, the Participant cannot edit or update their answers in the Daily Diary app.

Cancel

Confirm

7.3.14 Terminal Cycle Warning Dialog

Trigger: Study Coordinator confirms finalization of a **Questionnaire** with a **Terminal Cycle** value (**End of Treatment** or **End of Study**) selected in the **Finalization Dialog**.

Target identification: Participant ID, Questionnaire Type, Terminal Cycle being assigned.

Consequence summary: The **Participant's** answers will be locked, the score will be transmitted to **Rave EDC**, and the **Questionnaire Type** will be closed for the **Participant** so no further **Questionnaires** of that type may be sent.

Cancellation behavior: On cancel, the **Questionnaire** remains unchanged and the **Study Coordinator** is returned to the **Finalization Dialog**.

Pattern: Confirmation Dialog (see §4.1).

Reference: GUI-CAL-p00007.

Finalize Terminal Cycle

Participant ID: 002-1006789

Finalizing Cycle 1 — End of Study for HHT-QoL.

Effects of this action:

- Lock the Participant's answers permanently
- Calculate the Questionnaire score and transmit it to Rave EDC
- Close this Questionnaire Type for the Participant

After finalization, no further HHT-QoL Questionnaires can be sent to this Participant.

Cancel

Confirm

7.3.15 Call Back Questionnaire — Reason Dialog (Free Text)

Trigger: **Study Coordinator** initiates the call back action on a **Questionnaire** with **Sent**, **Delivery Failed**, or **Ready to Review** status.

Target identification: **Participant ID**, **Questionnaire Type**.

Consequence summary: The **Questionnaire** status will be set to **Not Sent**.

Pattern: Reason Dialog — Free Text (see §4.1).

Reference: REQ-CAL-p00023, GUI-CAL-p00006.

Call Back Questionnaire

Participant ID: 002-1013456

Calling back the NOSE HHT Questionnaire will set its status to Not Sent.

Reason for call back *

Enter reason for calling back this Questionnaire...

0/100

Cancel

Confirm

7.2

7.3.16 Call Back Notice

Trigger: A **Portal-Sent Questionnaire** assigned to the **Participant** has been called back by the **Study Coordinator**.

Consequence summary: Informs the **Participant** that the **Questionnaire** is no longer active and any answers entered will not be saved.

Presentation contexts:

- The **Portal-Sent Questionnaire** is called back while the **Participant** has it open.
- The **Participant** opens the **Mobile Application** after a call back has occurred.

- The **Participant** attempts to submit a **Portal-Sent Questionnaire** that has been called back while offline.

Behavior: Cannot be dismissed by tapping outside its bounds. On acknowledgement, the **Participant** is returned to the **Main Screen** and the corresponding **Questionnaire Task** is removed from the **Task List**.

Pattern: Acknowledgement Dialog (see §4.1).

Reference: GUI-CAL-p07002.

The screenshot shows the 'curehht' mobile application interface. At the top, there is a header with a menu icon on the left, the 'curehht' logo in the center, and a user profile icon on the right. Below the header, a confirmation prompt asks: 'Confirm Yesterday - May 7. Did you have nosebleeds?'. There are three buttons: 'Yes', 'No ✓', and 'I don't remember'. Below the buttons, the date 'Thursday, May 7, 2026' is displayed, followed by the text 'no events yesterday'. A white modal box with rounded corners is centered on the screen. It features a red circle with a white 'X' at the top. The text inside the modal reads: 'Questionnaire No Longer Active', followed by a paragraph: 'This questionnaire has been called back by your Study Coordinator and is no longer active. Any answers you entered will not be saved.' At the bottom of the modal is a green button labeled 'OK'. Below the modal, there is a large red button with a white plus sign and the text 'Record Nosebleed'. At the very bottom, there is a grey button with a calendar icon and the text 'Calendar'.

Confirm Yesterday - May 7. Did you have nosebleeds?

Yes No ✓ I don't remember

Thursday, May 7, 2026

no events yesterday

Questionnaire No Longer Active

This questionnaire has been called back by your Study Coordinator and is no longer active. Any answers you entered will not be saved.

OK

+ Record Nosebleed

Calendar

7.3.17 Successful Linking Confirmation

Trigger: A **Participant** successfully submits a valid **Mobile Linking Code** on the **Join the Study** screen.

Consequence summary: Confirms to the **Participant** that the device has been linked to the study and transitions the **Participant** from personal use mode into linked use mode.

Behavior: On acknowledgement, the **Participant** is navigated to the **User Profile** screen.

Pattern: Acknowledgement Dialog (see §4.1).



Device Linked Successfully


Your device has been successfully linked to the study.

OK

7.4 Notifications

7.4.1 Timeout Warning Notification


A push notification delivered to the Participant when a configured Questionnaire Session Timeout is approaching expiry. Tapping the notification opens the questionnaire in the Mobile Application. The wording is sponsor-configurable per Questionnaire definition; the default text is [*“Your [Questionnaire Display Name] session is about to expire. Open the app to continue and submit your answers.”*]

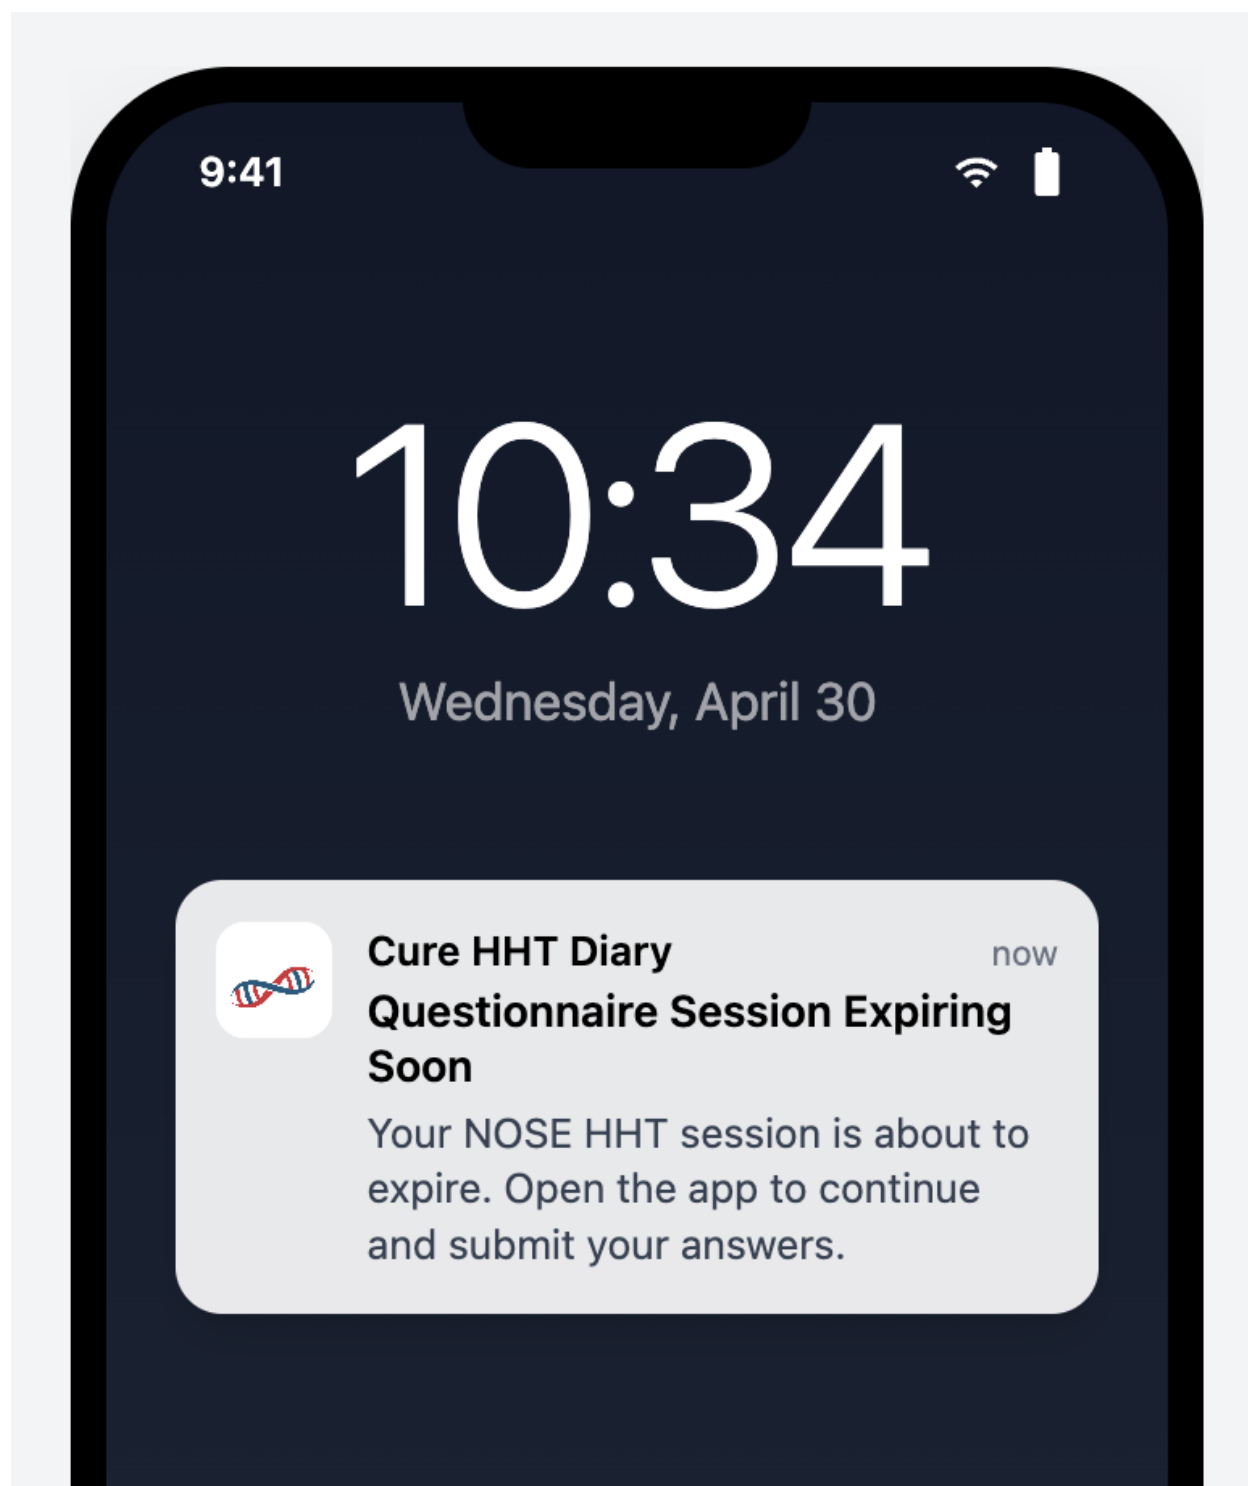

7.2.1

7.4.2 Session Expiry Notification


A push notification delivered to the Participant when the configured Session Timeout has been exceeded for an in-progress Questionnaire and the Participant's previously entered answers have been discarded. Tapping the notification opens the Mobile Application; if the Participant returns to the Questionnaire, the Session Expiry Dialog is displayed. The wording is sponsor-configurable per Questionnaire definition; the default text is *[“Your [Questionnaire Display Name] session has expired and your answers were not saved. Open the app to start again.”]*

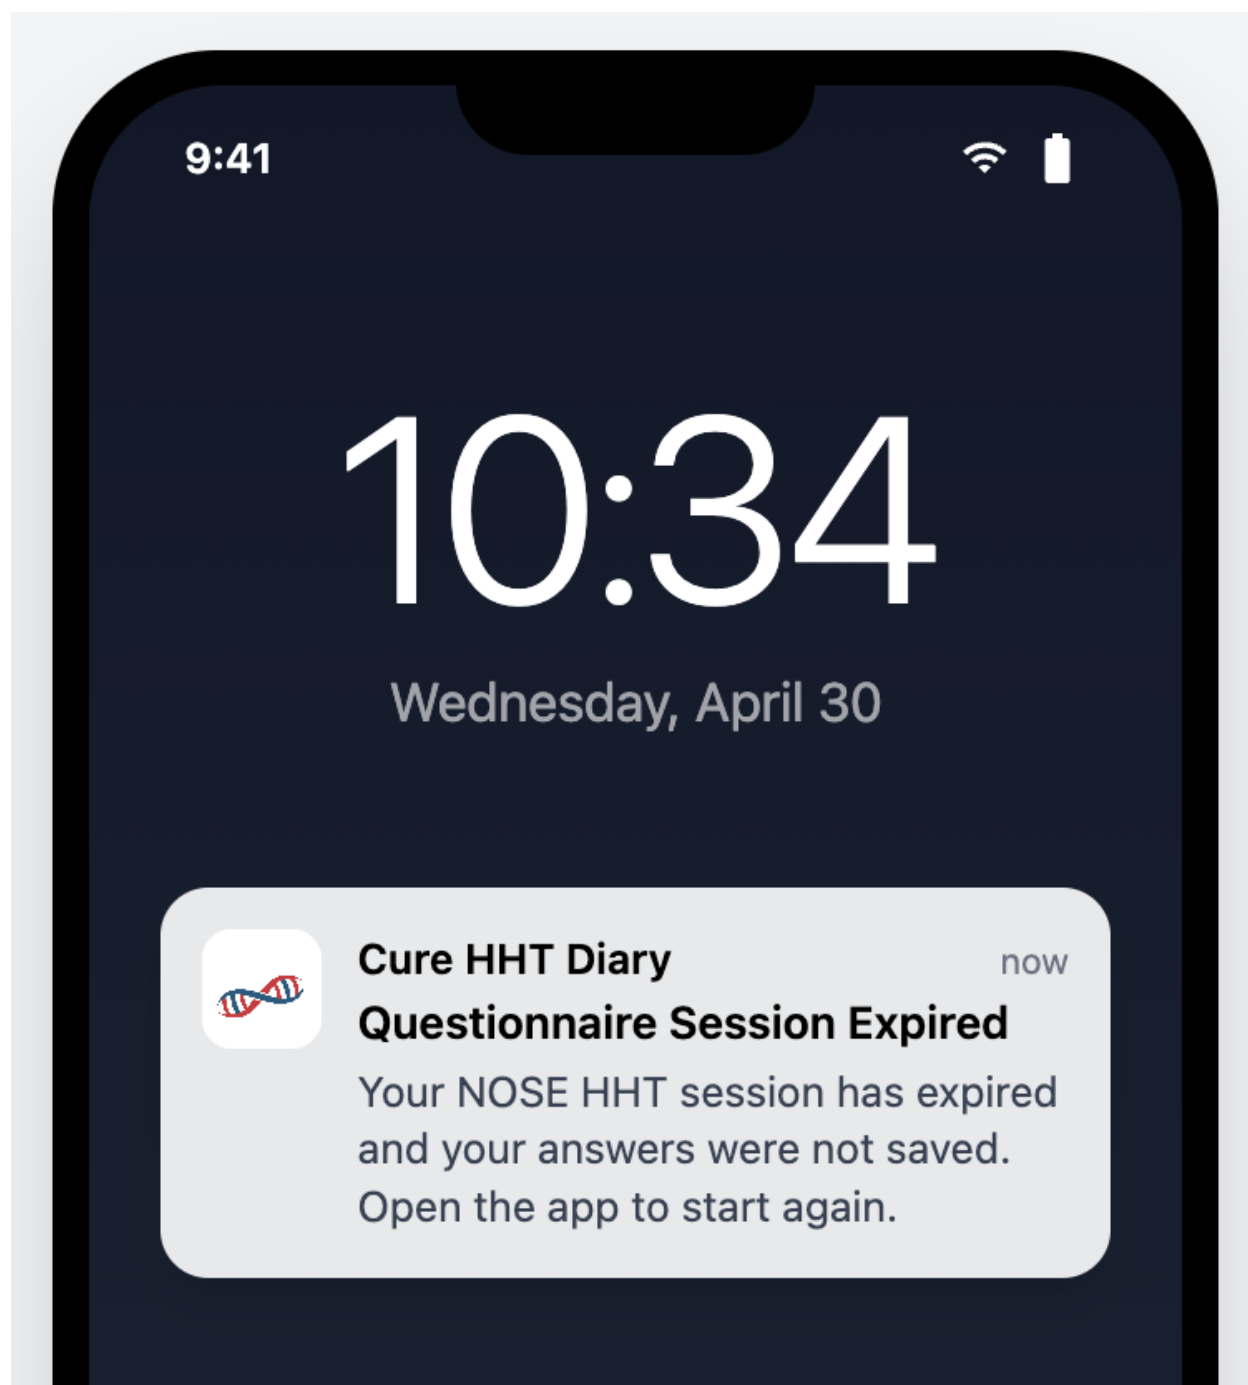

7.2.2

7.4.3 Disconnection Notification


A persistent, non-dismissible in-app notification displayed in the System Notice Area at the top of the Main Screen when the Participant's status is Disconnected. The notification persists until the Participant is reconnected to the Sponsor Portal. The wording is sponsor-configurable; the default text is [*"Your connection with the study has been interrupted. Please contact your study site for assistance."*]

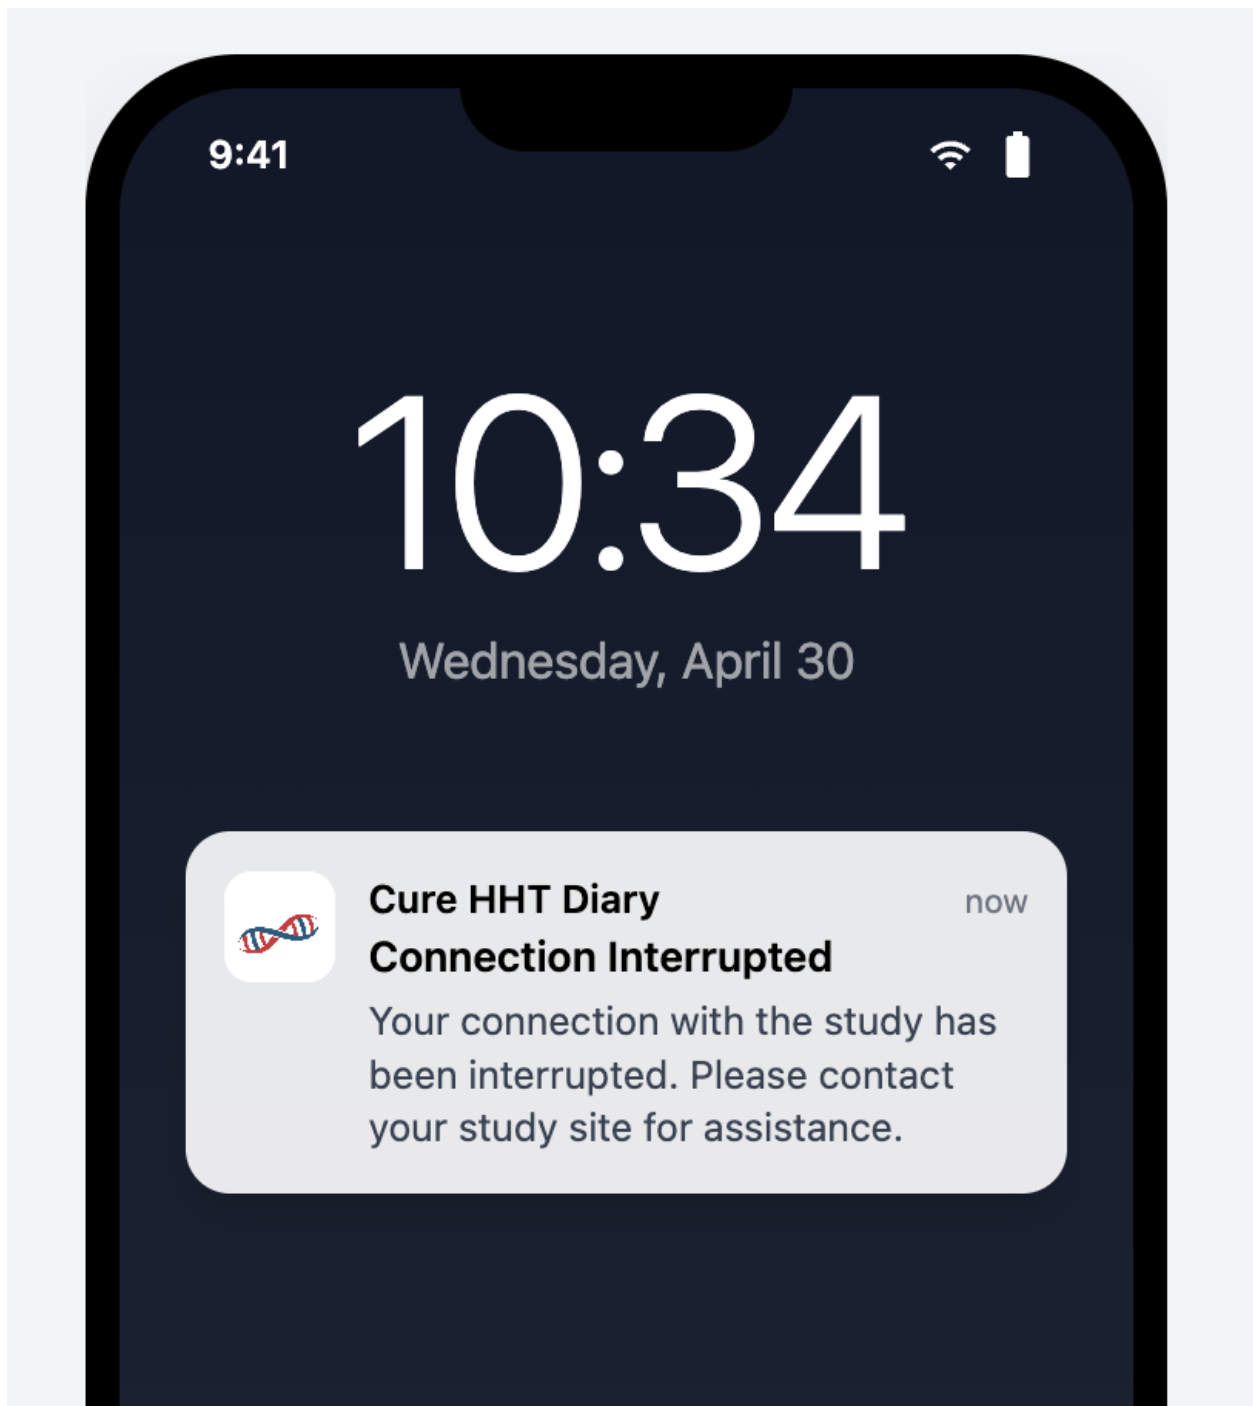

7.4.4 Portal-Sent Questionnaire Notification


A push notification delivered to the Participant when a Study Coordinator sends a Portal-Sent Questionnaire from the Sponsor Portal. Tapping the notification opens the Mobile Application; the Participant accesses the Questionnaire from the Questionnaire Task on

the Main Screen. The wording is sponsor-configurable; the default text is [*"A [Questionnaire Display Name] questionnaire is ready for you to complete. Open the app to begin."*]

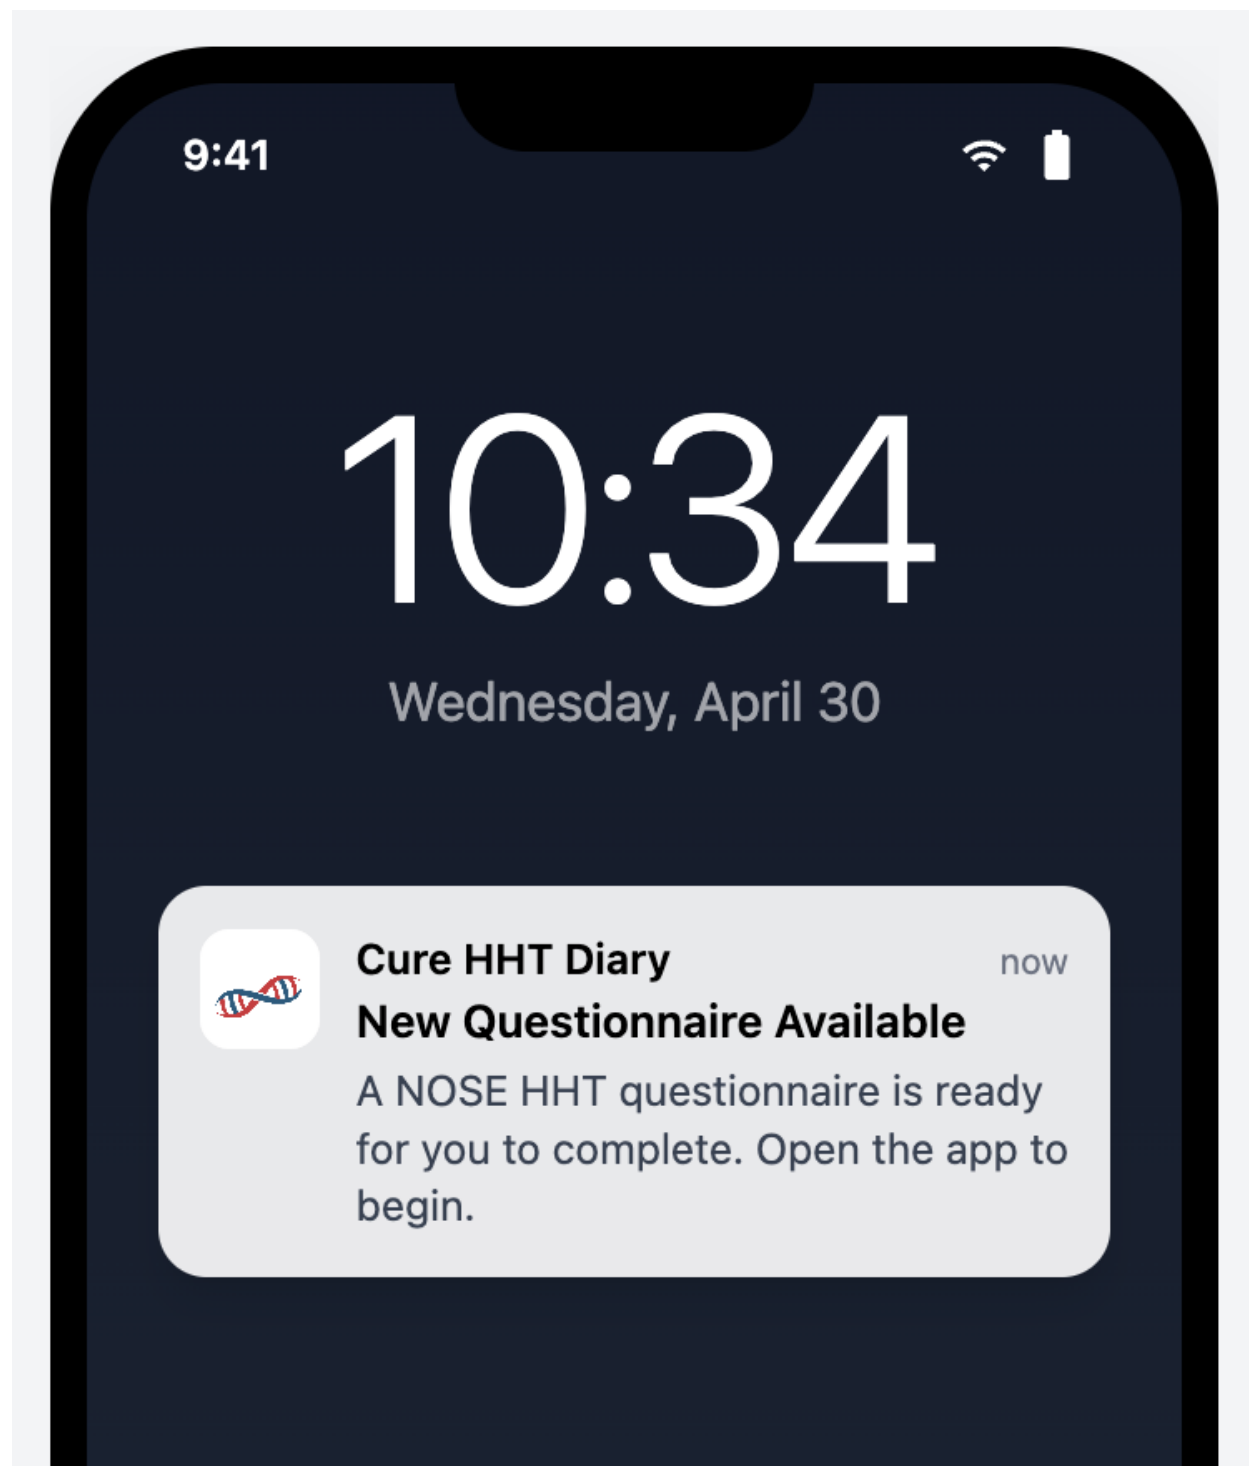


7.4.5 Yesterday Entry Reminder Notification

A push notification delivered to the Participant at the configured Reminder Time when no Daily Status has been recorded for the previous calendar day. Tapping the notification opens the Mobile Application; the Participant accesses the Yesterday Reminder Task on the Main Screen. The wording is sponsor-configurable; the default text is *["Did you have a nosebleed yesterday? Take a moment to record yesterday's status in your diary."]*

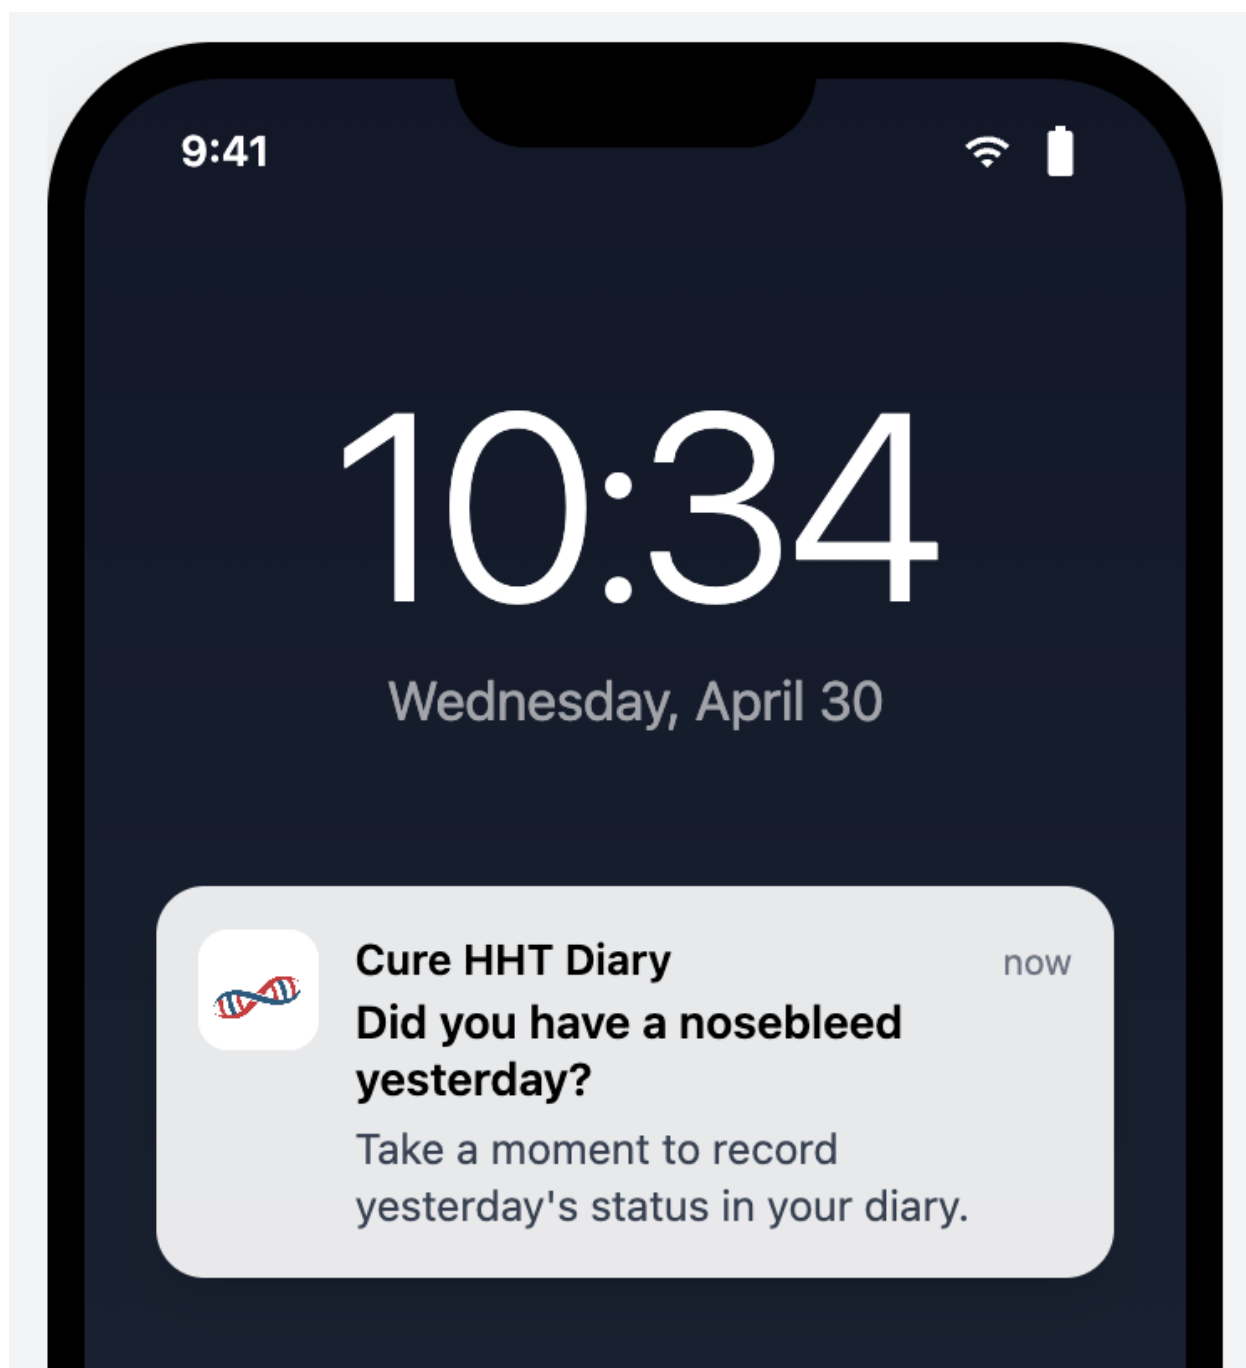


7.4.6 Ongoing Epistaxis Event Reminder

A push notification delivered to the Participant when an Incomplete Record has not been interacted with for the configured Reminder Interval. Tapping the notification opens the Mobile Application; the Participant returns to the Incomplete Record to either complete it or confirm the event is still ongoing. The wording is sponsor-configurable; the default text is *“Is your nosebleed still going? You started recording a nosebleed but haven’t finished. Tap to update.”*

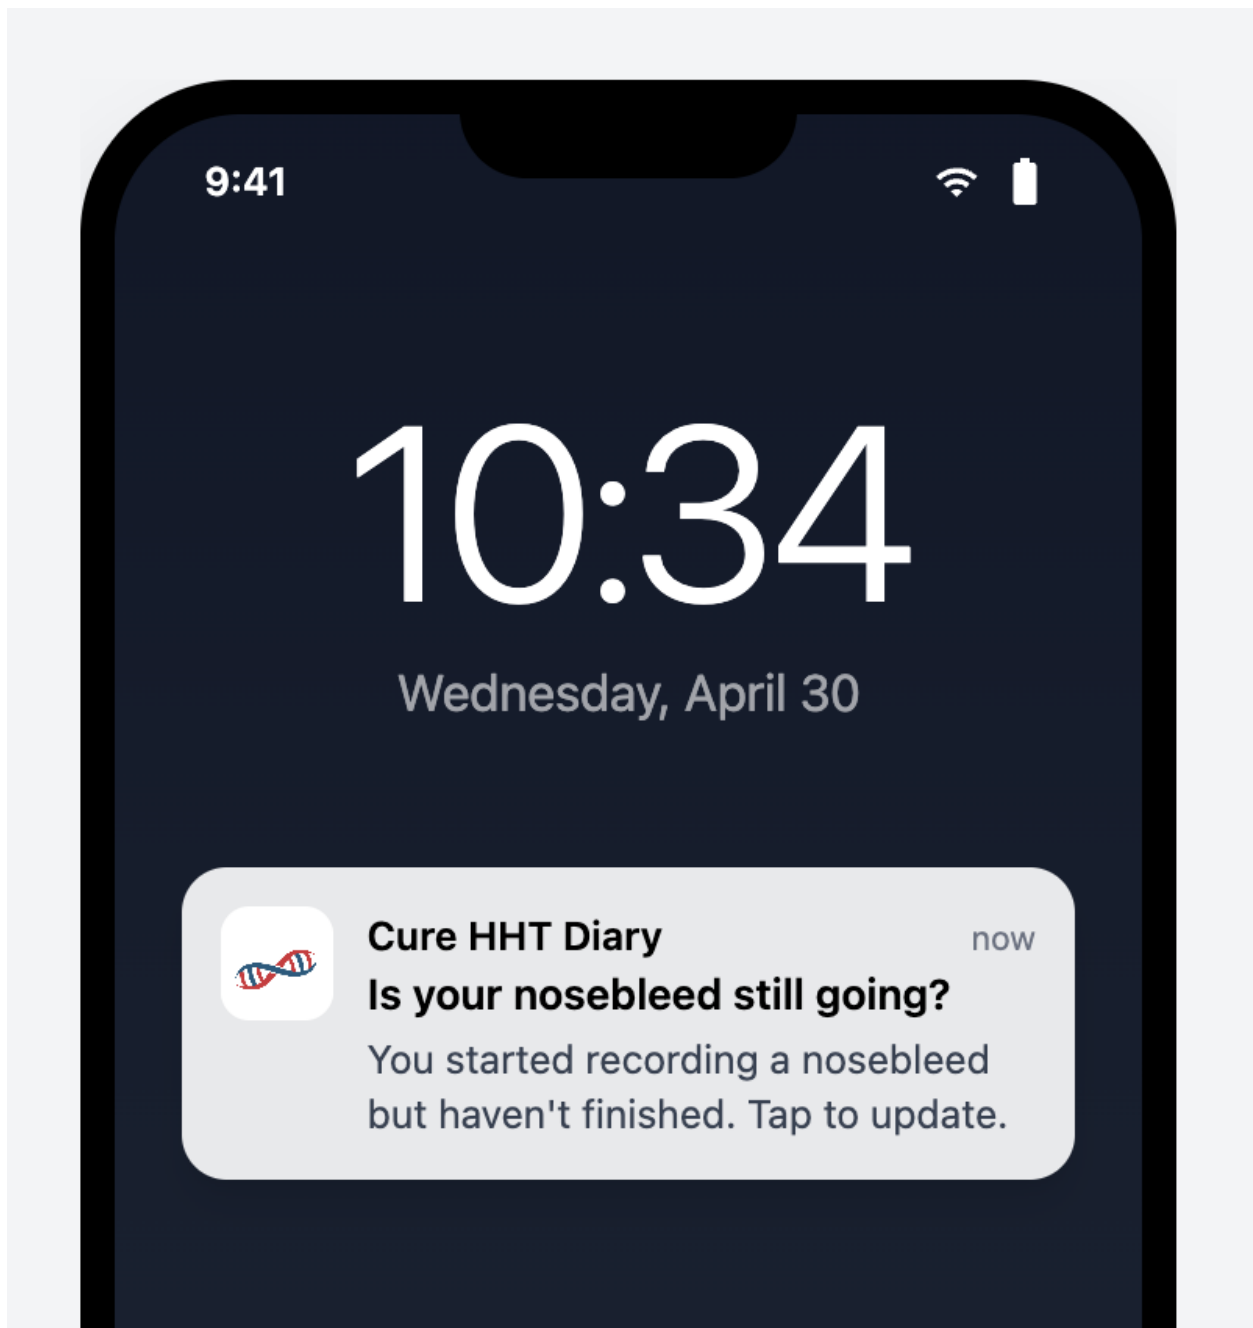

7.4.7 Historical Gap Reminder

A push notification delivered to the **Participant** at the configured Reminder Time when one or more Historical Gaps exist within the editable window. Tapping the notification opens the Mobile Application; the Participant accesses the missing days via the Calendar. The wording is sponsor-configurable; the default text is [*“You have one day without a recorded entry. Tap to review and complete your diary.”*]

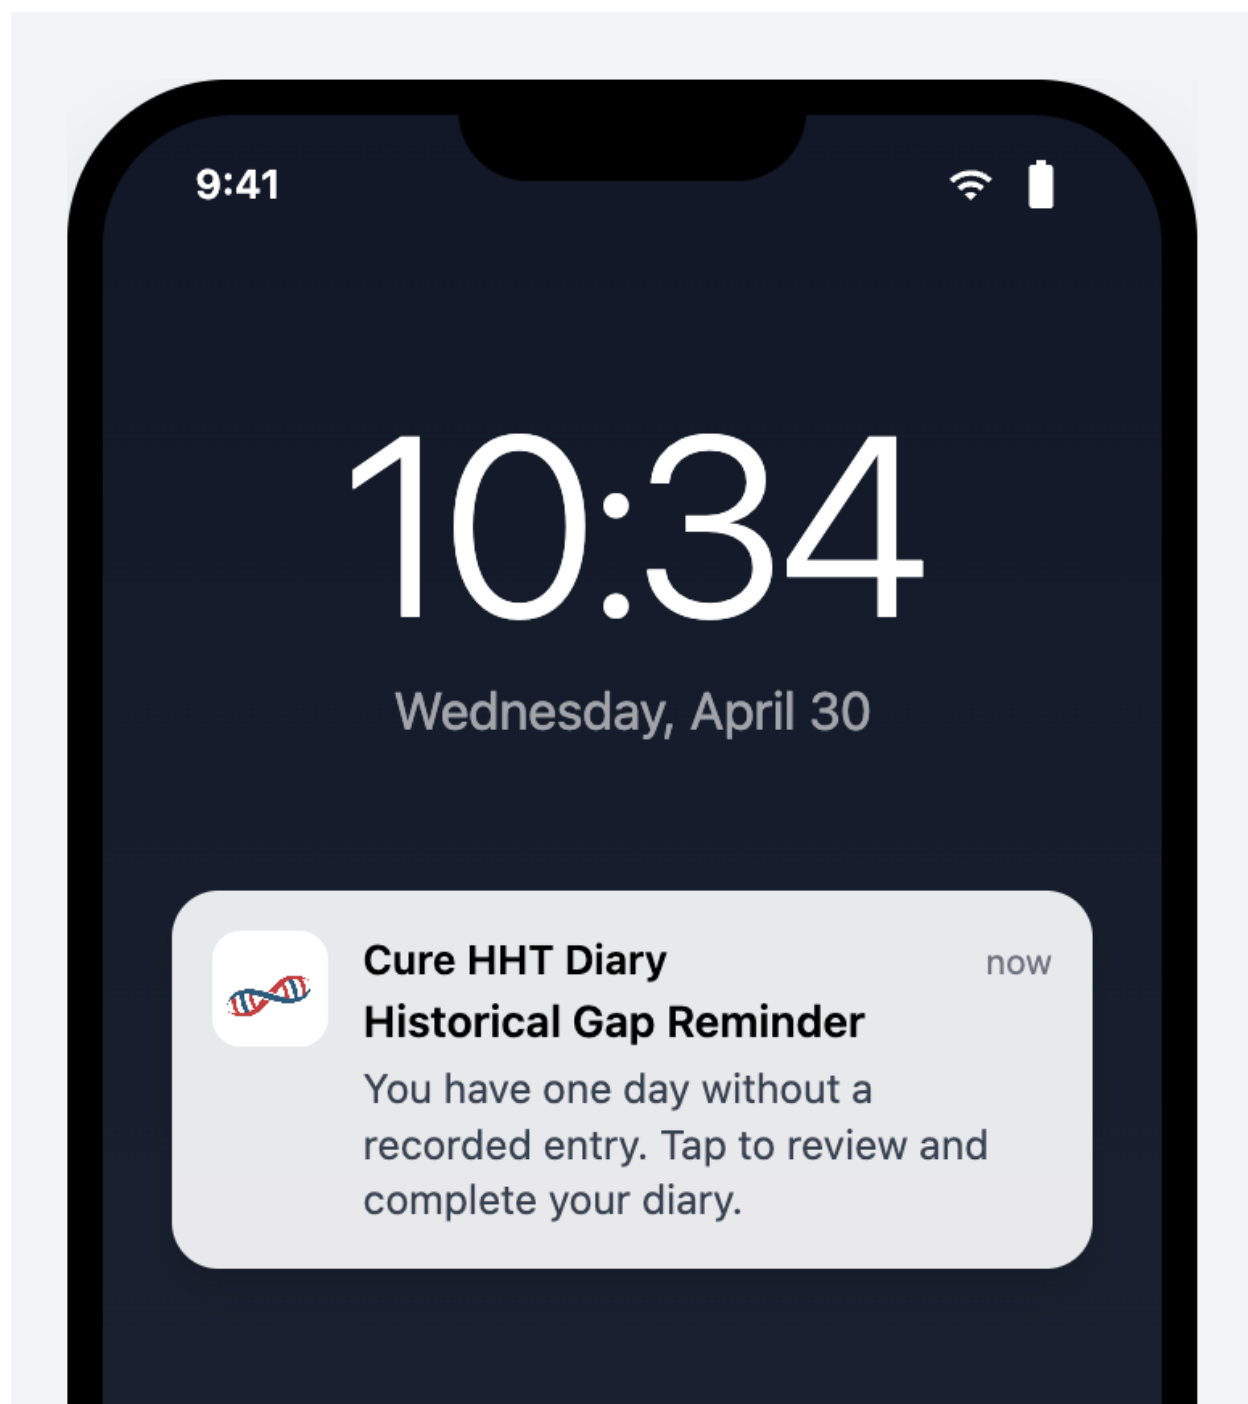

Glossary

8.1 A

ACT-PAT-001 — Link Participant The Action a Study Coordinator performs to issue a **Mobile Linking Code** for a **Participant** in **Not Connected** status, transitioning the **Participant** to **Pending**. *Defined in: DIARY-GUI-link-participant-flow (DIARY) Action*

A discrete operation that a user can perform within the System, subject to role-based access control. An Action either changes system state or retrieves protected data. *Defined in: DIARY-PRD-action-inventory (DIARY) Action Inventory*

The complete enumerated set of Actions the System recognizes, comprising the platform-level inventory in this requirement and any sponsor-level extensions. *Defined in: DIARY-PRD-action-inventory (DIARY) Activation Webpage*

A **Verification Link** associated with a **User Account** that provides a mechanism for the **Account Owner** to activate their account and configure their password and 2FA. *Defined in: DIARY-PRD-user-account-activation-workflow (DIARY) Admin (not indexed)*

A staff member with privileges to create and manage User Accounts, configure sites, and manage system settings. In clinical trial deployments, the Admin is typically a sponsor employee scoped to one sponsor's data. Scope: sponsor-wide access (all sites within one sponsor) in clinical trial context; organization-wide in non-CT deployments. Avoid: "Sponsor admin" (redundant in CT context); "super admin" (no such role). See: REQ-p00039 (Administrator Access with Audit Trail). *Defined in: file:spec/glossary-core.md (DIARY) Administrator*

A portal user responsible for managing User Accounts, role assignments, and Site assignments across the study. *Defined in: DIARY-PRD-role-definitions (DIARY) Administrator Dashboard*

The default surface presented to an **Administrator** upon successful authentication to the **Sponsor Portal**, containing top-level navigation to **User Account** management and audit log review. *Defined in: DIARY-GUI-administrator-dashboard (DIARY) Administrator Settings*

The read-only surface within the **Sponsor Portal** that displays **Configuration Parameters** to **Administrators**, organised by **Configuration Category**. *Defined in: DIARY-PRD-administrator-settings (DIARY) AE / SAE (Adverse Event / Serious Adverse Event) (not indexed)*

AE: any undesirable medical event occurring in a patient during a clinical trial, whether or not related to the investigational treatment. SAE: a severe adverse event resulting in death, hospitalization, disability, or other serious outcomes. Formal AE/SAE reporting is handled through the sponsor's EDC system, not directly through the Di-

ary Platform. SAEs require expedited reporting (typically within 24 hours). *Defined in: file:spec/glossary-core.md (DIARY)* **ALCOA+ Principles** *(not indexed)*

Data integrity standards for electronic health records, widely adopted in both clinical and non-clinical contexts. The acronym expands to: Attributable, Legible, Contemporaneous, Original, Accurate, plus Complete, Consistent, Enduring, and Available. Diary Platform Implementation: Event Sourcing architecture directly implements ALCOA+ principles — every event includes user ID and timestamp (Attributable); data is stored in readable formats (Legible); events are recorded immediately (Contemporaneous); events are never modified (Original); validation is enforced at entry (Accurate); the full audit trail is preserved (Complete); Event Sourcing ensures chronological ordering (Consistent); retention policies are enforced (Enduring); query interfaces provide access (Available). Clinical Trial Context: Required by FDA and EMA for clinical trial records. See: REQ-p00011 (ALCOA+ Data Integrity Principles), prd-clinical-trials.md. *Defined in: file:spec/glossary-core.md (DIARY)* **Analyst** *(not indexed)*

A researcher or data scientist with read-only access to data for analysis and reporting. Typically scoped to specific sites (may be sponsor-wide depending on assignment). Focused on data analysis, not compliance auditing. See: REQ-p00022 (Analyst Read-Only Access). *Defined in: file:spec/glossary-core.md (DIARY)* **Application Lock**

The state in which the **Mobile Application** requires the **Participant** to authenticate before any **Participant**-facing screen, action, or data is accessible. *Defined in: DIARY-PRD-application-lock (DIARY)* **Application Menu**

The menu accessed from the left side of the top navigation bar, grouping application-level functions. *Defined in: DIARY-GUI-mobile-navigation (DIARY)* **Application Privacy Policy**

The privacy policy governing the Mobile Application itself, covering platform-level data handling. *Defined in: DIARY-PRD-privacy-policy (DIARY)* **Audit Trail**

A computer-generated, time-stamped record that captures the who, what, when, and why of every modification to an Electronic Record, satisfying 21 CFR Part 11 §11.10(e). Attributes: who (user identification), what (change description), when (timestamp in UTC), why (reason for change, if applicable), where (device/platform information). Usage Context: compliance documentation, audit procedures, data integrity requirements. Clinical Trial Context: required by FDA 21 CFR Part 11, EU Annex 11, and ICH-GCP guidelines for regulatory compliance. Implemented using the Event Store architecture (technical term) to create an Audit Trail (regulatory term). See: REQ-p00004 (Immutable Audit Trail via Event Sourcing), REQ-p70006 (Comprehensive Audit Trail), prd-clinical-trials.md. *Defined in: file:spec/glossary-core.md (DIARY)* **Auditor** *(not indexed)*

An independent compliance reviewer with read-only access to all data and audit trails for regulatory compliance verification. Has full read-only access across all sites within a sponsor. Auditors can view but NEVER modify data. See: REQ-p00038 (Auditor Compliance Access). *Defined in: file:spec/glossary-core.md (DIARY)* **Au-**

Authentication Method

The mechanism required to release the **Application Lock**. The configured **Authentication Method** is one of: **PIN**, **Device Authentication**, or none. *Defined in: DIARY-PRD-application-lock (DIARY)*

8.2 C

Calendar The monthly view modal displaying date states and allowing the **Participant** to navigate to a specific date. *Defined in: DIARY-GUI-calendar-day-view (DIARY)*
Caregiver (not indexed)

A family member or trusted individual who has been granted delegated access to view or assist with a user's diary entries. Caregivers act on behalf of the user and are subject to the same privacy protections. Usage Context: personal health tracking context where the user shares diary access with someone who helps manage their health. *Defined in: file:spec/glossary-core.md (DIARY)* **CDISC (Clinical Data Interchange Standards Consortium) (not indexed)**

Organization developing international data standards for clinical trial data exchange. Key standards: CDASH (data collection), SDTM (data submission format), ADaM (analysis datasets). Diary ePRO data can be exported in CDISC-compliant formats for regulatory submission. *Defined in: file:spec/glossary-core.md (DIARY)* **Clinical Research Associate (CRA)**

A portal user responsible for monitoring Study Coordinator activities and site compliance at one or more assigned Sites. *Defined in: DIARY-PRD-role-definitions (DIARY)* **Clinical Trial Privacy Policy**

The privacy policy governing a Participant's participation in a specific clinical trial, covering sponsor-side data handling. Sponsor-configurable per deployment. *Defined in: DIARY-PRD-privacy-policy (DIARY)* **Code Expiry**

The configurable duration after which an unused **Verification Code** becomes invalid. *Defined in: DIARY-PRD-two-factor-authentication (DIARY)* **Completion Status**

The current state of a **Questionnaire** instance for a given participant. Valid values are defined per **Questionnaire** workflow. *Defined in: DIARY-PRD-questionnaire-system (DIARY)* **Configuration Category**

A grouping of related **Configuration Parameters** presented together within the **Administrator Settings** surface. *Defined in: DIARY-PRD-administrator-settings (DIARY)* **Configuration Parameter**

A named, sponsor-configured value that governs a specific System behavior, defined in a single source requirement and surfaced to **Administrators** for visibility. *Defined in: DIARY-PRD-administrator-settings (DIARY)* **Conflicting Record**

An existing entry whose time range intersects with the entry being created or edited. *Defined in: DIARY-PRD-entry-overlap-resolution (DIARY)* **CQRS (Command Query Responsibility Segregation) (not indexed)**

An architectural pattern separating write operations (commands that create events) from read operations (queries that read current state). Implementation in Diary Platform: the write side creates events in the Event Store; the read side reads optimized Record State tables; Event Store and Record State are separate but synchronized. Benefits: optimizes audit trail integrity (write side) and query performance (read side). Usage Context: technical architecture documentation. See: dev-database.md. *Defined in: file:spec/glossary-core.md (DIARY)* **CRA (Clinical Research Associate)** *(not indexed)*

Staff employed by the sponsor or CRO who monitor trial sites to ensure compliance with GCP, the protocol, and regulatory requirements. CRAs perform source data verification (SDV). In the Portal, CRAs typically have the Auditor role (read-only). *Defined in: file:spec/glossary-core.md (DIARY)* **CRF / eCRF (Case Report Form / Electronic Case Report Form)** *(not indexed)*

The primary tool used by investigators or site staff to record clinical trial data about a patient. Key distinction: CRF/eCRF data is entered by clinical trial staff, not by patients. The Diary Platform does not implement traditional eCRFs. Patient diary entries (ePRO data) may be exported to feed into a sponsor's EDC system. Avoid: do not use "eCRF" to refer to patient diary entries. *Defined in: file:spec/glossary-core.md (DIARY)* **CRO (Contract Research Organization)** *(not indexed)*

Organization hired by a sponsor to manage aspects of a clinical trial. CRO staff typically have Auditor or Analyst roles in the Portal. *Defined in: file:spec/glossary-core.md (DIARY)* **CTMS (Clinical Trial Management System)** *(not indexed)*

Software for managing operational aspects of a clinical trial. The Diary Platform is not a CTMS — it is specifically a health diary / ePRO data collection system. Sponsors typically use a separate CTMS alongside the Diary Platform. *Defined in: file:spec/glossary-core.md (DIARY)*

8.3 D

Daily Epistaxis Record The primary nosebleed tracking instrument used in the HHT Clinical Diary, derived from Clark et al. (2018) with modifications. *Defined in: DIARY-PRD-questionnaire-daily-epistaxis (DIARY)* **Daily Status**

The participant's self-reported summary of nosebleed activity for a given day. Valid values are Had Nosebleed, No Nosebleed, and Don't Remember. *Defined in: DIARY-PRD-epistaxis-capture-standard (DIARY)* **Database**

The PostgreSQL database (hosted on Cloud SQL) that stores all diary entries, audit trails, User Accounts, and configuration. Architecture: Event Store (immutable audit trail); Record State (current values, derived from events); Row-Level Security policies for access control. Usage Context: use when discussing data storage, schema, or database architecture. Clinical Trial Context: may be referred to as "Clinical Trial Database" when emphasizing regulatory compliance features. See: REQ-p00046

(Clinical Data Storage System), REQ-p00003 (Separate Database Per Sponsor), prd-database.md. *Defined in: file:spec/glossary-core.md (DIARY)* **Day View**

The screen displayed when the **Participant** selects a date from the **Calendar**, showing the entries for that date or prompting the **Participant** to record a **Daily Status**.

Defined in: DIARY-GUI-calendar-day-view (DIARY) **De-identified Data**

Health data with all personally identifiable information (name, email, date of birth, account identifiers) removed, leaving only a participant ID and health observations.

Purpose: enables research analysis and data sharing while protecting user privacy.

Clinical Trial Context: de-identified data can be shared with research partners; identified data requires explicit consent. Subject to GDPR and HIPAA requirements. See: REQ-p00016 (Separation of Identity and Clinical Data).

Defined in: file:spec/glossary-core.md (DIARY) **Deactivation**

The action of revoking a **User Account**'s ability to access the system without permanently removing the account or its associated data. A deactivated account retains all historical data and **Audit Trail** but cannot be used to log in or maintain active sessions. *Defined in: DIARY-PRD-user-account-deactivate (DIARY)* **Developer Admin** *(not indexed)*

A system administrator with infrastructure-level access for deployment, monitoring, and maintenance. Scope is cross-sponsor system administration (database backups, infrastructure monitoring). Data Access: Developer Admins have NO routine access to patient data. A documented break-glass procedure exists for emergency situations only, with full audit trail logging of all access. Context: internal operations only, not accessible to sponsors or clinical trial users. See: ops-security.md for developer admin procedures. *Defined in: file:spec/glossary-core.md (DIARY)* **Device Authentication**

Authentication performed by the device operating system using the credential the **Participant** has configured at the device level, including but not limited to device passcode, fingerprint, or face recognition. *Defined in: DIARY-PRD-application-lock (DIARY)* **Diary**

The iOS and Android smartphone application that individuals use to record daily health observations. The primary user-facing term for the mobile application. Preferred Terms: "Diary" (primary term, patient-friendly, simple and clear); "Mobile Diary" (when distinguishing from the web Portal); "Diary app" (informal, acceptable when context is clear). Usage Context: user-facing — "Diary" or "the app"; formal documentation — "Diary mobile application"; technical documentation — "Mobile Diary" or "Diary app". Clinical Trial Context: may use "Clinical Diary" when emphasizing regulatory compliance. Avoid: "ePRO application" (too technical, confusing to users); "eCRF" (refers to a different concept in clinical trials); "eSource" (refers to the complete platform, not just the mobile app); "Clinical Diary" as the primary name (clinical trials are a feature, not the identity). See: REQ-p00043 (Diary Mobile Application), prd-mobile-app.md. *Defined in: file:spec/glossary-core.md (DIARY)* **Diary Data Synchronization**

The continuous transmission of participant diary entries from the participant's mo-

mobile application to the **Sponsor Portal** and **Rave EDC**. *Defined in: DIARY-PRD-questionnaire-system (DIARY)* **Diary Entry**

A single user-reported record of a health event (e.g., nosebleed episode) including time, severity, duration, and other relevant details. Preferred Terms: “Diary Entry” (standard term); “Health Observation” (more formal context); “Entry” (short form when context is clear). Usage Context: use “diary entry” in user-facing communication and general documentation. Clinical Trial Context: when used in clinical trials, diary entries may capture protocol-specified data elements and serve as ePRO data. Avoid: “Event” (too generic); “Record” (too technical); “Data point” (depersonalizing). See: REQ-p00042 (HHT Epistaxis Data Capture Standard). *Defined in: file:spec/glossary-core.md (DIARY)*

Diary Platform

The complete system comprising all software, infrastructure, and data storage components that enable individuals to record and manage personal health observations, with optional clinical trial support features. Components: Diary (mobile application); Sponsor Portal; Database; supporting infrastructure and APIs. Primary Purpose: personal health diary for tracking daily health observations. Secondary Features: clinical trial support, data sharing with healthcare providers, research contribution. Usage Context: use when referring to the entire system architecture or in formal documentation. Avoid: “Clinical Diary Platform” (implies clinical trials are primary); “eSource system”; “ePRO platform” (use only in sponsor-specific external documentation). See: REQ-p00044 (Clinical Trial Compliant Diary Platform). *Defined in: file:spec/glossary-core.md (DIARY)*

Diary Start Day

The earliest date for which diary entries are valid for a given **User**. *Defined in: DIARY-PRD-diary-start-day (DIARY)*

Disconnection Notification

A persistent, non-dismissible notification displayed to the **Participant** when their mobile Application is disconnected from the **Sponsor Portal**. *Defined in: DIARY-PRD-notification-disconnection (DIARY)*

Duration Reasonableness Check

A configurable validation rule that prompts the **Participant** to confirm the recorded duration of an event when it falls outside expected boundaries. *Defined in: DIARY-PRD-entry-duration-check (DIARY)*

8.4 E

eCOA (Electronic Clinical Outcome Assessment) (not indexed) Umbrella term for electronic capture of clinical outcomes: ePRO (patient reports), ClinRO (clinician assessment), ObsRO (observer/caregiver reports), PerfO (performance measurements). The Diary is specifically an ePRO tool. *Defined in: file:spec/glossary-core.md (DIARY)*

EDC (Electronic Data Capture) (not indexed)

Software systems used to collect, manage, and store clinical trial data electronically, typically including eCRFs. The Diary Platform is not a full EDC system — it provides ePRO data that may be exported to a sponsor’s EDC system (e.g., Medidata Rave,

Oracle InForm). *Defined in: file:spec/glossary-core.md (DIARY)* **Electronic Record**

Any combination of text, graphics, data, or other digital information created, modified, maintained, or distributed by the platform that is subject to 21 CFR Part 11. *Defined in: file:spec/glossary-core.md (DIARY)*

Electronic Signature

A computer-implemented signing event that, under 21 CFR Part 11 §11.50, is legally equivalent to a handwritten signature. Diary Platform Implementation: the automatic attribution of a data entry or change to a specific User Account with timestamp and device information. Every diary entry and data modification is automatically signed with user account ID, timestamp (UTC), device information, and a cryptographic hash to prevent tampering. Users do not manually “sign” entries — the system automatically creates legally binding signatures. Usage Context: all diary entries (personal health tracking and clinical trial) are automatically attributed to the user who created them. See: REQ-p00010 (FDA 21 CFR Part 11 Compliance), prd-clinical-trials.md. *Defined in: file:spec/glossary-core.md (DIARY)* **EMA (European Medicines Agency)** *(not indexed)*

European Union agency responsible for evaluating and supervising medicines. For EU clinical trials, the Diary Platform complies with EU Clinical Trial Regulation 536/2014 and EU GMP Annex 11. *Defined in: file:spec/glossary-core.md (DIARY)* **Email Address**

A unique technical identifier used as a destination for system notifications and as a username for authentication to access the system. *Defined in: DIARY-PRD-user-account-create (DIARY)* **Entry Justification**

A reason selected from a sponsor-defined predefined list that the **Participant** must provide when creating or editing an entry that has exceeded the **Justification Threshold**. *Defined in: DIARY-PRD-entry-time-restrictions (DIARY)* **Epistaxis Event**

A single nosebleed occurrence recorded by the participant with timing, duration, and intensity data. *Defined in: DIARY-PRD-questionnaire-daily-epistaxis (DIARY)* **ePRO (Electronic Patient-Reported Outcomes)** *(not indexed)*

Electronic collection of health information reported directly by the patient, without interpretation by clinicians. The Diary functions as an ePRO tool when used in clinical trials. Avoid: while technically accurate, avoid “ePRO” in user-facing communication. Use “Diary” instead. See: REQ-p00043 (Diary Mobile Application). *Defined in: file:spec/glossary-core.md (DIARY)* **eSource**

The Diary Platform as a whole, when used as the original electronic source of patient-reported data in a clinical trial (as opposed to transcribing from paper diaries). Usage Context: regulatory submissions, protocol documentation, when emphasizing the system is the primary data source in a clinical trial context. Notes: “eSource” is a regulatory/clinical trial term, not the system’s primary identity. Refers to the complete platform (Diary + Database + Portal), not just the mobile app. Use only when discussing clinical trial regulatory compliance. Regulatory Basis: FDA guidance on electronic source documentation. See: REQ-p00010 (FDA 21 CFR Part 11 Compliance). *Defined in: file:spec/glossary-core.md (DIARY)* **ESS (Epistaxis Severity Score)** *(not indexed)*

Standardized clinical assessment tool measuring the severity and impact of nosebleeds in HHT patients. Calculated from patient-reported diary data. Specific to HHT clinical trials. *Defined in: file:spec/glossary-core.md (DIARY)*

Event Sourcing
An architectural pattern where all changes to application state are stored as a sequence of immutable events, rather than overwriting data in place. Benefits: complete history and timeline reconstruction; no data loss; full audit trail for personal health records; supports clinical trial regulatory compliance (FDA 21 CFR Part 11) when needed. Technical Details: every change (create, update, delete) appends an event to the Event Store. Current state is derived by replaying events. Usage Context: technical architecture and developer documentation. See: REQ-p00004 (Immutable Audit Trail via Event Sourcing), REQ-p01000 (Event Sourcing Client Interface), prd-event-sourcing-system.md. *Defined in: file:spec/glossary-core.md (DIARY)*

Event Store
The immutable log of all changes to diary entries and system data, implementing the Event Sourcing architectural pattern. Every create, update, or delete operation is stored as an event that is never modified or deleted (append-only). Current state is derived by replaying events, providing a complete change history. Usage Context: developer and architecture documentation. Clinical Trial Context: the Event Store implements the Audit Trail required by FDA 21 CFR Part 11 and other regulations. See: REQ-p00004 (Immutable Audit Trail via Event Sourcing), REQ-p01000 (Event Sourcing Client Interface), prd-event-sourcing-system.md. *Defined in: file:spec/glossary-core.md (DIARY)*

8.5 F

FDA (U.S. Food and Drug Administration) (*not indexed*) United States federal agency responsible for regulating pharmaceuticals, medical devices, and clinical trials. See: REQ-p00010 (FDA 21 CFR Part 11 Compliance). *Defined in: file:spec/glossary-core.md (DIARY)*

FDA 21 CFR Part 11

U.S. Food and Drug Administration regulation (Title 21 Code of Federal Regulations Part 11) establishing requirements for electronic records and electronic signatures to be considered trustworthy, reliable, and equivalent to paper records. Key Requirements: audit trails for all data changes; electronic signatures with cryptographic integrity; controlled system access; data validation and integrity checks; records retention for regulatory-mandated periods. Diary Platform Context: core compliance framework for clinical trial features. Usage Context: regulatory submissions, compliance documentation. See: REQ-p00010 (FDA 21 CFR Part 11 Compliance), prd-clinical-trials.md. *Defined in: file:spec/glossary-core.md (DIARY)*

Finalization

The Study Coordinator action that permanently locks participant answers, triggers score calculation and pushes the data to Rave EDC. *Defined in: DIARY-PRD-questionnaire-portal-sent-rules (DIARY)*

A common name, which is **PII**, of the person associated with a **User Account** that identifies a specific individual in the context of the **Sponsor Portal**. *Defined in: DIARY-PRD-user-account-create (DIARY)*

8.6 G

GCP (Good Clinical Practice) (not indexed) International ethical and scientific quality standards governing clinical trial conduct, including data collection, management, and participant protection. Primary guideline: ICH E6(R2). Note: “GCP” also stands for “Google Cloud Platform” — context determines meaning. *Defined in: file:spec/glossary-core.md (DIARY)* **GDPR (General Data Protection Regulation) (not indexed)**

European Union regulation governing data protection and privacy for EU residents. EU users have GDPR rights (access, rectification, erasure, portability). Clinical trial participation may limit some rights for data integrity reasons. Applies based on user location, not sponsor location. See: REQ-p01061 (GDPR Compliance), REQ-p01062 (GDPR Data Portability). *Defined in: file:spec/glossary-core.md (DIARY)*

Google Cloud Platform (GCP) (not indexed)

Cloud infrastructure provider hosting the Diary Platform: Cloud SQL (PostgreSQL database), Identity Platform (authentication), Cloud Storage (backups), per-sponsor GCP projects for multi-sponsor isolation. Note: in clinical trial contexts, “GCP” typically refers to Good Clinical Practice. *Defined in: file:spec/glossary-core.md (DIARY)*

8.7 H

Healthcare Provider (not indexed) A licensed healthcare professional (physician, nurse, specialist) who reviews a user’s diary data to support clinical care. The healthcare provider typically accesses data through the Portal with the user’s consent. Usage Context: personal health tracking context where the Diary data is shared with a care team. Distinction from Investigator: a Healthcare Provider reviews diary data for clinical care purposes. An Investigator reviews diary data as part of a clinical trial protocol. See: REQ-p70001 (Sponsor Portal Application). *Defined in: file:spec/glossary-core.md (DIARY)* **HHT (Hereditary Hemorrhagic Telangiectasia) (not indexed)**

Genetic disorder causing abnormal blood vessel formation, leading to frequent nosebleeds and other complications. The Diary Platform was initially developed for HHT patients but supports any health tracking use case. Current sponsor: Cure HHT Foundation. *Defined in: file:spec/glossary-core.md (DIARY)* **HHT-QoL**

A validated clinical instrument published in Blood Advances, 2022, measuring the impact of HHT symptoms on participants’ daily and social activities. *Defined in:*

DIARY-PRD-questionnaire-hht-qol (DIARY) HIPAA (Health Insurance Portability and Accountability Act) (not indexed)

United States federal law protecting the privacy and security of individuals' medical information. Key requirement: Business Associate Agreements (BAAs) with service providers. See: REQ-p01020 (Privacy Policy and Regulatory Compliance Documentation). *Defined in: file:spec/glossary-core.md (DIARY) Historical Gap*

A calendar day between the **Diary Start Day** and the current day, exclusive of the current day and the previous day, for which the **Participant** has not recorded a **Daily Status**. *Defined in: DIARY-PRD-notification-historical-gap (DIARY) Historical Gap Reminder*

A daily **Push Notification** delivered to the **Participant** prompting them to address one or more **Historical Gaps**. *Defined in: DIARY-PRD-notification-historical-gap (DIARY)*

8.8 I

ICF (Informed Consent Form) (not indexed) Signed document where a patient agrees to participate in a clinical trial. Must include how the Diary will be used, what data will be shared, privacy protections, and right to withdraw. The Diary Platform supports electronic ICF signatures compliant with 21 CFR Part 11. *Defined in: file:spec/glossary-core.md (DIARY) ICH (International Council for Harmonisation) (not indexed)*

Organization developing international standards for clinical trials. Key guidelines: ICH E6(R2) (Good Clinical Practice), ICH E8 (General Considerations for Clinical Studies), plus Quality (Q), Safety (S), Efficacy (E), and Multidisciplinary (M) guidelines. *Defined in: file:spec/glossary-core.md (DIARY) ICH-GCP / ICH E6(R2) (not indexed)*

The foundational international ethical and scientific quality standard for clinical trials involving human subjects. The 2016 revision emphasizes risk-based monitoring and data integrity. The Diary Platform follows ICH-GCP guidelines for data integrity (ALCOA+), audit trails, source data verification, and participant protection. See: REQ-p00011 (ALCOA+ Data Integrity Principles). *Defined in: file:spec/glossary-core.md (DIARY) Idle Timeout*

The configurable elapsed time the **Mobile Application** may remain in the background before the **System** re-applies the **Application Lock** on return to the foreground. *Defined in: DIARY-PRD-application-lock (DIARY) IMP (Investigational Medicinal Product) (not indexed)*

The drug, biological product, or device being tested in a clinical trial. Diary entries help assess the IMP's efficacy and potential side effects. *Defined in: file:spec/glossary-core.md (DIARY) Incomplete Record*

An **Epistaxis Event** that has been saved but is missing one or more required fields: start time, **Intensity**, or end time. *Defined in: DIARY-PRD-epistaxis-capture-standard*

(DIARY) Incomplete Records Task

A task indicating the **Participant** has one or more saved entries with missing required data. *Defined in: DIARY-GUI-participant-task-list (DIARY) IND / NDA (Investigational New Drug / New Drug Application) (not indexed)*

IND: Application to the FDA to test a new drug in humans. NDA: Application for FDA approval to market a drug. Sponsors submit Diary ePRO data as part of IND (during trials) and NDA (for approval) submissions. *Defined in: file:spec/glossary-core.md (DIARY) Intensity*

A participant-reported measure of nosebleed severity captured on a defined six-level scale ordered from least to most severe. *Defined in: DIARY-PRD-epistaxis-capture-standard (DIARY) Investigator*

A clinical-trial role authorized by the Sponsor to view patient data, review safety triggers, and unlock individual questionnaires within the Investigator's assigned site. A licensed clinical researcher responsible for enrolling patients, managing a clinical trial site, and ensuring protocol compliance. Responsibilities: enroll patients using linking codes; monitor patient engagement and data quality; send questionnaires and reminders to patients; review patient diary data for protocol compliance. Access: site-specific data only (via Row-Level Security). Avoid: "Site staff"; "clinical user"; "researcher" (be specific). See: REQ-p00036 (Investigator Site-Scoped Access), REQ-p00037 (Investigator Annotation Restrictions). *Defined in: file:spec/glossary-core.md (DIARY) IRB / IEC (Institutional Review Board / Independent Ethics Committee) (not indexed)*

IRB (U.S.) / IEC (international): independent ethics committee that reviews and approves clinical trial protocols, informed consent forms, and data privacy measures before a sponsor can use the Diary Platform at a trial site. Ongoing approval is required for any changes to Diary data collection procedures. *Defined in: file:spec/glossary-core.md (DIARY)*

8.9 J

Justification Threshold The configurable elapsed time from midnight (00:00) of the event date in the **Participant's** local timezone after which the **Participant** must provide a reason before creating or editing an entry for that date. *Defined in: DIARY-PRD-entry-time-restrictions (DIARY)*

8.10 L

Linking Code A unique, cryptographically random 10-character code used to securely connect a user's mobile Diary to a service. In clinical trial deployments, linking codes connect a user's device to their enrollment record at a trial site. In non-clinical-trial

contexts, a similar mechanism could connect the Diary to a backup or data-sharing service. Format: 10 characters, alphanumeric, case-insensitive. Purpose: enables secure device connection without transmitting PII or creating accounts before the link is established. Usage Context: patient enrollment workflow (clinical trials), device provisioning. See: REQ-p70007 (Linking Code Lifecycle Management), REQ-d00078 (Linking Code Validation). *Defined in: file:spec/glossary-core.md (DIARY)*

Linking Code Validation Failure

Any unsuccessful attempt to enter a linking code, regardless of the specific reason for failure. *Defined in: DIARY-PRD-linking-code-entry-errors (DIARY)*

Linking Consent
The explicit acknowledgement by the Participant that they have read and consent to the Clinical Trial Privacy Policy. This consent must be captured before the linking code submission is permitted. *Defined in: DIARY-GUI-join-study-screen (DIARY)*

Lock Threshold

The configurable elapsed time from midnight (00:00) of the event date in the **Participant's** local timezone after which the date is fully locked and no creation, editing, or deletion of entries is permitted. *Defined in: DIARY-PRD-entry-time-restrictions (DIARY)*

Lock Warning Offset

The configurable elapsed time before the Lock Threshold at which the **System** sends a push notification to the Participant about an **Incomplete Record** that has not been completed or deleted. *Defined in: DIARY-PRD-notification-incomplete-record-lock (DIARY)*

Long Duration Threshold

The configurable maximum duration above which a confirmation prompt is triggered. *Defined in: DIARY-PRD-entry-duration-check (DIARY)*

8.11 M

Main Screen The default screen displayed to the **Participant** upon opening the mobile application. *Defined in: DIARY-GUI-main-screen-layout (DIARY)*

Mobile Application
The iOS and Android application provided by the System for participant-reported diary data capture and questionnaire completion. Operates in personal use mode without an account or in linked use mode connected to a **Sponsor Portal** deployment. *Defined in: DIARY-PRD-mobile-application (DIARY)*

Mobile Linking Code

A unique, time-limited, single-use code generated by the **System** and provided to a **Participant** by clinical staff. The **Participant** enters the code in the **Mobile Application** to establish a connection between their device and the **Sponsor Portal**. *Defined in: DIARY-PRD-linking-code-lifecycle (DIARY)*

Multi-Sponsor Isolation

The architectural pattern ensuring complete data separation between different organizations (sponsors) using the Diary Platform for clinical trials. Implementation: separate Cloud SQL database per sponsor; separate GCP project per sponsor; sep-

arate web portal per sponsor (sponsor-specific subdomain); shared mobile Diary app with automatic sponsor detection. Purpose: enables a single codebase to serve multiple sponsors while maintaining regulatory compliance and data privacy. Context: this is a clinical trial feature. Personal health tracking deployments may not use multi-sponsor architecture. See: REQ-p00001 (Complete Multi-Sponsor Data Separation), REQ-p00008 (Single Mobile App for All Sponsors), prd-architecture-multi-sponsor.md. *Defined in: file:spec/glossary-core.md (DIARY)*

8.12 N

NOSE HHT The Nasal Outcome Score for Epistaxis in Hereditary Hemorrhagic Telangiectasia, a validated clinical instrument published in JAMA Otolaryngology — Head and Neck Surgery, 2020. *Defined in: DIARY-PRD-questionnaire-nose-hht (DIARY)*

NOSE-HHT (Nasal Outcome Score for Epistaxis in HHT) *(not indexed)*

Validated patient-reported outcome measure for assessing nosebleed impact in HHT patients. May be collected as a questionnaire within the Diary app during clinical trials. Specific to HHT clinical trials. *Defined in: file:spec/glossary-core.md (DIARY)*

8.13 O

Offline-First An architectural approach where the mobile Diary application functions fully without internet connection, storing data locally and synchronizing to the cloud when connectivity is available. Benefits: users can make diary entries anywhere, anytime; no data loss if internet unavailable; reduces dependency on network reliability; improves user experience and app responsiveness. Technical Implementation: local sembast NoSQL JSON database on device, background sync service. See: REQ-p00006 (Offline-First Data Entry), REQ-p01001 (Offline Event Queue with Automatic Synchronization), dev-app.md. *Defined in: file:spec/glossary-core.md (DIARY)*

Overlap

A state in which the time range of a new or edited entry intersects with the time range of one or more existing entries for the same **Participant**. *Defined in: DIARY-PRD-entry-overlap-resolution (DIARY)*

8.14 P

Participant An individual whose **Mobile Application** has been linked to the **Sponsor Portal** for the purpose of clinical trial data collection. A **Participant** has been registered

in the **Sponsor Portal** as a clinical trial subject. *Defined in: DIARY-PRD-participant-registration (DIARY)* **Participant Actions Modal**

A modal dialog displayed when a Study Coordinator selects a participant row, presenting the **Participant** ID and the secondary actions available for that participant's current status. *Defined in: DIARY-GUI-participant-dashboard (DIARY)* **Participant Linking Code**

The **Mobile Linking Code** that was used to establish the connection between a **Participant's** device and the **Sponsor Portal**. Displayed for reference and troubleshooting purposes. Cannot be used to establish a new connection. *Defined in: DIARY-PRD-linking-code-lifecycle (DIARY)* **Participation Status Badge**

The visual component displayed in the Clinical Trial section of the user profile screen showing the **Participant's** current study participation state and associated details. *Defined in: DIARY-GUI-participation-status-badge (DIARY)* **Password**

A secret string of characters used to authenticate a user's identity when accessing the **System**. *Defined in: DIARY-PRD-password-requirements (DIARY)* **Password Reuse Limit**

The configurable number of the user's most recent **Passwords** that a new **Password** must not match. *Defined in: DIARY-PRD-password-requirements (DIARY)* **Patient**

A human subject enrolled in a clinical trial who interacts with the platform via the diary application to record protocol-defined Electronic Records. Preferred Terms: "Patient" (when emphasizing health-tracking context — empathetic, widely understood); "Study Participant" (when the individual is enrolled in a clinical trial — formal clinical trial context). Usage Context: personal health tracking — "User" or "Patient"; clinical trial context — "Study Participant" or "Patient"; formal regulatory submissions — "Study Participant" (when required by convention). Key Distinction: not all Diary users are in clinical trials. Many use it purely for personal health tracking or to share with their healthcare providers. Avoid: "Subject" (outdated, depersonalizing). *Defined in: file:spec/glossary-core.md (DIARY)* **PHI (Protected Health Information) (not indexed)**

Any individually identifiable health information protected under HIPAA (name, dates, contact information, medical record numbers, health data linked to an individual). PHI is encrypted at rest and in transit, subject to strict access controls via RBAC and RLS policies. See: REQ-p00016 (Separation of Identity and Clinical Data), prd-security-data-classification.md. *Defined in: file:spec/glossary-core.md (DIARY)* **PI / Sub-I (Principal Investigator / Sub-Investigator) (not indexed)**

PI: lead physician at a clinical trial site. Sub-I: physicians or staff assisting the PI. Both have Investigator role access in the Portal. See: REQ-p00036 (Investigator Site-Scoped Access). *Defined in: file:spec/glossary-core.md (DIARY)* **PII (Personally Identifiable Information) (not indexed)**

Information that can identify, contact, or locate a specific individual, protected under GDPR and other privacy regulations. Overlap with PHI: all PHI is PII, but not all PII is PHI. See: prd-security-data-classification.md. *Defined in: file:spec/glossary-core.md (DIARY)* **PIN**

A numeric secret of configurable length set by the **Participant** and used to release the **Application Lock**. *Defined in: DIARY-PRD-application-lock (DIARY)* **Portal-Sent Questionnaire**

A Questionnaire initiated by a Study Coordinator from the Sponsor Portal and delivered to the participant via push notification. *Defined in: DIARY-PRD-questionnaire-portal-sent-rules (DIARY)* **Preamble**

The introductory content block presented to the participant before questionnaire questions begin informing the participant of the estimated completion time and that answers will not be saved until Submission. *Defined in: DIARY-PRD-questionnaire-portal-sent-rules (DIARY)* **PRO (Patient-Reported Outcome) (not indexed)**

Any report of a patient's health condition that comes directly from the patient, without interpretation by a clinician. Diary entries are PROs. When collected electronically via the Diary app, they become ePROs. *Defined in: file:spec/glossary-core.md (DIARY)* **Progress Indicator**

The persistent bar displayed at the top of every screen in the recording flow showing the three steps — Start, Max Intensity, and End — and their completion state. *Defined in: DIARY-GUI-epistaxis-record (DIARY)*

8.15 Q

Questionnaire A validated data collection instrument presented to a participant to capture self-reported clinical outcomes at protocol-defined points in a clinical trial. *Defined in: DIARY-PRD-questionnaire-system (DIARY)* **Questionnaire Display Name**

The participant-facing name of a **Questionnaire** as presented in the mobile application. Distinct from the instrument name used for internal identification and clinical reference. *Defined in: DIARY-PRD-questionnaire-system (DIARY)* **Questionnaire Task**

A task indicating a **Portal-Sent Questionnaire** has been sent to the **Participant** and has not yet been submitted. *Defined in: DIARY-GUI-participant-task-list (DIARY)* **Questionnaire Type**

A named category of **Questionnaire**. Each **Questionnaire Type** is implemented as an individual coded component. *Defined in: DIARY-PRD-questionnaire-system (DIARY)*

8.16 R

Rate Limit Cooldown The configurable duration after which the rate limit counter resets and the **User** may attempt linking again. *Defined in: DIARY-PRD-linking-code-entry-errors (DIARY)* **Rate Limit Threshold**

The configurable maximum number of consecutive **Linking Code Validation Failures** permitted within a single rate limit window before further attempts are temporarily blocked. *Defined in: DIARY-PRD-linking-code-entry-errors (DIARY) RBAC (Role-Based Access Control)*

Access control paradigm where permissions are assigned to roles (User, Investigator, Admin, etc.) rather than individual users. Roles: User, Healthcare Provider, Caregiver, Investigator, Admin, Auditor, Analyst, Sponsor, Developer Admin. Usage Context: security architecture, access control documentation. See: REQ-p00005 (Role-Based Access Control), prd-security-RBAC.md. *Defined in: file:spec/glossary-core.md (DIARY) Record State*

The current values of diary entries and other data, derived from the Event Store by replaying all events. In Event Sourcing architecture, this is the “read model” (also known as a Materialized View in database terminology) optimized for queries. Usage Context: developer and technical architecture documentation. Contrast: “Event Store” contains the history; “Record State” contains current values. See: REQ-p01006 (Type-Safe Materialized View Queries), prd-event-sourcing-system.md. *Defined in: file:spec/glossary-core.md (DIARY) Reminder Schedule*

An ordered list of elapsed-time intervals defining the timing of successive reminder notifications for an Incomplete Record. Each interval is measured from the time of the previous notification, with the first interval measured from the Participant’s most recent interaction with the record. *Defined in: DIARY-PRD-notification-ongoing-epistaxis (DIARY) Reminder Time*

The configurable time of day, in the **Participant’s** local timezone, at which the Yesterday Entry Reminder Notification is delivered. *Defined in: DIARY-PRD-notification-yesterday-entry (DIARY) Resolution*

The **Participant’s** choice of how to handle an **Overlap** between two entries. *Defined in: DIARY-PRD-entry-overlap-resolution (DIARY) Resolution Screen*

The screen presented to the **Participant** when an **Overlap** is confirmed, displaying the new entry and the **Conflicting Record** side by side with available resolution actions. *Defined in: DIARY-GUI-entry-overlap-resolution (DIARY) Review Screen*

The screen presented to the participant after answering the final question, displaying all questions and selected answers before Submission. *Defined in: DIARY-GUI-questionnaire-portal-sent-workflow (DIARY) Role*

A named set of authorities granted to a User Account that determines which Electronic Records the account may read, write, or modify. Diary Platform Roles: User, Healthcare Provider, Caregiver, Investigator, Admin, Auditor, Analyst, Sponsor, Developer Admin. See: REQ-p00005 (Role-Based Access Control), prd-security-RBAC.md. *Defined in: file:spec/glossary-core.md (DIARY) Role Selector*

UI element displayed in the header that shows the user’s currently active role and allows users with multiple assigned roles to switch their active role. *Defined in: DIARY-GUI-role-switching (DIARY) Row-Level Security*

Database-enforced access control that automatically filters data so users can only access records they are authorized to see, based on their role and sponsor/site

assignment. Purpose: ensures data isolation and role-based access control at the database layer (defense-in-depth). Example: an investigator at Site A cannot see diary entries from patients enrolled at Site B, even if both sites belong to the same sponsor — enforced by PostgreSQL RLS policies. Relationship to RBAC: RBAC defines what actions users can perform; RLS defines what data users can access. Usage Context: security architecture, database design. See: REQ-p00015 (Database-Level Access Enforcement), REQ-p00035 (Patient Data Isolation), prd-security-RLS.md. *Defined in: file:spec/glossary-core.md (DIARY)*

8.17 S

SDV (Source Data Verification) (not indexed) Process of verifying that data in the trial database matches original source documents. For the Diary Platform, diary entries are the source (eSource) — no paper transcription occurs. SDV focuses on verifying audit trails, timestamps, and data integrity. *Defined in: file:spec/glossary-core.md (DIARY)* **Second Factor**

The independent authentication factor required in addition to the **Password** during login. The specific method is sponsor-configurable per deployment. *Defined in: DIARY-PRD-two-factor-authentication (DIARY)* **Session**

An authenticated period during which a **User Account** owner can access the **Sponsor Portal** without re-entering credentials. *Defined in: DIARY-PRD-session-management (DIARY)* **Session Expiry**

The state reached when a participant has not completed a questionnaire within the configured Session Timeout duration. *Defined in: DIARY-PRD-questionnaire-session-timeout (DIARY)* **Session Expiry Dialog**

The Acknowledgement Dialog displayed to the participant when they open a questionnaire that has reached Session Expiry. *Defined in: DIARY-GUI-questionnaire-session-expiry (DIARY)* **Session Expiry Notification**

Push notification delivered to the participant when Session Expiry has occurred. *Defined in: DIARY-PRD-questionnaire-session-timeout (DIARY)* **Session Idle Timeout**

The configurable maximum duration of inactivity allowed during a **Session** before the **System** terminates it. *Defined in: DIARY-PRD-session-management (DIARY)* **Session Timeout**

The configurable maximum duration of inactivity allowed during questionnaire completion. When exceeded, the session expires and the answers selected so far are not retained. *Defined in: DIARY-PRD-questionnaire-session-timeout (DIARY)* **Short Duration Threshold**

The configurable minimum duration below which a confirmation prompt is triggered. *Defined in: DIARY-PRD-entry-duration-check (DIARY)* **Site**

A physical location (hospital, clinic, research center) where clinical trial activities are

conducted. Each site has one or more investigators. This is a clinical-trial-specific concept. Usage Context: sites are organizational units within a sponsor's clinical trial. Patients are enrolled at a specific site by an investigator at that site. See: REQ-p00018 (Multi-Site Support Per Sponsor). *Defined in: file:spec/glossary-core.md (DIARY)* **Sponsor**

The regulated entity that holds the IND or IDE and contracts the vendor to operate the platform for a specific clinical trial. An organization (pharmaceutical company, foundation, research institution) that uses the Diary Platform to support a clinical trial. Multi-Sponsor Context: the Diary Platform supports multiple sponsors simultaneously, with complete data isolation between sponsors (separate databases, portals, and configurations). Examples: Cure HHT Foundation (current), pharmaceutical companies developing HHT treatments. Key Distinction: sponsors are organizations using the clinical trial features of the Diary Platform. Not all Diary Platform deployments involve sponsors — some may be purely personal health tracking. See: REQ-p00001 (Complete Multi-Sponsor Data Separation), prd-architecture-multi-sponsor.md. *Defined in: file:spec/glossary-core.md (DIARY)* **Sponsor Portal**

The web application used by Investigators and Sponsor staff to administer trials, review patient data, and manage User Accounts. The web-based application used by healthcare providers, administrators, and (in clinical trial contexts) investigators, sponsors, auditors, and analysts to review user data, manage accounts, and administer features. Preferred Terms: "Sponsor Portal" (primary term, used when distinguishing from mobile Diary); "Portal" (short form when context is clear). Usage Context: use to distinguish from the mobile Diary application. Components: User Data Review; Admin Dashboard; Healthcare Provider Dashboard; Investigator Dashboard (clinical trial feature); Auditor Dashboard (clinical trial feature); Analyst Dashboard; Sponsor Configuration (clinical trial feature). Note: Portal serves both personal health tracking use cases (e.g., healthcare provider reviewing a user's diary) and clinical trial use cases (investigator monitoring trial participants). Avoid: "Admin app"; "web app" (too generic); "Clinical Trial Portal" as the primary name. See: REQ-p70001 (Sponsor Portal Application), prd-portal-auth.md. *Defined in: file:spec/glossary-core.md (DIARY)* **Sponsor-Level Action Extension**

An additional Action defined by a specific sponsor deployment beyond the platform Action Inventory. *Defined in: DIARY-PRD-action-inventory (DIARY)* **Study Coordinator**

A portal user responsible for managing day-to-day participant interactions at one or more assigned Sites. *Defined in: DIARY-PRD-role-definitions (DIARY)* **Submission**

The participant action that signals all questions are answered and the Questionnaire is ready for Study Coordinator review. *Defined in: DIARY-PRD-questionnaire-portal-sent-rules (DIARY)* **System Notice Area**

A dedicated zone at the top of the Main Screen reserved for persistent, non-dismissable system notices that require the Participant's attention. *Defined in: DIARY-GUI-main-screen-layout (DIARY)*

8.18 T

Task List The prioritized set of actionable items displayed on the **Participant's Main Screen** requiring **Participant** attention. *Defined in: DIARY-GUI-participant-task-list (DIARY)* **Time Picker**

The time selection component presenting the current time as default, a date selector, a timezone selector, and minute adjustment controls of -15, -5, -1, +1, +5, and +15 minutes. *Defined in: DIARY-GUI-epistaxis-record (DIARY)* **Timeout Warning Notification**

Push notification delivered to the participant when the Session Timeout is approaching. *Defined in: DIARY-PRD-questionnaire-session-timeout (DIARY)* **Trial**

A clinical study conducted under a Sponsor's protocol in which **Participants** are enrolled to capture self-reported clinical outcomes through the **Mobile Application**. The **Trial** begins at **Trial Start**. *Defined in: DIARY-PRD-questionnaire-system (DIARY)* **Trial Start**

The event that formally begins a participant's active trial participation. The trigger and label for **Trial Start** are sponsor-configurable. *Defined in: DIARY-PRD-questionnaire-system (DIARY)* **True Copy**

A complete, unaltered reproduction of the source document obtained directly from the original publisher URL. *Defined in: DIARY-PRD-questionnaire-nose-hht (DIARY)*

8.19 U

User Any individual who uses the Diary Platform. The default term for someone using the Diary for personal health tracking outside of a clinical trial. Usage Context: personal health tracking — “User” is the standard term; clinical trial contexts — use specific role names instead (Study Participant, Investigator, etc.) since “User” is ambiguous when multiple roles exist; technical documentation — acceptable as a generic term when role is irrelevant. Note: “User” is acceptable in general documentation. In clinical trial contexts, always prefer specific role names to avoid ambiguity. *Defined in: file:spec/glossary-core.md (DIARY)* **User Account**

The platform's representation of an individual authorized to interact with the system, identified by a unique Email Address and bound to one or more Roles. *Defined in: file:spec/glossary-core.md (DIARY)* **User Information Modal**

A modal dialog displaying the details and available actions for a selected **User Account**. *Defined in: DIARY-GUI-user-management-tabs (DIARY)* **User Menu**

The menu accessed from the right side of the top navigation bar, grouping account and study-related actions. *Defined in: DIARY-GUI-mobile-navigation (DIARY)* **User Session**

A bounded period of authenticated activity for a User Account, terminated by explicit sign-out or by the inactivity timeout configured per Role. *Defined in: file:spec/glossary-*

core.md (DIARY) UTC (Coordinated Universal Time) (not indexed)

Primary time standard used worldwide, not affected by time zones or daylight saving time. All database and audit trail timestamps are stored in UTC (with the patient's timezone offset for ePROs). Displayed in the user's local time zone in the Diary app and Portal. *Defined in: file:spec/glossary-core.md (DIARY)*

8.20 V

Verification Code A single-use, time-limited code presented as the **Second Factor** during login. *Defined in: DIARY-PRD-two-factor-authentication (DIARY)* **Verification Link**

A unique, time-limited, single-use secured URL delivered to an email address to confirm that the recipient controls that address. *Defined in: DIARY-PRD-user-account-activation-workflow (DIARY)*

8.21 Y

Yesterday Reminder Task A task prompting the **Participant** to record a **Daily Status** for the previous day. *Defined in: DIARY-GUI-participant-task-list (DIARY)*

Term Index

9.1 ACT-PAT-001 — Link Participant

9.2 Action

root: - DIARY-PRD-action-inventory - DIARY-PRD-sla-corrective-preventive - DIARY-GUI-administrator-settings-B - DIARY-GUI-administrator-settings-G - DIARY-GUI-audit-log-common-A - DIARY-GUI-audit-log-common-C - DIARY-GUI-audit-log-common-D - DIARY-GUI-audit-log-common-F - DIARY-GUI-audit-log-common-G - DIARY-GUI-join-study-screen-D - DIARY-GUI-entry-overlap-resolution-G - DIARY-GUI-entry-overlap-resolution-H - DIARY-GUI-entry-overlap-resolution-I - DIARY-GUI-epistaxis-record-D - DIARY-GUI-epistaxis-delete-A - DIARY-GUI-epistaxis-delete-B - DIARY-GUI-epistaxis-delete-E - DIARY-PRD-application-lock-C - DIARY-GUI-calendar-day-view-H - DIARY-GUI-calendar-day-view-M - DIARY-GUI-calendar-day-view-R - DIARY-GUI-calendar-day-view-T - DIARY-GUI-calendar-day-view-U - DIARY-GUI-participation-status-badge-E - DIARY-PRD-participant-mark-not-participating-B - DIARY-PRD-participant-mark-not-participating-D - DIARY-PRD-participant-reactivate-B - DIARY-PRD-participant-reactivate-C - DIARY-GUI-participant-dashboard-I - DIARY-GUI-participant-dashboard-N - DIARY-GUI-participant-dashboard-O - DIARY-GUI-show-linking-code-A - DIARY-GUI-show-linking-code-B - DIARY-GUI-link-participant-flow-B - DIARY-GUI-password-forgot-workflow-A - DIARY-GUI-password-forgot-workflow-B - DIARY-GUI-password-forgot-workflow-C - DIARY-GUI-password-forgot-workflow-D - DIARY-GUI-password-forgot-workflow-F - DIARY-GUI-password-forgot-workflow-J - DIARY-GUI-password-forgot-workflow-O - DIARY-GUI-password-forgot-workflow-P - DIARY-GUI-password-forgot-workflow-Q - DIARY-GUI-password-forgot-workflow-R - DIARY-GUI-password-forgot-workflow-U - DIARY-PRD-questionnaire-portal-sent-rules-M - DIARY-GUI-questionnaire-portal-sent-workflow-G - DIARY-GUI-questionnaire-portal-sent-workflow-H - DIARY-GUI-questionnaire-portal-sent-workflow-N - DIARY-PRD-action-inventory-A - DIARY-PRD-action-inventory-B - DIARY-PRD-action-inventory-C - DIARY-PRD-action-inventory-D - DIARY-PRD-sla-corrective-preventive-A - DIARY-PRD-sla-regulatory-event-support-L - DIARY-GUI-user-management-tabs-N - DIARY-GUI-user-account-deactivate-A - DIARY-GUI-user-account-deactivate-B - DIARY-GUI-user-account-deactivate-C - DIARY-GUI-user-account-reactivate-A - DIARY-GUI-user-account-reactivate-B - DIARY-GUI-user-account-reactivate-C - DIARY-GUI-user-information-modal-I - DIARY-GUI-user-information-modal-J - DIARY-GUI-user-information-modal-K - DIARY-GUI-administrator-dashboard-A - DIARY-GUI-administrator-settings:section:0 - DIARY-GUI-administrator-settings:section:3 - DIARY-GUI-audit-log-common:section:6 - rem:spec/prd-common-ui.md:7 - rem:spec/prd-common-ui.md:42 - DIARY-GUI-epistaxis-delete:section:3 - DIARY-PRD-application-lock:section:6 - DIARY-GUI-main-screen-layout:section:0 - DIARY-GUI-mobile-navigation:section:5 - DIARY-GUI-calendar-day-view:section:7 - DIARY-GUI-

participant-task-list:section:6 - DIARY-GUI-participation-status-badge:section:6 - DIARY-PRD-notification-portal-sent-questionnaire:section:4 - DIARY-PRD-notification-historical-gap:section:5 - DIARY-PRD-participant-mark-not-participating:section:1 - DIARY-GUI-participant-dashboard:section:6 - DIARY-GUI-show-linking-code:section:0 - DIARY-GUI-show-linking-code:section:2 - DIARY-GUI-link-participant-flow:section:0 - DIARY-GUI-questionnaire-portal-sent-workflow:section:0 - DIARY-GUI-questionnaire-portal-sent-workflow:section:8 - DIARY-PRD-action-inventory:section:0 - DIARY-PRD-action-inventory:section:1 - DIARY-PRD-action-inventory:section:2 - DIARY-GUI-role-switching:section:3 - DIARY-PRD-sla-corrective-preventive:section:0 - DIARY-PRD-sla-regulatory-event-support:section:0 - DIARY-PRD-user-account-create:section:1 - DIARY-PRD-user-account-site-assignment:section:1 - DIARY-PRD-user-account-deactivate:section:0 - DIARY-PRD-user-account-deactivate:section:1 - DIARY-PRD-reason-field-constraints:section:0 - DIARY-PRD-reason-field-constraints:section:1 - DIARY-GUI-user-account-deactivate:section:0 - DIARY-GUI-user-account-deactivate:section:3 - DIARY-GUI-user-account-reactivate:section:3 - DIARY-GUI-user-information-modal:section:3

9.3 Action Inventory

root: - DIARY-PRD-action-inventory

9.4 Activation Webpage

root: - DIARY-PRD-user-account-activation-workflow-B - DIARY-PRD-user-account-activation-workflow-C - DIARY-PRD-user-account-activation-resend-C - DIARY-PRD-user-account-activation-resend:section:0 - DIARY-PRD-user-account-activation-resend:section:1

9.5 Administrator

root: - DIARY-PRD-administrator-settings - DIARY-GUI-administrator-settings - DIARY-GUI-audit-log-administrator - DIARY-GUI-administrator-dashboard - DIARY-GUI-administrator-settings-A - DIARY-GUI-administrator-settings-B - DIARY-GUI-audit-log-administrator-A - DIARY-PRD-help-resources-A - DIARY-PRD-role-definitions-A - DIARY-PRD-role-definitions-D - DIARY-PRD-user-account-create-A - DIARY-PRD-user-account-create-C - DIARY-PRD-user-account-activation-workflow-E - DIARY-PRD-user-account-activation-workflow-H - DIARY-PRD-user-account-site-assignment-B - DIARY-PRD-user-account-site-assignment-C - DIARY-PRD-user-account-site-assignment-D - DIARY-PRD-user-account-activation-resend-A - DIARY-PRD-user-account-edit-A - DIARY-PRD-user-account-edit-B - DIARY-PRD-user-account-edit-C - DIARY-PRD-user-account-edit-E - DIARY-PRD-user-account-edit-F - DIARY-PRD-user-account-edit-G - DIARY-PRD-user-account-deactivate-A - DIARY-PRD-user-account-

deactivate-F - DIARY-PRD-user-account-reactivate-D - DIARY-GUI-user-information-modal-C - DIARY-GUI-user-information-modal-D - DIARY-GUI-administrator-dashboard-A - DIARY-GUI-administrator-dashboard-B - DIARY-GUI-administrator-dashboard-C - DIARY-GUI-administrator-dashboard-D - DIARY-GUI-administrator-dashboard-F - DIARY-GUI-administrator-dashboard-I - rem:spec/prd-administrator-settings.md:1 - DIARY-PRD-administrator-settings:section:0 - DIARY-PRD-administrator-settings:section:5 - DIARY-GUI-administrator-settings:section:0 - DIARY-GUI-administrator-settings:section:3 - DIARY-GUI-audit-log-administrator:section:0 - DIARY-GUI-audit-log-administrator:section:1 - DIARY-PRD-help-resources:section:5 - DIARY-PRD-password-forgot:section:0 - DIARY-PRD-password-forgot:section:5 - DIARY-PRD-rbac-customizable:section:1 - DIARY-PRD-action-inventory:section:1 - DIARY-PRD-role-definitions:section:1 - rem:spec/prd-user-account.md:3 - DIARY-PRD-user-account-create:section:0 - DIARY-PRD-user-account-activation-workflow:section:6 - DIARY-PRD-user-account-site-assignment:section:1 - DIARY-PRD-user-account-activation-resend:section:1 - DIARY-PRD-user-account-edit:section:1 - DIARY-PRD-user-account-deactivate:section:1 - DIARY-PRD-user-account-reactivate:section:0 - DIARY-GUI-user-management-tabs:section:5 - DIARY-GUI-user-account-deactivate:section:3 - DIARY-GUI-user-information-modal:section:3 - DIARY-GUI-administrator-dashboard:section:0 - DIARY-GUI-administrator-dashboard:section:4

9.6 Administrator Dashboard

root: - DIARY-GUI-administrator-dashboard

9.7 Administrator Settings

root: - DIARY-PRD-administrator-settings - DIARY-GUI-administrator-settings - DIARY-PRD-administrator-settings-A - DIARY-PRD-administrator-settings-B - DIARY-PRD-administrator-settings-E - DIARY-PRD-administrator-settings-F - DIARY-GUI-administrator-settings-A - DIARY-GUI-administrator-settings-B - DIARY-GUI-administrator-settings-F - DIARY-GUI-administrator-settings-G - DIARY-GUI-administrator-dashboard-C - rem:spec/prd-administrator-settings.md:3 - DIARY-PRD-administrator-settings:section:0 - DIARY-GUI-administrator-settings:section:0

9.8 Application Lock

root: - DIARY-PRD-application-lock - DIARY-PRD-application-lock-A - DIARY-PRD-application-lock-B - DIARY-PRD-application-lock-C - DIARY-PRD-application-lock-D - DIARY-PRD-application-lock-E - DIARY-PRD-application-lock-F - DIARY-PRD-application-lock-G - rem:spec/prd-mobile-app.md:3 - DIARY-PRD-application-lock:section:0 - DIARY-PRD-application-lock:section:6

9.9 Application Menu

root: - DIARY-GUI-mobile-navigation-A - DIARY-GUI-mobile-navigation-K - rem:spec/prd-mobile-navigation.md:3 - DIARY-GUI-mobile-navigation:section:0 - DIARY-GUI-mobile-navigation:section:5

9.10 Application Privacy Policy

root: - DIARY-GUI-mobile-navigation-K - DIARY-GUI-mobile-navigation-L - DIARY-PRD-privacy-policy:section:0 - DIARY-PRD-privacy-policy:section:1 - DIARY-GUI-mobile-navigation:section:5

9.11 Audit Trail

root: - DIARY-PRD-ancillary-platform-services-D - DIARY-PRD-questionnaire-localization-K - DIARY-PRD-system-validation-traceability-E - DIARY-PRD-sla-regulatory-event-support-H - DIARY-PRD-user-account-deactivate-D - DIARY-PRD-user-account-deactivate-F - DIARY-PRD-user-account-reactivate-D - DIARY-GUI-audit-log-study-coordinator:section:3 - DIARY-PRD-entry-time-restrictions:section:4 - DIARY-GUI-epistaxis-delete:section:3 - DIARY-PRD-evidence-email-identity:section:0 - DIARY-PRD-notification-behavior:section:4 - DIARY-PRD-participant-reactivate:section:1 - DIARY-PRD-questionnaire-submission-control:section:0 - DIARY-PRD-questionnaire-submission-control:section:1 - DIARY-PRD-questionnaire-versioning:section:0 - DIARY-PRD-questionnaire-localization:section:0 - DIARY-PRD-user-account-create:section:1 - DIARY-PRD-user-account-deactivate:section:0 - DIARY-PRD-user-account-deactivate:section:1 - DIARY-PRD-reason-field-constraints:section:1 - DIARY-GUI-user-account-reactivate:section:3

9.12 Authentication Method

root: - DIARY-PRD-application-lock-D - DIARY-PRD-application-lock-E - DIARY-PRD-application-lock-F - DIARY-PRD-application-lock-G - DIARY-PRD-application-lock-H - DIARY-PRD-application-lock-O - DIARY-PRD-application-lock:section:0 - DIARY-PRD-application-lock:section:6

9.13 Calendar

root: - DIARY-GUI-calendar-day-view - DIARY-PRD-epistaxis-capture-standard-A - DIARY-PRD-evidence-bitcoin-timestamp-C - DIARY-PRD-diary-start-day-I - DIARY-GUI-main-screen-layout-J - DIARY-GUI-calendar-day-view-A - DIARY-GUI-calendar-day-view-B - DIARY-

GUI-calendar-day-view-C - DIARY-GUI-calendar-day-view-D - DIARY-GUI-calendar-day-view-E - DIARY-GUI-calendar-day-view-H - DIARY-GUI-calendar-day-view-R - DIARY-GUI-calendar-day-view-S - DIARY-GUI-participant-task-list-H - DIARY-PRD-notification-yesterday-entry-A - DIARY-PRD-notification-yesterday-entry-C - DIARY-PRD-notification-yesterday-entry-D - DIARY-PRD-notification-yesterday-entry-E - DIARY-PRD-notification-historical-gap-A - DIARY-PRD-notification-historical-gap-C - DIARY-PRD-diary-start-day:section:1 - rem:spec/prd-mobile-navigation.md:3 - DIARY-GUI-main-screen-layout:section:5 - DIARY-GUI-calendar-day-view:section:0 - DIARY-GUI-calendar-day-view:section:7 - DIARY-PRD-notification-yesterday-entry:section:0 - DIARY-PRD-notification-yesterday-entry:section:5 - DIARY-PRD-notification-historical-gap:section:5 - DIARY-PRD-questionnaire-daily-epistaxis:section:1

9.14 Clinical Research Associate (CRA)

9.15 Clinical Trial Privacy Policy

root: - DIARY-PRD-privacy-policy - DIARY-GUI-join-study-screen-B - DIARY-GUI-join-study-screen-C - DIARY-GUI-join-study-screen-E - DIARY-PRD-privacy-policy-A - DIARY-PRD-privacy-policy-B - DIARY-PRD-privacy-policy-C - DIARY-GUI-participation-status-badge-C - rem:spec/prd-device-linking.md:3 - DIARY-GUI-join-study-screen:section:0 - DIARY-GUI-join-study-screen:section:1 - rem:spec/prd-mobile-app.md:3 - DIARY-PRD-privacy-policy:section:0 - DIARY-PRD-privacy-policy:section:1

9.16 Code Expiry

root: - DIARY-PRD-two-factor-authentication-E - DIARY-PRD-two-factor-authentication-H

9.17 Completion Status

root: - DIARY-PRD-questionnaire-system-B - DIARY-PRD-questionnaire-system:section:4

9.18 Configuration Category

root: - DIARY-PRD-administrator-settings-C - DIARY-GUI-administrator-settings-C - DIARY-GUI-administrator-settings-D - DIARY-PRD-administrator-settings:section:5 - DIARY-GUI-

administrator-settings:section:0

9.19 Configuration Parameter

root: - DIARY-PRD-administrator-settings-B - DIARY-PRD-administrator-settings-C - DIARY-PRD-administrator-settings-D - DIARY-PRD-administrator-settings-E - DIARY-GUI-administrator-settings-D - DIARY-GUI-administrator-settings:section:0

9.20 Conflicting Record

root: - DIARY-PRD-entry-overlap-resolution-F - DIARY-PRD-entry-overlap-resolution-J - DIARY-GUI-entry-overlap-resolution-D - DIARY-GUI-entry-overlap-resolution-F - DIARY-GUI-entry-overlap-resolution-G - DIARY-GUI-entry-overlap-resolution-I - DIARY-GUI-entry-overlap-resolution:section:6

9.21 Daily Epistaxis Record

root: - DIARY-PRD-questionnaire-daily-epistaxis - DIARY-PRD-questionnaire-daily-epistaxis-A - rem:spec/prd-questionnaire-overview.md:3 - DIARY-PRD-questionnaire-daily-epistaxis:section:1

9.22 Daily Status

root: - DIARY-PRD-epistaxis-capture-standard-A - DIARY-PRD-epistaxis-capture-standard-B - DIARY-PRD-epistaxis-capture-standard-C - DIARY-PRD-diary-start-day-I - DIARY-GUI-calendar-day-view-G - DIARY-GUI-calendar-day-view-I - DIARY-GUI-calendar-day-view-J - DIARY-GUI-calendar-day-view-K - DIARY-GUI-calendar-day-view-M - DIARY-GUI-calendar-day-view-T - DIARY-GUI-calendar-day-view-U - DIARY-GUI-participant-task-list-A - DIARY-GUI-participant-task-list-M - DIARY-GUI-participant-task-list-N - DIARY-GUI-participant-task-list-P - DIARY-PRD-notification-yesterday-entry-A - DIARY-PRD-notification-yesterday-entry-D - DIARY-PRD-epistaxis-capture-standard:section:1 - DIARY-GUI-participant-task-list:section:6 - DIARY-PRD-notification-yesterday-entry:section:0 - DIARY-PRD-notification-yesterday-entry:section:5 - DIARY-PRD-notification-historical-gap:section:0 - DIARY-PRD-notification-historical-gap:section:5

9.23 Database

root: - DIARY-PRD-data-backup-and-archival-A - DIARY-PRD-data-backup-and-archival-C - DIARY-PRD-questionnaire-versioning-C - DIARY-PRD-sla-service-availability-E - DIARY-PRD-sla-incident-severity-F - DIARY-PRD-sla-disaster-recovery-C - DIARY-PRD-questionnaire-versioning:section:0

9.24 Day View

root: - DIARY-GUI-calendar-day-view - DIARY-GUI-calendar-day-view-I - DIARY-GUI-calendar-day-view-M - DIARY-GUI-calendar-day-view-R - DIARY-GUI-calendar-day-view-T - DIARY-GUI-calendar-day-view-U - rem:spec/prd-mobile-navigation.md:3 - DIARY-GUI-calendar-day-view:section:0 - DIARY-GUI-calendar-day-view:section:7 - DIARY-PRD-questionnaire-daily-epistaxis:section:1

9.25 De-identified Data

9.26 Deactivation

root: - DIARY-PRD-user-account-deactivate-B - DIARY-GUI-user-account-deactivate-A - DIARY-GUI-user-account-deactivate-B - DIARY-GUI-user-account-deactivate-C - DIARY-GUI-user-account-deactivate-E - DIARY-PRD-session-management:section:5 - rem:spec/prd-user-account.md:3 - DIARY-PRD-user-account-edit:section:1 - DIARY-PRD-user-account-deactivate:section:0 - DIARY-PRD-user-account-deactivate:section:1 - DIARY-PRD-user-account-reactivate:section:0 - DIARY-PRD-reason-field-constraints:section:1 - DIARY-GUI-user-account-deactivate:section:0 - DIARY-GUI-user-account-deactivate:section:3 - DIARY-GUI-user-account-reactivate:section:3 - DIARY-GUI-user-information-modal:section:3

9.27 Device Authentication

root: - DIARY-PRD-application-lock-F - DIARY-PRD-application-lock-J - DIARY-PRD-application-lock-L - DIARY-PRD-application-lock-M - DIARY-PRD-application-lock:section:0 - DIARY-PRD-application-lock:section:6

9.28 Diary

root: - DIARY-PRD-mobile-application - DIARY-PRD-diary-start-day - DIARY-GUI-audit-log-study-coordinator-A - DIARY-GUI-audit-log-cra-A - DIARY-PRD-entry-overlap-resolution-E - DIARY-PRD-epistaxis-capture-standard-A - DIARY-PRD-epistaxis-capture-standard-B - DIARY-GUI-epistaxis-delete-F - DIARY-PRD-evidence-timestamp-attestation-A - DIARY-PRD-evidence-bitcoin-timestamp-B - DIARY-PRD-evidence-bitcoin-timestamp-G - DIARY-PRD-evidence-timestamp-verification-H - DIARY-PRD-evidence-timestamp-archival-B - DIARY-PRD-mobile-application-C - DIARY-PRD-mobile-offline-first-A - DIARY-PRD-mobile-offline-first-B - DIARY-PRD-diary-start-day-A - DIARY-PRD-diary-start-day-B - DIARY-PRD-diary-start-day-C - DIARY-PRD-diary-start-day-D - DIARY-PRD-diary-start-day-E - DIARY-PRD-diary-start-day-F - DIARY-PRD-diary-start-day-I - DIARY-GUI-main-screen-layout-F - DIARY-GUI-calendar-day-view-C - DIARY-GUI-calendar-day-view-G - DIARY-PRD-notification-incomplete-record-lock-A - DIARY-PRD-notification-incomplete-record-lock-G - DIARY-PRD-questionnaire-system-C - DIARY-PRD-questionnaire-system-D - DIARY-PRD-questionnaire-portal-sent-rules-K - DIARY-GUI-administrator-dashboard-C - DIARY-GUI-administrator-dashboard-E - DIARY-GUI-administrator-dashboard-F - rem:spec/glossary-core.md:721 - rem:spec/glossary-core.md:747 - rem:spec/prd-common-ui.md:63 - rem:spec/prd-diary-entry-rules.md:1 - rem:spec/prd-diary-entry-rules.md:3 - DIARY-PRD-entry-time-restrictions:section:4 - DIARY-PRD-entry-overlap-resolution:section:7 - rem:spec/prd-evidence-records.md:3 - DIARY-PRD-evidence-bitcoin-timestamp:section:0 - rem:spec/prd-mobile-app.md:3 - DIARY-PRD-mobile-offline-first:section:1 - DIARY-PRD-diary-start-day:section:0 - DIARY-PRD-diary-start-day:section:1 - DIARY-PRD-application-lock:section:0 - DIARY-GUI-main-screen-layout:section:0 - DIARY-GUI-calendar-day-view:section:0 - DIARY-GUI-calendar-day-view:section:7 - rem:spec/prd-mobile-notifications.md:3 - DIARY-PRD-notification-incomplete-record-lock:section:0 - DIARY-PRD-notification-yesterday-entry:section:0 - DIARY-PRD-notification-yesterday-entry:section:5 - DIARY-PRD-notification-historical-gap:section:5 - DIARY-PRD-notification-behavior:section:4 - DIARY-PRD-participant-link-new:section:1 - DIARY-PRD-participant-reconnection:section:1 - DIARY-GUI-show-linking-code:section:2 - DIARY-PRD-platform-operations-monitoring:section:0 - DIARY-PRD-ancillary-platform-services:section:0 - DIARY-PRD-questionnaire-system:section:4 - DIARY-PRD-questionnaire-daily-epistaxis:section:1 - rem:spec/prd-questionnaire-versioning.md:3 - rem:spec/prd-requirements-management.md:3 - rem:spec/prd-sla.md:3

9.29 Diary Data Synchronization

root: - rem:spec/prd-common-ui.md:63

9.30 Diary Entry

root: - rem:spec/glossary-core.md:721

9.31 Diary Platform

9.32 Diary Start Day

root: - DIARY-PRD-diary-start-day

9.33 Disconnection Notification

root: - DIARY-PRD-notification-disconnection - DIARY-GUI-main-screen-layout-E - DIARY-PRD-notification-disconnection-A - DIARY-PRD-notification-disconnection-B - DIARY-PRD-notification-disconnection-C - DIARY-PRD-notification-disconnection-D - DIARY-PRD-notification-disconnection-E - DIARY-GUI-main-screen-layout:section:5 - DIARY-PRD-notification-disconnection:section:5

9.34 Duration Reasonableness Check

root: - DIARY-PRD-entry-duration-check - rem:spec/prd-diary-entry-rules.md:3

9.35 Electronic Record

9.36 Electronic Signature

9.37 Email Address

root: - DIARY-PRD-evidence-email-identity-A - DIARY-PRD-evidence-email-identity-G - DIARY-PRD-password-forgot-A - DIARY-PRD-password-forgot-B - DIARY-PRD-password-forgot-C - DIARY-GUI-password-forgot-workflow-B - DIARY-GUI-password-forgot-workflow-D - DIARY-GUI-password-forgot-workflow-E - DIARY-GUI-password-forgot-workflow-G -

DIARY-GUI-password-forgot-workflow-K - DIARY-GUI-password-forgot-workflow-L - DIARY-PRD-user-account-create-A - DIARY-PRD-user-account-create-B - DIARY-PRD-user-account-activation-workflow-C - DIARY-PRD-user-account-activation-workflow-E - DIARY-PRD-user-account-edit-D - DIARY-PRD-user-account-edit-F - DIARY-PRD-user-account-edit-G - DIARY-GUI-user-management-tabs-H - DIARY-GUI-user-management-tabs-L - DIARY-GUI-user-information-modal-A - rem:spec/glossary-core.md:23 - DIARY-PRD-evidence-email-identity:section:0 - DIARY-PRD-password-forgot:section:0 - DIARY-PRD-password-forgot:section:5 - DIARY-GUI-password-forgot-workflow:section:0 - DIARY-PRD-user-account-create:section:1 - DIARY-PRD-user-account-activation-workflow:section:6 - DIARY-PRD-user-account-edit:section:0 - DIARY-PRD-user-account-reactivate:section:0 - DIARY-GUI-user-management-tabs:section:5

9.38 Entry Justification

root: - DIARY-PRD-entry-time-restrictions-A - DIARY-PRD-entry-time-restrictions-B - DIARY-PRD-entry-time-restrictions-C - DIARY-PRD-entry-time-restrictions-D - DIARY-PRD-entry-time-restrictions-K - DIARY-GUI-entry-overlap-resolution-F

9.39 Epistaxis Event

root: - DIARY-PRD-notification-ongoing-epistaxis - DIARY-PRD-epistaxis-capture-standard-C - DIARY-PRD-epistaxis-capture-standard-D - DIARY-PRD-epistaxis-capture-standard-E - DIARY-PRD-epistaxis-capture-standard-F - DIARY-PRD-epistaxis-capture-standard-G - DIARY-GUI-epistaxis-delete-E - DIARY-GUI-epistaxis-delete-G - DIARY-PRD-epistaxis-capture-standard:section:1 - DIARY-PRD-application-lock:section:6 - DIARY-PRD-notification-ongoing-epistaxis:section:0 - DIARY-PRD-notification-ongoing-epistaxis:section:5 - DIARY-PRD-notification-ongoing-epistaxis:section:6

9.40 eSource

9.41 Event Sourcing

9.42 Event Store

9.43 FDA 21 CFR Part 11

root: - DIARY-PRD-data-backup-and-archival:section:0 - DIARY-PRD-evidence-timestamp-attestation:section:1 - DIARY-PRD-evidence-bitcoin-timestamp:section:0 - DIARY-PRD-evidence-timestamp-verification:section:0 - DIARY-PRD-evidence-device-fingerprint:section:0 - DIARY-PRD-evidence-patient-authentication:section:0 - DIARY-PRD-evidence-email-identity:section:0 - DIARY-PRD-platform-operations-monitoring:section:0 - DIARY-PRD-action-inventory:section:2 - rem:spec/prd-requirements-management.md:3 - DIARY-PRD-system-validation-traceability:section:1 - DIARY-PRD-sla-root-cause-analysis:section:0 - DIARY-PRD-sla-regulatory-event-support:section:0 - DIARY-PRD-user-account-deactivate:section:1

9.44 Finalization

root: - DIARY-PRD-questionnaire-portal-sent-rules-N - DIARY-PRD-questionnaire-portal-sent-rules-O - DIARY-GUI-questionnaire-portal-sent-workflow-R - DIARY-GUI-epistaxis-record:section:5 - DIARY-PRD-participant-registration:section:1 - DIARY-PRD-questionnaire-portal-sent-rules:section:0 - DIARY-PRD-questionnaire-portal-sent-rules:section:5 - DIARY-GUI-questionnaire-portal-sent-workflow:section:8

9.45 Full Name

root: - DIARY-PRD-user-account-create-A - DIARY-GUI-user-management-tabs-H - DIARY-GUI-user-management-tabs-L - DIARY-GUI-user-information-modal-A - DIARY-GUI-administrator-dashboard-A - DIARY-PRD-user-account-create:section:1 - DIARY-GUI-user-management-tabs:section:5

9.46 HHT-QoL

root: - DIARY-PRD-questionnaire-hht-qol - DIARY-PRD-score-hht-qol - DIARY-PRD-questionnaire-hht-qol-A - DIARY-PRD-questionnaire-hht-qol-E - DIARY-PRD-questionnaire-hht-qol-F - DIARY-PRD-score-hht-qol-A - rem:spec/prd-questionnaire-overview.md:3 - DIARY-PRD-questionnaire-hht-qol:section:0 - DIARY-PRD-questionnaire-hht-qol:section:1 - DIARY-PRD-questionnaire-session-timeout:section:6 - rem:spec/prd-score-calculation.md:3 - DIARY-PRD-score-hht-qol:section:0 - DIARY-PRD-score-nose-hht:section:0

9.47 Historical Gap

root: - DIARY-PRD-notification-historical-gap - DIARY-PRD-notification-historical-gap-A - DIARY-PRD-notification-historical-gap-B - DIARY-PRD-notification-historical-gap-C - DIARY-PRD-notification-historical-gap-D - DIARY-PRD-notification-historical-gap-E - DIARY-PRD-notification-historical-gap-F - DIARY-PRD-notification-historical-gap-G - DIARY-PRD-notification-historical-gap-H - DIARY-PRD-notification-historical-gap:section:0 - DIARY-PRD-notification-historical-gap:section:5 - DIARY-PRD-notification-historical-gap:section:6

9.48 Historical Gap Reminder

root: - DIARY-PRD-notification-historical-gap

9.49 Idle Timeout

root: - DIARY-PRD-application-lock-B - DIARY-PRD-application-lock-Q - DIARY-PRD-session-management-C - DIARY-PRD-session-management-G - DIARY-PRD-session-management:se

9.50 Incomplete Record

root: - DIARY-PRD-notification-incomplete-record-lock - DIARY-PRD-epistaxis-capture-standard-G - DIARY-PRD-notification-incomplete-record-lock-A - DIARY-PRD-notification-incomplete-record-lock-B - DIARY-PRD-notification-incomplete-record-lock-C - DIARY-PRD-notification-ongoing-epistaxis-A - DIARY-PRD-notification-ongoing-epistaxis-C - DIARY-PRD-notification-ongoing-epistaxis-D - DIARY-PRD-notification-ongoing-epistaxis-E - DIARY-PRD-notification-ongoing-epistaxis-F - DIARY-PRD-epistaxis-capture-standard:section:1 -

DIARY-PRD-notification-incomplete-record-lock:section:0 - DIARY-PRD-notification-incomplete-record-lock:section:3

9.51 Incomplete Records Task

root: - DIARY-GUI-participant-task-list-A - DIARY-GUI-participant-task-list-B - DIARY-GUI-participant-task-list-C - DIARY-GUI-participant-task-list-E - DIARY-GUI-participant-task-list:section:6
- DIARY-PRD-notification-ongoing-epistaxis:section:5

9.52 Intensity

root: - DIARY-PRD-epistaxis-capture-standard-E - DIARY-GUI-epistaxis-record-A - DIARY-GUI-epistaxis-record-F - DIARY-GUI-epistaxis-record-G - DIARY-GUI-epistaxis-record-H - DIARY-GUI-epistaxis-record-I - rem:spec/prd-epistaxis.md:3 - DIARY-PRD-epistaxis-capture-standard:section:1 - DIARY-GUI-epistaxis-record:section:0 - DIARY-GUI-epistaxis-record:section:5

9.53 Investigator

root: - DIARY-PRD-role-definitions-B - rem:spec/glossary-core.md:721 - DIARY-PRD-role-definitions:section:1

9.54 Justification Threshold

root: - DIARY-PRD-entry-time-restrictions-A - DIARY-PRD-entry-time-restrictions-H - DIARY-PRD-entry-time-restrictions-J - DIARY-GUI-entry-overlap-resolution-F - DIARY-PRD-entry-time-restrictions:section:4

9.55 Linking Code

root: - DIARY-PRD-linking-code-entry-errors - DIARY-PRD-linking-code-lifecycle - DIARY-GUI-show-linking-code - DIARY-PRD-linking-code-entry-errors-A - DIARY-PRD-linking-code-entry-errors-C - DIARY-PRD-linking-code-entry-errors-D - DIARY-GUI-join-study-screen-A - DIARY-GUI-join-study-screen-D - DIARY-GUI-linking-confirmation-A - DIARY-GUI-mobile-navigation-F - DIARY-GUI-participation-status-badge-B - DIARY-GUI-participation-status-

badge-D - DIARY-GUI-participation-status-badge-E - DIARY-PRD-linking-code-lifecycle-A - DIARY-PRD-linking-code-lifecycle-B - DIARY-PRD-linking-code-lifecycle-D - DIARY-PRD-linking-code-lifecycle-E - DIARY-PRD-linking-code-lifecycle-F - DIARY-PRD-linking-code-lifecycle-G - DIARY-PRD-linking-code-lifecycle-H - DIARY-PRD-participant-link-new-B - DIARY-PRD-participant-link-new-C - DIARY-PRD-participant-reconnection-D - DIARY-PRD-participant-reconnection-E - DIARY-GUI-show-linking-code-A - DIARY-GUI-show-linking-code-B - DIARY-GUI-show-linking-code-C - DIARY-GUI-link-participant-flow-A - DIARY-GUI-link-participant-flow-B - rem:spec/prd-common-ui.md:77 - DIARY-PRD-linking-code-entry-errors:section:0 - DIARY-GUI-join-study-screen:section:0 - DIARY-GUI-join-study-screen:section:1 - DIARY-GUI-linking-confirmation:section:0 - DIARY-PRD-notification-disconnection:section:1 - DIARY-GUI-participation-status-badge:section:6 - DIARY-PRD-linking-code-lifecycle:section:0 - DIARY-PRD-linking-code-lifecycle:section:6 - DIARY-PRD-participant-link-new:section:0 - DIARY-PRD-participant-link-new:section:1 - DIARY-PRD-participant-reconnection:section:0 - DIARY-GUI-show-linking-code:section:0 - DIARY-GUI-show-linking-code:section:2 - DIARY-GUI-link-participant-flow:section:0

9.56 Linking Code Validation Failure

9.57 Linking Consent

root: - DIARY-GUI-join-study-screen-B - DIARY-GUI-join-study-screen-C - DIARY-GUI-join-study-screen-D - DIARY-GUI-join-study-screen-E - DIARY-GUI-join-study-screen:section:1

9.58 Lock Threshold

root: - DIARY-PRD-entry-time-restrictions-A - DIARY-PRD-entry-time-restrictions-E - DIARY-PRD-entry-time-restrictions-F - DIARY-PRD-entry-time-restrictions-G - DIARY-PRD-entry-time-restrictions-I - DIARY-PRD-entry-time-restrictions-J - DIARY-PRD-entry-time-restrictions-M - DIARY-GUI-entry-overlap-resolution-G - DIARY-GUI-entry-overlap-resolution-I - DIARY-GUI-calendar-day-view-Q - DIARY-GUI-calendar-day-view-S - DIARY-PRD-notification-incomplete-record-lock-A - DIARY-PRD-notification-incomplete-record-lock-G - DIARY-PRD-notification-historical-gap-D - DIARY-PRD-entry-time-restrictions:section:4 - DIARY-GUI-entry-overlap-resolution:section:6 - DIARY-GUI-participant-task-list:section:6 - DIARY-PRD-notification-incomplete-record-lock:section:0 - DIARY-PRD-notification-incomplete-record-lock:section:3

9.59 Lock Warning Offset

root: - DIARY-PRD-notification-incomplete-record-lock-A - DIARY-PRD-notification-incomplete-record-lock-C - DIARY-PRD-notification-incomplete-record-lock-D - DIARY-PRD-notification-incomplete-record-lock-F - DIARY-PRD-notification-incomplete-record-lock-G

9.60 Long Duration Threshold

root: - DIARY-PRD-entry-duration-check-C - DIARY-PRD-entry-duration-check-G

9.61 Main Screen

root: - DIARY-GUI-main-screen-layout - DIARY-GUI-entry-overlap-resolution-M - DIARY-GUI-main-screen-layout-A - DIARY-GUI-main-screen-layout-C - DIARY-GUI-main-screen-layout-I - DIARY-GUI-main-screen-layout-J - DIARY-GUI-mobile-navigation-A - DIARY-GUI-mobile-navigation-B - DIARY-GUI-calendar-day-view-H - DIARY-PRD-notification-disconnection-A - DIARY-PRD-notification-behavior-A - DIARY-GUI-linking-confirmation:section:1 - rem:spec/prd-mobile-navigation.md:3 - DIARY-GUI-main-screen-layout:section:0 - DIARY-GUI-mobile-navigation:section:0 - DIARY-GUI-participant-task-list:section:0 - DIARY-GUI-participant-task-list:section:6 - DIARY-PRD-notification-portal-sent-questionnaire:section:0 - DIARY-PRD-notification-yesterday-entry:section:0 - DIARY-PRD-notification-behavior:section:4

9.62 Mobile Application

root: - DIARY-PRD-mobile-application - DIARY-GUI-mobile-navigation - DIARY-PRD-mobile-application-A - DIARY-PRD-mobile-application-B - DIARY-PRD-mobile-application-C - DIARY-PRD-mobile-application-D - DIARY-PRD-mobile-application-F - DIARY-PRD-diary-start-day-D - DIARY-PRD-application-lock-A - DIARY-PRD-application-lock-B - DIARY-PRD-application-lock-J - DIARY-PRD-notification-portal-sent-questionnaire-A - DIARY-PRD-notification-portal-sent-questionnaire-B - DIARY-PRD-notification-ongoing-epistaxis-G - DIARY-PRD-notification-ongoing-epistaxis-H - DIARY-PRD-notification-historical-gap-G - DIARY-PRD-notification-behavior-A - DIARY-PRD-notification-behavior-C - DIARY-PRD-participant-link-new-C - DIARY-PRD-participant-disconnection-E - DIARY-PRD-participant-disconnection-F - DIARY-PRD-participant-reconnection-F - DIARY-PRD-participant-mark-not-participating-D - DIARY-PRD-participant-reactivate-C - rem:spec/glossary-core.md:721 - rem:spec/prd-common-ui.md:3 - rem:spec/prd-common-ui.md:63 - rem:spec/prd-common-ui.md:94 - rem:spec/prd-mobile-app.md:1 - rem:spec/prd-mobile-app.md:3 - DIARY-PRD-mobile-application:section:0 - DIARY-

PRD-diary-start-day:section:0 - DIARY-PRD-diary-start-day:section:1 - DIARY-PRD-privacy-policy:section:0 - DIARY-PRD-privacy-policy:section:1 - DIARY-PRD-application-lock:section:0 - rem:spec/prd-mobile-navigation.md:1 - rem:spec/prd-mobile-navigation.md:3 - DIARY-GUI-mobile-navigation:section:0 - rem:spec/prd-mobile-notifications.md:3 - DIARY-PRD-notification-disconnection:section:0 - DIARY-PRD-notification-behavior:section:0 - DIARY-PRD-notification-behavior:section:1 - DIARY-PRD-linking-code-lifecycle:section:6 - DIARY-PRD-participant-link-new:section:0 - DIARY-PRD-participant-link-new:section:1 - DIARY-PRD-participant-disconnection:section:1 - DIARY-PRD-participant-mark-not-participating:section:0 - DIARY-PRD-participant-mark-not-participating:section:1 - DIARY-PRD-participant-reactivate:section:0

9.63 Mobile Linking Code

9.64 Multi-Sponsor Isolation

9.65 NOSE HHT

root: - DIARY-PRD-questionnaire-nose-hht - DIARY-PRD-score-nose-hht - DIARY-PRD-questionnaire-nose-hht-A - DIARY-PRD-questionnaire-nose-hht-E - DIARY-PRD-questionnaire-nose-hht-F - DIARY-PRD-score-nose-hht-A - rem:spec/prd-questionnaire-overview.md:3 - DIARY-PRD-questionnaire-nose-hht:section:0 - DIARY-PRD-questionnaire-nose-hht:section:1 - DIARY-PRD-questionnaire-hht-qol:section:1 - DIARY-PRD-questionnaire-portal-sent-rules:section:5 - DIARY-PRD-questionnaire-session-timeout:section:6 - rem:spec/prd-score-calculation.md:3 - DIARY-PRD-questionnaire-score-calculation:section:1 - DIARY-PRD-score-nose-hht:section:0

9.66 Offline-First

root: - DIARY-PRD-mobile-offline-first - rem:spec/prd-mobile-app.md:3 - DIARY-PRD-mobile-offline-first:section:0 - DIARY-PRD-mobile-offline-first:section:1

9.67 Overlap

root: - DIARY-PRD-entry-overlap-resolution-A - DIARY-PRD-entry-overlap-resolution-B - DIARY-PRD-entry-overlap-resolution-C - DIARY-PRD-entry-overlap-resolution-D - DIARY-PRD-entry-overlap-resolution-E - DIARY-PRD-entry-overlap-resolution-J - DIARY-GUI-entry-overlap-resolution-A - DIARY-GUI-entry-overlap-resolution-C - DIARY-PRD-entry-overlap-resolution:section:0 - DIARY-PRD-entry-overlap-resolution:section:7 - DIARY-GUI-entry-

overlap-resolution:section:0 - DIARY-GUI-entry-overlap-resolution:section:6 - DIARY-GUI-mobile-navigation:section:5

9.68 Participant

root: - DIARY-GUI-participant-task-list - DIARY-PRD-participant-registration - DIARY-PRD-participant-link-new - DIARY-PRD-participant-disconnection - DIARY-PRD-participant-reconnection - DIARY-PRD-participant-reactivate - DIARY-GUI-participant-dashboard - DIARY-GUI-link-participant-flow - DIARY-GUI-audit-log-study-coordinator-A - DIARY-GUI-audit-log-study-coordinator-B - DIARY-GUI-audit-log-cra-A - DIARY-GUI-audit-log-cra-E - DIARY-GUI-join-study-screen-B - DIARY-GUI-join-study-screen-E - DIARY-GUI-linking-confirmation-A - DIARY-GUI-linking-confirmation-B - DIARY-PRD-entry-time-restrictions-A - DIARY-PRD-entry-time-restrictions-B - DIARY-PRD-entry-duration-check-A - DIARY-PRD-entry-duration-check-B - DIARY-PRD-entry-duration-check-C - DIARY-PRD-entry-duration-check-D - DIARY-PRD-entry-overlap-resolution-A - DIARY-PRD-entry-overlap-resolution-B - DIARY-PRD-entry-overlap-resolution-E - DIARY-PRD-entry-overlap-resolution-F - DIARY-PRD-entry-overlap-resolution-K - DIARY-PRD-entry-overlap-resolution-M - DIARY-PRD-entry-overlap-resolution-N - DIARY-PRD-entry-overlap-resolution-O - DIARY-GUI-entry-overlap-resolution-A - DIARY-GUI-entry-overlap-resolution-B - DIARY-GUI-entry-overlap-resolution-C - DIARY-GUI-entry-overlap-resolution-J - DIARY-GUI-entry-overlap-resolution-K - DIARY-GUI-entry-overlap-resolution-M - DIARY-PRD-epistaxis-capture-standard-A - DIARY-PRD-epistaxis-capture-standard-B - DIARY-PRD-epistaxis-capture-standard-C - DIARY-PRD-epistaxis-capture-standard-E - DIARY-GUI-epistaxis-record-C - DIARY-GUI-epistaxis-record-E - DIARY-GUI-epistaxis-record-H - DIARY-GUI-epistaxis-record-I - DIARY-GUI-epistaxis-record-J - DIARY-GUI-epistaxis-record-K - DIARY-GUI-epistaxis-delete-B - DIARY-GUI-epistaxis-delete-C - DIARY-GUI-epistaxis-delete-D - DIARY-GUI-epistaxis-delete-E - DIARY-GUI-epistaxis-delete-F - DIARY-GUI-epistaxis-delete-G - DIARY-PRD-diary-start-day-B - DIARY-PRD-diary-start-day-C - DIARY-PRD-diary-start-day-H - DIARY-PRD-privacy-policy-B - DIARY-PRD-privacy-policy-C - DIARY-PRD-application-lock-C - DIARY-PRD-application-lock-E - DIARY-PRD-application-lock-H - DIARY-PRD-application-lock-I - DIARY-PRD-application-lock-J - DIARY-PRD-application-lock-M - DIARY-GUI-mobile-navigation-G - DIARY-GUI-mobile-navigation-J - DIARY-GUI-calendar-day-view-A - DIARY-GUI-calendar-day-view-F - DIARY-GUI-calendar-day-view-G - DIARY-GUI-calendar-day-view-H - DIARY-GUI-calendar-day-view-J - DIARY-GUI-calendar-day-view-K - DIARY-GUI-calendar-day-view-L - DIARY-GUI-calendar-day-view-Q - DIARY-GUI-calendar-day-view-R - DIARY-GUI-calendar-day-view-T - DIARY-GUI-calendar-day-view-U - DIARY-GUI-participant-task-list-A - DIARY-GUI-participant-task-list-C - DIARY-GUI-participant-task-list-D - DIARY-GUI-participant-task-list-G - DIARY-GUI-participant-task-list-H - DIARY-GUI-participant-task-list-K - DIARY-GUI-participant-task-list-M - DIARY-GUI-participant-task-list-N - DIARY-GUI-participant-task-list-O - DIARY-GUI-participant-task-list-P - DIARY-GUI-participant-task-list-R - DIARY-PRD-notification-disconnection-A - DIARY-PRD-notification-disconnection-B - DIARY-PRD-notification-

disconnection-C - DIARY-GUI-participation-status-badge-B - DIARY-GUI-participation-status-badge-C - DIARY-GUI-participation-status-badge-D - DIARY-GUI-participation-status-badge-E - DIARY-GUI-participation-status-badge-F - DIARY-GUI-participation-status-badge-G - DIARY-GUI-participation-status-badge-H - DIARY-PRD-notification-incomplete-record-lock-A - DIARY-PRD-notification-incomplete-record-lock-C - DIARY-PRD-notification-portal-sent-questionnaire-A - DIARY-PRD-notification-portal-sent-questionnaire-C - DIARY-PRD-notification-yesterday-entry-B - DIARY-PRD-notification-yesterday-entry-C - DIARY-PRD-notification-ongoing-epistaxis-A - DIARY-PRD-notification-ongoing-epistaxis-B - DIARY-PRD-notification-ongoing-epistaxis-D - DIARY-PRD-notification-ongoing-epistaxis-H - DIARY-PRD-notification-ongoing-epistaxis-J - DIARY-PRD-notification-historical-gap-A - DIARY-PRD-notification-historical-gap-B - DIARY-PRD-notification-behavior-A - DIARY-PRD-linking-code-lifecycle-A - DIARY-PRD-linking-code-lifecycle-C - DIARY-PRD-linking-code-lifecycle-E - DIARY-PRD-linking-code-lifecycle-H - DIARY-PRD-participant-registration-A - DIARY-PRD-participant-registration-B - DIARY-PRD-participant-link-new-A - DIARY-PRD-participant-link-new-C - DIARY-PRD-participant-disconnection-A - DIARY-PRD-participant-disconnection-D - DIARY-PRD-participant-disconnection-E - DIARY-PRD-participant-disconnection-F - DIARY-PRD-participant-reconnection-A - DIARY-PRD-participant-reconnection-E - DIARY-PRD-participant-reconnection-F - DIARY-PRD-participant-mark-not-participating-A - DIARY-PRD-participant-mark-not-participating-D - DIARY-PRD-participant-reactivate-A - DIARY-PRD-participant-reactivate-C - DIARY-GUI-participant-dashboard-A - DIARY-GUI-participant-dashboard-C - DIARY-GUI-participant-dashboard-I - DIARY-GUI-participant-dashboard-K - DIARY-GUI-participant-dashboard-L - DIARY-GUI-participant-dashboard-M - DIARY-GUI-participant-dashboard-N - DIARY-GUI-participant-dashboard-O - DIARY-GUI-show-linking-code-A - DIARY-GUI-show-linking-code-B - DIARY-GUI-show-linking-code-C - DIARY-GUI-link-participant-flow-A - DIARY-GUI-link-participant-flow-C - DIARY-PRD-questionnaire-system-D - DIARY-PRD-questionnaire-sponsor-configuration-B - DIARY-PRD-questionnaire-sponsor-configuration-C - DIARY-PRD-questionnaire-sponsor-configuration-D - DIARY-PRD-questionnaire-daily-epistaxis-A - DIARY-PRD-questionnaire-daily-epistaxis-B - DIARY-PRD-questionnaire-portal-sent-rules-A - DIARY-PRD-questionnaire-portal-sent-rules-B - DIARY-PRD-questionnaire-portal-sent-rules-C - DIARY-PRD-questionnaire-portal-sent-rules-D - DIARY-PRD-questionnaire-portal-sent-rules-E - DIARY-PRD-questionnaire-portal-sent-rules-G - DIARY-PRD-questionnaire-portal-sent-rules-H - DIARY-PRD-questionnaire-portal-sent-rules-I - DIARY-PRD-questionnaire-portal-sent-rules-J - DIARY-PRD-questionnaire-portal-sent-rules-K - DIARY-PRD-questionnaire-portal-sent-rules-L - DIARY-PRD-questionnaire-portal-sent-rules-M - DIARY-PRD-questionnaire-portal-sent-rules-N - DIARY-PRD-questionnaire-portal-sent-rules-O - DIARY-GUI-questionnaire-portal-sent-workflow-B - DIARY-GUI-questionnaire-portal-sent-workflow-C - DIARY-GUI-questionnaire-portal-sent-workflow-D - DIARY-GUI-questionnaire-portal-sent-workflow-H - DIARY-GUI-questionnaire-portal-sent-workflow-I - DIARY-GUI-questionnaire-portal-sent-workflow-J - DIARY-GUI-questionnaire-portal-sent-workflow-K - DIARY-GUI-questionnaire-portal-sent-workflow-L - DIARY-GUI-questionnaire-portal-sent-workflow-M - DIARY-GUI-questionnaire-portal-sent-workflow-O - DIARY-GUI-questionnaire-portal-sent-workflow-P - DIARY-GUI-questionnaire-portal-sent-workflow-Q - DIARY-GUI-questionnaire-portal-sent-workflow-R - DIARY-GUI-questionnaire-portal-sent-workflow-S - DIARY-PRD-questionnaire-

session-timeout-A - DIARY-PRD-questionnaire-session-timeout-B - DIARY-PRD-questionnaire-session-timeout-C - DIARY-PRD-questionnaire-session-timeout-D - DIARY-PRD-questionnaire-session-timeout-E - DIARY-PRD-questionnaire-session-timeout-F - DIARY-PRD-questionnaire-session-timeout-G - DIARY-PRD-questionnaire-session-timeout-H - DIARY-GUI-questionnaire-session-expiry-B - DIARY-GUI-questionnaire-session-expiry-D - DIARY-GUI-questionnaire-session-expiry-E - DIARY-GUI-questionnaire-session-expiry-G - rem:spec/glossary-core.md:721 - DIARY-GUI-audit-log-study-coordinator:section:0 - DIARY-GUI-audit-log-study-coordinator:section:3 - DIARY-GUI-audit-log-cra:section:0 - DIARY-GUI-audit-log-cra:section:3 - rem:spec/prd-common-ui.md:59 - rem:spec/prd-common-ui.md:61 - rem:spec/prd-common-ui.md:63 - rem:spec/prd-common-ui.md:73 - rem:spec/prd-common-ui.md:77 - rem:spec/prd-common-ui.md:94 - rem:spec/prd-device-linking.md:3 - DIARY-PRD-linking-code-entry-errors:section:4 - DIARY-GUI-join-study-screen:section:0 - DIARY-GUI-join-study-screen:section:1 - DIARY-GUI-linking-confirmation:section:0 - DIARY-GUI-linking-confirmation:section:1 - DIARY-PRD-entry-time-restrictions:section:0 - DIARY-PRD-entry-time-restrictions:section:4 - DIARY-PRD-entry-duration-check:section:5 - DIARY-PRD-entry-overlap-resolution:section:0 - DIARY-PRD-entry-overlap-resolution:section:7 - DIARY-GUI-entry-overlap-resolution:section:0 - DIARY-GUI-entry-overlap-resolution:section:6 - rem:spec/prd-epistaxis.md:3 - DIARY-PRD-epistaxis-capture-standard:section:0 - DIARY-PRD-epistaxis-capture-standard:section:1 - DIARY-GUI-epistaxis-record:section:0 - DIARY-GUI-epistaxis-record:section:5 - DIARY-GUI-epistaxis-delete:section:0 - DIARY-GUI-epistaxis-delete:section:3 - DIARY-PRD-help-resources:section:0 - DIARY-PRD-mobile-application:section:1 - DIARY-PRD-mobile-offline-first:section:1 - DIARY-PRD-diary-start-day:section:0 - DIARY-PRD-privacy-policy:section:1 - DIARY-PRD-application-lock:section:0 - DIARY-PRD-application-lock:section:6 - rem:spec/prd-mobile-navigation.md:3 - DIARY-GUI-main-screen-layout:section:0 - DIARY-GUI-main-screen-layout:section:5 - DIARY-GUI-mobile-navigation:section:5 - DIARY-GUI-calendar-day-view:section:0 - DIARY-GUI-calendar-day-view:section:7 - rem:spec/prd-mobile-notifications.md:1 - rem:spec/prd-mobile-notifications.md:3 - DIARY-GUI-participant-task-list:section:0 - DIARY-GUI-participant-task-list:section:6 - DIARY-PRD-notification-disconnection:section:0 - DIARY-PRD-notification-disconnection:section:1 - DIARY-GUI-participation-status-badge:section:0 - DIARY-GUI-participation-status-badge:section:6 - DIARY-PRD-notification-incomplete-record-lock:section:0 - DIARY-PRD-notification-incomplete-record-lock:section:3 - DIARY-PRD-notification-portal-sent-questionnaire:section:0 - DIARY-PRD-notification-portal-sent-questionnaire:section:4 - DIARY-PRD-notification-yesterday-entry:section:0 - DIARY-PRD-notification-yesterday-entry:section:5 - DIARY-PRD-notification-ongoing-epistaxis:section:0 - DIARY-PRD-notification-ongoing-epistaxis:section:5 - DIARY-PRD-notification-historical-gap:section:5 - DIARY-PRD-notification-behavior:section:0 - DIARY-PRD-notification-behavior:section:1 - DIARY-PRD-notification-behavior:section:4 - rem:spec/prd-participant.md:1 - rem:spec/prd-participant.md:3 - DIARY-PRD-linking-code-lifecycle:section:0 - DIARY-PRD-linking-code-lifecycle:section:6 - DIARY-PRD-participant-registration:section:0 - DIARY-PRD-participant-registration:section:1 - DIARY-PRD-participant-link-new:section:0 - DIARY-PRD-participant-link-new:section:1 - DIARY-PRD-participant-disconnection:section:0 - DIARY-PRD-participant-disconnection:section:1 - DIARY-PRD-participant-reconnection:section:0 - DIARY-PRD-participant-reconnection:section:1 - DIARY-PRD-participant-mark-not-participating:section:0 - DIARY-PRD-participant-mark-

not-participating:section:1 - DIARY-PRD-participant-reactivate:section:0 - DIARY-PRD-participant-reactivate:section:1 - DIARY-GUI-participant-dashboard:section:0 - DIARY-GUI-participant-dashboard:section:6 - DIARY-GUI-show-linking-code:section:0 - DIARY-GUI-show-linking-code:section:2 - DIARY-GUI-link-participant-flow:section:0 - DIARY-GUI-link-participant-flow:section:2 - DIARY-PRD-platform-operations-monitoring:section:0 - DIARY-PRD-questionnaire-system:section:0 - DIARY-PRD-questionnaire-system:section:4 - DIARY-PRD-questionnaire-change-control:section:1 - DIARY-PRD-questionnaire-daily-epistaxis:section:0 - DIARY-PRD-questionnaire-nose-hht:section:0 - DIARY-PRD-questionnaire-nose-hht:section:1 - DIARY-PRD-questionnaire-hht-qol:section:0 - DIARY-PRD-questionnaire-hht-qol:section:1 - rem:spec/prd-questionnaire-participant-workflow.md:1 - rem:spec/prd-questionnaire-participant-workflow.md:3 - DIARY-PRD-questionnaire-portal-sent-rules:section:0 - DIARY-PRD-questionnaire-portal-sent-rules:section:5 - DIARY-GUI-questionnaire-portal-sent-workflow:section:8 - DIARY-PRD-questionnaire-session-timeout:section:6 - DIARY-GUI-questionnaire-session-expiry:section:0 - DIARY-GUI-questionnaire-session-expiry:section:5 - DIARY-PRD-action-inventory:section:1 - DIARY-PRD-questionnaire-score-calculation:section:1

9.69 Participant Actions Modal

9.70 Participant Linking Code

9.71 Participation Status Badge

root: - DIARY-GUI-participation-status-badge - DIARY-GUI-mobile-navigation-J - DIARY-GUI-participation-status-badge-A - DIARY-GUI-participation-status-badge-B - DIARY-GUI-participation-status-badge-C - DIARY-GUI-participation-status-badge-D - DIARY-GUI-participation-status-badge-E - DIARY-GUI-participation-status-badge-F - DIARY-GUI-participation-status-badge-G - DIARY-GUI-participation-status-badge-H - DIARY-GUI-linking-confirmation:section:1 - DIARY-GUI-mobile-navigation:section:5 - rem:spec/prd-mobile-notifications.md:3 - DIARY-GUI-participation-status-badge:section:0

9.72 Password

root: - DIARY-PRD-password-requirements - DIARY-PRD-password-forgot - DIARY-GUI-password-forgot-workflow - DIARY-PRD-password-requirements-A - DIARY-PRD-password-requirements-B - DIARY-PRD-password-requirements-C - DIARY-PRD-password-requirements-D - DIARY-PRD-password-requirements-E - DIARY-PRD-password-requirements-F - DIARY-PRD-two-factor-authentication-B - DIARY-PRD-two-factor-authentication-C - DIARY-PRD-password-forgot-A - DIARY-PRD-password-forgot-B - DIARY-PRD-password-forgot-D - DIARY-

PRD-password-forgot-E - DIARY-PRD-password-forgot-F - DIARY-PRD-password-forgot-G - DIARY-PRD-password-forgot-H - DIARY-PRD-password-forgot-I - DIARY-GUI-password-forgot-workflow-A - DIARY-GUI-password-forgot-workflow-B - DIARY-GUI-password-forgot-workflow-C - DIARY-GUI-password-forgot-workflow-M - DIARY-GUI-password-forgot-workflow-N - DIARY-GUI-password-forgot-workflow-P - DIARY-GUI-password-forgot-workflow-Q - DIARY-GUI-password-forgot-workflow-R - DIARY-GUI-password-forgot-workflow-U - DIARY-PRD-user-account-activation-workflow-D - rem:spec/prd-portal-auth.md:3 - DIARY-PRD-password-requirements:section:0 - DIARY-PRD-two-factor-authentication:section:0 - DIARY-PRD-two-factor-authentication:section:4 - DIARY-PRD-password-forgot:section:0 - DIARY-PRD-password-forgot:section:5 - DIARY-GUI-password-forgot-workflow:section:0 - DIARY-GUI-password-forgot-workflow:section:6 - DIARY-PRD-user-account-reactivate:section:0

9.73 Password Reuse Limit

9.74 Patient

root: - DIARY-PRD-evidence-patient-authentication - DIARY-PRD-evidence-device-fingerprint-I - DIARY-PRD-evidence-patient-authentication-E - DIARY-PRD-evidence-patient-authentication-I - DIARY-PRD-evidence-patient-authentication-L - DIARY-PRD-evidence-patient-authentication-M - DIARY-PRD-evidence-geolocation-E - DIARY-PRD-evidence-geolocation-H - DIARY-PRD-evidence-email-identity-A - DIARY-PRD-evidence-email-identity-C - DIARY-PRD-evidence-email-identity-G - DIARY-PRD-questionnaire-versioning-M - DIARY-PRD-questionnaire-versioning-T - DIARY-PRD-questionnaire-localization-B - DIARY-PRD-questionnaire-localization-E - DIARY-PRD-questionnaire-localization-H - DIARY-PRD-questionnaire-localization-I - DIARY-PRD-questionnaire-localization-K - DIARY-PRD-sla-incident-severity-B - rem:spec/glossary-core.md:721 - rem:spec/prd-evidence-records.md:3 - DIARY-PRD-evidence-device-fingerprint:section:0 - DIARY-PRD-evidence-patient-authentication:section:0 - DIARY-PRD-evidence-geolocation:section:0 - DIARY-PRD-evidence-email-identity:section:0 - DIARY-PRD-ancillary-platform-services:section:0 - DIARY-PRD-questionnaire-versioning:section:0 - DIARY-PRD-questionnaire-localization:section:0 - DIARY-PRD-sla-incident-severity:section:0

9.75 PIN

root: - DIARY-PRD-evidence-patient-authentication-C - DIARY-PRD-evidence-patient-authentication-G - DIARY-PRD-evidence-patient-authentication-H - DIARY-PRD-evidence-patient-authentication-I - DIARY-PRD-application-lock-E - DIARY-PRD-application-lock-H - DIARY-PRD-application-lock-I - DIARY-PRD-application-lock-J - DIARY-PRD-application-lock-K - DIARY-PRD-application-lock-L - DIARY-PRD-application-lock-M - DIARY-PRD-application-lock-P - DIARY-PRD-evidence-patient-authentication:section:0 - DIARY-PRD-application-lock:section:6

9.76 Portal-Sent Questionnaire

root: - DIARY-PRD-notification-portal-sent-questionnaire - DIARY-PRD-questionnaire-portal-sent-rules - DIARY-GUI-questionnaire-portal-sent-workflow

9.77 Preamble

root: - DIARY-PRD-questionnaire-portal-sent-rules-A - DIARY-PRD-questionnaire-portal-sent-rules-B - DIARY-PRD-questionnaire-portal-sent-rules-C - DIARY-PRD-questionnaire-portal-sent-rules-D - DIARY-GUI-questionnaire-portal-sent-workflow-A - DIARY-PRD-questionnaire-session-timeout-D - DIARY-GUI-questionnaire-session-expiry-D - rem:spec/prd-questionnaire-participant-workflow.md:3 - DIARY-PRD-questionnaire-portal-sent-rules:section:0 - DIARY-PRD-questionnaire-portal-sent-rules:section:5 - DIARY-PRD-questionnaire-portal-sent-rules:section:6 - DIARY-GUI-questionnaire-portal-sent-workflow:section:0 - DIARY-GUI-questionnaire-portal-sent-workflow:section:8 - DIARY-GUI-questionnaire-portal-sent-workflow:section:9 - DIARY-PRD-questionnaire-session-timeout:section:6 - DIARY-GUI-questionnaire-session-expiry:section:5

9.78 Progress Indicator

root: - DIARY-GUI-epistaxis-record-A - DIARY-GUI-epistaxis-record-B - DIARY-GUI-epistaxis-record-C - DIARY-GUI-questionnaire-portal-sent-workflow-D - DIARY-GUI-epistaxis-record:section:0 - DIARY-GUI-epistaxis-record:section:5 - DIARY-GUI-questionnaire-portal-sent-workflow:section:0

9.79 Questionnaire

root: - DIARY-PRD-notification-portal-sent-questionnaire - DIARY-PRD-questionnaire-system - DIARY-PRD-questionnaire-sponsor-configuration - DIARY-PRD-questionnaire-change-control - DIARY-PRD-questionnaire-daily-epistaxis - DIARY-PRD-questionnaire-nose-hht - DIARY-PRD-questionnaire-hht-qol - DIARY-PRD-questionnaire-portal-sent-rules - DIARY-GUI-questionnaire-portal-sent-workflow - DIARY-PRD-questionnaire-session-timeout - DIARY-GUI-questionnaire-session-expiry - DIARY-PRD-questionnaire-versioning - DIARY-PRD-questionnaire-localization - DIARY-PRD-questionnaire-sponsor-eligibility - DIARY-PRD-questionnaire-score-calculation - DIARY-GUI-audit-log-common-G - DIARY-GUI-participant-task-list-A - DIARY-GUI-participant-task-list-F - DIARY-GUI-participant-task-list-G - DIARY-GUI-participant-task-list-H - DIARY-GUI-participant-task-list-I - DIARY-GUI-participant-task-list-J - DIARY-PRD-notification-portal-sent-questionnaire-A - DIARY-PRD-notification-portal-sent-questionnaire-B - DIARY-PRD-notification-portal-sent-questionnaire-C - DIARY-PRD-notification-portal-sent-questionnaire-

D - DIARY-PRD-questionnaire-system-A - DIARY-PRD-questionnaire-system-B - DIARY-PRD-questionnaire-system-F - DIARY-PRD-questionnaire-sponsor-configuration-B - DIARY-PRD-questionnaire-sponsor-configuration-C - DIARY-PRD-questionnaire-sponsor-configuration-E - DIARY-PRD-questionnaire-submission-control-A - DIARY-PRD-questionnaire-submission-control-B - DIARY-PRD-questionnaire-change-control-B - DIARY-PRD-questionnaire-change-control-D - DIARY-PRD-questionnaire-daily-epistaxis-A - DIARY-PRD-questionnaire-nose-hht-A - DIARY-PRD-questionnaire-nose-hht-C - DIARY-PRD-questionnaire-nose-hht-F - DIARY-PRD-questionnaire-hht-qol-A - DIARY-PRD-questionnaire-hht-qol-C - DIARY-PRD-questionnaire-hht-qol-F - DIARY-PRD-questionnaire-portal-sent-rules-A - DIARY-PRD-questionnaire-portal-sent-rules-B - DIARY-PRD-questionnaire-portal-sent-rules-C - DIARY-PRD-questionnaire-portal-sent-rules-F - DIARY-PRD-questionnaire-portal-sent-rules-G - DIARY-PRD-questionnaire-portal-sent-rules-H - DIARY-PRD-questionnaire-portal-sent-rules-I - DIARY-PRD-questionnaire-portal-sent-rules-K - DIARY-GUI-questionnaire-portal-sent-workflow-D - DIARY-GUI-questionnaire-portal-sent-workflow-E - DIARY-GUI-questionnaire-portal-sent-workflow-Q - DIARY-GUI-questionnaire-portal-sent-workflow-R - DIARY-GUI-questionnaire-portal-sent-workflow-S - DIARY-PRD-questionnaire-session-timeout-A - DIARY-PRD-questionnaire-session-timeout-B - DIARY-PRD-questionnaire-session-timeout-C - DIARY-PRD-questionnaire-session-timeout-D - DIARY-PRD-questionnaire-session-timeout-E - DIARY-PRD-questionnaire-session-timeout-F - DIARY-PRD-questionnaire-session-timeout-G - DIARY-PRD-questionnaire-session-timeout-H - DIARY-PRD-questionnaire-session-timeout-I - DIARY-PRD-questionnaire-session-timeout-J - DIARY-GUI-questionnaire-session-expiry-A - DIARY-GUI-questionnaire-session-expiry-B - DIARY-GUI-questionnaire-session-expiry-F - DIARY-GUI-questionnaire-session-expiry-G - DIARY-PRD-questionnaire-versioning-A - DIARY-PRD-questionnaire-versioning-H - DIARY-PRD-questionnaire-versioning-J - DIARY-PRD-questionnaire-versioning-K - DIARY-PRD-questionnaire-versioning-L - DIARY-PRD-questionnaire-versioning-T - DIARY-PRD-questionnaire-localization-J - DIARY-PRD-questionnaire-sponsor-eligibility-A - DIARY-PRD-questionnaire-sponsor-eligibility-B - DIARY-PRD-questionnaire-sponsor-eligibility-C - DIARY-PRD-questionnaire-sponsor-eligibility-D - DIARY-PRD-questionnaire-sponsor-eligibility-E - DIARY-PRD-questionnaire-sponsor-eligibility-F - DIARY-PRD-questionnaire-sponsor-eligibility-H - DIARY-PRD-questionnaire-sponsor-eligibility-I - DIARY-PRD-questionnaire-sponsor-eligibility-K - DIARY-PRD-questionnaire-sponsor-eligibility-M - DIARY-PRD-questionnaire-sponsor-eligibility-N - DIARY-PRD-questionnaire-score-calculation-A - DIARY-PRD-questionnaire-score-calculation-B - DIARY-PRD-questionnaire-score-calculation-C - DIARY-PRD-score-hht-qol-A - DIARY-PRD-score-nose-hht-A - rem:spec/prd-common-ui.md:7 - rem:spec/prd-common-ui.md:90 - rem:spec/prd-common-ui.md:92 - rem:spec/prd-common-ui.md:94 - DIARY-GUI-calendar-day-view:section:7 - DIARY-PRD-notification-portal-sent-questionnaire:section:0 - DIARY-PRD-notification-portal-sent-questionnaire:section:4 - DIARY-PRD-notification-portal-sent-questionnaire:section:5 - DIARY-PRD-participant-link-new:section:0 - DIARY-PRD-participant-disconnection:section:1 - rem:spec/prd-questionnaire-management.md:1 - rem:spec/prd-questionnaire-management.md:3 - DIARY-PRD-questionnaire-system:section:0 - DIARY-PRD-questionnaire-system:section:4 - DIARY-PRD-questionnaire-sponsor-configuration:section:0 - DIARY-PRD-questionnaire-sponsor-configuration:section:1 - DIARY-PRD-questionnaire-submission-control:section:1 - DIARY-PRD-questionnaire-change-control:section:1 - DIARY-

PRD-questionnaire-nose-hht:section:0 - DIARY-PRD-questionnaire-hht-qol:section:0 - rem:spec/prd-questionnaire-participant-workflow.md:1 - rem:spec/prd-questionnaire-participant-workflow.md:3 - DIARY-PRD-questionnaire-portal-sent-rules:section:0 - DIARY-PRD-questionnaire-portal-sent-rules:section:5 - DIARY-PRD-questionnaire-portal-sent-rules:section:6 - DIARY-GUI-questionnaire-portal-sent-workflow:section:0 - DIARY-GUI-questionnaire-portal-sent-workflow:section:8 - DIARY-GUI-questionnaire-portal-sent-workflow:section:9 - DIARY-PRD-questionnaire-session-timeout:section:0 - DIARY-PRD-questionnaire-session-timeout:section:6 - rem:spec/prd-questionnaire-versioning.md:1 - rem:spec/prd-questionnaire-versioning.md:5 - DIARY-PRD-questionnaire-sponsor-eligibility:section:0 - DIARY-PRD-action-inventory:section:1 - rem:spec/prd-score-calculation.md:3 - DIARY-PRD-questionnaire-score-calculation:section:1 - DIARY-PRD-score-hht-qol:section:0 - DIARY-PRD-score-nose-hht:section:0

9.80 Questionnaire Display Name

9.81 Questionnaire Task

root: - DIARY-GUI-participant-task-list-A - DIARY-GUI-participant-task-list-F - DIARY-GUI-participant-task-list-G - DIARY-GUI-participant-task-list-I - DIARY-GUI-participant-task-list-J - DIARY-GUI-participant-task-list-K - DIARY-GUI-participant-task-list:section:6

9.82 Questionnaire Type

9.83 Rate Limit Cooldown

root: - DIARY-PRD-linking-code-entry-errors-D - DIARY-PRD-linking-code-entry-errors-E - DIARY-PRD-linking-code-entry-errors-G

9.84 Rate Limit Threshold

root: - DIARY-PRD-linking-code-entry-errors-D - DIARY-PRD-linking-code-entry-errors-F

9.85 RBAC (Role-Based Access Control)

9.86 Record State

root: - DIARY-PRD-epistaxis-capture-standard:section:1

9.87 Reminder Schedule

root: - DIARY-PRD-notification-ongoing-epistaxis-B - DIARY-PRD-notification-ongoing-epistaxis-C - DIARY-PRD-notification-ongoing-epistaxis-D - DIARY-PRD-notification-ongoing-epistaxis-G - DIARY-PRD-notification-ongoing-epistaxis-H - DIARY-PRD-notification-ongoing-epistaxis-I - DIARY-PRD-notification-ongoing-epistaxis-J - DIARY-PRD-notification-ongoing-epistaxis:section:0

9.88 Reminder Time

root: - DIARY-PRD-notification-yesterday-entry-A - DIARY-PRD-notification-yesterday-entry-B - DIARY-PRD-notification-yesterday-entry-F - DIARY-PRD-notification-historical-gap-A - DIARY-PRD-notification-historical-gap-I - DIARY-PRD-notification-yesterday-entry:section:5
- DIARY-PRD-notification-historical-gap:section:5

9.89 Resolution

root: - DIARY-PRD-entry-overlap-resolution - DIARY-GUI-entry-overlap-resolution - DIARY-PRD-entry-overlap-resolution-E - DIARY-PRD-entry-overlap-resolution-G - DIARY-PRD-entry-overlap-resolution-H - DIARY-PRD-entry-overlap-resolution-J - DIARY-PRD-entry-overlap-resolution-N - DIARY-GUI-entry-overlap-resolution-C - DIARY-GUI-entry-overlap-resolution-D - DIARY-GUI-entry-overlap-resolution-E - DIARY-GUI-entry-overlap-resolution-F - DIARY-GUI-entry-overlap-resolution-G - DIARY-GUI-entry-overlap-resolution-I - DIARY-GUI-entry-overlap-resolution-J - DIARY-GUI-entry-overlap-resolution-L - DIARY-PRD-sla-incident-response-times-M - DIARY-PRD-sla-incident-response-times-N - DIARY-PRD-sla-incident-response-times-O - DIARY-PRD-sla-incident-response-times-P - DIARY-PRD-sla-incident-response-times-R - DIARY-PRD-sla-incident-response-times-T - DIARY-PRD-sla-customer-notification-L - DIARY-PRD-sla-root-cause-analysis-E - rem:spec/prd-diary-entry-rules.md:3 - DIARY-PRD-entry-overlap-resolution:section:0 - DIARY-PRD-entry-overlap-resolution:section:7 - DIARY-PRD-entry-overlap-resolution:section:8 - DIARY-GUI-entry-

overlap-resolution:section:0 - DIARY-GUI-entry-overlap-resolution:section:6 - DIARY-GUI-entry-overlap-resolution:section:7 - DIARY-PRD-platform-operations-monitoring:section:0 - DIARY-PRD-sla-incident-severity:section:0 - DIARY-PRD-sla-incident-response-times:section:0

9.90 Resolution Screen

9.91 Review Screen

root: - DIARY-GUI-questionnaire-portal-sent-workflow-K - DIARY-GUI-questionnaire-portal-sent-workflow-L - DIARY-GUI-questionnaire-portal-sent-workflow-M - DIARY-GUI-questionnaire-portal-sent-workflow-N - DIARY-GUI-questionnaire-portal-sent-workflow-O - DIARY-GUI-questionnaire-portal-sent-workflow-P - DIARY-GUI-questionnaire-portal-sent-workflow-R - DIARY-GUI-questionnaire-portal-sent-workflow:section:0 - DIARY-GUI-questionnaire-portal-sent-workflow:section:8 - DIARY-GUI-questionnaire-portal-sent-workflow:section:9

9.92 Role

root: - DIARY-PRD-rbac-customizable - DIARY-PRD-role-definitions - DIARY-GUI-role-switching - DIARY-PRD-help-resources-B - DIARY-PRD-session-management-F - DIARY-PRD-rbac-customizable-B - DIARY-PRD-rbac-customizable-C - DIARY-PRD-action-inventory-A - DIARY-PRD-action-inventory-B - DIARY-PRD-action-inventory-C - DIARY-PRD-role-definitions-B - DIARY-PRD-role-definitions-C - DIARY-PRD-role-definitions-D - DIARY-GUI-role-switching-A - DIARY-GUI-role-switching-B - DIARY-GUI-role-switching-C - DIARY-GUI-role-switching-D - DIARY-GUI-role-switching-E - DIARY-GUI-role-switching-F - DIARY-GUI-role-switching-G - DIARY-PRD-user-account-create-A - DIARY-PRD-user-account-create-C - DIARY-PRD-user-account-edit-B - DIARY-PRD-user-account-edit-E - DIARY-GUI-user-management-tabs-L - DIARY-GUI-user-information-modal-A - DIARY-GUI-user-information-modal-B - DIARY-GUI-user-information-modal-D - DIARY-GUI-user-information-modal-E - DIARY-GUI-user-information-modal-F - DIARY-GUI-user-information-modal-H - DIARY-GUI-administrator-dashboard-A - rem:spec/glossary-core.md:721 - DIARY-PRD-administrator-settings:section:0 - DIARY-PRD-administrator-settings:section:5 - rem:spec/prd-audit-log.md:3 - DIARY-GUI-audit-log-common:section:0 - DIARY-GUI-audit-log-study-coordinator:section:3 - rem:spec/prd-common-ui.md:53 - DIARY-PRD-help-resources:section:0 - DIARY-PRD-help-resources:section:5 - DIARY-PRD-privacy-policy:section:1 - DIARY-PRD-participant-disconnection:section:1 - DIARY-PRD-participant-mark-not-participating:section:1 - DIARY-PRD-session-management:section:0 - DIARY-PRD-session-management:section:5 - DIARY-PRD-questionnaire-system:section:4 - rem:spec/prd-rbac.md:1 - rem:spec/prd-rbac.md:3 - DIARY-PRD-rbac-customizable:section:0 - DIARY-PRD-rbac-customizable:section:1 - DIARY-PRD-action-inventory:section:0 - DIARY-PRD-action-inventory:section:1 - DIARY-PRD-action-

inventory:section:2 - DIARY-PRD-role-definitions:section:0 - DIARY-PRD-role-definitions:section:1
- DIARY-GUI-role-switching:section:0 - DIARY-GUI-role-switching:section:3 - DIARY-PRD-
score-hht-qol:section:0 - rem:spec/prd-user-account.md:3 - DIARY-PRD-user-account-create:section:1
- DIARY-PRD-user-account-edit:section:1 - DIARY-PRD-user-account-deactivate:section:1
- DIARY-PRD-user-account-reactivate:section:0 - DIARY-GUI-user-information-modal:section:3
- DIARY-GUI-administrator-dashboard:section:4

9.93 Role Selector

9.94 Row-Level Security

9.95 Second Factor

root: - DIARY-PRD-two-factor-authentication-C - DIARY-PRD-two-factor-authentication-
G - DIARY-PRD-two-factor-authentication:section:4

9.96 Session

root: - DIARY-PRD-session-management - DIARY-PRD-questionnaire-session-timeout -
DIARY-GUI-questionnaire-session-expiry - DIARY-PRD-session-management-A - DIARY-
PRD-session-management-C - DIARY-PRD-session-management-D - DIARY-PRD-session-
management-G - DIARY-PRD-questionnaire-portal-sent-rules-K - DIARY-PRD-questionnaire-
session-timeout-A - DIARY-PRD-questionnaire-session-timeout-C - DIARY-PRD-questionnaire-
session-timeout-D - DIARY-PRD-questionnaire-session-timeout-E - DIARY-PRD-questionnaire-
session-timeout-F - DIARY-PRD-questionnaire-session-timeout-G - DIARY-PRD-questionnaire-
session-timeout-H - DIARY-PRD-questionnaire-session-timeout-I - DIARY-GUI-questionnaire-
session-expiry-A - DIARY-GUI-questionnaire-session-expiry-B - DIARY-GUI-questionnaire-
session-expiry-C - DIARY-GUI-questionnaire-session-expiry-D - DIARY-GUI-questionnaire-
session-expiry-F - DIARY-GUI-questionnaire-session-expiry-G - DIARY-PRD-rbac-customizable-
B - DIARY-GUI-administrator-dashboard-I - DIARY-PRD-administrator-settings:section:5
- rem:spec/prd-portal-auth.md:3 - DIARY-PRD-password-forgot:section:5 - DIARY-PRD-
session-management:section:0 - DIARY-PRD-session-management:section:5 - rem:spec/prd-
questionnaire-participant-workflow.md:3 - DIARY-PRD-questionnaire-portal-sent-rules:section:5
- DIARY-PRD-questionnaire-session-timeout:section:0 - DIARY-PRD-questionnaire-session-
timeout:section:6 - DIARY-PRD-questionnaire-session-timeout:section:7 - DIARY-GUI-questionnaire-
session-expiry:section:0 - DIARY-GUI-questionnaire-session-expiry:section:5 - DIARY-GUI-
questionnaire-session-expiry:section:6 - DIARY-GUI-role-switching:section:3 - DIARY-PRD-
user-account-edit:section:1 - DIARY-PRD-user-account-deactivate:section:1

9.97 Session Expiry

root: - DIARY-GUI-questionnaire-session-expiry

9.98 Session Expiry Dialog

9.99 Session Expiry Notification

9.100 Session Idle Timeout

9.101 Session Timeout

root: - DIARY-PRD-questionnaire-session-timeout

9.102 Short Duration Threshold

root: - DIARY-PRD-entry-duration-check-A - DIARY-PRD-entry-duration-check-F

9.103 Site

root: - DIARY-PRD-user-account-site-assignment - DIARY-GUI-audit-log-cra-A - DIARY-GUI-audit-log-cra-B - DIARY-GUI-audit-log-cra-D - DIARY-PRD-linking-code-entry-errors-C - DIARY-PRD-evidence-patient-authentication-H - DIARY-PRD-evidence-patient-authentication-I - DIARY-PRD-notification-disconnection-E - DIARY-GUI-participant-dashboard-I - DIARY-PRD-session-management-F - DIARY-PRD-user-account-create-A - DIARY-PRD-user-account-site-assignment-D - DIARY-PRD-user-account-edit-C - DIARY-PRD-user-account-edit-E - DIARY-PRD-user-account-reactivate-B - DIARY-GUI-user-information-modal-A - DIARY-GUI-user-information-modal-D - DIARY-GUI-user-information-modal-E - DIARY-GUI-user-information-modal-G - DIARY-GUI-audit-log-cra:section:0 - DIARY-GUI-audit-log-cra:section:3 - DIARY-PRD-data-backup-and-archival:section:0 - DIARY-PRD-linking-code-entry-errors:section:4 - DIARY-PRD-evidence-patient-authentication:section:0 - DIARY-PRD-notification-disconnection:section:0 - DIARY-GUI-show-linking-code:section:2 - DIARY-PRD-session-management:section:5 - DIARY-PRD-questionnaire-localization:section:0 - DIARY-PRD-action-inventory:section:1

- rem:spec/prd-user-account.md:3 - DIARY-PRD-user-account-create:section:0 - DIARY-PRD-user-account-create:section:1 - DIARY-PRD-user-account-site-assignment:section:0
- DIARY-PRD-user-account-site-assignment:section:1 - DIARY-PRD-user-account-edit:section:1
- DIARY-PRD-user-account-deactivate:section:1 - DIARY-PRD-user-account-reactivate:section:0
- DIARY-GUI-user-information-modal:section:3

9.104 Sponsor

root: - DIARY-PRD-questionnaire-sponsor-configuration - DIARY-PRD-questionnaire-sponsor-eligibility - DIARY-PRD-administrator-settings-A - DIARY-PRD-administrator-settings-F - DIARY-PRD-administrator-settings-G - DIARY-PRD-configuration-precedence-A - DIARY-PRD-configuration-precedence-B - DIARY-PRD-configuration-precedence-C - DIARY-PRD-configuration-precedence-D - DIARY-PRD-configuration-precedence-E - DIARY-PRD-configuration-precedence-F - DIARY-PRD-data-backup-and-archival-F - DIARY-PRD-linking-code-entry-errors-F - DIARY-PRD-linking-code-entry-errors-G - DIARY-PRD-linking-code-entry-errors-H - DIARY-PRD-linking-code-entry-errors-I - DIARY-PRD-linking-code-entry-errors-K - DIARY-PRD-entry-time-restrictions-H - DIARY-PRD-entry-time-restrictions-I - DIARY-PRD-entry-time-restrictions-K - DIARY-PRD-entry-duration-check-F - DIARY-PRD-entry-duration-check-G - DIARY-PRD-entry-duration-check-H - DIARY-PRD-epistaxis-capture-standard-F - DIARY-PRD-evidence-patient-authentication-C - DIARY-PRD-evidence-geolocation-C - DIARY-PRD-evidence-geolocation-N - DIARY-PRD-help-resources-A - DIARY-PRD-help-resources-D - DIARY-PRD-mobile-application-F - DIARY-PRD-mobile-offline-first-D - DIARY-PRD-diary-start-day-G - DIARY-PRD-privacy-policy-A - DIARY-PRD-application-lock-O - DIARY-PRD-application-lock-P - DIARY-PRD-application-lock-Q - DIARY-PRD-application-lock-R - DIARY-GUI-mobile-navigation-A - DIARY-GUI-participant-task-list-A - DIARY-GUI-participant-task-list-I - DIARY-GUI-participant-task-list-J - DIARY-PRD-notification-disconnection-B - DIARY-PRD-notification-disconnection-D - DIARY-PRD-notification-disconnection-E - DIARY-GUI-participation-status-badge-B - DIARY-GUI-participation-status-badge-H - DIARY-PRD-notification-incomplete-record-lock-D - DIARY-PRD-notification-incomplete-record-lock-E - DIARY-PRD-notification-yesterday-entry-F - DIARY-PRD-notification-ongoing-epistaxis-I - DIARY-PRD-notification-ongoing-epistaxis-J - DIARY-PRD-notification-historical-gap-I - DIARY-PRD-notification-historical-gap-J - DIARY-PRD-participant-registration-A - DIARY-PRD-participant-registration-B - DIARY-PRD-participant-link-new-C - DIARY-PRD-participant-disconnection-C - DIARY-PRD-participant-disconnection-E - DIARY-PRD-participant-disconnection-F - DIARY-PRD-participant-reconnection-C - DIARY-PRD-participant-reconnection-E - DIARY-PRD-participant-reconnection-F - DIARY-PRD-participant-mark-not-participating-C - DIARY-PRD-participant-mark-not-participating-D - DIARY-PRD-participant-reactivate-C - DIARY-PRD-ancillary-platform-services-L - DIARY-PRD-two-factor-authentication-A - DIARY-PRD-two-factor-authentication-B - DIARY-PRD-two-factor-authentication-G - DIARY-PRD-two-factor-authentication-H - DIARY-PRD-password-forgot-A - DIARY-GUI-password-forgot-workflow-A - DIARY-GUI-password-forgot-workflow-R - DIARY-PRD-session-management-B - DIARY-PRD-session-management-G - DIARY-PRD-questionnaire-system-E - DIARY-

PRD-questionnaire-sponsor-configuration-A - DIARY-PRD-questionnaire-sponsor-configuration-B - DIARY-PRD-questionnaire-sponsor-configuration-C - DIARY-PRD-questionnaire-sponsor-configuration-D - DIARY-PRD-questionnaire-sponsor-configuration-E - DIARY-PRD-questionnaire-sponsor-eligibility-A - DIARY-PRD-questionnaire-sponsor-eligibility-B - DIARY-PRD-questionnaire-sponsor-eligibility-C - DIARY-PRD-questionnaire-sponsor-eligibility-D - DIARY-PRD-questionnaire-sponsor-eligibility-E - DIARY-PRD-questionnaire-sponsor-eligibility-F - DIARY-PRD-questionnaire-sponsor-eligibility-G - DIARY-PRD-questionnaire-sponsor-eligibility-J - DIARY-PRD-questionnaire-sponsor-eligibility-L - DIARY-PRD-questionnaire-sponsor-eligibility-N - DIARY-PRD-action-inventory-D - DIARY-PRD-role-definitions-A - DIARY-PRD-sla-service-availability-K - DIARY-PRD-sla-service-availability-L - DIARY-PRD-sla-corrective-preventive-C - DIARY-PRD-sla-corrective-preventive-O - DIARY-PRD-sla-data-recovery-I - DIARY-PRD-sla-chronic-failure-escalation-F - DIARY-PRD-sla-chronic-failure-escalation-G - DIARY-PRD-sla-chronic-failure-escalation-J - DIARY-PRD-sla-regulatory-event-support-C - DIARY-PRD-sla-regulatory-event-support-E - DIARY-GUI-administrator-dashboard-A - DIARY-GUI-administrator-dashboard-I - rem:spec/glossary-core.md:721 - rem:spec/glossary-core.md:738 - rem:spec/glossary-core.md:740 - rem:spec/glossary-core.md:747 - rem:spec/prd-administrator-settings.md:3 - DIARY-PRD-administrator-settings:section:0 - DIARY-PRD-administrator-settings:section:5 - rem:spec/prd-common-ui.md:3 - rem:spec/prd-common-ui.md:42 - rem:spec/prd-common-ui.md:49 - rem:spec/prd-common-ui.md:51 - rem:spec/prd-common-ui.md:63 - DIARY-PRD-configuration-precedence:section:0 - DIARY-PRD-configuration-precedence:section:1 - DIARY-PRD-configuration-precedence:section:2 - DIARY-PRD-data-backup-and-archival:section:0 - DIARY-PRD-linking-code-entry-errors:section:4 - DIARY-GUI-join-study-screen:section:1 - DIARY-GUI-linking-confirmation:section:1 - rem:spec/prd-evidence-records.md:3 - DIARY-PRD-evidence-geolocation:section:0 - DIARY-PRD-evidence-email-identity:section:0 - DIARY-PRD-help-resources:section:0 - DIARY-PRD-help-resources:section:1 - DIARY-PRD-help-resources:section:5 - rem:spec/prd-mobile-app.md:3 - DIARY-PRD-mobile-application:section:0 - DIARY-PRD-mobile-application:section:1 - DIARY-PRD-mobile-offline-first:section:1 - DIARY-PRD-diary-start-day:section:1 - DIARY-PRD-privacy-policy:section:0 - DIARY-PRD-privacy-policy:section:1 - DIARY-PRD-application-lock:section:0 - DIARY-PRD-application-lock:section:6 - DIARY-PRD-notification-disconnection:section:0 - DIARY-PRD-notification-disconnection:section:1 - DIARY-GUI-participation-status-badge:section:6 - DIARY-PRD-notification-incomplete-record-lock:section:0 - DIARY-PRD-notification-portal-sent-questionnaire:section:0 - DIARY-PRD-notification-portal-sent-questionnaire:section:4 - DIARY-PRD-notification-yesterday-entry:section:5 - DIARY-PRD-notification-ongoing-epistaxis:section:0 - DIARY-PRD-notification-ongoing-epistaxis:section:5 - DIARY-PRD-notification-historical-gap:section:5 - rem:spec/prd-participant.md:3 - DIARY-PRD-linking-code-lifecycle:section:0 - DIARY-PRD-linking-code-lifecycle:section:6 - DIARY-PRD-participant-registration:section:0 - DIARY-PRD-participant-registration:section:1 - DIARY-PRD-participant-link-new:section:0 - DIARY-PRD-participant-link-new:section:1 - DIARY-PRD-participant-disconnection:section:0 - DIARY-PRD-participant-disconnection:section:1 - DIARY-PRD-participant-reconnection:section:0 - DIARY-PRD-participant-reconnection:section:1 - DIARY-PRD-participant-mark-not-participating:section:0 - DIARY-PRD-participant-mark-not-participating:section:1 - DIARY-PRD-participant-reactivate:section:0 - DIARY-PRD-ancillary-platform-services:section:0 - rem:spec/prd-portal-auth.md:1 - rem:spec/prd-portal-auth.md:3

- DIARY-PRD-password-requirements:section:0 - DIARY-PRD-two-factor-authentication:section:0
- DIARY-PRD-two-factor-authentication:section:4 - DIARY-PRD-session-management:section:0
- DIARY-PRD-session-management:section:5 - rem:spec/prd-questionnaire-management.md:3
- DIARY-PRD-questionnaire-system:section:4 - DIARY-PRD-questionnaire-sponsor-configuration:section:0
- DIARY-PRD-questionnaire-sponsor-configuration:section:1 - DIARY-PRD-questionnaire-submission-control:section:1 - DIARY-PRD-questionnaire-portal-sent-rules:section:0 - DIARY-PRD-questionnaire-session-timeout:section:6 - rem:spec/prd-questionnaire-versioning.md:1
- rem:spec/prd-questionnaire-versioning.md:3 - DIARY-PRD-questionnaire-versioning:section:0
- DIARY-PRD-questionnaire-sponsor-eligibility:section:0 - rem:spec/prd-rbac.md:3 - DIARY-PRD-rbac-customizable:section:1 - DIARY-PRD-action-inventory:section:0 - DIARY-PRD-action-inventory:section:2 - DIARY-PRD-role-definitions:section:0 - DIARY-PRD-role-definitions:section:0
- DIARY-GUI-role-switching:section:0 - rem:spec/prd-sla.md:3 - DIARY-PRD-sla-disaster-recovery:section:0 - DIARY-PRD-sla-root-cause-analysis:section:0 - DIARY-PRD-sla-data-recovery:section:0 - DIARY-PRD-sla-chronic-failure-escalation:section:0 - DIARY-PRD-sla-regulatory-event-support:section:0 - rem:spec/prd-user-account.md:3 - DIARY-PRD-user-account-create:section:1 - DIARY-PRD-user-account-deactivate:section:1 - DIARY-GUI-administrator-dashboard:section:4

9.105 Sponsor Portal

root: - rem:spec/prd-common-ui.md:3 - rem:spec/prd-common-ui.md:49 - rem:spec/prd-common-ui.md:51 - rem:spec/prd-common-ui.md:63

9.106 Sponsor-Level Action Extension

9.107 Study Coordinator

root: - DIARY-GUI-audit-log-study-coordinator - DIARY-GUI-audit-log-cra-C - DIARY-GUI-audit-log-cra-D - DIARY-PRD-help-resources-A - DIARY-GUI-participant-task-list-A - DIARY-PRD-notification-portal-sent-questionnaire-D - DIARY-PRD-linking-code-lifecycle-A - DIARY-PRD-participant-link-new-A - DIARY-PRD-participant-link-new-B - DIARY-PRD-participant-disconnection-A - DIARY-PRD-participant-reconnection-A - DIARY-PRD-participant-mark-not-participating-A - DIARY-PRD-participant-reactivate-A - DIARY-GUI-participant-dashboard-L - DIARY-GUI-show-linking-code-A - DIARY-GUI-show-linking-code-C - DIARY-GUI-link-participant-flow-A - DIARY-GUI-link-participant-flow-B - DIARY-GUI-link-participant-flow-C - DIARY-PRD-role-definitions-A - DIARY-PRD-role-definitions-B - DIARY-PRD-user-account-create-C - DIARY-GUI-audit-log-study-coordinator:section:0 - DIARY-GUI-audit-log-study-coordinator:section:3 - DIARY-GUI-audit-log-cra:section:0 - DIARY-GUI-audit-log-cra:section:3

- rem:spec/prd-common-ui.md:63 - rem:spec/prd-common-ui.md:77 - rem:spec/prd-common-ui.md:94 - DIARY-PRD-help-resources:section:5 - DIARY-GUI-participant-task-list:section:6 - DIARY-PRD-notification-portal-sent-questionnaire:section:0 - DIARY-PRD-notification-portal-sent-questionnaire:section:4 - rem:spec/prd-participant.md:3 - DIARY-PRD-linking-code-lifecycle:section:6 - DIARY-PRD-participant-link-new:section:1 - DIARY-PRD-participant-mark-not-participating:section:0 - DIARY-PRD-participant-reactivate:section:0 - DIARY-GUI-participant-dashboard:section:6 - DIARY-GUI-show-linking-code:section:0 - DIARY-GUI-link-participant-flow:section:0 - DIARY-PRD-questionnaire-portal-sent-rules:section:0 - DIARY-PRD-questionnaire-portal-sent-rules:section:5 - DIARY-PRD-rbac-customizable:section:1 - DIARY-PRD-user-account-reactivate:section:0 - DIARY-GUI-user-information-modal:section:3

9.108 Submission

root: - DIARY-PRD-questionnaire-submission-control - DIARY-PRD-evidence-bitcoin-timestamp-H - DIARY-PRD-evidence-device-fingerprint-A - DIARY-PRD-evidence-device-fingerprint-D - DIARY-PRD-evidence-patient-authentication-J - DIARY-PRD-evidence-patient-authentication-M - DIARY-PRD-evidence-geolocation-F - DIARY-PRD-evidence-email-identity-B - DIARY-GUI-participant-task-list-J - DIARY-GUI-password-forgot-workflow-E - DIARY-PRD-questionnaire-sponsor-configuration-C - DIARY-PRD-questionnaire-sponsor-configuration-D - DIARY-PRD-questionnaire-submission-control-B - DIARY-PRD-questionnaire-portal-sent-rules-C - DIARY-PRD-questionnaire-portal-sent-rules-H - DIARY-PRD-questionnaire-portal-sent-rules-J - DIARY-PRD-questionnaire-portal-sent-rules-K - DIARY-PRD-questionnaire-portal-sent-rules-L - DIARY-PRD-questionnaire-portal-sent-rules-M - DIARY-PRD-questionnaire-portal-sent-rules-N - DIARY-GUI-questionnaire-portal-sent-workflow-Q - DIARY-PRD-sla-data-recovery-M - DIARY-PRD-reason-field-constraints-A - rem:spec/prd-common-ui.md:35 - DIARY-PRD-evidence-device-fingerprint:section:0 - DIARY-PRD-mobile-application:section:1 - DIARY-PRD-notification-portal-sent-questionnaire:section:4 - DIARY-GUI-password-forgot-workflow:section:0 - rem:spec/prd-questionnaire-management.md:3 - DIARY-PRD-questionnaire-sponsor-configuration:section:1 - DIARY-PRD-questionnaire-submission-control:section:1 - rem:spec/prd-questionnaire-participant-workflow.md:3 - DIARY-PRD-questionnaire-portal-sent-rules:section:0 - DIARY-PRD-questionnaire-portal-sent-rules:section:5 - DIARY-GUI-questionnaire-portal-sent-workflow:section:0 - DIARY-GUI-questionnaire-portal-sent-workflow:section:8 - DIARY-GUI-questionnaire-portal-sent-workflow:section:9 - DIARY-PRD-questionnaire-score-calculation:section:1

9.109 System Notice Area

root: - DIARY-GUI-main-screen-layout-A - DIARY-GUI-main-screen-layout-B - DIARY-GUI-main-screen-layout-C - DIARY-GUI-main-screen-layout:section:5

9.110 Task List

root: - DIARY-GUI-participant-task-list - DIARY-GUI-main-screen-layout-A - DIARY-GUI-main-screen-layout-D - DIARY-GUI-participant-task-list-A - DIARY-GUI-participant-task-list-I - DIARY-GUI-participant-task-list-Q - DIARY-GUI-participant-task-list-R - DIARY-GUI-main-screen-layout:section:5 - rem:spec/prd-mobile-notifications.md:3 - DIARY-GUI-participant-task-list:section:0 - DIARY-PRD-notification-yesterday-entry:section:5

9.111 Time Picker

root: - DIARY-GUI-epistaxis-record-E - DIARY-GUI-epistaxis-record-J - DIARY-GUI-epistaxis-record:section:5

9.112 Timeout Warning Notification

root: - DIARY-PRD-questionnaire-session-timeout-E - DIARY-PRD-questionnaire-session-timeout-J - DIARY-GUI-questionnaire-session-expiry-A - DIARY-PRD-questionnaire-session-timeout:section:7 - DIARY-GUI-questionnaire-session-expiry:section:0

9.113 Trial

root: - DIARY-PRD-privacy-policy - DIARY-PRD-entry-time-restrictions-M - DIARY-PRD-evidence-timestamp-attestation-A - DIARY-PRD-evidence-timestamp-attestation-C - DIARY-PRD-evidence-timestamp-archival-A - DIARY-PRD-evidence-geolocation-C - DIARY-PRD-evidence-geolocation-H - DIARY-PRD-evidence-geolocation-M - DIARY-PRD-diary-start-day-G - DIARY-GUI-mobile-navigation-I - DIARY-GUI-mobile-navigation-J - DIARY-GUI-participation-status-badge-A - DIARY-GUI-participation-status-badge-B - DIARY-PRD-notification-historical-gap-E - DIARY-PRD-questionnaire-change-control-B - DIARY-PRD-questionnaire-sponsor-eligibility-A - DIARY-PRD-questionnaire-sponsor-eligibility-B - DIARY-PRD-questionnaire-sponsor-eligibility-C - DIARY-PRD-sla-service-availability-J - rem:spec/glossary-core.md:721 - rem:spec/prd-common-ui.md:61 - rem:spec/prd-common-ui.md:63 - rem:spec/prd-common-ui.md:77 - DIARY-PRD-data-backup-and-archival:section:0 - DIARY-PRD-linking-code-entry-errors:section:4 - DIARY-GUI-linking-confirmation:section:1 - DIARY-PRD-entry-time-restrictions:section:0 - DIARY-PRD-entry-time-restrictions:section:4 - rem:spec/prd-evidence-records.md:3 - DIARY-PRD-evidence-timestamp-attestation:section:1 - DIARY-PRD-evidence-bitcoin-timestamp:section:0 - DIARY-PRD-evidence-timestamp-archival:section:1 - DIARY-PRD-evidence-device-fingerprint:section:0 - DIARY-PRD-evidence-patient-authentication:section:0 - DIARY-PRD-evidence-email-identity:section:0

- DIARY-PRD-mobile-application:section:0 - DIARY-PRD-mobile-application:section:1 - DIARY-PRD-diary-start-day:section:0 - DIARY-PRD-diary-start-day:section:1 - DIARY-PRD-privacy-policy:section:1 - DIARY-GUI-main-screen-layout:section:5 - DIARY-GUI-mobile-navigation:section:5 - DIARY-GUI-participation-status-badge:section:0 - DIARY-GUI-participation-status-badge:section:6 - DIARY-PRD-notification-yesterday-entry:section:0 - DIARY-PRD-notification-ongoing-epistaxis:section:5 - DIARY-PRD-notification-ongoing-epistaxis:section:5 - DIARY-PRD-notification-historical-gap:section:5 - DIARY-PRD-participant-registration:section:0 - DIARY-PRD-participant-registration:section:1 - DIARY-PRD-participant-disconnection:section:0 - DIARY-PRD-participant-disconnection:section:1 - DIARY-PRD-participant-reconnection:section:0 - DIARY-PRD-participant-reconnection:section:1 - DIARY-PRD-participant-mark-not-participating:section:0 - DIARY-PRD-participant-mark-not-participating:section:1 - DIARY-PRD-participant-reactivate:section:0 - DIARY-PRD-participant-reactivate:section:1 - DIARY-GUI-participant-dashboard:section:0 - DIARY-PRD-platform-operations-monitoring:section:0 - DIARY-PRD-ancillary-platform-services:section:0 - DIARY-PRD-two-factor-authentication:section:4 - rem:spec/prd-questionnaire-management.md:3 - DIARY-PRD-questionnaire-system:section:4 - DIARY-PRD-questionnaire-submission-control:section:1 - DIARY-PRD-questionnaire-change-control:section:0 - DIARY-PRD-questionnaire-change-control:section:1 - DIARY-PRD-rbac-customizable:section:1 - DIARY-PRD-action-inventory:section:1 - DIARY-PRD-architecture-decision-docs:section:0 - DIARY-PRD-sla-service-availability:section:0 - DIARY-PRD-sla-disaster-recovery:section:0 - DIARY-PRD-sla-customer-notification:section:0 - DIARY-PRD-sla-data-recovery:section:0 - DIARY-PRD-sla-chronic-failure-escalation:section:0 - DIARY-PRD-sla-regulatory-event-support:section:0 - DIARY-PRD-user-account-site-assignment:section:0

9.114 Trial Start

root: - DIARY-PRD-questionnaire-system-C - DIARY-PRD-questionnaire-system-E - DIARY-PRD-questionnaire-system:section:4

9.115 True Copy

root: - DIARY-PRD-questionnaire-nose-hht-B - DIARY-PRD-questionnaire-nose-hht-C - DIARY-PRD-questionnaire-hht-qol-B - DIARY-PRD-questionnaire-hht-qol-C - DIARY-PRD-questionnaire-nose-hht:section:1 - DIARY-PRD-questionnaire-hht-qol:section:1 - DIARY-PRD-questionnaire-score-calculation:section:1

9.116 User

root: - DIARY-PRD-user-account-create - DIARY-PRD-user-account-edit - DIARY-PRD-user-account-deactivate - DIARY-PRD-user-account-reactivate - DIARY-GUI-user-management-

tabs - DIARY-GUI-user-account-deactivate - DIARY-GUI-user-account-reactivate - DIARY-GUI-user-information-modal - DIARY-GUI-audit-log-common-A - DIARY-GUI-audit-log-common-C - DIARY-GUI-audit-log-administrator-A - DIARY-GUI-linking-confirmation-B - DIARY-PRD-help-resources-B - DIARY-PRD-help-resources-C - DIARY-PRD-help-resources-D - DIARY-PRD-help-resources-E - DIARY-PRD-mobile-application-E - DIARY-PRD-mobile-application-F - DIARY-PRD-diary-start-day-A - DIARY-GUI-mobile-navigation-A - DIARY-GUI-mobile-navigation-E - DIARY-GUI-mobile-navigation-F - DIARY-GUI-mobile-navigation-I - DIARY-GUI-participation-status-badge-A - DIARY-PRD-notification-historical-gap-G - DIARY-GUI-participant-dashboard-F - DIARY-PRD-password-requirements-E - DIARY-PRD-password-requirements-F - DIARY-PRD-two-factor-authentication-C - DIARY-PRD-two-factor-authentication-F - DIARY-PRD-password-forgot-A - DIARY-PRD-password-forgot-C - DIARY-PRD-password-forgot-E - DIARY-PRD-password-forgot-F - DIARY-PRD-password-forgot-G - DIARY-PRD-password-forgot-I - DIARY-GUI-password-forgot-workflow-K - DIARY-GUI-password-forgot-workflow-L - DIARY-GUI-password-forgot-workflow-S - DIARY-PRD-session-management-A - DIARY-PRD-session-management-B - DIARY-PRD-session-management-D - DIARY-PRD-session-management-E - DIARY-PRD-session-management-F - DIARY-PRD-questionnaire-versioning-I - DIARY-PRD-rbac-customizable-A - DIARY-PRD-rbac-customizable-B - DIARY-PRD-rbac-customizable-C - DIARY-PRD-action-inventory-B - DIARY-PRD-action-inventory-C - DIARY-GUI-role-switching-A - DIARY-GUI-role-switching-B - DIARY-GUI-role-switching-C - DIARY-GUI-role-switching-D - DIARY-GUI-role-switching-E - DIARY-PRD-user-account-create-A - DIARY-PRD-user-account-create-C - DIARY-PRD-user-account-activation-workflow-A - DIARY-PRD-user-account-activation-workflow-B - DIARY-PRD-user-account-activation-workflow-C - DIARY-PRD-user-account-activation-workflow-D - DIARY-PRD-user-account-activation-workflow-E - DIARY-PRD-user-account-activation-workflow-G - DIARY-PRD-user-account-activation-workflow-H - DIARY-PRD-user-account-site-assignment-D - DIARY-PRD-user-account-activation-resend-A - DIARY-PRD-user-account-activation-resend-B - DIARY-PRD-user-account-activation-resend-C - DIARY-PRD-user-account-edit-A - DIARY-PRD-user-account-edit-D - DIARY-PRD-user-account-edit-E - DIARY-PRD-user-account-edit-F - DIARY-PRD-user-account-edit-G - DIARY-PRD-user-account-deactivate-A - DIARY-PRD-user-account-deactivate-B - DIARY-PRD-user-account-deactivate-C - DIARY-PRD-user-account-deactivate-D - DIARY-PRD-user-account-deactivate-E - DIARY-PRD-user-account-deactivate-F - DIARY-PRD-user-account-reactivate-A - DIARY-PRD-user-account-reactivate-B - DIARY-PRD-user-account-reactivate-C - DIARY-PRD-user-account-reactivate-D - DIARY-GUI-user-management-tabs-B - DIARY-GUI-user-management-tabs-C - DIARY-GUI-user-management-tabs-F - DIARY-GUI-user-management-tabs-G - DIARY-GUI-user-management-tabs-H - DIARY-GUI-user-management-tabs-I - DIARY-GUI-user-management-tabs-J - DIARY-GUI-user-management-tabs-K - DIARY-GUI-user-management-tabs-L - DIARY-GUI-user-management-tabs-M - DIARY-GUI-user-management-tabs-N - DIARY-GUI-user-account-deactivate-A - DIARY-GUI-user-account-deactivate-D - DIARY-GUI-user-account-deactivate-E - DIARY-GUI-user-account-reactivate-A - DIARY-GUI-user-account-reactivate-D - DIARY-GUI-user-account-reactivate-E - DIARY-GUI-user-information-modal-A - DIARY-GUI-user-information-modal-B - DIARY-GUI-user-information-modal-C - DIARY-GUI-user-information-modal-D - DIARY-GUI-user-information-modal-E - DIARY-GUI-user-

information-modal-I - DIARY-GUI-user-information-modal-J - DIARY-GUI-user-information-modal-K - DIARY-GUI-user-information-modal-L - DIARY-GUI-user-information-modal-M - DIARY-GUI-administrator-dashboard-A - DIARY-GUI-administrator-dashboard-E - rem:spec/glossary-core.md:721 - rem:spec/glossary-core.md:747 - rem:spec/prd-audit-log.md:3 - DIARY-GUI-audit-log-administrator:section:0 - DIARY-GUI-audit-log-administrator:section:1 - rem:spec/prd-common-ui.md:7 - rem:spec/prd-common-ui.md:35 - rem:spec/prd-common-ui.md:42 - rem:spec/prd-common-ui.md:49 - rem:spec/prd-common-ui.md:51 - rem:spec/prd-common-ui.md:53 - rem:spec/prd-device-linking.md:3 - DIARY-PRD-linking-code-entry-errors:section:4 - DIARY-GUI-join-study-screen:section:0 - DIARY-GUI-linking-confirmation:section:1 - DIARY-PRD-evidence-patient-authentication:section:0 - DIARY-PRD-help-resources:section:0 - DIARY-PRD-help-resources:section:1 - DIARY-PRD-help-resources:section:5 - DIARY-PRD-mobile-application:section:1 - rem:spec/prd-mobile-navigation.md:3 - DIARY-GUI-mobile-navigation:section:0 - DIARY-GUI-mobile-navigation:section:5 - DIARY-GUI-participation-status-badge:section:6 - DIARY-PRD-notification-historical-gap:section:5 - DIARY-PRD-two-factor-authentication:section:4 - DIARY-PRD-password-forgot:section:0 - DIARY-PRD-password-forgot:section:5 - DIARY-GUI-password-forgot-workflow:section:0 - DIARY-GUI-password-forgot-workflow:section:6 - DIARY-PRD-session-management:section:5 - DIARY-PRD-questionnaire-versioning:section:0 - DIARY-PRD-action-inventory:section:1 - rem:spec/prd-user-account.md:1 - rem:spec/prd-user-account.md:3 - DIARY-PRD-user-account-create:section:0 - DIARY-PRD-user-account-create:section:1 - DIARY-PRD-user-account-activation-workflow:section:0 - DIARY-PRD-user-account-activation-workflow:section:6 - DIARY-PRD-user-account-site-assignment:section:1 - DIARY-PRD-user-account-activation-resend:section:0 - DIARY-PRD-user-account-activation-resend:section:1 - DIARY-PRD-user-account-edit:section:0 - DIARY-PRD-user-account-edit:section:1 - DIARY-PRD-user-account-deactivate:section:0 - DIARY-PRD-user-account-reactivate:section:0 - DIARY-GUI-user-management-tabs:section:0 - DIARY-GUI-user-management-tabs:section:5 - DIARY-GUI-user-account-reactivate:section:0 - DIARY-GUI-user-account-reactivate:section:3 - DIARY-GUI-user-information-modal:section:0 - DIARY-GUI-user-information-modal:section:3 - DIARY-GUI-administrator-dashboard:section:0 - DIARY-GUI-administrator-dashboard:section:4

9.117 User Account

root: - DIARY-PRD-user-account-create - DIARY-PRD-user-account-edit - DIARY-PRD-user-account-deactivate - DIARY-PRD-user-account-reactivate - DIARY-GUI-user-account-deactivate - DIARY-GUI-user-account-reactivate

9.118 User Information Modal

root: - DIARY-GUI-user-information-modal

9.119 User Menu

9.120 User Session

9.121 Verification Code

root: - DIARY-PRD-two-factor-authentication-B - DIARY-PRD-two-factor-authentication-C - DIARY-PRD-two-factor-authentication-D - DIARY-PRD-two-factor-authentication-E - DIARY-PRD-two-factor-authentication-F - DIARY-PRD-two-factor-authentication:section:4

9.122 Verification Link

root: - DIARY-PRD-password-forgot-B - DIARY-PRD-password-forgot-D - DIARY-PRD-password-forgot-E - DIARY-PRD-password-forgot-F - DIARY-PRD-password-forgot-I - DIARY-GUI-password-forgot-workflow-H - DIARY-GUI-password-forgot-workflow-L - DIARY-GUI-password-forgot-workflow-S - DIARY-GUI-password-forgot-workflow-T - DIARY-PRD-user-account-activation-workflow-E - DIARY-PRD-user-account-activation-workflow-F - DIARY-PRD-user-account-activation-workflow-G - DIARY-PRD-user-account-activation-workflow-H - DIARY-PRD-user-account-edit-F - DIARY-PRD-password-forgot:section:0 - DIARY-GUI-password-forgot-workflow:section:0 - DIARY-PRD-user-account-activation-resend:section:1

9.123 Yesterday Reminder Task

root: - DIARY-GUI-participant-task-list-A - DIARY-GUI-participant-task-list-L - DIARY-GUI-participant-task-list-P - DIARY-GUI-participant-task-list:section:6 - DIARY-PRD-notification-yesterday-entry:section:0