(a) Align timestamps to the output frame grid

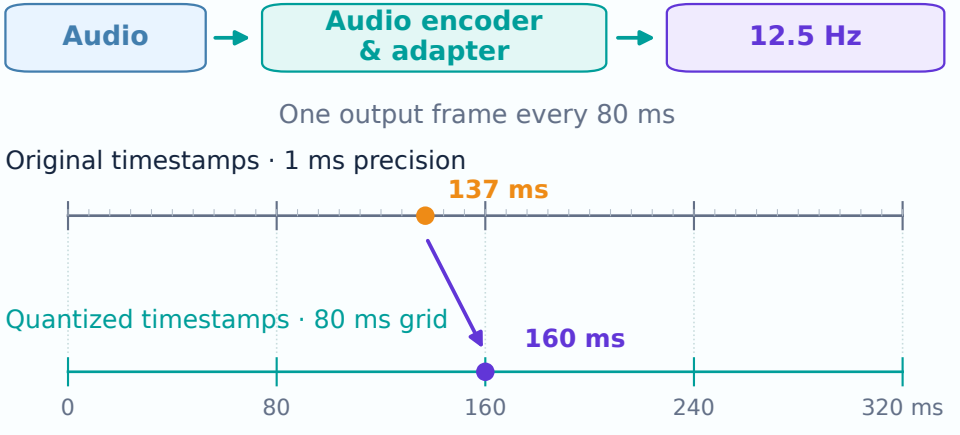

Example: 137 ms → 160 ms | Targets follow the 80 ms grid

(b) Training loss with timestamp quantization

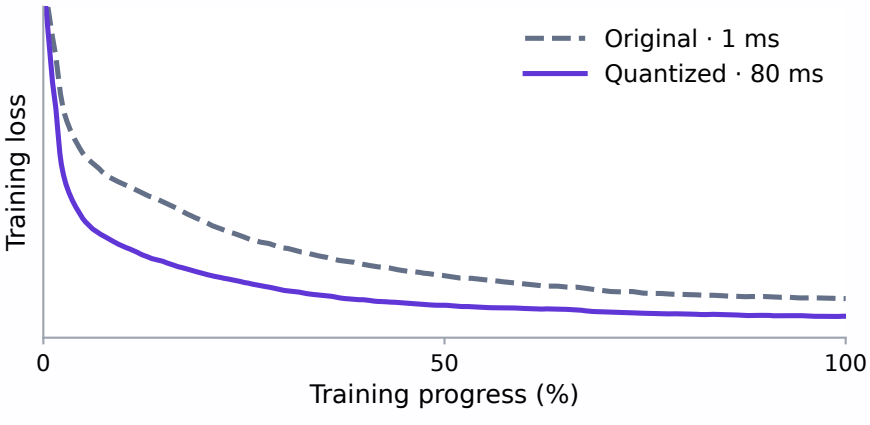

Faster loss reduction with frame-aligned targets