
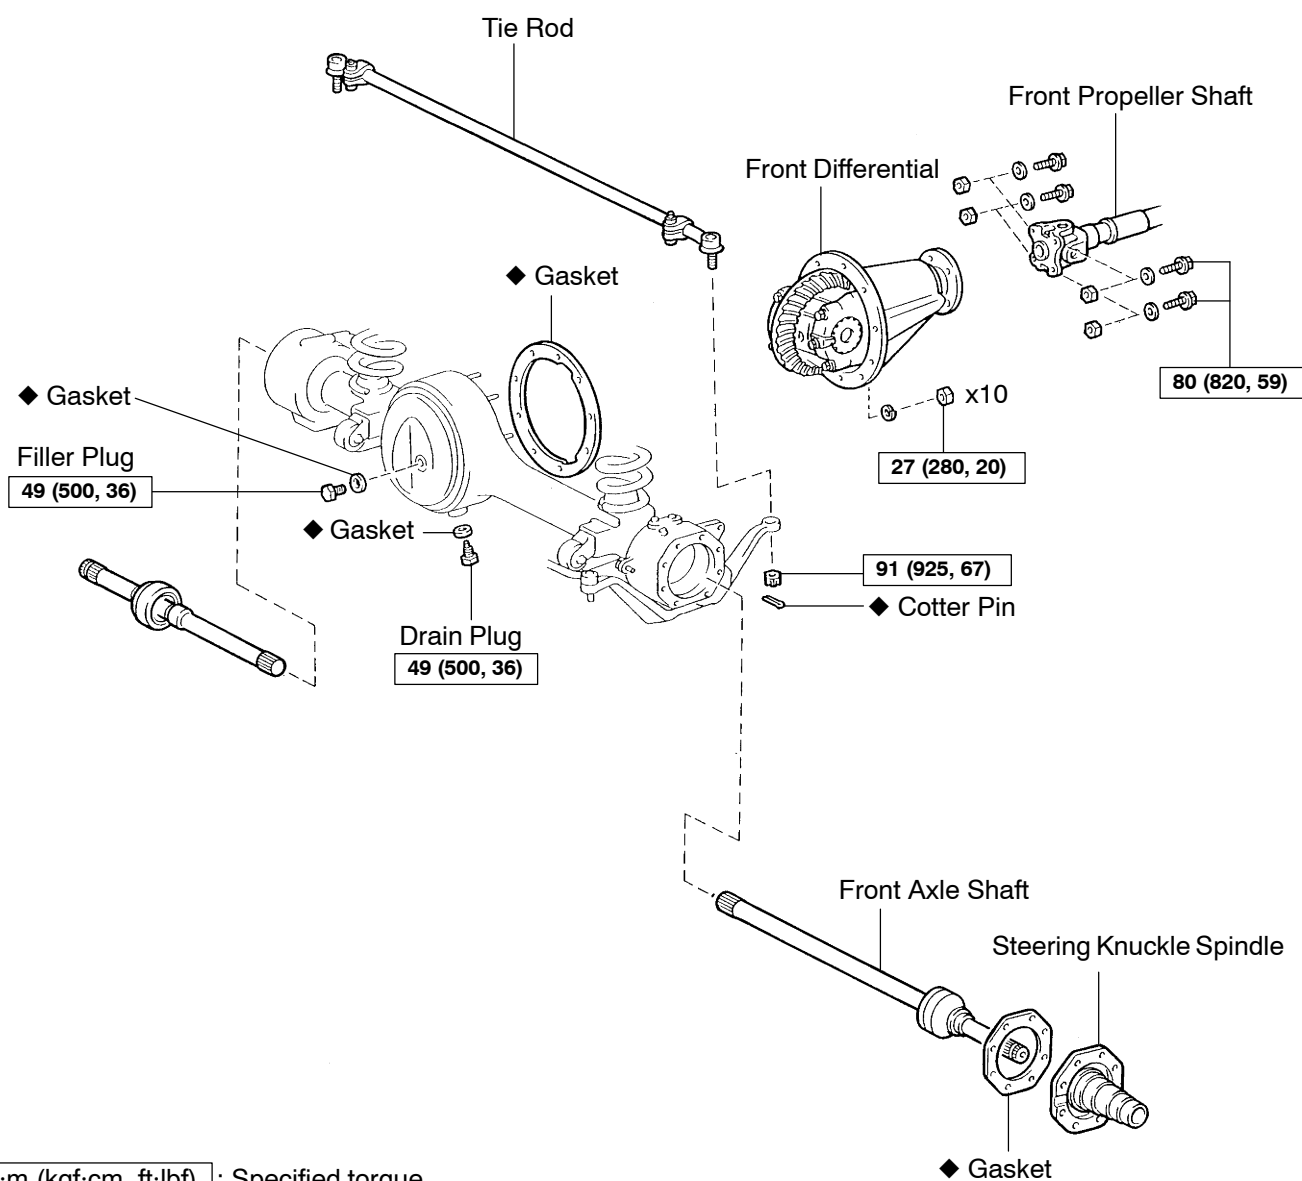


FRONT DIFFERENTIAL CARRIER (Rigid Front Suspension) COMPONENTS

SA1BX-01

w/ Diff. Lock

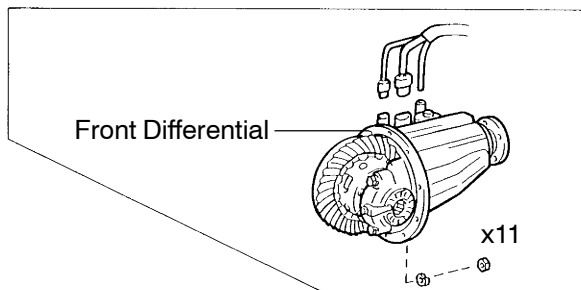


N·m (kgf·cm, ft·lbf) : Specified torque

◆ Non-reusable part

F05945

w/o Diff. Lock

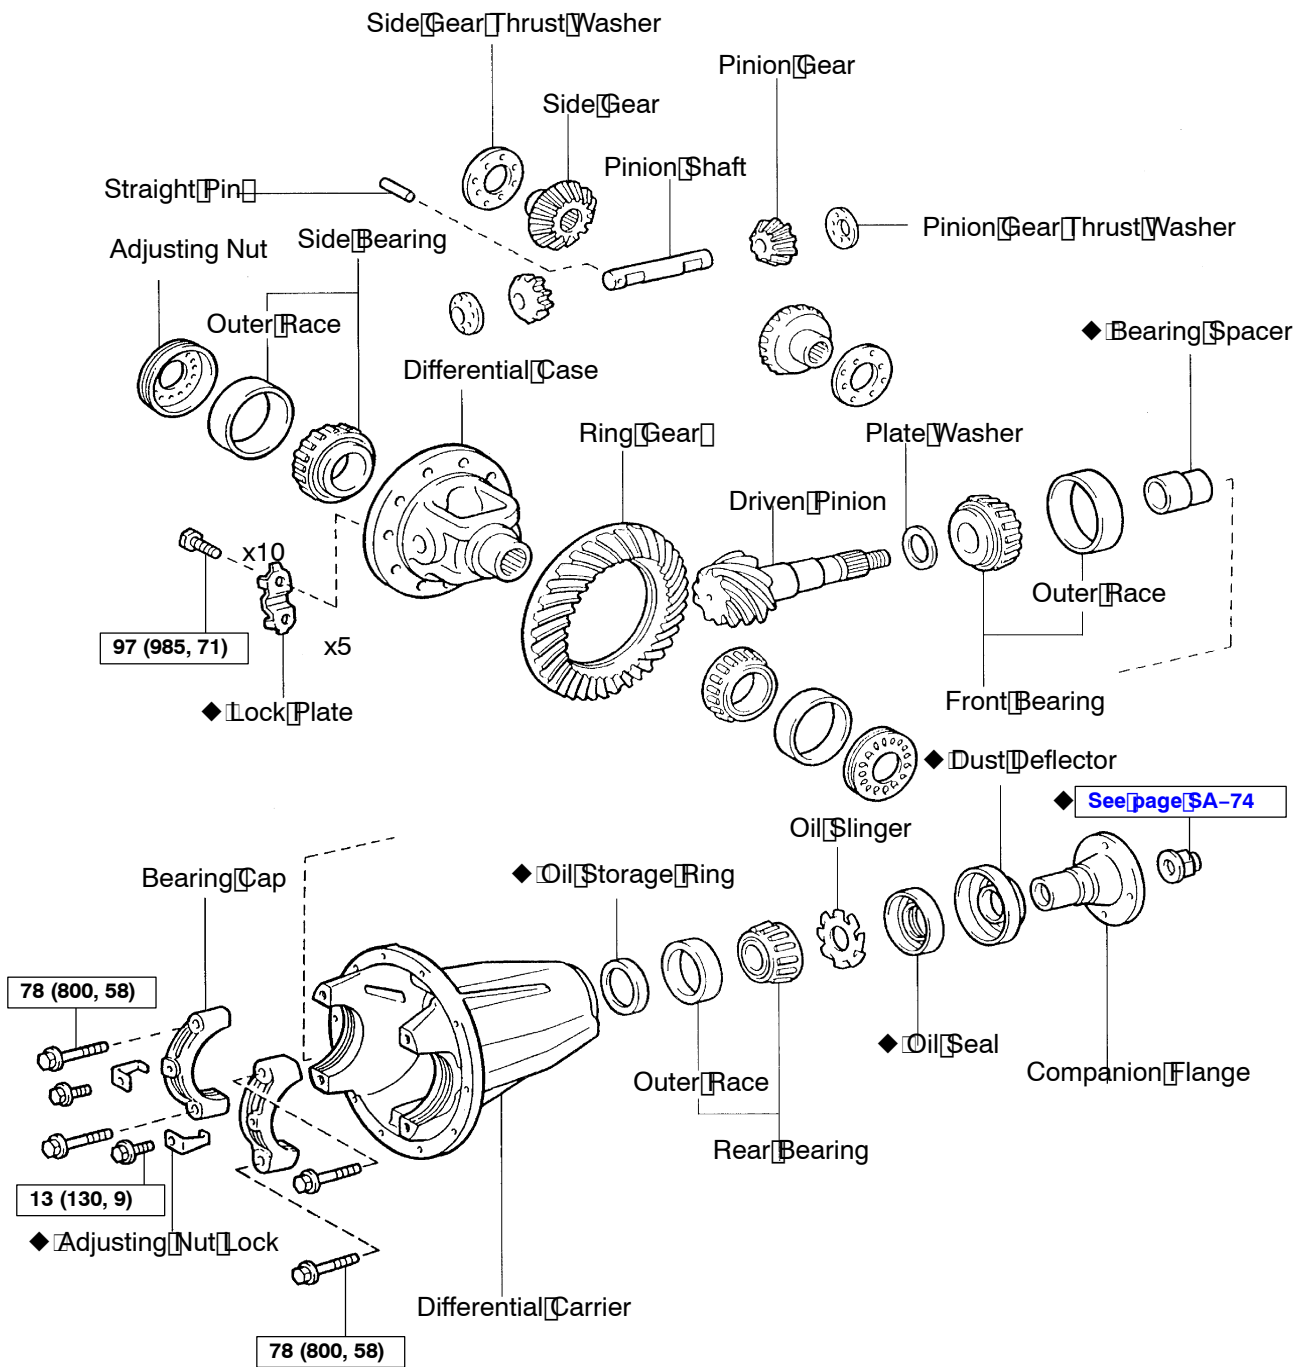

N·m(kgf·cm, ft·lbf) : Specified Torque

◆ Non-reusable part

★ Straight Screw Plug
 22 (220, 16)
 Spring Seat
 Compression Spring
 Ball
 ★ 24 (240, 17)
 Shaft Retainer
 Shift Fork Shaft
 Shift Fork
 Slotted Spring Pin
 Oil Storage Ring
 Differential Carrier
 Bearing Cap
 Adjusting Nut Lock
 78 (800, 58)
 Sleeve
 13 (130, 9)
 Side Bearing
 Outer Race
 Adjusting Nut
 97 (985, 71)
 Lock Plate
 x10
 x5
 Pinion Gear
 Spider
 Side Gear
 Pinion Gear Thrust Washer
 Side Gear Thrust Washer
 Position Switch
 40 (410, 30)
 Gasket
 O-Ring
 26 (270, 20)
 Actuator
 See page SA-74
 Dust Deflector
 Oil Slinger
 Companion Flange
 Oil Seal
 Outer Race
 Rear Bearing
 78 (800, 58)
 LH Differential Case
 47 (480, 35)
 x8
 RH Differential Case
 Ring Gear
 Drive Pinion
 Front Bearing
 Bearing Spacer
 Outer Race
 Plate Washer
 Adjusting Nut

◆ Non-reusable part
★ Precoated part