
Forms

Practice Quiz, 17 questions

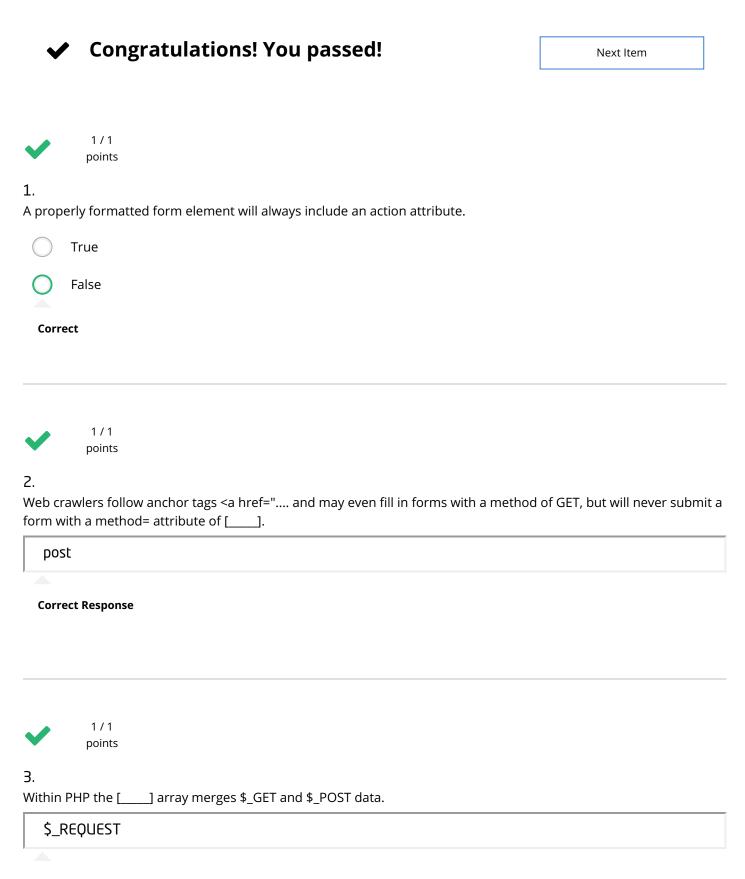

Correct Response

Forms

Office
Practice Quiz, 17 questions
1/1
points
4.
It is good practice for a web application to change data on a GET request.
True
False
Correct
1/1
points
5.
The [] attribute of an text input field will set a default value for the field.
value
Correct Response
1/1
points
6.
The function htmlentities will transform an ampersand character (&) into
Gamp;
Correct Response
Correct Response



1/1 points

racti opossitu 67 d	uestions
Correct Resp	onse
1/ poir	
8. To connect the	e behavior of multiple radio buttons (e.g. to make sure that only one is "on" at the same time), make
	ach radio button the same [] attribute.
name	
Correct Resp	onse
1/	
poir	its — — — — — — — — — — — — — — — — — — —
9.	
To set a check	box as checked by default, use the [] attribute.
checked	
Correct Resp	onse
_ 1/	1
poir	
10.	
To set a defau	lt option in a drop-down list, use the [] attribute.
selected	
Selected	
Selected	

https://www.coursera.org/learn/web-applications-php/quiz/E6K50/forms

Forms
Practice Quiz, 17 questions
0 / 1 points
11. All browsers treat unknown input types as type= [] "
flying
Incorrect Response
1/1 points 12. In HTML5, the email input type doesn't validate the value until you press
submit
Correct Response
1/1 points 13. Post data is appended to the URL.
True
C False
Correct
1/1 points

https://www.coursera.org/learn/web-applications-php/quiz/E6K50/forms

14.

In a PHP script, it is generally a good idea to process any incoming POST data before you produce page output.

Formstrue	
Practice Quiz, 17 questions Correct	
○ False	
1/1 points	
15. "View Page Source" allows you to see the HTML code.	
True	
Correct	
False	
1/1 points	
16. "View Page Source" allows you to see the PHP code.	
True	
False	
Correct	



1/1 points

17.

"View Page Source" allows you to see the output of the PHP code.



True

Correct

_				
Fo	rn	าร	Fal	lse

Practice Quiz, 17 questions



