

QO-BENCH: Diagnosing Query-Operator-Preserving Retrieval over Typed Event Tuples

Mengao Zhang* Xiang Yang† Chang Liu Tianhui Tan Ke-Wei Huang

Asian Institute of Digital Finance, National University of Singapore

mzhang057@e.ntu.edu.sg {yangxiang, chang_liu, tant, dishkw}@nus.edu.sg

Abstract

Many real-world questions over business, legal, and scientific corpora are natural-language versions of database-style queries over records latent in text. Existing retrieval-augmented generation (RAG) systems are optimized primarily for semantic relevance, but retrieving plausible passages does not guarantee correct query execution. We introduce QO-BENCH, a diagnostic benchmark for *query-operator question answering* over typed event tuples. The benchmark covers 22,984 news articles and 614 corporate events, with 18 query templates instantiating 785 questions. Each gold answer is deterministically computed from typed event tuples and scored by recall, with answers matched to the gold tuples by exact match rather than an LLM judge. This design enables operator-level diagnosis such as joins and intersection. We evaluate RAG, ReAct RAG, GraphRAG, and information-extraction-to-SQL under matched conditions, with a long-context oracle ceiling to isolate retrieval failure. A two-axis framework—index-time preservation versus query-time execution—predicts where each paradigm fails, and the results bear it out: systems retrieve relevant text but discard the typed values operators need, and the deployable paradigm ranking inverts across operators, with similarity retrieval leading on filter/project and extraction-to-SQL on intersection and counting. Even given the gold evidence, a long-context oracle stays far from saturated, so operator execution—not retrieval alone—is a core bottleneck that a stronger answer model does not remove. QO-BENCH reframes the goal from passage relevance to query-operator-preserving retrieval. The benchmark, predictions, and code are released at <https://github.com/ZHANG-MENGAO/qo-bench>.

* Corresponding author. Now at Nanyang Technological University.

† Work done during an internship at the Asian Institute of Digital Finance, National University of Singapore.

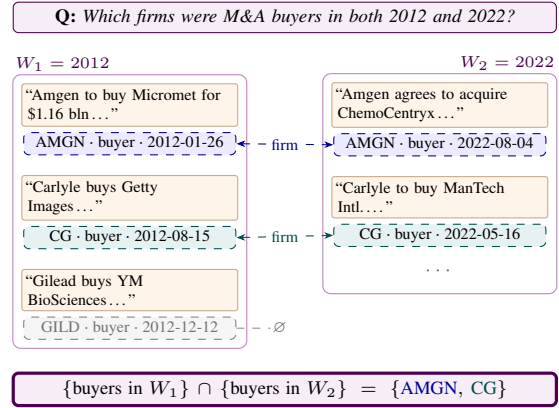


Figure 1: Query-operator QA: event tuples are *latent* in text (dashed), linked across articles only by shared typed attributes (color = firm; snippets illustrative).

1 Introduction

Many high-value information needs in business, law, and policy are expressed in natural language but behave like database queries. A user may ask, *Which firms were buyers in M&A announcements in both 2012 and 2022?* or *Which firms had a CEO change within 30 days of an M&A announcement?* The records these questions range over are not given in a table; they lie *latent across a text corpus*, reported piecemeal across many articles. Because no single article pre-aggregates them for an arbitrary query, such questions cannot rely on one summarizing passage. They require selecting events that satisfy constraints, assigning roles, anchoring dates, and joining evidence across conditions. Figure 1 illustrates the setting: the event tuples that answer such a question are latent across articles, linked only by shared typed attributes, and no single passage materializes them. We call this setting *query-operator question answering* (QO-QA): natural-language questions specify database-style operators over records. Relational databases support such questions through typed attributes, query plans, and set semantics (Codd, 1970, 1972;

Gray et al., 1997). However, many real corpora are not clean databases. They are news articles, filings, contracts, reports, emails, or analyst notes, where the relevant records must first be recovered from text. QO-QA therefore lies at the boundary between semantic parsing and retrieval-augmented generation: the question demands database-style execution, but the evidence resides in unstructured documents.

Retrieval-augmented generation (RAG) (Lewis et al., 2020; Karpukhin et al., 2020) is typically built around a different contract: retrieve passages that are semantically relevant to a question, then ask a language model to synthesize an answer. This contract is powerful for passage lookup, but QO-QA exposes a structural mismatch.

For the question of Figure 1, a system must identify M&A events, normalize firm names, distinguish buyers from targets, attach announcement dates, construct buyer sets for each year, and intersect them. Top- k retrieval may return plausible passages, but semantic relevance alone does not guarantee role correctness, temporal correctness, set completeness, or count correctness.

The capability needed here is *operator-preserving retrieval*: retrieval that preserves the typed values required to execute the operators expressed in the question. This framing separates two sources of failure. On the corpus side, an index may fail to preserve operator-relevant attributes. On the query side, a system may fail to convert the natural-language question into an executable plan involving the operators it induces. Standard RAG and ReAct-style RAG (Yao et al., 2023) leave most operator execution to the generator. GraphRAG (Edge et al., 2024) introduces entity-relation structure and summaries, but summaries may compress away necessary attributes. Information-extraction-to-SQL systems (Li et al., 2021; Yu et al., 2018; Scholak et al., 2021) execute operators explicitly, but only after committing to a schema and extraction pipeline whose coverage and normalization may be incomplete. Thus, QO-QA is not simply “text-to-SQL over news” or “RAG with more documents”: it asks whether retrieval architectures can bridge natural-language operator intent and latent event structure in text.

We introduce QO-BENCH, a diagnostic benchmark for QO-QA over typed event tuples. The benchmark spans 18 query templates evaluated on a stratified sample of 785 questions. The questions are instantiated over 22,984 news articles covering

614 corporate events.¹ Each gold answer is deterministically computed from event tuples with event type, entity, role, anchor date, counterparty, and provenance fields. This gives QO-BENCH an explicit denotational gold standard. Systems return structured final answers—entity lists, event lists, ordered lists, counts, grouped results—which are canonicalized and compared with the gold denotation by exact match—not an LLM judge—and scored with template-specific recall. This design lets us attribute each failure to a specific operator rather than to answer phrasing. Our experiments compare RAG, ReAct RAG, GraphRAG local and global search, and information-extraction-to-SQL. Our goal is not to rank a single best system, but to produce a failure profile: which operators each paradigm supports, which it approximates poorly, and which it cannot reliably execute.

Our experiments yield a consistent diagnosis. No paradigm dominates: the deployable ranking *inverts* across operators, and the failures separate along the framework’s two axes—similarity retrieval (RAG, ReAct RAG) loses *coverage*, GraphRAG preserves structure but not exact *values*, and IE→SQL cannot *execute* cross-event joins beyond its schema. Even the ceiling is operator-bound: a long-context oracle stays far from saturated on the gold evidence, and a stronger answer model does not lift it.

Contributions. First, we formulate QO-QA, where questions specify database-style operators over records latent in text, and identify operator preservation as a central retrieval property. Second, we introduce QO-BENCH, a benchmark with deterministic typed event-tuple gold answers and role-, date-, and counterparty-aware denotations over events attested by their provenance articles. Third, we use the QO-QA framework to decompose representative paradigms along its two axes—index-time preservation and query-time execution—and, against a long-context oracle ceiling that separates retrieval from answer-synthesis failures, locate where each paradigm fails.

¹Corporate events provide a useful substrate because they naturally exhibit the full range of operators we want to test. The same QO-QA structure appears beyond business news, including legal case aggregation, biomedical evidence synthesis, and policy monitoring (e.g., *case filed and settled within the same year*, or *FDA approval within 180 days of Phase-3 completion*).

2 Related Work

QO-BENCH builds on work in retrieval-augmented, multi-document, temporal, list, and aggregation question answering, but targets a different diagnostic unit. Dense, late-interaction, and retrieval-augmented models make large-corpus retrieval central to QA (Karpukhin et al., 2020; Khattab and Zaharia, 2020; Lewis et al., 2020; Izacard and Grave, 2021), while multi-document and long-context benchmarks test whether models combine evidence across passages (Shaham et al., 2023; Bai et al., 2024). Multi-hop and agentic retrieval methods further decompose questions into iterative retrieval steps (Yang et al., 2018; Trivedi et al., 2022; Ho et al., 2020; Yao et al., 2023; Press et al., 2023; Trivedi et al., 2023). These settings are related, but they usually evaluate whether systems find and synthesize relevant evidence, rather than whether retrieval preserves the typed values needed to execute database-style operators.

Several benchmarks cover parts of this problem. FanOutQA evaluates fan-out multi-document questions (Zhu et al., 2024); MEBench studies cross-document reasoning (Lin et al., 2025); TLQA evaluates time-referenced list construction (Dumitru et al., 2025); ChronoQA studies temporal-sensitive RAG with absolute, aggregate, and relative temporal questions (Chen et al., 2025); and RAG-Bench evaluates general RAG behavior and attribution (Friel et al., 2024). List-QA datasets such as LIQUID evaluate questions with multiple non-contiguous answers (Lee et al., 2023), while financial QA benchmarks such as FinQA, TAT-QA, FinanceBench, and FAITH emphasize numerical reasoning, tabular reasoning, evidence-grounded answers, or tabular faithfulness over financial documents (Chen et al., 2021; Zhu et al., 2021; Islam et al., 2023; Zhang et al., 2025). AGGBench is closest because it studies aggregation over unstructured text as a completeness-oriented find-all task (Zhu et al., 2026). Unlike AGGBench’s entity-level aggregation setting, QO-BENCH evaluates deterministic query execution over typed event tuples.

Closest to our query-time axis are HoloBench and LOTUS. HoloBench (Maekawa et al., 2025) evaluates long-context LLMs on database operations over verbalized Spider tables supplied as a single context—isolating query-time execution, with no index-time preservation or cross-document retrieval—and its finding that LLMs struggle even with all text supplied corroborates our long-context

(LC) oracle ceiling (§5). LOTUS (Patel et al., 2025) is an execution engine, not a benchmark: it runs semantic relational operators over pre-materialized DataFrames, presupposing the corpus-side organization our index-time axis measures; we view it as a candidate query-time executor for the schema-with-residual direction (§5.4).

QO-BENCH is also related to structure-based retrieval and information extraction. GraphRAG organizes extracted entities and relations into graphs (Edge et al., 2024). Event extraction, semantic parsing, and text-to-SQL make operators executable by converting text into structured records and questions into programs (Wang et al., 2020; Li et al., 2021; Yu et al., 2018; Scholak et al., 2021), but depend on predefined schemas and complete normalized tuples. We therefore compare these paradigms under matched conditions (§5). The goal is not to claim that aggregation, temporal reasoning, list answers, or financial QA are new, but to test whether retrieval architectures can preserve and execute the typed event values required by natural-language query operators. Table 1 summarizes this distinction.

3 A Framework for Query-Operator QA

3.1 QO-QA as Denotational Retrieval

We formalize QO-QA as a derivation from corpus to answer. A corpus entails events with attributes; a question selects events, projects fields, and applies an operator; and a system is judged by whether it recovers the denotation required by the question.

Let $C = \{d_1, \dots, d_n\}$ be a document corpus and let $E = \{e_1, \dots, e_m\}$ be the latent event set entailed by C . Each event $e \in E$ has an attribute set $A(e)$ whose elements $a = (n, v)$ pair an attribute name with a value derivable from the corpus. Attribute names are open-ended: for an M&A event, for example, relevant names may include acquirer, target, seller, announcement date, completion date, deal value, jurisdiction, and regulatory status.

A question q is a typed query specification

$$q = (k, \mathcal{D}_q, \phi, \pi, \alpha),$$

where $k \geq 1$ is the arity and $\mathcal{D}_q \subseteq E_{\tau_1} \times \dots \times E_{\tau_k}$ is the typed tuple domain induced by the event types in the question. For $k = 1$, we identify the tuple (e) with the event e when this causes no ambiguity. The predicate ϕ selects tuples from $\mathcal{D}_q$ using attribute constraints and, for $k \geq 2$, tuple-level conditions such as shared entities, temporal

Benchmark	Typed event-tuple gold	Deterministic gold (no judge)	Per-operator diagnosis	Matched archs. + oracle	Cross-doc completeness
AGGBench	✗ (entity)	✓	Aggregate only	Partial (no oracle)	✓
MEBench	✗ (entity)	✓	Reasoning types	✗	Partial
FanOutQA	✗	✗ (LLM judge)	✗	✗	Partial
TLQA	✗ (lists)	Partial	Temporal / list	✗	Partial
ChronoQA	✗	✗ (LLM/human)	Temporal types	Partial (RAG)	Partial
LIQUID / ListQA	✗ (lists)	Partial	✗	✗	✗
RAGBench	✗	✗ (TRACe)	✗	✗	✗
FinanceBench	✗	Partial	✗	✗	✗
HoloBench	✗ (verbalized DB rows)	✓	✓ (DB operations)	✗ (long-context only)	✗ (single context)
QO-BENCH	✓	✓	✓ (6 operators)	✓ (5 paradigms + LC)	✓

Table 1: Comparison with related benchmarks. QO-BENCH is, to our knowledge, the first benchmark to combine deterministic typed event-tuple gold (no LLM judge), per-operator failure attribution, and a matched multi-architecture comparison against an oracle ceiling.

windows, or announce–complete deal identity. The projection π returns structured records with component labels, and α is an operator such as list, count, group.

The selected tuple relation and projected relation are

$$R_q = \{\vec{e} \in \mathcal{D}_q : \phi(A(\vec{e})) = 1\}, \quad (1)$$

$$P_q = \langle \pi(A(\vec{e})) : \vec{e} \in R_q \rangle, \quad (2)$$

where $A(\vec{e}) = (A(e_1), \dots, A(e_k))$ and $\langle \cdot \rangle$ denotes a multiset that preserves tuple identity and multiplicity, as required by counting, grouping, and ordering.

The gold answer is the denotation

$$y^*(q) = \text{Ans}_E(q) = \alpha(P_q). \quad (3)$$

Depending on α , $y^*(q)$ may be a list or set of entities or events, an ordered list, a matched event-pair set, a count, a grouped table; when $R_q = \emptyset$, the empty list, set, or table, or a count of 0.

Worked example. Consider the question of Figure 1 (template B.3.2, Table 8), whose windows are the calendar years $W_1 = 2012$ and $W_2 = 2022$. As a typed specification $q = (k, \mathcal{D}_q, \phi, \pi, \alpha)$: the arity is $k = 2$ with $\mathcal{D}_q = E_{\text{ann}} \times E_{\text{ann}}$, where E_{ann} is the set of M&A-announcement events; the predicate $\phi(e_1, e_2)$ holds iff $\text{role}(e_1) = \text{role}(e_2) = \text{buyer}$, $\text{date}(e_1) \in W_1$, $\text{date}(e_2) \in W_2$, and $\text{firm}(e_1) = \text{firm}(e_2)$ —the last conjunct being the tuple-level join condition; the projection π returns the shared firm identifier, and α deduplicates into a distinct-entity set. On the operational event set, R_q contains qualifying pairs for exactly two firms, so $y^*(q) = \{\text{AMGN}, \text{CG}\}$ (Eq. 3).

A document set $D \subseteq C$ is sufficient for q if it attests the attributes needed to evaluate ϕ and the attributes returned by π for the selected tuples. For

tuple queries, this includes fields needed to evaluate joins, such as normalized entity IDs, roles, anchor dates, counterparties, and deal-linking identifiers. Thus, QO-QA stresses set-complete retrieval: a system must surface the selected tuples in R_q and the fields needed to project and aggregate them. In our benchmark, many multi-document questions are multi-event and multi-article retrieval problems; in broader settings, a single event may also require evidence composed across multiple documents.

3.2 Preservation and Execution

QO-QA imposes two architectural requirements. First, the index must preserve operator-relevant values. Second, the runtime must execute the operator structure expressed by the question.

Index-time preservation. The relevant issue is not whether the original text is stored, but whether operator-relevant values are recoverable through the system’s query-time interface in typed, executable form. Let $\iota(C)$ denote the index a system builds over C —its stored, queryable representation of the corpus. We call an index $\mathcal{S}$ -preserving for an attribute set $\mathcal{S}$ if, for every event e and every attribute $a \in A(e)$ whose name lies in $\mathcal{S}$, the value of a can be recovered from $\iota(C)$ by a well-defined query-time procedure under the system’s *retrieval budget*—the bounded evidence (e.g. top- k chunks or a fixed number of retrieval hops) it may surface per query (Appendix F). Full open-schema preservation, where $\mathcal{S}$ contains all possible attribute names in $A(e)$, is an idealized target.

Query-time execution. At query time, the system must parse the question into an operator specification, retrieve tuples and fields conditioned on that specification, and apply α over the projected relation. Parsing errors produce the wrong plan; retrieval errors omit tuples or fields; aggregation

errors occur when evidence is present but the system still miscounts, misgroups, misorders, or fails to intersect sets. For large selected relations, set-complete retrieval is often the bottleneck: once relevant tuples are outside the retrieved context, downstream generation cannot reconstruct them from available evidence.

We apply these two requirements as diagnostic axes for five representative paradigms: RAG, ReAct RAG, GraphRAG in local and global query modes, and IE→SQL, which builds on event extraction and text-to-SQL. The selection is not exhaustive, but it spans distinct points along both axes. Table 2 summarizes the decomposition.

RAG and ReAct RAG preserve article text, embeddings, and chunk-level metadata, but leave role, stage, counterparty, and aggregation operators to the generator. GraphRAG preserves entity- and relation-level structure in a summary-driven graph (entities are clustered into communities, each summarized by an LLM-written community report), but exact operator-relevant values such as dates, stages, roles, and counts may be compressed into prose. IE→SQL materializes typed attributes and executes operators explicitly, but only for fields covered by its frozen schema $\mathcal{S}$. The unoccupied design point is corpus-side coverage with query-time typed execution beyond a fixed schema; QO-BENCH diagnoses which parts of the preserve-and-execute pipeline current paradigms support and which remain missing.

3.3 A Tractable Subclass for Evaluation

The latent formulation above allows open-ended queries over open-ended attribute sets, which is difficult to evaluate deterministically. We therefore evaluate a controlled subclass.

(1) *Schema-bounded queries.* Let $\tau(e)$ denote the event type of event e . For each event type t , we fix a finite schema $S(t)$ containing the fields used by our templates. Every template restricts ϕ and π to fields in the schemas of the component event types.

(2) *Single-document-attestable events.* An event $e \in E$ is admitted to the operational set $\hat{E} \subseteq E$ iff some article attests every schema field in $S(\tau(e))$ for e , after canonicalization and conflict resolution.

These restrictions make the benchmark easier than the fully open-ended setting: the relevant schema is known in advance, and each event is individually recoverable from a single article. Failures on this restricted substrate therefore provide

conservative evidence of architectural difficulty.

4 The QO-BENCH Benchmark

4.1 Corpus, Events, and Ground Truth

Instantiating the tractable subclass of §3.3, QO-BENCH pairs a financial-news corpus with structured corporate-event ground truth. The corpus is the NASDAQ subset of FNSPID (Dong et al., 2024). Event candidates come from S&P Capital IQ Key Developments, a structured corporate-event stream recording event type, firms and roles, and dates, taken over 2010–2023. We align each S&P event to FNSPID articles by two filters—the event’s firm ticker and an event-type-specific date window around its anchor date (Appendix B)—producing a set of candidate articles per event. A unanimous three-LLM judge panel then attests, per event, which candidates genuinely describe it (§4.2); an event enters the operational set $\hat{E}$ only when an article attests its schema fields. The resulting benchmark contains 22,984 FNSPID articles² and $|\hat{E}| = 614$ single-article-attestable events across eight types: M&A announcement, completion, cancellation, and rumor; CEO change; CFO change; IPO; and stock split. Figure 2 summarizes the construction pipeline.

Event-type definitions are anchored in public records, including SEC Form 8-K Items, Securities Act §5, and NYSE/NASDAQ listing rules, and are supplied verbatim to every paradigm (Appendix D). Ground truth is represented as typed event tuples keyed by public identifiers rather than as text spans. Table 3 gives the common tuple fields. The queryable schema $S(t)$ for event type t contains the fields used by templates. Provenance is retained as evidence metadata but is not itself a query predicate. This representation enables deterministic denotational evaluation while avoiding span-match ambiguity. Licensing details are in Appendix A.

Deterministic evaluation. For each question, the gold answer is the denotation $y^*(q) = \alpha(P_q)$ over the operational event set $\hat{E}$, using the notation of §3.1. Evaluation therefore compares the system’s returned answer $f(q, C)$ (its answer for q on corpus C) directly with $y^*(q)$, without an LLM-as-a-judge at scoring time: matching to the gold denotation is by exact match on canonicalized values, and

²The reported 22,984 counts distinct FNSPID articles; because one article can match several events, event–article links are more numerous (on average 1.13 events per article).

Paradigm	Indexing		Querying		
	Method	Preservation scope	Parse	Retrieve	Aggregate
RAG	Text chunks + embeddings	Text + chunk metadata	No typed parse	Semantic	Generator
ReAct RAG	Text chunks + embeddings	Text + chunk metadata	Sub-question plan	Iterated semantic	Generator
GraphRAG-local	Entity graph + summaries	Entity/relation summaries	Entity match	Neighborhood	Generator
GraphRAG-global	Entity graph + summaries	Entity/relation summaries	No typed parse	Community map	Fixed reduce
IE→SQL	Schema-typed tuples	$A(e) \cap \mathcal{S}$	NL → SQL	SQL selection	SQL operators

Table 2: Paradigm decomposition along the two requirements of §3.2. *Indexing* (**Method**, **Preservation scope**) shows how the index is built and which part of $A(e)$ it preserves in queryable form; *Querying* (**Parse**, **Retrieve**, **Aggregate**) shows how the runtime dispatches the three query-time subtasks.

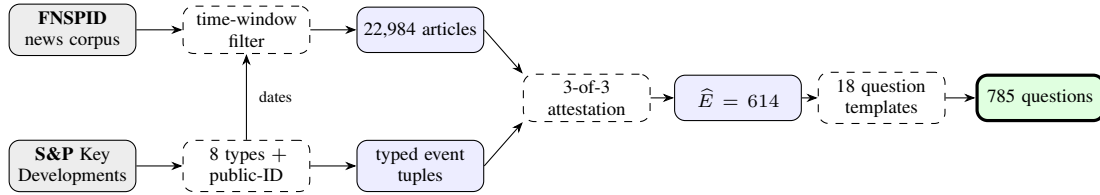


Figure 2: QO-BENCH construction pipeline. Date windows around S&P Capital IQ events filter the FNSPID (Dong et al., 2024) corpus; 3-of-3 judge attestation aligns the two into the operational event set $\hat{E}$ (614 single-article-attestable events), over which 18 templates instantiate the 785-question benchmark with deterministic gold denotations.

Field	Description
Firm	Normalized focal firm identifier, e.g., ticker, CIK, or canonical name.
Event type	One of eight event categories; M&A lifecycle stages are separate types.
Date	Anchor date used for filtering and ordering.
Role	Buyer, target, seller, or executive role, depending on event type.
Counterparty	Optional normalized counterparty.
Provenance	Supporting article IDs; evidence metadata, not a queryable field in $S(t)$.

Table 3: Common event-tuple fields.

answers are scored by recall. The scoring protocol (tolerance and covered subset) is defined in §5; per-output-type scoring rules ship with the released evaluation scripts (Appendix F).

4.2 Validating the Judge Consensus

The operational set $\hat{E}$ is constructed using unanimous 3-LLM attestation: an event–article pair is accepted only when all three judges agree that the article attests the event’s schema fields. To validate this high-precision proxy, three expert annotators re-examined a stratified sample of 221 accepted event–

article pairs; under a conservative both-annotators criterion the 3-of-3 consensus reaches 94.1% precision (per-type precision, agreement, and the disagreement analysis in Appendix C).

4.3 Template Taxonomy

QO-BENCH contains 18 templates in two capability classes. Evaluation uses a stratified sample capped at 50 questions per template, totaling 785 questions: 200 from four Capability A templates and 585 from fourteen Capability B templates. **Capability A (filtered retrieval)** questions require selection and projection under typed predicates. Examples include listing a firm’s M&A announcements within a time window or returning firms with IPOs in a year. These templates test type-matched event recall, entity disambiguation, and role-aware retrieval.

Capability B (compositional operations) questions add an operator over filtered events. Examples include finding firms with both a CEO change and an M&A announcement within 30 days, identifying M&A buyers in two different years, selecting the earliest IPO in a quarter, counting firms above an event-frequency threshold, grouping events by

quarter, and returning type-labeled unions. These templates test temporal joins, intersections, ordering, counting, grouping, and multi-type aggregation. Appendix E lists every template with its signature, sample size, example, and diagnostic target.

5 Experiments and Analysis

We compare five deployable paradigms against a retrieval-free **long-context oracle (LC-oracle)** ceiling that feeds each question the 3-of-3 attested documents supporting its gold answer. With the answer LLM (Qwen3.6-27B) held fixed, the gap from each deployable paradigm to this ceiling isolates the cost of its retrieval architecture.

5.1 Setup

Templates are scored by recall with a ± 7 -day date tolerance (absorbing news-vs-anchor date drift). Recall is computed on the *covered subset*: each gold denotation is restricted to events attested in the corpus ($\hat{E}$), so a system is not penalized for gold events whose evidence the corpus lacks. This recall is our main metric. For leakage control, no paradigm sees question templates at index time and all use fixed decoding; in particular IE $\rightarrow$ SQL’s schema is generated from event definitions alone, frozen, and used verbatim with no manual corrections (full configurations in Appendix F). The comparison is designed around *information parity* rather than architectural uniformity: every paradigm receives the same domain supervision—the event-definitions document is the only prior in the system, embedded in the RAG and LC-oracle prompt scaffold, ReAct’s system prompt, GraphRAG’s indexing configuration, and IE $\rightarrow$ SQL’s schema-generation input (Table 9)—while field-level materialization remains an architectural choice available to any system, not privileged data access. Metric-robustness analyses (strict vs. tolerant matching, answer-set sizes, precision/F1, and question paraphrase) are consolidated in Appendix H.

5.2 Main Results

Overall, the LC-oracle ceiling reaches 52.2%; among deployable paradigms IE $\rightarrow$ SQL is strongest at 37.9%, ahead of RAG (25.2%) and ReAct RAG (23.9%), with GraphRAG global search (GR-global, 3.8%) and local search (GR-local, 0.9%) near the no-context floor (0.6%; Table 13). Table 4 reports recall by operator family and capability;

per-template recall is deferred to Appendix G (Table 10). The main finding is not the ranking but its *operator-dependence*: no paradigm dominates across families, and the deployable ranking inverts from one operator to the next.

Three patterns organize the results. **(1) Even the ceiling is operator-bound.** With gold evidence in context, LC-oracle is far from saturated (52.2%): 77.6% on filtering but 3.9% on intersection, so operator *execution*, not only retrieval, is a bottleneck. **(2) Filtering is broadly solved.** On filter/project, RAG, ReAct RAG, and IE $\rightarrow$ SQL each recover roughly two-thirds of the ceiling (53.6, 55.4, 50.6; GraphRAG is the exception, GR-global/local 7.3/3.5). **(3) The ranking inverts on composition.** IE $\rightarrow$ SQL dominates intersection (50.9 vs. RAG/ReAct 6.0/9.5) and counting/grouping (51.2 vs. RAG/ReAct 30.0/3.4): SQL executes these natively, while a generator must reconstruct them from prose—on intersection IE $\rightarrow$ SQL even *exceeds* the LC-oracle, whose LLM cannot reliably intersect from gold chunks—the oracle bounds retrieval and generation, not operator execution, so an explicit SQL executor can legitimately surpass it.

Re-scoring the LC-oracle ceiling with two further answer models—from open-weight to frontier scale and light to heavy reasoning—leaves the hardest operators just as hard (Table 13): intersection stays near 4% for all three. A stronger or more heavily reasoning answer model does not lift the ceiling: operator execution is ill-suited to free-form generation—an architectural mismatch, not a capacity limitation.

5.3 Localizing Failure: Preservation and Execution

The framework’s two axes—index-time *preservation* and query-time *execution*—imply that paradigms fail in different places.

Preservation fails in two ways. The first is *coverage*: gold-article retrieval recall (Table 12) measures whether the supporting evidence is surfaced at all, and RAG and ReAct RAG reach just 32.4% and 38.4% of gold articles, with Cap B coverage (~ 27 –30%) far below Cap A: for similarity retrieval the corpus-side axis is lost *before any operator runs*—a preservation failure by the budget-relative definition of §3.2. The cause is not only relevance ranking but the fixed top- k cutoff itself: it imposes a hard cap on the candidate set, so once a query’s gold answer spans more distinct events than

Operator family	LC-oracle	RAG	ReAct RAG	GR-local	GR-global	IE→SQL
<i>Capability A</i>						
Filter / project	77.6	53.6	55.4	3.5	7.3	50.6
Role / type	35.3	18.2	51.1	0.0	6.3	55.6
<i>Cap A (all)</i>	67.0	44.8	54.3	2.6	7.1	51.9
<i>Capability B</i>						
Temporal join	52.3	11.1	15.7	0.3	0.0	21.1
Ordering	59.9	29.8	27.8	0.5	5.8	17.8
Intersection	3.9	6.0	9.5	0.4	2.2	50.9
Count / group	56.2	30.0	3.4	0.3	5.1	51.2
<i>Cap B (all)</i>	47.1	18.5	13.5	0.3	2.7	33.1
Overall	52.2	25.2	23.9	0.9	3.8	37.9

Table 4: Per-operator-family and capability recall (%), ± 7 -day tolerant, question-weighted (micro).

top- k surfaces, set-completeness is unattainable by construction—which is why coverage collapses on the many-event Cap B aggregations.

The second is *value-fidelity*: surfacing the evidence is not enough if the index does not also keep the exact values an operator consumes. GraphRAG fails here. Its index preserves entity–relation *structure* and community summaries, but the LLM-generated reports compress away the precise dates, roles, and counts: GR-local scores $\leq 3.5\%$ on every value-dependent family despite organizing the whole corpus—organization is not preservation. GR-global makes the point sharply: its map-reduce forwards essentially the entire corpus (article-level coverage $\approx 100\%$ by construction; Table 12), yet still reaches only 3.8% overall, losing the same values in summarization rather than in retrieval. With the corpus-side index held fixed, the local-to-global gap ($0.9 \rightarrow 3.8\%$) isolates the query side: global’s fixed map-reduce surfaces more community reports than local’s entity-match neighborhood, lifting most families a few points (e.g. filtering $3.5 \rightarrow 7.3$); only cross-event temporal joins stay near 0% in both modes, since the values that would link events were never preserved. GraphRAG thus fails the *value-fidelity* facet of preservation, distinct from the coverage facet that bounds RAG. A stage-wise field-survival analysis over the built index (104k entities, 291k typed claims, 30.7k communities; Appendix I) localizes the loss: tracing each gold event to its attesting article, event dates survive index-time extraction at 94.8% but only 30.9% survive verbatim into the community report covering that event, while firm-entity survival is flat across the same transition ($56.8\% \rightarrow 56.4\%$)—entity-centric summarization keeps the entities and strips the typed scalar values attached to them, pin-

ning the value-fidelity failure to the community-summarization stage.

Execution is the query-side axis: even the LC-oracle, fed the gold documents directly, scores only 3.9% on intersection—here execution, not retrieval, is the limiting factor. IE→SQL covers 64.8% of gold documents (near-uniform across Cap A/B), so its residual losses lie not on coverage but on this same axis, on cross-event temporal joins: it scores 0% on the announce-to-complete cross-stage join (B.1.4), where linking an announcement to its completion needs a cross-stage linkage identity the extractor populates on 93% of M&A announcement records but only $\sim 4\%$ of completion records, capping announce-to-complete pairing at $\sim 4\%$, and equally 0% on the cross-type CEO-change/M&A join (B.1.2), whose join key it likewise never materializes. Decomposing IE→SQL bounds the ceiling: extraction recall peaks at 75.8% (event level, above end-to-end SQL recall), and 50% of residual misses are the extractor declining to emit a record from a brief in-article mention—conservatism faithful to the paradigm’s design, not a SQL error. This is the structural ceiling of schema-bounded extraction, and it sits on the query axis, not on coverage. Bucketing every LC-oracle failure by a fixed mechanical rule (Appendix J) makes the execution axis concrete: *field mis-attribution* (33.3%—the answer cites the gold event’s source article yet mislabels a typed field, typically an M&A lifecycle stage), *incomplete enumeration* (26.7%), *abstention* (22.1%—on intersection questions the LC-oracle returns the empty set on 91.2% (83/91), the mechanism behind the family’s 3.9% ceiling), and *date mis-anchoring* (17.9%—the article’s publication date mistaken for the event date).

The three deployable families thus fail at three

distinct points—similarity retrieval on *coverage*, GraphRAG on *value-fidelity*, and schema-based execution on the *query* axis—the first two both facets of index-time preservation, exactly as the framework predicts.

5.4 Implications

No paradigm both preserves operator-relevant values across the corpus and executes typed operators over them. The design target is therefore not larger context or better generation, but broad corpus-side coverage combined with query-time typed execution beyond a fixed schema.

This diagnosis suggests several architectural directions. One is to treat plan-and-execute retrieval as an IR primitive: a query planner would infer the operator structure of the question, retrieve candidate events for coverage, materialize the fields needed for a query-specific schema, and execute aggregation over the resulting temporary relation. A second direction is schema-with-residual coverage, where a fixed event schema handles common operators while residual text retrieval captures attributes outside the schema; semantic-operator execution engines such as LOTUS (Patel et al., 2025) are natural query-time executors for this design. A third is late-binding entity and event resolution, triggered only when the query requires cross-event joins or intersections. Finally, retrievers should be trained not only for relevance but also for set completeness.

More broadly, QO-QA isolates capabilities that single-document reading comprehension and open-domain QA do not stress: exact filtering, attribute preservation, cross-document composition, and aggregation.

6 Conclusion

This paper argues that query-operator QA is not naive QA with more documents: a natural-language question specifies a computation over latent event records. To study this setting, we introduced QO-BENCH, a diagnostic benchmark with 18 typed query templates instantiating 785 questions over 22,984 financial-news articles.

We also proposed a two-axis framework that separates index-time preservation from query-time execution. In matched experiments, RAG, ReAct RAG, GraphRAG, and IE→SQL exhibit various operator-specific failures. The LC-oracle gap shows that many failures arise before generation, when retrieval fails to expose the records over

which the answer must be computed—while the ceiling itself shows that operator execution fails even with those records in context.

QO-BENCH reframes cross-document QA as *schema-based information retrieval with natural-language input and output*. We hope it supports future work on operator-preserving retrieval systems that combine broad corpus coverage with query-time typed execution beyond fixed schemas.

Limitations

QO-BENCH uses corporate events as operational ground truth. The tested operators—filtering, joining, intersection, counting, grouping, and ordering—are domain-general, but absolute results may not transfer to domains with weaker public records, less standardized event definitions, or noisier entity resolution. The benchmark also uses template-generated questions, which provide controlled operator probes but underrepresent the linguistic diversity of natural user queries. A 90-question paraphrase pilot (Appendix H.4) suggests the findings are robust to surface rephrasing: overall recall moves by at most a few points, slightly in the paraphrases’ favor, and the per-operator structure—including the intersection collapse—is unchanged. Although answers are computed deterministically from normalized event tuples, the tuples may still contain errors from source ambiguity, date conventions, event-stage boundaries, or entity normalization; we mitigate these risks through public identifiers, provenance, unanimous attestation, and human validation. Finally, each paradigm admits many implementations and scores depend on the answer LLM, so our results should be interpreted as matched-condition architecture diagnostics rather than exhaustive or model-invariant performance estimates.

Ethics and Responsible Benchmarking

QO-BENCH is built from public corporate news and public corporate-event records. It does not use non-public personal data; any executive names or firm affiliations come from public disclosures or news reports. Corporate news coverage is uneven and tends to overrepresent large publicly listed firms, English-language markets, and media-salient events. This skew should be considered when interpreting coverage or event-frequency statistics.

The benchmark is intended for retrieval-architecture evaluation, not for investment, legal,

compliance, or employment decisions. System outputs should not be treated as verified financial facts without human review and source checking. To respect article-text licensing, we release article identifiers, metadata, public-identifier event tuples, questions, prompts, and evaluation scripts; redistribution of full article text remains governed by the originating publishers' licenses.

Acknowledgments

We gratefully acknowledge the support of National University of Singapore IT for providing access to its high-performance computing resources (Grant: NUSREC-HPC-00001).

References

- Yushi Bai and 1 others. 2024. LongBench: A bilingual, multitask benchmark for long context understanding. In *ACL*.
- Chris Buckley and Ellen M. Voorhees. 2004. Retrieval evaluation with incomplete information. In *Proceedings of the 27th Annual International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 25–32.
- Zhiyu Chen and 1 others. 2021. FinQA: A dataset of numerical reasoning over financial data. In *EMNLP*.
- Ziyang Chen and 1 others. 2025. A question answering dataset for temporal-sensitive retrieval-augmented generation. *Scientific Data*.
- Edgar F. Codd. 1970. A relational model of data for large shared data banks. *Communications of the ACM*, 13(6):377–387.
- Edgar F. Codd. 1972. Relational completeness of data base sublanguages. In Randall Rustin, editor, *Data Base Systems: Courant Computer Science Symposia Series 6*, pages 65–98. Prentice-Hall.
- Zihan Dong, Xinyu Fan, and Zhiyuan Peng. 2024. FN-SPID: A comprehensive financial news dataset in time series. In *KDD*.
- Alexandru Dumitru, Venkatesh V, Adam Jatowt, and Avishek Anand. 2025. Evaluating list construction and temporal understanding capabilities of large language models. In *ICTIR*.
- Darren Edge and 1 others. 2024. From local to global: A graph RAG approach to query-focused summarization. *arXiv preprint arXiv:2404.16130*.
- Robert Friel, Masha Belyi, and Atindriyo Sanyal. 2024. RAGBench: Explainable benchmark for retrieval-augmented generation systems. *arXiv preprint arXiv:2407.11005*.
- Jim Gray, Surajit Chaudhuri, Adam Bosworth, Andrew Layman, Don Reichart, Murali Venkatrao, Frank Pellow, and Hamid Pirahesh. 1997. Data cube: A relational aggregation operator generalizing group-by, cross-tab, and sub-totals. *Data Mining and Knowledge Discovery*, 1(1):29–53.
- Xanh Ho and 1 others. 2020. Constructing a multi-hop QA dataset for comprehensive evaluation of reasoning steps. In *COLING*.
- Pranab Islam and 1 others. 2023. FinanceBench: A new benchmark for financial question answering. *arXiv preprint arXiv:2311.11944*.
- Gautier Izacard and Edouard Grave. 2021. Leveraging passage retrieval with generative models for open domain question answering. In *EACL*.
- Vladimir Karpukhin and 1 others. 2020. Dense passage retrieval for open-domain question answering. In *EMNLP*.
- Omar Khattab and Matei Zaharia. 2020. ColBERT: Efficient and effective passage search via contextualized late interaction over BERT. In *SIGIR*.
- Seongyun Lee, Hyunjae Kim, and Jaewoo Kang. 2023. LIQUID: A framework for list question answering dataset generation. In *AAAI*.
- Patrick Lewis and 1 others. 2020. Retrieval-augmented generation for knowledge-intensive NLP tasks. In *NeurIPS*.
- Qian Li and 1 others. 2021. A survey on deep learning event extraction: Approaches and applications. *arXiv preprint arXiv:2107.02126*.
- Teng Lin and 1 others. 2025. MEBench: Benchmarking large language models for cross-document multi-entity question answering. In *EMNLP*.
- Seiji Maekawa, Hayate Iso, and Nikita Bhutani. 2025. Holistic reasoning with long-context LMs: A benchmark for database operations on massive textual data. In *The Thirteenth International Conference on Learning Representations (ICLR)*.
- Liana Patel, Siddharth Jha, Melissa Pan, Harshit Gupta, Parth Asawa, Carlos Guestrin, and Matei Zaharia. 2025. Semantic operators and their optimization: Enabling LLM-based data processing with accuracy guarantees in LOTUS. *Proceedings of the VLDB Endowment*, 18(11):4171–4184.
- Ronak Pradeep, Nandan Thakur, Shivani Upadhyay, Daniel Campos, Nick Craswell, and Jimmy Lin. 2024. Initial nugget evaluation results for the TREC 2024 RAG track with the AutoNuggetizer framework. *arXiv preprint arXiv:2411.09607*.
- Ronak Pradeep, Nandan Thakur, Shivani Upadhyay, Daniel Campos, Nick Craswell, and Jimmy Lin. 2025. The great nugget recall: Automating fact extraction and RAG evaluation with large language models. In

Proceedings of the 48th International ACM SIGIR Conference on Research and Development in Information Retrieval.

Ofir Press and 1 others. 2023. Measuring and narrowing the compositionality gap in language models. In *Findings of EMNLP*.

Torsten Scholak and 1 others. 2021. PICARD: Parsing incrementally for constrained auto-regressive decoding from language models. In *EMNLP*.

Uri Shaham and 1 others. 2023. ZeroSCROLLS: A zero-shot benchmark for long text understanding. In *Findings of EMNLP*.

Harsh Trivedi and 1 others. 2022. MuSiQue: Multi-hop questions via single-hop question composition. *Transactions of the Association for Computational Linguistics (TACL)*.

Harsh Trivedi and 1 others. 2023. Interleaving retrieval with chain-of-thought reasoning for knowledge-intensive multi-step questions. In *ACL*.

Xiaozhi Wang and 1 others. 2020. MAVEN: A massive general domain event detection dataset. In *EMNLP*.

Zhilin Yang and 1 others. 2018. HotpotQA: A dataset for diverse, explainable multi-hop question answering. In *EMNLP*.

Shunyu Yao and 1 others. 2023. ReAct: Synergizing reasoning and acting in language models. In *ICLR*.

Tao Yu and 1 others. 2018. Spider: A large-scale human-labeled dataset for complex and cross-domain semantic parsing and text-to-SQL task. In *EMNLP*.

Mengao Zhang, Jiayu Fu, Tanya Warrier, Yuwen Wang, Tianhui Tan, and Ke-wei Huang. 2025. FAITH: A framework for assessing intrinsic tabular hallucinations in finance. In *Proceedings of the 6th ACM International Conference on AI in Finance (ICAIF)*.

Andrew Zhu, Alyssa Hwang, Liam Dugan, and Chris Callison-Burch. 2024. FanOutQA: A multi-hop, multi-document question answering benchmark for large language models. In *ACL*.

Fengbin Zhu and 1 others. 2021. TAT-QA: A question answering benchmark on a hybrid of tabular and textual content in finance. In *ACL*.

Haojia Zhu and 1 others. 2026. Aggregation queries over unstructured text: Benchmark and agentic method. *arXiv preprint arXiv:2602.01355*.

A Data Sources, Licensing, and Public-Identifier Release

QO-BENCH draws news articles from FNSPID (Dong et al., 2024), a public dataset of NASDAQ financial news, and corporate events from S&P Capital IQ Key Developments, a proprietary structured-event feed accessed under license.

Disclaimer. The S&P Capital IQ Key Developments feed is proprietary and may not be redistributed. The released benchmark therefore contains no S&P content: neither raw event records, vendor record identifiers (e.g., keyDevId, internal firm IDs), nor S&P headlines or situation summaries. Each ground-truth event is published instead as a *public-identifier tuple* — the participating firm keyed by a public identifier (stock ticker, SEC CIK, or LEI), the event type drawn from our eight public-record-anchored definitions, the anchor date, role, and counterparty — together with provenance article IDs into FNSPID. These tuples are recoverable from public records and carry no proprietary text, so the benchmark is vendor-independent and freely redistributable while remaining a faithful denotational gold standard. Reconstructing the original vendor records requires a separate S&P Capital IQ license.

B Corpus Construction

FNSPID subset. We use the NASDAQ subset of FNSPID (Dong et al., 2024): 2,953,850 URL-deduplicated articles pre-tagged with 8,553 distinct stock symbols. We apply no explicit date filter; although FNSPID is nominally dated 1999–2023, its NASDAQ coverage before 2010 is sparse, so in practice the corpus spans 2010–2023—matching the period of the S&P events. Date selection within this span happens per event below.

Article matching. Each S&P event is matched to candidate FNSPID articles by exact ticker (FNSPID articles carry a stock symbol; no alias or fuzzy normalization is applied), restricted to a per-event-type asymmetric date window around the anchor date (Table 5). Articles with empty bodies are dropped, and duplicates are removed by URL, keeping the occurrence closest to the anchor. The anchor is the legal/announcement date for each type; because news typically trails legal completion by several weeks, windows are widened after the anchor rather than symmetric.

Attestation funnel. Three judges—Gemma-4-31B-IT, Qwen3.6-27B, and gpt-oss-120B—independently label each (event, article) pair, and a pair is attested only on unanimous 3-of-3 confirmation. From the 16,414 S&P events across the eight types in 2010–2023, we select a 1,376-event subset to bound judging cost, producing 25,888 candidate (event, article) pairs; 1,591 pairs (6.1%)

Event type	Days before	Days after
M&A announcement	7	14
M&A completion	7	90
M&A cancellation	7	30
M&A rumor	14	14
CEO change	14	60
CFO change	14	60
IPO	7	60
Stock split	7	14

Table 5: Per-event-type date windows around the S&P anchor date used to collect candidate FNSPID articles, in days before/after the anchor.

are attested 3-of-3, yielding $|\hat{E}| = 614$ distinct single-article-attestable events.

C Judge-Consensus Validation

The operational set $\hat{E}$ relies on a unanimous 3-of-3 LLM-judge consensus. To validate it, three expert annotators (using the same event definitions as the judges) labeled a stratified sample of 221 accepted (event, article) pairs (up to 30 per type); every pair received two independent labels.

Precision. Because the pool contains only accepted pairs, the check is precision-only (recall is not estimable without a separately drawn negative pool). We count an accepted pair as correct only when both of its annotators confirm it—any single rejection, including a split vote, counts as incorrect—a conservative criterion. Under it the 3-of-3 consensus reaches 94.1% precision (208/221). Precision is at least 90% on seven of the eight event types; only M&A completions are lower, at 73.3%, where an article often references the closing only with vague timing.

Inter-annotator agreement. Agreement is computed on the 209 pairs co-labeled by one annotator pair (the remaining 12, co-labeled by a different pair, are unanimously positive and leave κ undefined). On these pairs raw agreement is 96.2% and Cohen’s $\kappa = 0.538$. The moderate κ despite high raw agreement is a prevalence effect: the accepted-only pool is dominated by positive labels, which inflates chance agreement and deflates κ ; it does not indicate low reliability.

Disagreement. Boundary errors concentrate on whether an article truly *attests* the event rather than merely *mentions* it: (i) M&A completions referenced only with vague timing inside earnings-call transcripts or analyst recaps; (ii) IPO articles

Type	Record	Date	Role
M&A announce	8-K 1.01	announce	buyer/target
M&A complete	8-K 2.01	close	buyer/target
M&A cancel	8-K 1.02	terminate	buyer/target
M&A rumor	NYSE §202.03	publish	target
CEO change	8-K 5.02	report	—
CFO change	8-K 5.02	report	—
IPO	Sec. Act §5	report	—
Stock split	NYSE §703.02	effective	—

Table 6: The eight event types, each anchored to a public-record disclosure class (SEC 8-K items, the Securities Act, or exchange listing rules). The anchor date is the canonical date per type; *role* applies to M&A (rumor records only the target) and is null otherwise.

dated before the offering, using forward-looking language (“plans to raise,” “set to price”); and (iii) tangential mentions of CEO/CFO transitions in earnings-call acknowledgements. These cases affect boundary decisions in $\hat{E}$; once an event tuple is admitted, gold answers are computed deterministically from normalized tuple fields.

D Event Definitions

Each event type is defined by reference to a public-record disclosure class (Table 6), keeping the ontology vendor-independent and identical across paradigms. This document is supplied verbatim to every paradigm as shared task supervision; full operational scope and edge cases accompany the released code.

E Template Catalog

Tables 7 and 8 list all 18 templates with their signatures, output types, per-template sample sizes, an example question, and the operator each diagnoses.

F Paradigm Configurations

All deployable paradigms share the corpus, the event-definitions document, and the same answer LLM—Qwen3.6-27B (vLLM, reasoning mode enabled), decoding held fixed; only the retrieval architecture differs.

RAG retrieves with the hybrid retrieval stack detailed under *Retrieval configuration* below, feeding the top-30 chunks to the answer LLM. **ReAct RAG** uses the LangChain `create_react_agent` recipe with light prompt adaptation: the agent issues up to five retrieval calls over the same hybrid stack, accumulating evidence across rounds before answering. **GraphRAG** (Edge et al., 2024) extracts entities

ID	Signature	Output	N Example	Diagnoses
A.1.1	(E, W)	List[Event]	50 List all CEO changes in Q1 2023.	Type-matched event recall in a window.
A.1.2	$(E, W) \rightarrow \pi_{\text{firm}}$	List[Entity]	50 Which firms had IPOs in 2018?	Event-to-firm deduplication.
A.2.1	(E, F, W)	List[Event]	50 List Microsoft's M&A announcements 2020–2023.	Entity disambiguation under filter.
A.3.1	(E, R, W)	List[Entity/Event]	50 Firms that were M&A targets in 2020.	Role-aware retrieval.

Table 7: Capability A (filtered retrieval) templates. N is the per-template count in the stratified evaluation sample (at most 50 per template).

ID	Signature	Output	N Example	Diagnoses
B.1.1	(E, F, W, dir)	List[Event]	50 M&A announces in 2022 before Microsoft–Activision.	Anchor + relative window.
B.1.2	$([E_1, E_2], W, \Delta)$	List[EventPair]	50 CEO change + M&A announce within 30d, 2022–23.	Symmetric temporal join.
B.1.3	$([E_t, E_f], W, \Delta)$	List[EventPair]	50 CFO change $\rightarrow$ M&A announce within 90d.	Directional lag.
B.1.4	(W, Δ)	List[Deal]	39 M&A deals announced 2022 closing within 180d.	Announce $\rightarrow$ complete identity.
B.1.5	$(F, [E_1, E_2], W)$	Int	50 Days between MSFT–ATVI announce and close?	Date arithmetic on self-join.
B.2.1	(E, W, pos)	OrderedList	50 First IPO of Q1 2018?	Extremal selection.
B.2.2	$(F, \{E_1 \dots\}, W)$	OrderedList	50 Tesla CEO changes, M&A, splits 2015–23.	Multi-type interleaving.
B.3.1	$([E_1, E_2], W)$	List[Entity]	30 Firms with CEO change AND M&A announce in 2023.	Cross-type intersection.
B.3.2	$(E, R, [W_1, W_2])$	List[Entity]	46 M&A buyers in both 2012 and 2022.	Cross-window same-role.
B.3.3	$([E_1, E_2], R, W)$	List[Entity]	15 M&A target in both announce and complete, 2020.	Cross-type same-role.
B.4.1	(E, W, N)	List[Entity]	16 Firms with ≥ 3 CEO changes, 2010–20.	Count threshold.
B.4.2	(E, R, W, N)	List[Entity]	39 M&A buyer ≥ 4 times, 2015–23.	Role-aware count threshold.
B.4.3	(E, W, b)	List[Event]+b	50 CEO changes 2023 grouped by quarter.	Time bucketing.
B.4.4	$(\{E_1 \dots\}, W)$	List[Event]+t	50 M&A announces + IPOs Q1 2023, labeled.	Type-label union.

Table 8: Capability B (compositional operations) templates. N is the per-template count in the stratified evaluation sample (at most 50 per template).

and relations, clusters them into Leiden communities, and produces LLM-generated community reports, queried in two modes—*local* (entity match $\rightarrow$ neighborhood $\rightarrow$ related-community fetch) and *global* (fixed map-reduce over community reports). We run the graphrag package with unmodified source and generous (not minimal) index settings; the only prompt change, shared with all paradigms, prepends the event-definitions document. Local and global share the corpus-side index but differ on the query side, isolating the query-side contribution.

IE $\rightarrow$ SQL proceeds in three stages: (i) the database schema is *generated by an LLM (GPT-5.5, $T=0$) from the event definitions alone*—never exposed to question templates—and frozen verbatim; a pre-specified provision for documented manual corrections was not invoked (zero corrections); (ii) a separate LLM (Qwen3.6-27B, $T=0$, reasoning mode) extracts event tuples from each article into the frozen schema with provenance; (iii) per-template SQL skeletons translate questions to SQL executed against the events database, with no LLM at query time. Stage (i) is the schema-leakage control: IE $\rightarrow$ SQL is evaluated as an intrinsic test of schema-based retrieval, not as a hand-tuned upper bound.

LC-oracle bypasses retrieval and feeds each question its gold-supporting chunks linked via

provenance. It is a ceiling, not a deployable paradigm.

Full prompts, chunking parameters, embedding model, retrieval k , hop budgets, GraphRAG version and indexing settings, the IE $\rightarrow$ SQL schema-generation prompt and raw output, extraction prompts, per-template scoring scripts, and SQL skeletons accompany the released code.

Retrieval configuration. Retrieval is hybrid: dense (Qwen3-Embedding-4B) plus BM25, fused by reciprocal-rank fusion ($k=60$), then reranked by Qwen3-Reranker-4B. The per-stage cutoffs are: **RAG** retrieves 100 initial candidates and keeps the top 30 after reranking; **ReAct** retrieves 50 $\rightarrow$ 10 per search call, up to five calls with cross-round deduplication, so it can accumulate up to ~ 50 unique chunks; a ± 30 -day date-window pre-filter applies when the question specifies a time window; **GraphRAG** uses package defaults (top_k_mapped_entities=10, community_level=2). The sensitivity of gold-article coverage to the top- k budget is reported in Appendix G (Table 11).

IE $\rightarrow$ SQL database statistics. The extraction stage reads each of the 22,984 articles once and emits 5,256 article-level event records, distributed as: M&A announcement 1,969; CEO change 869; M&A completion 857; M&A rumor 650; IPO

Paradigm	Event-defs. placement	Answer-time context
RAG	prompt scaffold	top-30 reranked chunks
ReAct RAG	system prompt	$\leq 5 \times 10$ accumulated chunks
GR-local	indexing config. + prompt	entity-matched community reports
GR-global	indexing config. + prompt	map-reduce over community reports
IE→SQL	schema-gen. input + extraction prompt	SQL result rows (no LLM at query time)
LC-oracle	prompt scaffold	gold-attested chunks (ceiling)

Table 9: Paradigm input and context parity: all paradigms share the corpus, the event-definitions prior, the answer LLM, and fixed decoding; only the retrieval architecture differs.

446; CFO change 238; M&A cancellation 129; stock split 98. Multi-stage union-find canonicalization collapses these into 3,465 deduplicated events (a 34.1% reduction) referencing 1,011 canonical firms (resolved from 2,498 raw firm-name strings). Each event carries the 15 shared columns of the events table plus a per-type detail table of 8–16 typed columns, per the frozen schema in the released code.

Input and context parity. Table 9 summarizes what each paradigm receives, per the information-parity design of §5.

G Additional Results

Per-template recall. Table 10 reports per-template recall for all paradigms—the resolution behind the operator-family aggregate of Table 4.

Gold-article retrieval recall. Table 12 measures whether the gold-attesting evidence reaches a paradigm at all, decoupled from whether the operator is then executed: for each question we compute the fraction of its gold-attesting articles whose content the paradigm surfaces into its answering context (for IE→SQL, whose event the extraction stage recovers), averaged by template. The LC-oracle is 100% by definition. For IE→SQL, the extraction stage recovers roughly two-thirds of gold articles, well above its end-task recall (Table 10), localizing the dominant loss to the query/composition layer rather than to coverage.

Does coverage converge with a larger retrieval budget? No. Table 11 sweeps gold-article coverage over retrieval cutoffs $k = 10$ –200 under the deployed hybrid+rerank pipeline (all 785 questions). Coverage grows roughly logarithmically in k and converges nowhere near the LC-oracle’s 100%: at $k=200$ ($6.7\times$ the deployed budget) nearly half

of all gold-attesting articles still never enter the context, because relevance-ranked retrieval keeps preferring redundant coverage of already-found events over the gold articles it has not yet surfaced. The cap is most severe exactly where execution is also weakest: on intersection questions coverage reaches only 24.9% even at $k=200$, so retrieval-side coverage shortfall and generation-side composition failure compound on the same operator family—the fixed-cutoff cap discussed in §5.

Answer-model robustness and the no-context floor. Table 13 reports the per-operator profile of the LC-oracle ceiling across three answer models (Qwen3.6-27B; DeepSeek v4-flash; v4-pro Think Max) alongside the no-context floor (Qwen, parametric only, zero articles). The robustness of the ceiling’s operator profile is discussed in §5; beyond it, the floor isolates retrieval’s per-family contribution. No-context recovers near-zero recall on every family—retrieval and context account for nearly all of the ceiling, from 77.6% on filtering down to the operator-bound 3.9% on intersection.

H Metric Robustness

This appendix consolidates four robustness analyses of the evaluation metric: sensitivity to match strictness (Appendix H.1), answer-set sizes and the overgeneration risk (Appendix H.2), pool precision and F1 (Appendix H.3), and a question-paraphrase pilot (Appendix H.4).

H.1 Sensitivity to Match Strictness

Exact-match scoring is sensitive to canonicalization errors, entity-name variation, and event ambiguity. Table 14 re-scores all paradigms under three regimes: *strict* exact-date matching, the paper’s ± 7 -day tolerance, and ± 7 -day matching with ticker-alias normalization added. Absolute recall shifts, but the paradigm ranking and every per-operator conclusion are identical under all regimes. On the three dimensions:

- **Date conventions** are the largest effect (LC-oracle $27.7 \rightarrow 52.2$): news genuinely reports trailing or effective dates rather than legal anchor dates, which is exactly why the paper’s primary metric carries the ± 7 -day tolerance (§5).
- **Entity-name variation** is structurally excluded from the *metric*: gold and outputs are keyed to unique public identifiers

Template	LC-oracle	RAG	ReAct RAG	GR-local	GR-global	IE→SQL
<i>Filter / project</i>						
A.1.1	72.3	46.9	49.6	3.4	3.6	51.8
A.1.2	83.2	43.9	62.5	3.4	15.7	54.0
A.2.1	77.3	70.0	54.0	3.7	2.7	46.0
<i>Role / type</i>						
A.3.1	35.3	18.2	51.1	0.0	6.3	55.6
<i>Temporal join</i>						
B.1.1	70.5	0.0	0.0	1.2	0.2	38.1
B.1.2	41.7	7.0	16.1	0.0	0.0	0.0
B.1.3	44.0	3.0	18.7	0.0	0.0	38.9
B.1.4	22.6	9.1	0.0	0.0	0.0	0.0
B.1.5	76.0	36.0	40.0	0.0	0.0	24.0
<i>Ordering</i>						
B.2.1	54.7	30.3	23.7	0.0	8.3	10.3
B.2.2	65.2	29.3	31.8	1.0	3.3	25.2
<i>Intersection</i>						
B.3.1	7.8	11.1	23.6	0.7	1.7	39.4
B.3.2	0.0	2.9	3.3	0.0	3.3	53.6
B.3.3	7.8	5.6	0.0	1.3	0.0	65.7
<i>Count / group</i>						
B.4.1	28.1	20.8	2.1	0.0	4.2	58.3
B.4.2	43.6	34.6	6.8	0.0	6.4	59.8
B.4.3	68.5	33.2	1.2	0.8	4.1	45.8
B.4.4	62.7	26.2	3.2	0.2	5.3	47.4

Table 10: Per-template recall (%) under ± 7 -day date tolerance; 785-question stratified sample, Qwen3.6-27B answer model.

Family	<i>n</i>	<i>k</i> =10	<i>k</i> =30	<i>k</i> =50	<i>k</i> =100	<i>k</i> =200
Filter / project	150	37.8	55.6	61.2	70.2	76.0
Role / type	50	21.8	38.2	46.1	59.2	67.1
Temporal join	239	19.1	29.1	34.4	39.8	42.5
Ordering	100	41.5	58.3	65.0	72.9	79.8
Intersection	91	5.0	10.8	15.3	20.5	24.9
Count / group	155	11.4	23.3	30.0	38.8	45.4
All	785	22.5	35.2	41.1	48.6	53.7

Table 11: Gold-article coverage (%) as a function of the retrieval cutoff *k* under the deployed hybrid+rerank pipeline. *k*=30 is the deployed budget (Appendix F); Table 12 reports coverage at the deployed budgets.

(ticker/CIK/LEI), so no name string is ever compared. This is not burden-free for IE→SQL, which must *resolve* names to tickers at extraction: 320 Reuters-suffixed tickers (“AAPL.O” for AAPL) cost ~ 8 points of recall—the alias regime, which normalizes them, lifts IE→SQL alone (37.9→45.8) and leaves every other paradigm unchanged. When no attesting article prints a ticker, a correctly extracted event is silently lost. Both biases run one way, so IE→SQL is under-stated, never over-stated: the ranking holds and our symbolic-execution claims are *conservative*.

- **Event ambiguity** concentrates on M&A life-cycle boundaries: M&A completions show the lowest human-validated attestation precision (73.3%), while the other seven event types are $\geq 90\%$ (Appendix C).

Worked example (PANW/Demisto). One gold event ties all three dimensions together: (PANW, M&A_announce, 2019-02-19), Palo Alto Networks’ \$560M acquisition of Demisto. Five of its seven attesting articles yield M&A-announcement records at extraction, but four anchor the event date to the article’s own publication date (2019-02-20 through 2019-03-05)—the date-convention drift the ± 7 -day tolerance absorbs. The only date-exact record comes from the announcement-day newswire article, which never prints the ticker symbol; its firm field therefore resolves to a raw name string (palo_alto_networks_inc) rather than to PANW and is invisible to ticker-keyed SQL—the entity-variation dimension. And the two earnings-recap articles that mention the deal only in passing produce no extraction at all—the attestation-boundary ambiguity of Appendix C. Two small errors at different stages compose into a strict-mode miss; neither alone would lose the event.

Paradigm	Cap A	Cap B	Overall
LC-oracle	100.0	100.0	100.0
RAG	47.6	27.2	32.4
ReAct RAG	61.8	30.4	38.4
GR-local		N/A	
GR-global		$\approx 100^\dagger$	
IE $\rightarrow$ SQL	62.6	65.6	64.8

Table 12: Gold-article retrieval recall (%) under ± 7 -day matching: per-question coverage of gold-attesting articles; capability columns are question-weighted (micro) means over GT-applicable templates. For IE $\rightarrow$ SQL this is extraction-stage coverage; for the retrieval paradigms it is the fraction of gold articles surfaced into the answer context. LC-oracle is 100% by construction (fed gold chunks). GR-local gold-article retrieval recall is not well-defined—its entity-graph neighborhood answers from community summaries that expose no clean mapping back to source articles, so per-article gold coverage cannot be computed (N/A). † GR-global retrieval is non-discriminative—it forwards essentially the entire corpus (all community reports) to the LLM map step, so article-level retrieval recall is $\approx 100\%$ by design; its information loss occurs in community-report summarization, not in retrieved-set membership.

H.2 Answer-Set Sizes: Recall Does Not Reward Overgeneration

Recall-only scoring could in principle be inflated by overgeneration—a system returning the entire entity universe would achieve high recall on some templates. We screen every prediction for set inflation over all 735 list-valued questions. For a question q , let y^* be the gold set and $\hat{y}$ the predicted set. Table 15 reports, per system: the **size ratio**—median $|\hat{y}|/|y^*|$ (1 = sized like gold, < 1 = under-enumeration, > 1 = overgeneration); **% inflated**—the share of questions with $|\hat{y}| > 2|y^*|$; and **% empty**—the abstention rate ($\hat{y} = \emptyset$), the opposite risk.

Across retrieval-side paradigms the dominant mode is under-enumeration and abstention, not overgeneration, so recall is not inflated. Abstention peaks for GraphRAG (61–90% empty) and for the LC-oracle on intersection (91.2% vs. 17.1% overall; Appendix J). Inflation cannot buy recall either: the two highest non-IE $\rightarrow$ SQL inflation rates belong to ReAct RAG (10.7%) and the no-context floor (9.9%), yet ReAct RAG still trails RAG on recall and the floor reaches only 0.6% recall. The sole over-generator is IE $\rightarrow$ SQL, which extracts genuine events outside the attested pool rather than hallucinating (Appendix H.3).

Operator family	LC-oracle (ceiling)			No-ctx (floor)
	Qwen	v4-flash	v4-pro	
Filter / project	77.6	78.2	77.3	1.1
Role / type	35.3	35.2	35.4	0.6
Temporal join	52.3	34.9	38.4	0.0
Ordering	59.9	59.0	61.6	2.1
Intersection	3.9	4.4	3.8	0.5
Count / group	56.2	55.8	59.9	0.1
Cap A	67.0	67.5	66.8	1.0
Cap B	47.1	39.8	42.7	0.5
Overall	52.2	46.8	48.8	0.6

Table 13: Answer-model robustness and the no-context floor (% , ± 7 -day tolerant, question-weighted micro). The LC-oracle ceiling is re-scored with three answer models—Qwen3.6-27B (open-weight, $\sim 5K$ reasoning tokens/question), DeepSeek v4-flash (no reasoning), and v4-pro (Think Max, $\sim 24K$ reasoning tokens/question). The No-ctx column (Qwen, parametric only, zero articles) is the floor.

Paradigm	strict	$\pm 7d$ (paper)	alias $\pm 7d$
LC-oracle	27.7	52.2	52.2
RAG	15.1	25.2	25.2
ReAct RAG	13.5	23.9	23.9
GR-local	0.5	0.9	0.9
GR-global	2.8	3.8	3.8
IE $\rightarrow$ SQL	25.0	37.9	45.8

Table 14: Overall recall (%) under three matching regimes: strict exact-date, the paper’s ± 7 -day tolerance, and ± 7 -day plus ticker-alias normalization (e.g. “AAPL.O” $\rightarrow$ AAPL). The ranking and every per-operator conclusion are invariant; alias normalization affects only IE $\rightarrow$ SQL.

H.3 Pool Precision and F1

Reliably measuring system *recall* requires gold *precision*, which our annotation provides (94.1%; Appendix C). Measuring system *precision*, by contrast, would require gold *completeness*—a property a pooled ground truth, by design, does not claim: of 16,414 S&P candidates, 1,376 were judged and 614 admitted under unanimous 3-of-3 attestation, as exhaustively annotating all 22,984 articles $\times$ 8 event types is infeasible. This follows established IR pooling practice (bpref; Buckley and Voorhees, 2004) and remains standard in recent work: the TREC 2024–2025 RAG Tracks likewise adopt nugget *recall* as their primary measure (Pradeep et al., 2024, 2025). A predicted item outside the pool is *unjudged*, not wrong: the IE $\rightarrow$ SQL database holds $\sim 5.6\times$ more events than the 614-event pool, so naive pool-precision is dominated by unjudged items, not errors.

System	Recall	Size ratio	% infl.	% empty
LC-oracle	52.2	0.67	1.2	17.1
RAG	25.2	0.50	4.9	32.7
ReAct RAG	23.9	0.25	10.7	48.8
GR-local	0.9	0.00	0.3	90.2
GR-global	3.8	0.00	2.0	61.4
IE→SQL	37.9	1.75	41.9	11.8
No-context	0.6	0.00	9.9	59.3

Table 15: Set-size screen over the 735 list-valued questions: recall (%), median predicted-to-gold size ratio, share of predictions exceeding twice the gold size, and empty-prediction (abstention) rate.

System	macro-P	macro-F1	Recall
LC-oracle	78.3	66.5	52.2
RAG	45.2	38.6	25.2
ReAct RAG	42.1	41.3	23.9
GR-local	26.4	13.4	0.9
GR-global	16.5	11.5	3.8
IE→SQL	28.4	31.3	37.9
No-context	2.9	1.8	0.6

Table 16: Pool precision and F1 (%), macro-averaged over nonempty predictions on the 735 list-valued questions. Under a pooled (non-exhaustive) gold, precision values are lower bounds.

With that caveat, Table 16 reports pool precision and F1, macro-averaged over nonempty predictions (precision is undefined on empty predictions; abstention rates are in Appendix H.2); F1 is the per-question harmonic mean.

Three observations. First, when free-form paradigms answer, rows are mostly in-pool (LC-oracle 78.3%), so recall is not recovered from noise; the no-context floor’s 2.9% confirms the metric separates grounded answers from guessing. Second, F1 preserves the coarse separation—the LC-oracle well ahead; RAG, ReAct RAG, and IE→SQL clustered next; GraphRAG and the no-context floor far below—though not the exact order: IE→SQL slips from second in recall to fourth in F1, for the reason below. Third, under a pooled gold these precisions are *lower bounds*, and IE→SQL bears the brunt: its pool precision falls below RAG and ReAct RAG because real-but-outside-pool events count against it—e.g. on the 2013 instance of B.3.1 (gold = {BGC, NDAQ}), IE→SQL also returns TRMB, and Trimble did announce and complete acquisitions in 2013 with corpus articles: correct in the world, an “error” against the pool.

Family	<i>n</i>	LC-oracle			RAG		
		orig	para	Δ	orig	para	Δ
Filter / project	15	71.9	75.3	+3.3	31.2	42.9	+11.7
Role / type	5	0.0	0.0	+0.0	0.0	0.0	+0.0
Temporal join	25	57.0	58.7	+1.6	6.0	6.0	+0.0
Ordering	10	70.0	65.0	−5.0	25.0	25.0	+0.0
Intersection	15	3.3	5.6	+2.2	1.1	3.3	+2.2
Count / group	20	53.4	53.1	−0.4	14.7	16.4	+1.7
All	90	48.0	48.8	+0.7	13.1	15.8	+2.7

Table 17: Paraphrase pilot: per-family recall (%) on the 90-question subset, original vs. paraphrased phrasing.

H.4 Question-Paraphrase Pilot

To test whether findings transfer beyond template surface forms, we paraphrased 5 questions per template (90 total, fixed seed), each rewritten by GPT-5.5 ($T=0.7$) under a prompt requiring a substantial change of syntactic frame (cleft, passive, fronted adverbial, imperative)—not a synonym swap—while copying every date, event-type name, role, and ticker verbatim and preserving all conditions (time windows, “distinct”, “both . . . and”, ordering, counts). Every rewrite passed an automatic token-preservation check and a manual screen. We re-ran the LC-oracle and RAG on the original and paraphrased versions with the paper’s scorer (Table 17).

Paraphrasing does not materially change the results. Overall recall moves by +0.7 (LC-oracle) and +2.7 (RAG), within run-to-run noise and slightly *in the paraphrases’ favor*, so template phrasing was not inflating scores. The per-operator structure is unchanged: intersection remains collapsed under both phrasings, filter/project stays the easiest family, and the family ranking holds for both systems. IE→SQL is invariant by design (its SQL skeletons key on the typed specification, not the surface form).

I GraphRAG Stage-wise Field Survival

To localize where GraphRAG drops operator-relevant values (§5), we trace typed values through the built index (104k entities, 291k typed claims, 30.7k communities). For each of the 614 gold events matched 1:1 to its (indexed) attesting article, we measure whether two operator-relevant value types survive at (i) index-time extraction (entity and claim artifacts) and (ii) community summarization (community reports). Table 18 reports the results.

The loss is localized. **Dates are extracted but**

Value	Extraction	Community report
Event date ($\pm 7d$)	94.8%	30.9%
Firm entity	56.8%	56.4%

Table 18: GraphRAG field survival by index stage: share of gold-event values recoverable from the extraction artifacts vs. from the community report covering the event. Date survival in reports is a verbatim-match lower bound; paraphrases like “late 2019” are uncounted, though they are not operator-usable either.

not summarized: 94.8% of gold event dates are captured as typed claims at extraction, but only 30.9% survive verbatim into the community report covering that event—the exact scalar that temporal and filter operators need is dropped during entity-centric summarization. **Entities are preserved:** firm-entity survival is flat across the same transition (56.8% $\rightarrow$ 56.4%); summarization keeps the entities and strips the typed values attached to them. The drop is worst on the M&A lifecycle events whose dates separate announce/complete/rumor (date survival 18–42%). Query-time context was not logged, so this covers the two index-time stages, but the 30.9% summarization ceiling already upper-bounds what any query over the community layer can recover.

J Failure Modes Given Gold-Article Retrieval

Taking all questions whose gold articles verifiably reached the answering context yet whose answer is wrong, we assign each a primary bucket by a fixed rule (an approximate triage, not an exhaustive per-row labeling):

- **abstention:** empty prediction on a non-empty gold set;
- **field mis-attribution:** a predicted row cites the missed gold event’s source article but disagrees with it on a non-date field (firm, role, or event type);
- **date mis-anchoring:** a predicted row matches the missed gold event on all non-date fields, but its date is off beyond the ± 7 -day tolerance;
- **incomplete enumeration:** a partial list with none of the above signals.

For the LC-oracle the retrieval condition holds by construction, so all 570 failures (of 735 list-

Bucket	n	Share	Concentrates in
Field mis-attribution	190	33.3%	temporal join (73), count/group (43)
Incomplete enumeration	152	26.7%	spread across families
Abstention	126	22.1%	intersection (83 of 91)
Date mis-anchoring	102	17.9%	filter/project (34), temporal join (32)

Table 19: Primary failure buckets for the 570 LC-oracle failures on list-valued questions; gold evidence is in context by construction.

valued questions) qualify, giving the cleanest view of what goes wrong *after* the gold evidence reaches the context (Table 19).

Each bucket has a distinct mechanism, and each family a dominant one.

Abstention: the intersection collapse. On 91.2% of intersection questions (83/91) the LC-oracle returns the empty set—the source of the family’s 3.9% ceiling in Table 4. This is not a reading failure: the same model is the strongest paradigm at enumerating each event set alone (A.1.1/A.1.2: 72.3/83.2) and collapses only when it must *intersect* two sets within-firm (B.3.1–B.3.3: 7.8/0.0/7.8). Tellingly, the ranking flips here toward systems that move composition *out of* single-pass generation: IE $\rightarrow$ SQL runs the join in SQL (39.4/53.6/65.7) and beats even the LC-oracle, which composes in one generation pass despite holding all the evidence. This pins the bottleneck on composition-in-generation, not evidence access.

Field mis-attribution: right article, wrong field. The failing row cites the gold event’s source article but fills a typed field wrong. The cleanest cases are lifecycle-stage confusions on a single firm: for Cognizant (CTSH) the gold event is an M&A completion, yet a system cites the deal’s article and returns it as an M&A announcement. This is the LC-oracle’s largest bucket (190 of 570) and clusters on the M&A announce/complete/rumor boundaries—also the hardest to attest (Appendix C)—so it persists even with all gold articles supplied: an attribution, not retrieval, failure.

Date mis-anchoring: publication date mistaken for event date. For Newell’s 2013 divestiture completion (gold anchor 2013-07-15), a system cites a gold-attesting retrospective published 2013-09-12 and dates the event to the article, 59 days off.

Incomplete enumeration. Partial lists with no misread signal. For deployable paradigms this bucket coincides with the budget-bound coverage tail quantified by the top- k sweep (Table 11); for the LC-oracle, which holds all gold articles in context, it instead reflects generation-side enumeration limits—the under-enumeration quantified in Table 15.