
Genomic material is fragmented or cDNA is generated.



The fragments are uniquely labeled with molecular barcodes.



After amplification and sequencing, there are many labeled reads.
But errors can occur—in both reads and barcodes.

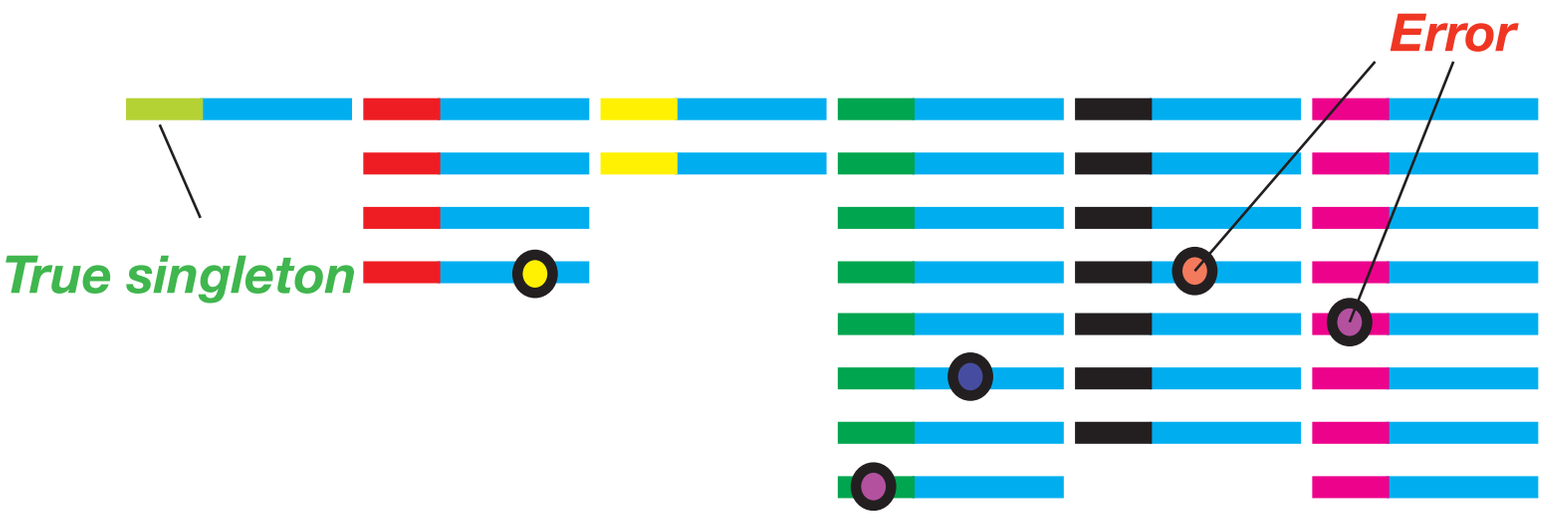

Software helps to remove such errors, as well as PCR duplicates.

Software-corrected molecules with singletons removed.

