Cyjax App For Google SecOps SIEM

User Guide

Overview **4**
Cyjax Platform 5
Google SecOps SIEM 5
Google SecOps Integration for Cyjax 5
Release Notes 5
App Installation & Configuration **7**
Pre-Requisites 7
Creating zip of the cloud function 8
Automatic deployment of the required resources **9**
Prerequisites For Script Execution : 9
Execution Steps : 9
Manual deployment of the required resources **11**
Enabling required APIs 11
Using Secrets 11
Add the Cyjax API Key in Secret Manager 12
Create a GCP Bucket 14
Cloud Function Deployment 15
Command based deployment 15
Configure Scheduler 17
Command based deployment 17
Update Service Account Permission 19
Environment Variables to be configured in Cloud Function 20
View Events in Google SecOps 21
Redeploying an Upgraded Build **23**
Deployment Steps: 23
Dashboard Configuration **24**
Import Cyjax Dashboard into Google SecOps SIEM 24
Dashboards **26**
Indicator Dashboard 26
Filters Description 26
1. Indicator Active Time 26
2. Indicator Type 26
3. Indicator Source 26
4. Indicator Handling Condition 26
Panels Description 26
1. Total Indicator 26

2. Indicator Handling Condition Matrix 26
3. Indicator Type Distribution 26
4. Handling Condition Breakdown 26
5. Top 10 TTP 26
6. Indicator Timeline 27
7. Indicators overview 27
8. Top 10 Countries 27
9. Top 10 Asns 27
10. Industry Breakdown 27
11. Enriched indicators Overview 27
Correlation Dashboard 28
Filters Description 28
1. Indicator Active Time Range 28
2. Classification Filter 28
Panels Description 28
1. Cyjax IOC Matches 28
2. Malicious IPs 28
3. Suspicious IPs 28
4. Benign IPs 28
5. Unknown IPs 28
6. Total Event Matches 28
7. Top 10 IP Indicators 29
8. IOC by Handling Condition 29
9. IOCs Geolocation Overview 29
10. Correlation Overview 29
Locate Environment Variables 30
Limitations 31
Troubleshooting 33
GCP Resources/Services Approximate Cost Details 34

Overview

Cyjax Platform

Cyjax is an intelligence platform that utilises a combined human and automated collection approach to gather, process and enrich data from open, deep and dark web sources. It harvests, develops and delivers this alongside technical feeds and geopolitical monitoring. Our platform delivers high-fidelity intelligence in a critically fast time, helping organisations strengthen their cyber defence and accelerate response.

Google SecOps SIEM

Google SecOps is a modern, cloud-native SecOps platform that empowers security teams to better defend against today's and tomorrow's threats. By combining Google's hyper-scale infrastructure, unparalleled visibility, and understanding of cyber adversaries, Google SecOps provides curated outcomes that proactively uncover the latest threats in near real-time, and enable security teams to detect, investigate and respond with speed and precision.

Google SecOps Integration for Cyjax

This integration enables the seamless ingestion, parsing, and visualization of Cyjax threat intelligence Indicator data within Google SecOps SIEM, offering comprehensive insights through native Google SecOps dashboards. It supports real-time delivery of indicators from Cyjax's threat intelligence platform, automatically correlating security events with contextual threat data.

Release Notes

V1.0.0

- Provided the ingestion script which can deploy as a GCP cloud function to collect indicators from the Cyjax Intelligence Platform and ingest in the Google SecOps.
- Provided the parser that processes data ingested from the Cyjax Intelligence platform and converts it into the Google SecOps UDM data model.
- Provided dashboards for visualization.

App Installation & Configuration

Pre-Requisites

- Google SecOps
- Cyjax Intelligence platform (API token).
- GCP Project with the below required permissions:
    - GCP user and project service account should have below permissions. Follow these steps to assign these permissions to the service account used for accessing other GCP services within your project.
        - Cloud Scheduler Job Runner
        - Secret Manager Secret Access
        - Storage Admin
        - Chronicle API Editor
        - Role Viewer
        - Cloud Run Invoker
- GCP Services
    - Before using the below services, ensure the Google APIs are enabled in your GCP project
        - Cloud Run Function (4-core CPU or higher is recommended)
        - GCS bucket
        - Secret Manager
        - Cloud Scheduler
- Access to Google SecOps Dashboard section.

Creating zip of the cloud function

- Create a zip file with the contents of the following files:
    1. Download the common directory from [Git repository](#).
    2. Download the contents of the [Cyjax ingestion script](#).
    3. Create a zip in the following structure.

❖ Example:

```
├── README.md
├── common
│   ├── __init__.py
│   ├── auth.py
│   ├── auth_test.py
│   ├── env_constants.py
│   ├── ingest.py
│   ├── ingest_test.py
│   ├── ingest_v1.py
│   ├── ingest_v1_test.py
│   ├── status.py
│   ├── utils.py
│   └── utils_test.py
├── constant.py
├── exception_handler.py
├── exception_handle_testr.py
├── main.py
├── main_test.py
└── requirements.txt
└── utility.py
└── utility_test.py
└── cyjax_client.py
└── cyjax_client_test.py
```

Automatic deployment of the required resources

This section explains the use of the provided bash script to automate the deployment of the Cyjax Intelligence ingestion function and related resources within your GCP project.

Prerequisites For Script Execution :

- Access to a GCP project with an owner role to enable APIs, create service accounts, IAM bindings, GCS buckets, Cloud Functions, Cloud Scheduler jobs, and Secret Manager secrets.
- The Cloud Function source code packaged as a ZIP file in this format, available on your local machine or accessible within the Cloud Shell environment.

Execution Steps :

1. Open Google Cloud Shell :
    - Navigate to the Google Cloud Console (console.cloud.google.com).
    - Click the "**Activate Cloud Shell**" in the upper right corner of the console. A terminal window will open within your browser.
2. Create the Script File :
    - Choose a name for the script, for example, `cyjax_deploy.sh`
    - Use a text editor like `nano` to create the file in your Cloud Shell home directory: `nano cyjax_deploy.sh`
3. Paste the Script Content :
    - Copy the entire content of the bash script provided from github repo.
    - Paste the script content into the `nano` editor. In Cloud Shell, you can typically right-click and select "Paste" or use `Ctrl+Shift+V.`
4. Save and Exit :
    - Press `Ctrl+X` to exit `nano.`
    - When prompted to save, press `Y`.
    - Press `Enter` to confirm the filename (`cyjax_deploy.sh`)

5. Upload Your Cloud Function ZIP (if not already in Cloud Shell) :
    - If your function ZIP file is on your local machine, you need to upload it to Cloud Shell.
    - Click the three-dot menu in the Cloud Shell terminal window.
    - Select "Upload" and choose your ZIP file. It will be uploaded to your Cloud Shell home directory. Note the filename.
6. Make the Script Executable :
    - Grant execute permissions to the script file: `chmod +x cyjax_deploy.sh`
7. Run the Deployment Script :
    - Execute the script: `./cyjax_deploy.sh`
8. Follow the Prompts :
    - The script will prompt you to enter various configuration details, such as:
        - GCP Project ID & Region
        - Local path to your Cloud Function ZIP file (e.g.,`/home/username/your-function.zip`)
        - Chronicle Customer ID
        - Chronicle Region
        - CyjaxAPI token Value (this will be stored securely in Secret Manager)
        - Other optional environment variables.
    - Provide the requested information at each prompt. Required fields must be filled. Optional fields can be left blank to use defaults where applicable. These values can be obtained by following these steps.
9. Monitor the Output :
    - The script will display progress messages, indicating which steps are being performed (e.g., enabling APIs, creating resources, deploying the function).
    - Error messages will be shown in red. If an error occurs, the script is designed to stop. Review the error message to troubleshoot.
10. Post-Deployment :

- Once the script completes successfully, verify the resources in the GCP Console:
    - Check Cloud Functions to see your deployed function.
    - Check Cloud Scheduler to see the scheduled job.
    - Check GCS for the bucket and upload ZIP.
    - Check the Secret Manager for the Cyjax API Key secret.
    - Review Cloud Logging for any function execution logs or errors.

Manual deployment of the required resources

Enabling required APIs

Ensure the following Google APIs are enabled in your GCP project (via **APIs & Services** → **Library**).

Service	**APIs needs to enable**
Google SecOps	• chronicle.googleapis.com
Cloud Functions	• cloudfunctions.googleapis.com • run.googleapis.com • cloudbuild.googleapis.com • artifactregistry.googleapis.com • logging.googleapis.com
Cloud Scheduler	• cloudscheduler.googleapis.com • pubsub.googleapis.com
Cloud Storage (Bucket)	• storage-component.googleapis.com
Secret Manager	• secretmanager.googleapis.com
Cloud Resource Manager	• cloudresourcemanager.googleapis.com

Using Secrets

- Environment variables marked as secret must be configured as secrets on Google Secret Manager. [REF]
- Once the secrets are created on Secret Manager, use the secret's resource ID as the value for environment variables.

  For example:
  CHRONICLE_SERVICE_ACCOUNT:
  projects/{project_id}/secrets/{secret_id}/versions/{version_id}

Add the Cyjax API Key in Secret Manager

1. Log in to the "https://console.cloud.google.com/" using valid credentials.
2. Navigate to '**Secret Manager**'.
3. Click on '**Create Secret**'.
4. Provide the name for the secret in the `Name` field.
5. Provide the value for the secret in the `Secret Value` field.
6. Keep the other configurations as default, Click on the '**Create Secret**' button.

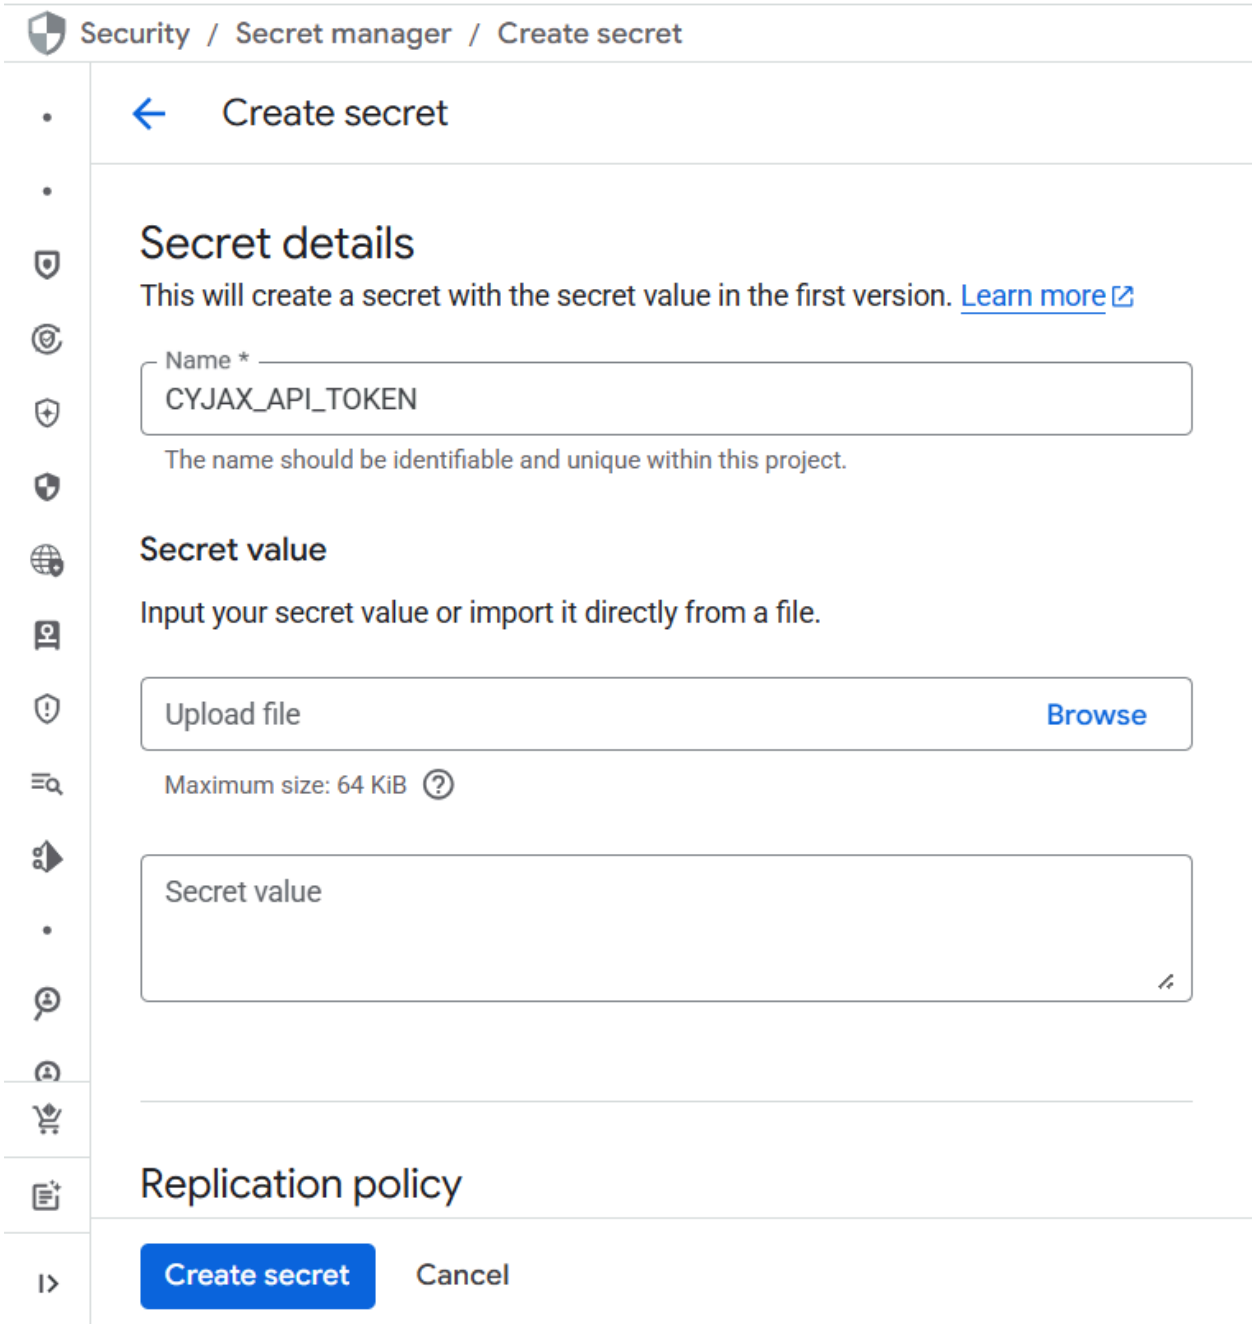

Refer to this page for more information about how to create secrets.

Once the secrets are created on Secret Manager, use the secret's resource id as the value for environment variables. For example

SECRET_KEY: projects/{project_id}/secrets/{secret_id}/versions/{version_id}

Note : Ensure that the resource ID format matches the following structure: projects/{project_id}/secrets/{secret_id}/versions/{version_id}. You can copy the resource name from the secret version details to obtain this value.

Create a GCP Bucket

1. Log in to the "https://console.cloud.google.com/" using valid credentials.
2. Navigate to Buckets in GCP.
3. Click on the Create button.
4. Enter the name of the bucket.
5. Users can select the region and modify the optional parameters if required and then click on the Create button.

Copy the bucket name and provide it in the **GCP_BUCKET_NAME** environment variable.

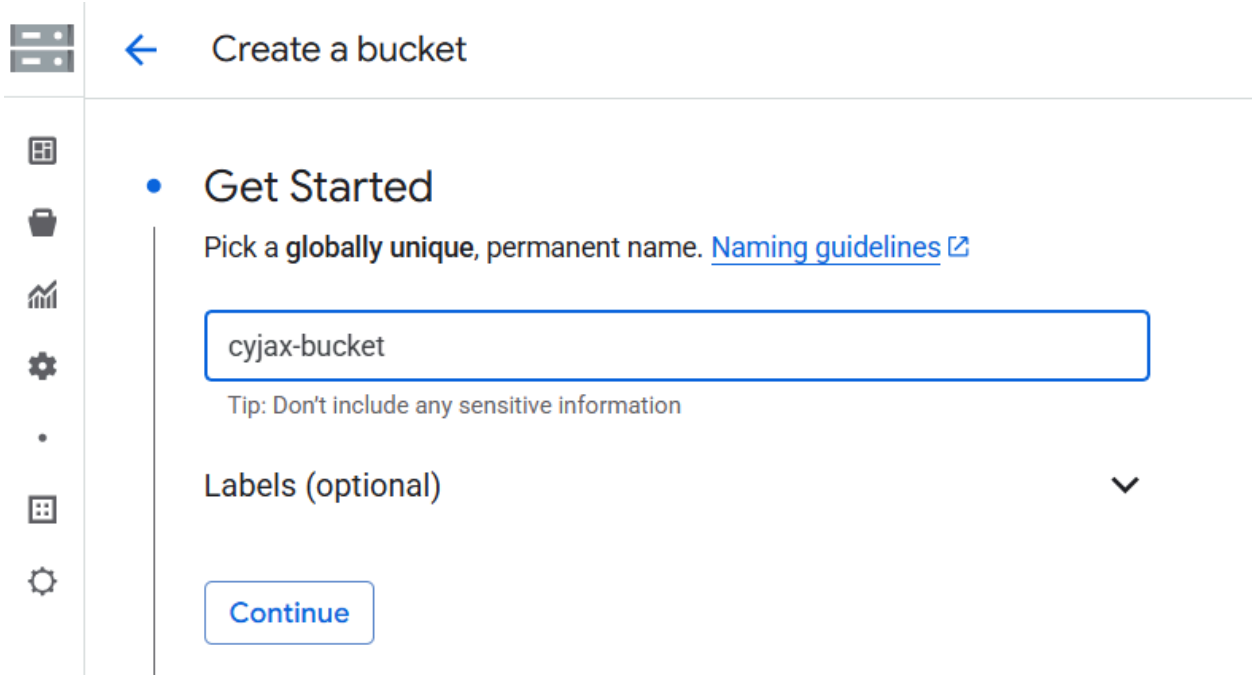

Cloud Function Deployment

Command based deployment

1. Navigate to the bucket and open the bucket created for the Cyjax in these steps. Upload the created cloud function zip file in the bucket.
2. Click Activate Cloud Shell at the top right corner of the Google Cloud console.
3. Modify the below command based on your value and run in the terminal.

Command Format :

```
gcloud functions deploy CLOUD_FUNCTION_NAME --set-env-vars
"ENV_NAME1=ENV_VALUE1,ENV_NAME2=ENV_VALUE2,ENV_NAME3=ENV_VALUE3" --gen2 --runtime=python312 --region=REGION
--source=SOURCE_OF_FUNCTION  --entry-point=main
--service-account=SERVICE_ACCOUNT_EMAIL --trigger-http
--no-allow-unauthenticated --memory=8GiB --timeout=3600s
```

- **CLOUD_FUNCTION_NAME**: Unique name of the cloud function.
- **REGION**: A region for your cloud function. (Ex : us-central1, us-west1, etc.)
- **SOURCE_OF_FUNCTION**: gsutil URI of the cloud function zip in cloud storage. (e.g. gs://cyjax_test_bucket/cyjax_test.zip) where the cyjax_test_bucket is the name of the created bucket and cyjax_test.zip is the cloud function zip file.
- **SERVICE_ACCOUNT_EMAIL**: Email of the created service account of the project. Make sure the selected Service account must have a required permission. Update Service Account Permission following these steps.
- **ENV_NAME1**=**ENV_VALUE1**: Name and value of the environment variable to be created. Environment variables

Note:

1. When deploying a Cloud Function, ensure that the **--timeout** parameter in the deployment command matches the frequency specified in the Cloud Scheduler **--schedule** parameter. Aligning these values prevents overlapping executions, which could lead to data duplication.
    - **For example**, if you set --timeout=3600s when deploying the Cloud Function, configure the Cloud Scheduler with: --schedule="*/60 * * * *".

- This ensures that each scheduled run starts only after the previous execution has completed.

Example Command,

```
gcloud functions deploy cyjax-secops-function --set-env-vars
"CHRONICLE_CUSTOMER_ID=ed19f037-2354-43df-bfbf-350362b45844,CHRONICLE
_PROJECT_NUMBER=2134567,CHRONICLE_REGION=us,GCP_BUCKET_NAME=cyjax_
test_bucket,CYJAX_API_TOKEN=projects/1234567890/secrets/cyjax_api_token/versi
ons/1," --gen2 --runtime=python312 --region=us-central1
--source=gs://cyjax_test_bucket/cyjax_test.zip  --entry-point=main
--service-account=1234567890-compute@developer.gserviceaccount.com
--trigger-http --no-allow-unauthenticated --memory=8GiB --timeout=3600s
```

Configure Scheduler

Command based deployment

1. Click Activate Cloud Shell at the top right corner of the Google Cloud console.
2. Modify the below command based on your value and run in the terminal.

Command Format :

```
gcloud scheduler jobs create http SCHEDULER_NAME --schedule="CRON_TIME"
--uri="CLOUD_FUNCTION_URL" --http-method=POST --attempt-deadline=30m
--oidc-service-account-email=SERVICE_ACCOUNT_EMAIL --location=LOCATION
--time-zone=TIME_ZONE --project=CHRONICLE_PROJECT_NUMBER
```

- **SCHEDULER_NAME**: Unique name of the cloud scheduler.
- **CRON_TIME**: Cron time format for the scheduler to run in every interval. (eg. */60 * * * *)
- **CLOUD_FUNCTION_URL**: URL of the created cloud function. Navigate to create cloud function details.
- **SERVICE_ACCOUNT_EMAIL**: Email of the created service account of the project. Make sure the selected Service account must have a required Permission. Update Service Account Permission following these steps.
- **LOCATION**: A region for your connector. (Ex : us-central1, us-west1, etc)
- **TIME_ZONE**: The time zone of your region. (Ex : UTC)

Note:

1. When deploying a Cloud Function, ensure that the **--timeout** parameter in the deployment command matches the frequency specified in the Cloud Scheduler **--schedule** parameter. Aligning these values prevents overlapping executions, which could lead to data duplication.
    - **For example**, if you set --timeout=3600s when deploying the Cloud Function, configure the Cloud Scheduler with: --schedule="*/60 * * * *".
    - This ensures that each scheduled run starts only after the previous execution has completed.

Example Command

```
gcloud scheduler jobs create http cyjax-secops-scheduler --schedule="0 * * * *"
--uri="https://us-central1-test.cloudfunctions.net/cyjax-secops-function"
--attempt-deadline=30m
--oidc-service-account-email=1234567890-compute@developer.gserviceaccount.c
om --location=us-central1 --time-zone=UTC
```

Update Service Account Permission

1. Open **GCP Console**, Then go to **IAM**.
2. In View By **Main Tab** > Click **GRANT ACCESS**.
3. Add Service Account name in **New Principals**. (Example : service_account_name.gserviceaccount.com)
4. In **Assign Role**, assign below roles to service accounts.
    a. Cloud Scheduler Job Runner
    b. Secret Manager Secret Access
    c. Storage Admin
    d. Chronicle API Editor
    e. Cloud Run Invoker
    f. Role Viewer
5. Click **Save**.

Environment Variables to be configured in Cloud Function

During the integration setup, users are required to provide environment specific values. These values can be obtained by following these steps.

Environment variable	Description	Default value	Required	Secret Manager
GCP_PROJECT_ID	ID of the GCP Project where the ingestion script has to be deployed.	-	Yes	No
CHRONICLE_CUSTOMER_ID	Google SecOps customer id. Navigate to settings in the Google SecOps console for the customer id.	-	Yes	No
CHRONICLE_REGION	A region where the Google SecOps instance is located.	us	No	No
CHRONICLE_PROJECT_NUMBER	Specifies the GCP project identifier associated with your Google SecOps environment.	-	Yes	No
CHRONICLE_SERVICE_ACCOUNT	The Service Account JSON of the GCP project with Google SecOps environment. **Note:** This is required when ingesting indicators into a SecOps instance hosted in a different GCP project than the one where the deployment resides.	-	No	Yes
GCP_BUCKET_NAME	Name of the created GCP bucket.	-	Yes	No
CYJAX_API_TOKEN	Copied resource name value of API TOKEN of Cyjax secret manager.	-	Yes	Yes

	Generate an API Token from the Cyjax platform's API tokens section.			
HISTORICAL_IOC_DURATION	The historical days for IOC data fetching in days.	1 day	No	No
QUERY	A query to search Cyjax Indicators. Examples are below: credentials, malicious	-	No	No
ENABLE_ENRICHMENT	When true, the fetched indicators will be enriched. Allowed values are : [true,false]	false	No	No
INDICATOR_TYPES	A pipe separated list of indicator types. If not specified all indicators are returned. Allowed values: [Domain, Email, Hostname, FileHash-MD5, FileHash-SHA1, FileHash-SHA256, FileHash-SSDEEP, IPv4, IPv6, URL]	-	No	No

View Events in Google SecOps

---

1. Log in to Google SecOps:
    a. Open a web browser and navigate to the Google SecOps instance URL. For example: https://test.backstory.chronicle.security/
    b. Replace test with your actual Google SecOps instance name.
2. Access SIEM Search:
    a. From the top left corner of the Google SecOps console, select the "Investigation" option.
    b. Within the Investigation section, choose "SIEM Search".
3. Filter Events by Log Type:
    a. In the SIEM Search interface, locate the "UDM Search" section.
    b. Apply a filter for the metadata field "log_type". Set the filter value to metadata.log_type="**CYJAX_THREAT_INTELLIGENCE**".
4. View Cyjax Intelligence Entities:
    a. The SIEM Search results will display Cyjax Intelligence entities within the "Results" section.

Redeploying an Upgraded Build

Run the same Automatic or Manual steps with the new Cloud Function ZIP. Use the same function name so GCP updates the code automatically.

Deployment Steps:

Automatic: Rerun the bash script to provide the **updated ZIP**, and reuse the earlier configuration values (Project ID, API key, etc.).

Manual: Rerun the gcloud functions deploy command, point the source flag to the **latest ZIP**, and keep the **function name** unchanged.

Important Notes:

- Same function name means the old build is overwritten, no extra cleanup required.
- Cloud Scheduler, Secret Manager, and service-account settings stay valid.
- After redeploying, check Cloud Logging to confirm everything runs without errors.

Dashboard Configuration

Import Cyjax Dashboard into Google SecOps SIEM

Complete the following steps to import a dashboard:

1. Log in to your Google SecOps instance.
2. In the navigation bar, click **Dashboards & Reports > Dashboards**.
3. Click **New dashboard** and then select **Import from JSON**. The **Import dashboard** confirmation dialog appears.
4. Click the **Upload dashboard files** button. The **Select file** dialog appears. Select the dashboard json file. The selected dashboard file will appear in the table.

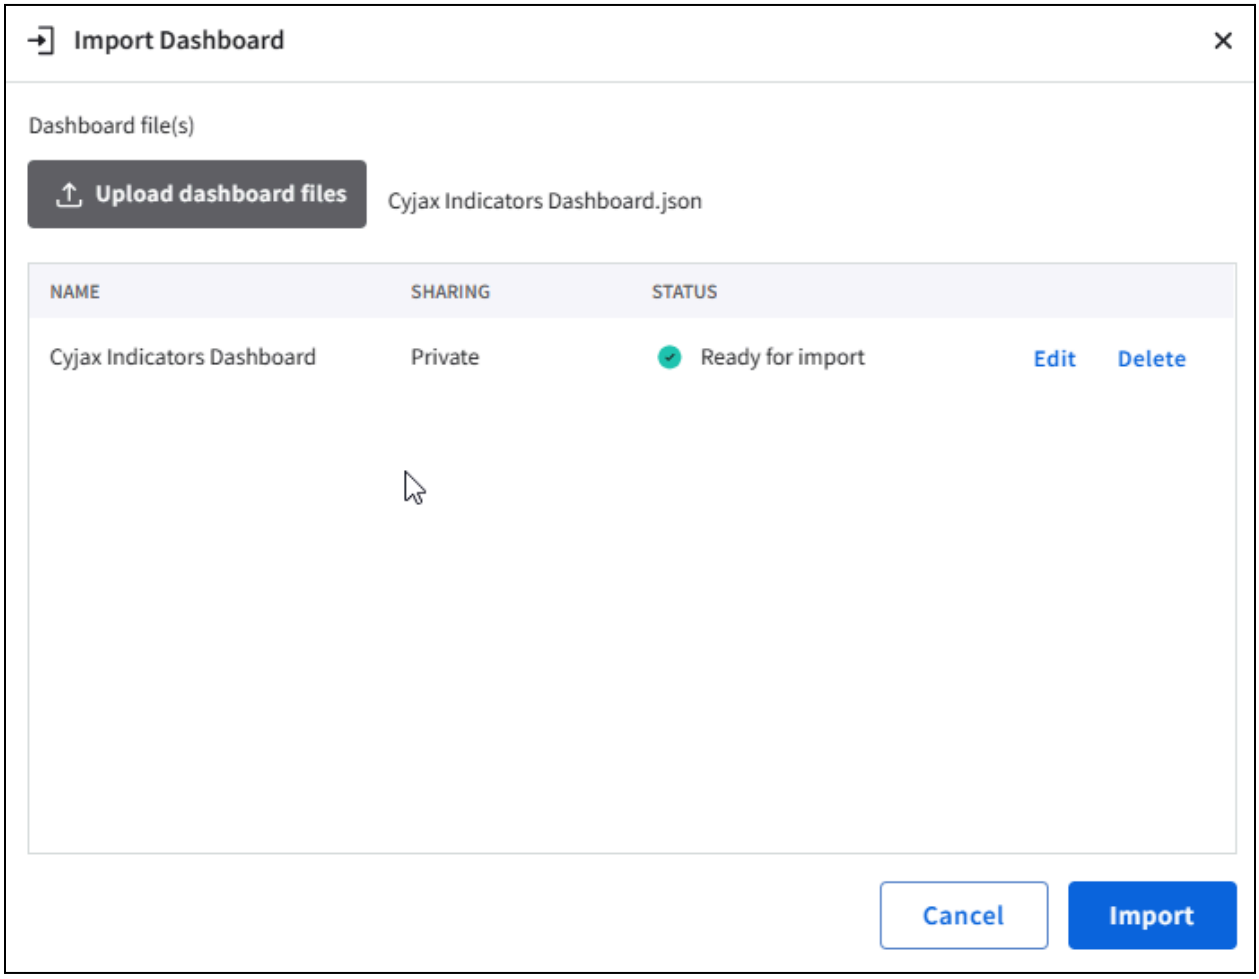

5. Click **Import** to continue importing the dashboard to a personal or shared dashboard.

Dashboards

Indicator Dashboard

The Indicator Dashboard provides detailed information about Indicators fetched from Cyjax.

Filters Description

1. **Indicator Active Time**
    a. This filter updated the panel based on the time range selected in it. Default: Last 7 days.

2. **Indicator Type**
    a. Filter the indicators by each type (Domain, IP, FILE, URL or USER). Default: All

3. **Indicator Handling Condition**
    a. Filters the Panels according to the selected handling condition. i.e.GREEN, RED, AMBER and WHITE. Default: All

Panels Description

1. **Total Indicator**
    a. Count of total indicator in Cyjax threat intelligence.

2. **Red Handling Condition Indicators**
    a. Count of Red handling condition indicators in Cyjax threat intelligence.

3. **Amber Handling Condition Indicators**
    a. Count of Amber handling condition indicators in Cyjax threat intelligence.

4. **Green Handling Condition Indicators**
    a. Count of Green handling condition indicators in Cyjax threat intelligence.

5. **White Handling Condition Indicators**
    a. Count of White handling condition indicators in Cyjax threat intelligence.

6. **Indicator Type Distribution**
    a. Show the count of indicators by each type (Domain, IP, FILE, URL or USER).

7. **Handling Condition Breakdown**
    a. Display chart for indicator counts by Handling condition (RED, AMBER, GREEN, WHITE)

8. **Top 10 TTP**
    a. Shows the top 10 most frequent TTP with count of indicators.

9. **Indicator Timeline**
    a. The chart displays indicator trends over time by indicator type.

10. **Indicators overview**
    a. Comprehensive investigation table displaying Cyjax indicators for in depth analysis.

11. **Top 10 Countries**
    a. Shows the top 10 most frequent countries with count of indicators.

12. **Top 10 Asns**
    a. Shows the top 10 most frequent Asns with count of indicators.

13. **Industry Breakdown**
    a. Displays indicator industry type with count of indicators.

14. **Enriched indicators Overview**
    a. Comprehensive investigation table displaying Cyjax indicator enrichment for in-depth analysis.

Screenshots

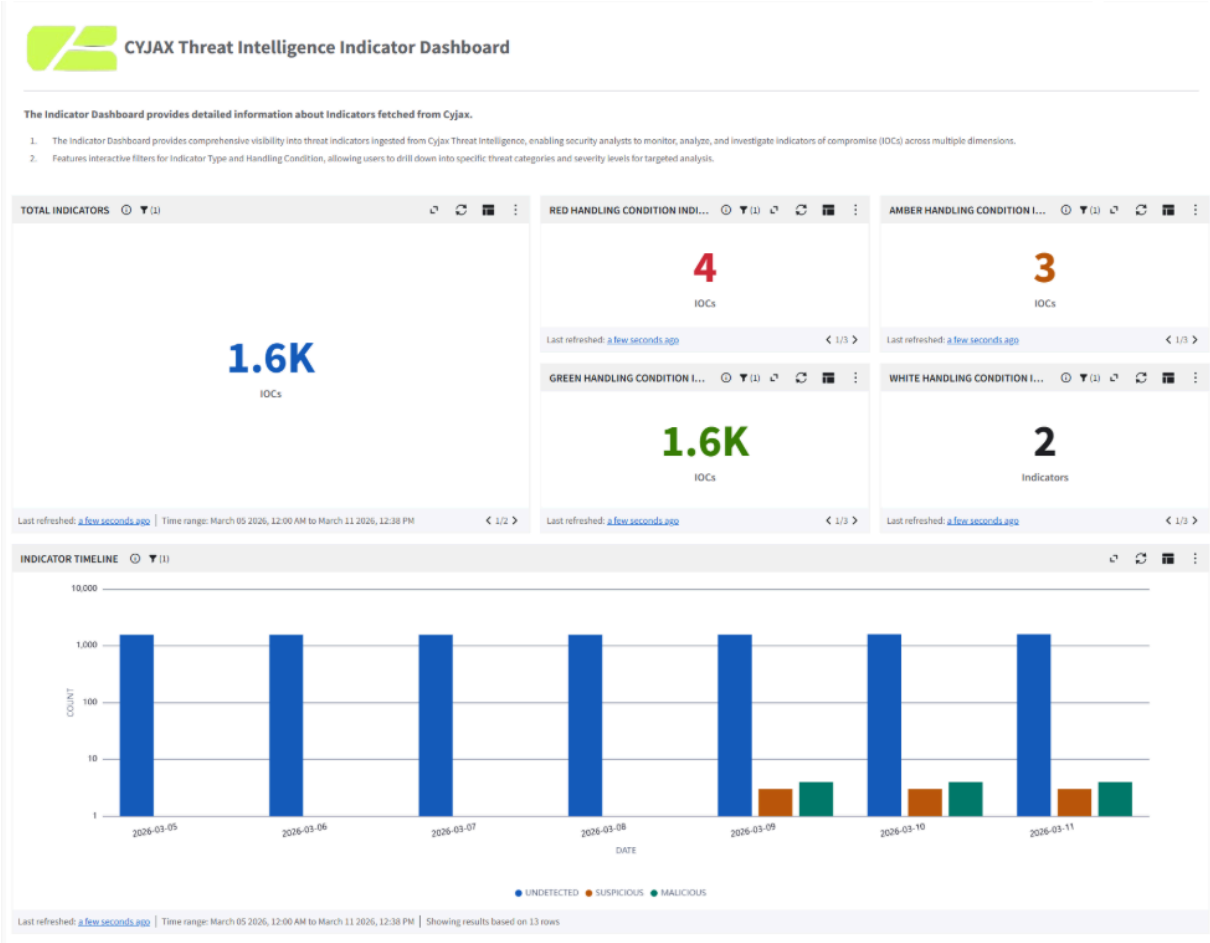

Top 10 Analytics

Key insights into the most prevalent entities in CYJAX Threat Intelligence data. Analyze top organizations, ASNs, and geographic locations.

TOP 10 ASNS

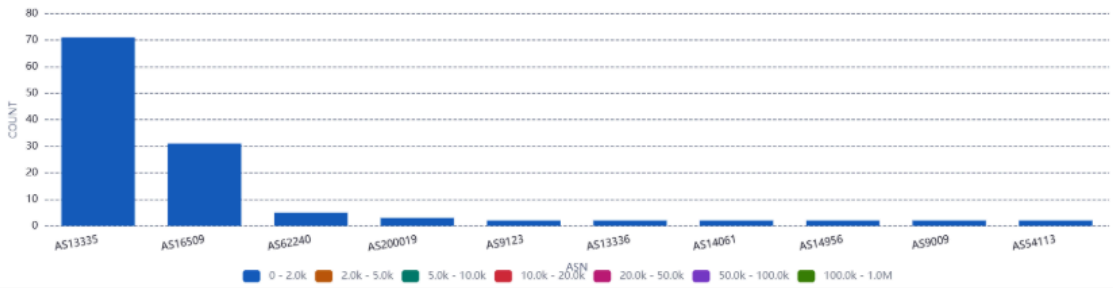

Last refreshed: 3 hours ago | Time range: February 18 2026, 12:00 AM to March 09 2026, 07:20 AM | Showing results based on 10 rows

TOP 10 TTP

TTP	COUNT
Protocol Tunneling	1561
Exfiltration Over C2 Channel	1552
Credentials In Files	1552
Malicious File	1552
Ingress Tool Transfer	1552
Data from Local System	1552
Credentials from Web Browsers	1511
Screen Capture	1511

Last refreshed: 3 hours ago | Time range: February 18 2026, 12:00 AM to March 09 2026, 07:20 AM | 1/2

TOP 10 COUNTRIES

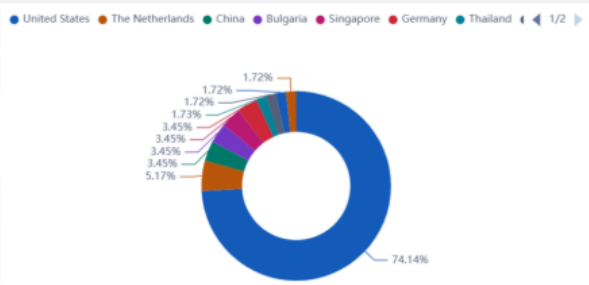

Last refreshed: 3 hours ago | Time range: February 18 2026, 12:00 AM to March 09 2026, 07:20 AM | 1/2

Classification Distribution

Overview of IOC classifications. Use these charts to understand the IOC type distribution across industries and handling conditions.

INDICATOR TYPE DISTRIBUTION (1)



Last refreshed: 3 hours ago | Time range: February 18 2026, 12:00 AM to March 09 2026, 07:20 AM 1/2

INDUSTRY BREAKDOWN (1)

INDUSTRY	COUNT
IT	1552
Financial	1511
Online gaming	1511
Healthcare	50
Manufacturing	41
Unknown	41
Education	9

Last refreshed: 3 hours ago | Time range: February 18 2026, 12:00 AM to March 09 2026, 07:20 AM 1/2

HANDLING CONDITION BREAKDOWN (1)

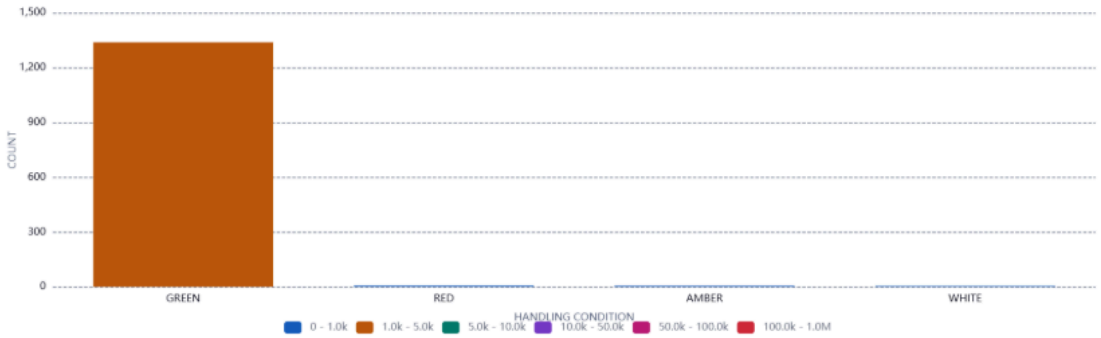

Last refreshed: 3 hours ago | Time range: February 18 2026, 12:00 AM to March 09 2026, 07:20 AM | Showing results based on 4 rows

Detailed Tables

Comprehensive tables for in-depth analysis. Drill down into individual IOCs.

INDICATORS OVERVIEW (1)

IOC [DRILL...	Type	Description	Handling ...	Source[RE...	ASN Organ...	ASN Number	Geo Count...	Geo Count...	UUID	Discovere...	Count
zenithflo...	DOMAIN_...	Public co...	UNDETEC...	https://cy...	AMAZON-02	16509	US	United St...	8074387b...	2026-03-0...	1
visiondoc...	DOMAIN_...	Public co...	UNDETEC...	https://cy...	AMAZON-02	16509	US	United St...	15dca94e...	2026-03-0...	1
sparkforg...	DOMAIN_...	Public co...	UNDETEC...	https://cy...	AMAZON-02	16509	US	United St...	d8672f8f-...	2026-03-0...	1
openmatr...	DOMAIN_...	Public co...	UNDETEC...	https://cy...	AMAZON-02	16509	US	United St...	b8591ced...	2026-03-0...	1
neuraldoc...	DOMAIN_...	Public co...	UNDETEC...	https://cy...	AMAZON-02	16509	US	United St...	443c2b75...	2026-03-0...	1
quantapa...	DOMAIN_...	Public co...	UNDETEC...	https://cy...	AMAZON-02	16509	US	United St...	1efbc134-...	2026-03-0...	1
visiondoc...	DOMAIN_...	Public co...	UNDETEC...	https://cy...	AMAZON-02	16509	US	United St...	3ca07c92-...	2026-03-0...	1
sparkforg...	DOMAIN_...	Public co...	UNDETEC...	https://cy...	AMAZON-02	16509	US	United St...	913bed78...	2026-03-0...	1

Last refreshed: 3 hours ago | Time range: February 18 2026, 12:00 AM to March 09 2026, 07:20 AM | Showing results based on 1,353 rows

ENRICHED INDICATORS OVERVIEW (1)

IOC [DRILL...	Type	Description	Handling ...	Source [R...	ASN Organ...	ASN Number	Geo Count...	Geo Count...	UUID	Last Seen	Count
openmatr...	DOMAIN_...	Public co...	UNDETEC...	https://cy...	AMAZON-02	16509	US	United St...	68c1589e-...	2026-03-0...	1
sparkforg...	DOMAIN_...	Public co...	UNDETEC...	https://cy...	AMAZON-02	16509	US	United St...	913bed78...	2026-03-0...	1
openmatr...	DOMAIN_...	Public co...	UNDETEC...	https://cy...	AMAZON-02	16509	US	United St...	b8591ced...	2026-03-0...	1
neuraldoc...	DOMAIN_...	Public co...	UNDETEC...	https://cy...	AMAZON-02	16509	US	United St...	245226b8...	2026-03-0...	1
sparkforg...	DOMAIN_...	Public co...	UNDETEC...	https://cy...	AMAZON-02	16509	US	United St...	d8672f8f-...	2026-03-0...	1
primevect...	DOMAIN_...	Public co...	UNDETEC...	https://cy...	AMAZON-02	16509	US	United St...	c902beba...	2026-03-0...	1
zenithflo...	DOMAIN_...	Public co...	UNDETEC...	https://cy...	AMAZON-02	16509	US	United St...	8074387b...	2026-03-0...	1
signalbas...	DOMAIN_...	Public co...	UNDETEC...	https://cy...	AMAZON-02	16509	US	United St...	9f2f0db9-...	2026-03-0...	1

Last refreshed: 3 hours ago | Time range: February 18 2026, 12:00 AM to March 09 2026, 07:20 AM | Showing results based on 320 rows

Correlation Dashboard

The Correlation dashboard is designed to identify relationships across indicators and events from other sources.

Filters Description

1. **Indicator Active Time Range**
    a. This filter updated the panel based on the time range selected in it. Default: Last 7 days.

2. **Classification Filter**
    b. Filters the Panels according to the selected Classification type. i.e.GREEN, RED, AMBER and WHITE.

Panels Description

1. **Unique IOC Matches**
    a. Total count of Cyjax Intelligence IOC matches detected in the environment.

2. **RED Handling Condition**
    a. Count of IoCs matched against Cyjax Threat Intelligence with RED Handling condition.

3. **AMBER Handling Condition**
    a. Count of IoCs matched against Cyjax Threat Intelligence with AMBER Handling condition.

4. **Total Event Matches**
    a. Total count of GreyNoise Intelligence IOC matches detected in the environment.

5. **Top 10 Indicators**
    a. Table of the 10 most frequently matched Indicators from Cyjax.

6. IOC By Classification

a. Pie chart showing Cyjax Intelligence IOC distribution by classification.

7. IOCs Geolocation Overview

a. World map plotting the geographic origin of matched Cyjax Intelligence IOCs.

8. Correlation Overview

a. Comprehensive investigation table displaying Cyjax Intelligence IOC matches for in-depth analysis.

Screenshot

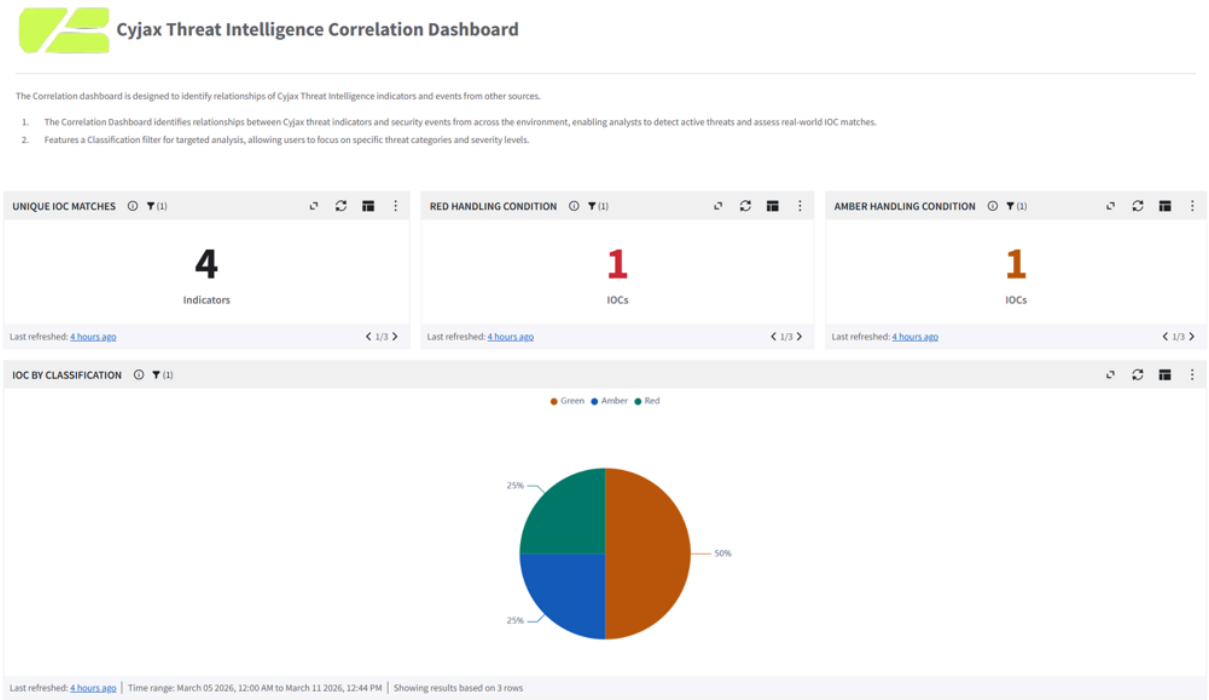

IOC Match Event & Trends

Monitor the volume and patterns of CYJAX Threat Intelligence IOC match events across your environment.

TOTAL EVENT MATCHES (1)

4

TOTAL EVENT MATCHES

Last refreshed: 4 hours ago | 1/3

TOP 10 IOCS (1)

IOC	TYPE	COUNT	HOSTNAME
csrobalicetesthb.com	IOC_TYPE_DOMAIN	1	windows-hb
abctesthb.com	IOC_TYPE_DOMAIN	1	windows-hb
81.82.28.71	IOC_TYPE_IP	1	windows-hb
decoraat.net	IOC_TYPE_DOMAIN	1	windows-hb

Last refreshed: 4 hours ago | Time range: March 05 2026, 12:00 AM to March 11 2026, 12:44 PM | Showing results based on 4 rows

IOCS GEOLOCATION OVERVIEW (1)

Last refreshed: 4 hours ago | Time range: March 05 2026, 12:00 AM to March 11 2026, 12:44 PM | Showing 1 row

CORRELATION OVERVIEW [DRILLDOWN] (1)

IOC	TYPE	CLASSIFICATION	CATEGORY	LATITUDE	LONGITUDE	TIME	COUNTRY	CONFIDENCE	HOSTNAME
81.82.28.71	IOC_TYPE_IP	GREEN	—	51.0950244	51.0950244	2026-03-09	Belgium	—	windows-hb
csrobalicetesthb.com	IOC_TYPE_DOMAIN	RED	—	0	0	2026-03-09	-	—	windows-hb
decoraat.net	IOC_TYPE_DOMAIN	GREEN	—	0	0	2026-03-09	-	—	windows-hb
abctesthb.com	IOC_TYPE_DOMAIN	AMBER	—	0	0	2026-03-09	-	—	windows-hb

Last refreshed: 4 hours ago | Time range: March 05 2026, 12:00 AM to March 11 2026, 12:44 PM | Showing results based on 4 rows

Locate Environment Variables

CHRONICLE_CUSTOMER_ID

Steps to find:

1. Log in to the GCP console (console.cloud.google.com).
2. From the GCP Navigation Menu, Navigate to Security > Google SecOps.
3. Expand Instance details.
4. Copy the Customer ID value.

CHRONICLE_REGION

Steps to find:

1. Log in to the GCP console (console.cloud.google.com).
2. Navigate to Security > Google SecOps.
3. Expand Instance details.
4. Copy the Region value.

CHRONICLE_PROJECT_NUMBER

Steps to find:

1. Log in to the GCP console (console.cloud.google.com).
2. On the home page you can find Project number.

GCP_BUCKET_NAME

Steps to find:

1. Log in to the GCP console (console.cloud.google.com).
2. From the GCP Navigation Menu, Cloud Storage > Buckets.
3. Copy the bucket name (e.g., cyjax-bucket).

INDICATOR_TYPES

Steps to find:

1. Pipe-separated list of indicator types to fetch.
2. Allowed values: Domain, Email, Hostname, FileHash-MD5, FileHash-SHA1, FileHash-SHA256, FileHash-SSDEEP, IPv4, IPv6, URL
3. Example: Domain|Email|IPv4

CYJAX_API_TOKEN

Steps to find:

1. Navigate to your Cyjax platform .
2. Go to the `**Profile > API tokens**` section.
3. Generate and Copy the API Token.

QUERY

Steps to find:

1. A query string to filter Cyjax Indicators.
2. Optional parameter to narrow down the indicators fetched.

HISTORICAL_IOC_DURATION

Steps to find:

1. Number of days of historical IOC data to fetch on first run. .
2. Maximum value: 7 days
3. Default value: 1 day

Limitations

1. If the user does not specify the required environment variable while configuring the Cloud Function, the script deployment will fail.
2. CBN parser will only be able to parse the Cyjax entity data.
3. The Google SecOps Ingestion API has a payload limit of 4 MB. Logs exceeding this limit will not be ingested and will be skipped. To minimize data loss, please ensure that log sizes remain within the allowed limit.
4. Newly ingested entities often take additional time to appear on the dashboard. This latency impacts real time monitoring and reduces the effectiveness of dashboards for time sensitive investigations. A support ticket was raised regarding this issue for further investigation and resolution and its limitation from Google SecOps side.
5. When Cloud Run functions execute for more than 30 minutes, Cloud Scheduler will show a "Failed" status with 504 Gateway Timeout errors. This is expected behavior and does not indicate actual function failure. The Cloud Run function continues execution despite the timeout in Cloud Scheduler.
   Error Message Example:
   ```
   ERROR <timestamp> [httpRequest.requestMethod:POST]
   [httpRequest.status: 504] [httpRequest.responseSize: 72 B]
   [httpRequest.latency:1,799.798 s]
   [httpRequest.userAgent:Google-Cloud-Scheduler]
   https://<cloud_function_uri>
   ```
6. Google SecOps does not enforce validation on time range filters. Users can configure a start time greater than the end time, or set both values to be identical, without receiving an error. Filter validation logic is platform managed and cannot be extended.
7. Time range granularity in Google SecOps follows calendar-based logic. Selecting "Past 1 Week" on a Monday considers the Monday-to-Sunday range, potentially returning only the current day's data if selected at the start of a week. Similar behavior applies to monthly filters.

Troubleshooting

This section describes the common issues that might happen during the deployment or the running of the app and the steps to resolve the issues.

1. GCloud logs can be used for troubleshooting.
    a. Log in to the "https://console.cloud.google.com/" using valid credentials.
    b. Navigate to 'Cloud functions' and click on the deployed function where you can find the logs module.
    c. Logs can be filtered using severity.
2. If you test the cloud function immediately after deploying it on gcloud, It might be possible that the cloud function will not work as expected. To resolve this, wait for a few seconds and then test it.
3. If the cloud function stops its execution because memory exceeds the limit, reconfigure the cloud function's memory configuration and increase the memory limit.
4. The dashboard may be slow to load or unresponsive - This could be due to a problem with the data source being unavailable or having too much data, the query that is being used, or the way that the dashboard is being rendered.
5. Entities are successfully ingested but not displayed in search results this could be due to following reasons.
    a. The time range for the search is outside of the timestamp associated with the ingested event.
    b. The ingested entity might be a duplicate entity with the same payload.

GCP Resources/Services Approximate Cost Details

Service	Standard Configurations	Purpose	Reference
Cloud Functions	Type: Memory: 8192MB CPU: 4.8GHz Execution time per function (ms): 3600 Invocations per month: 1500 Minimum number of instances: 1	Function / Script which pulls data from Cyjax Platform using API and ingest into Google SecOps.	Approx cost ~ $66/month https://cloud.google.com/functions/pricing
Cloud Storage (Bucket)	Total Amount of Storage: 1 GiB	Storage bucket used to manage API checkpoints	Approx cost ~ $0.02/month https://cloud.google.com/storage/pricing
Secret Manager	Access operations: 1500	Used to maintain credentials.	Approx cost ~ $0/month https://cloud.google.com/secret-manager/pricing
Cloud Scheduler	Total amount of jobs: 1	Scheduler which executes above cloud function at a specific time interval.	Approx cost ~ $0/month https://cloud.google.com/scheduler/pricing

Note: Users can also calculate (using pricing calculator) the estimated price of the Google Cloud services used.