CYJAX Threat Intelligence - Google SecOps SOAR Integration

User Guide

Version: 1.0.0

Table of Contents

Table of Contents 2

Overview 3

CYJAX Platform 3

Google SecOps 3

CYJAX Threat Intelligence Integration for Google SecOps SOAR Integration 3

Release Notes 4

App Installation & Configuration 5

Pre-Requisites 5

Google SecOps 5

CYJAX Threat Intelligence 5

Installing the Integration 6

Configuration 8

Actions 13

Invoking Actions 13

Invoke Action Manually (from Case) 13

Invoke Action Automatically (from Playbook/Block) 14

Select Entities for Action 15

Select Specific Entities for Action 15

Select All Entities for Action 15

Select Entities of Specific Type for Action 16

Actions provided in the Integration 17

Action 1: Ping 17

Action 2: Enrich IOCs 18

Action 3: Domain Monitor 20

Action 4: List Data Breaches 22

Uninstalling the Integration 26

Limitations 27

Known Behaviors 28

Troubleshooting 29

Case 1: PythonProcess Has timed out. 29

Case 2: Unknown error running Action. 31

Overview

CYJAX Platform

CYJAX is an intelligence platform that utilises a combined human and automated collection approach to gather, process and enrich data from open, deep and dark web sources. It harvests, develops and delivers this alongside technical feeds and geopolitical monitoring. Our platform delivers high-fidelity intelligence in a critically fast time, helping organisations strengthen their cyber defence and accelerate response.

Google SecOps

Google SecOps is a cybersecurity telemetry platform for threat hunting, and threat intelligence and is part of the Google Cloud Platform. Google SecOps stores log events it receives in two formats: either as the original raw log or structured Unified Data Model (UDM) log. There are two critical elements to consider for parsing, Unified Data Model (UDM) which defines the schema for parsing, and Configuration Based Normalizers (CBN) which describes how log data is transformed to the UDM schema.

CYJAX Threat Intelligence Integration for Google SecOps SOAR Integration

The SOAR component enables security teams to leverage CYJAX's threat intelligence capabilities directly within automated investigation and response workflows. This integration enhances visibility into external threats by providing actionable intelligence on indicators, domains, and data exposure risks.

Release Notes

V1.0.0

- This integration implements investigative and generic actions for the CYJAX platform on the Google SecOps SOAR Platform. It enables end-users to implement comprehensive network security use cases through a combination of the following actions:

Actions:

1. **Ping** – Tests the connectivity between Google SecOps SOAR and the CYJAX instance by making an authenticated API call. It validates the provided asset configuration parameters and verifies that the credentials have the necessary permissions.
2. **Enrich IOCs** – This action returns enrichment information for an indicator of compromise as sightings from monitored sources, GeoIP and ASN.
3. **Domain Monitor** – This action allows you to retrieve information for the Domain Monitor feature. The feature tracks your brands against newly registered global domains and the certificate transparency logs (CTL).
4. **List Data Breaches** – Lists all email addresses collected from data breaches.

App Installation & Configuration

Pre-Requisites

Google SecOps

- A Google SecOps SOAR Instance with an Admin role user.

CYJAX Threat Intelligence

- CYJAX platform access (API Token).

Installing the Integration

1. Log in to the Google SecOps SOAR Platform.
2. From the Sidebar, click on the **Content Hub** section

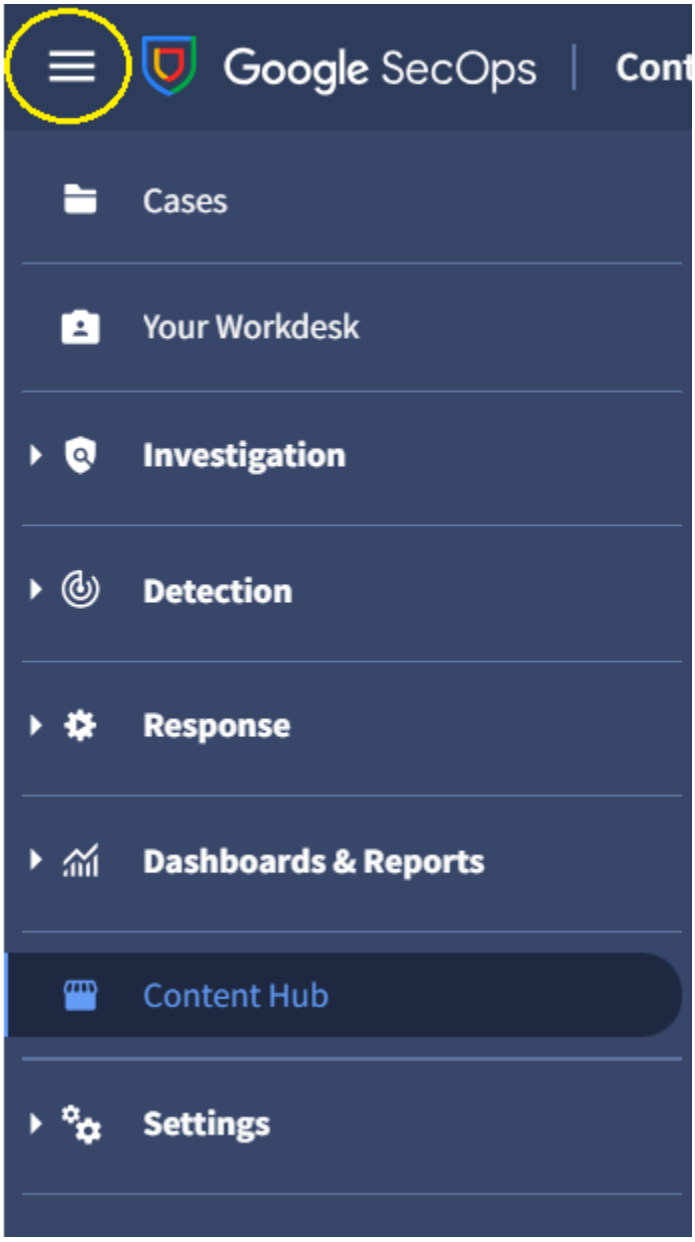

3. In the Content Hub, click on the Response Integrations tab.

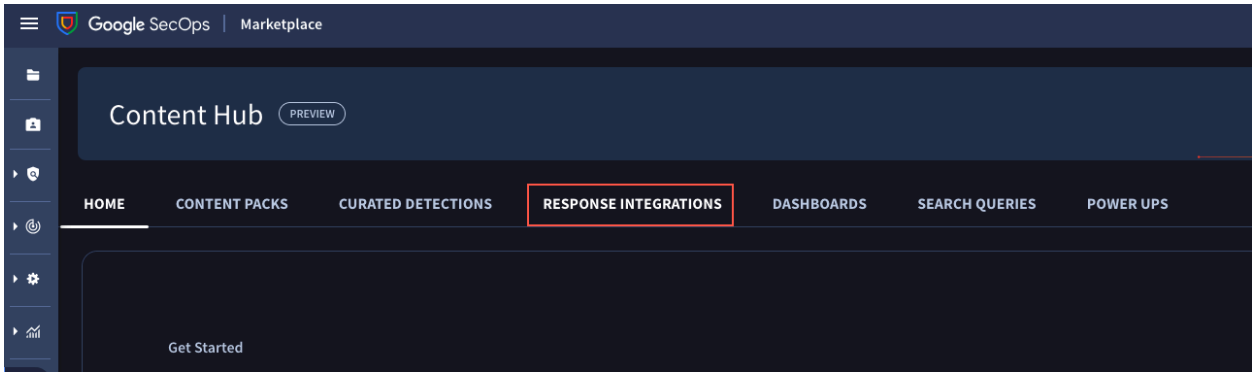

4. From the **Response Integrations** tab, search for **CYJAXThreatIntelligence**.

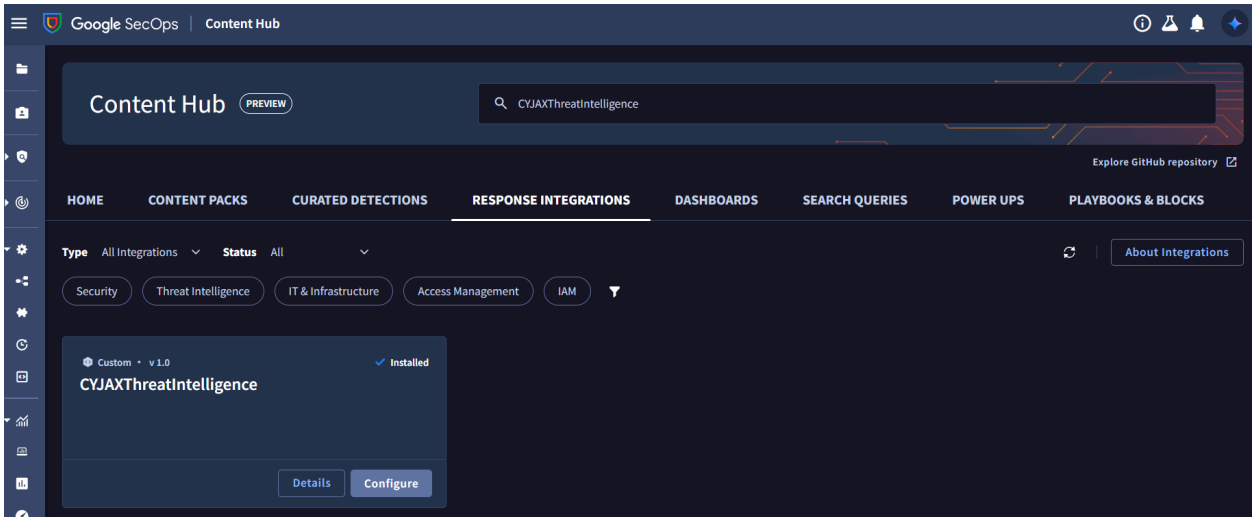

5. Click the **Install** button to install the integration.

Configuration

1. Once the integration has been installed successfully, the user needs to configure it to use the actions provided by the integration. These actions can be run manually from a case or can be used in playbooks.
2. To configure the integration, users can navigate to **Response** > **Integrations Setup**.

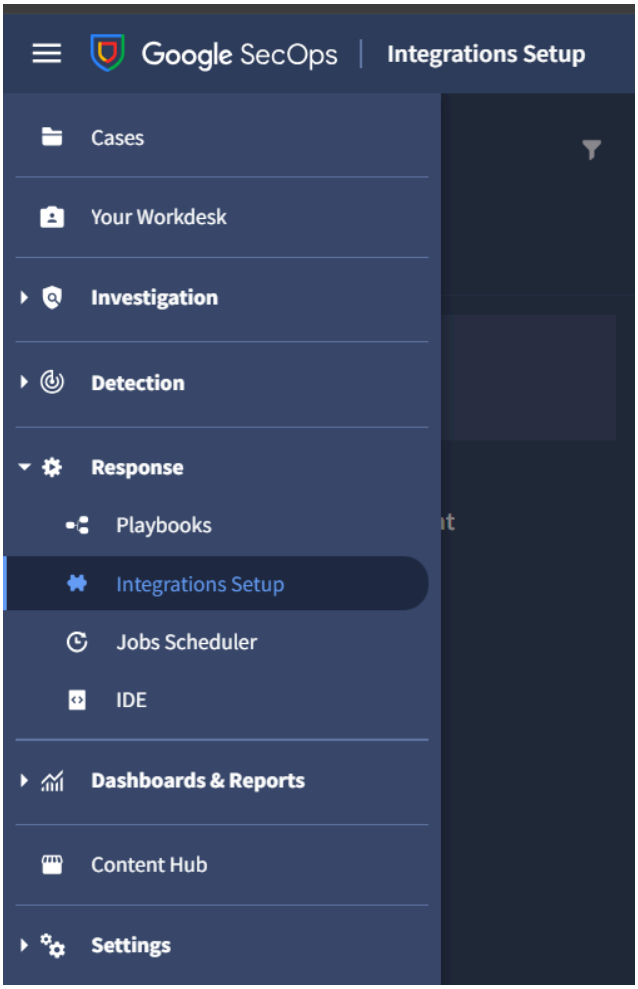

3. The integration can be configured in any of the desired environments. The integration actions can be used for playbooks and cases belonging to the environment in which the integration is configured.
4. Click on the **Plus** (**+**) button to configure the integration for the desired environment.

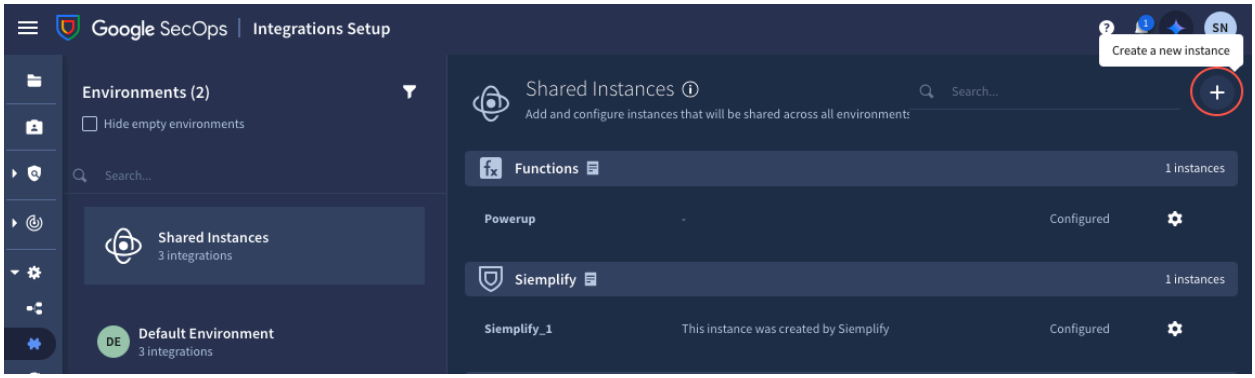

5. Search for **CYJAXThreatIntelligence** integration and select it. Click **Save**.

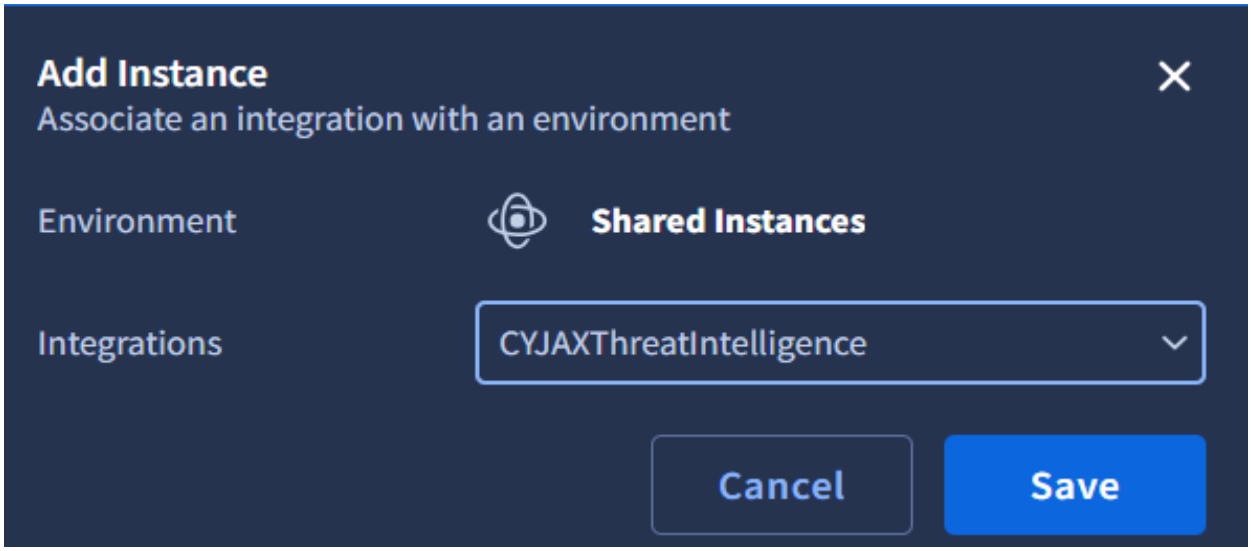

6. The instance of integration will be saved. However, in the next pop-up, users must add the necessary configuration parameters to use the actions.

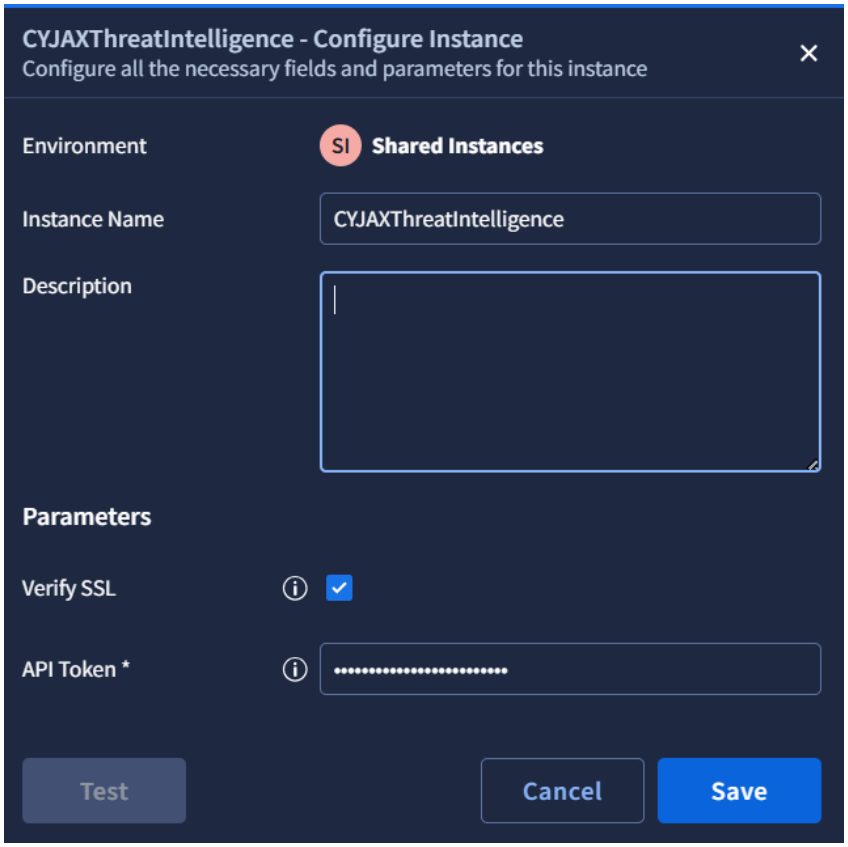

Field name	Description	Default value	Required	Type
API Token	API token required to authenticate requests to the CYJAX Platform API.	-	True	String
Verify SSL	Controls SSL certificate verification when making HTTPS requests to the CYJAX Threat Intelligence endpoint.	True	False	Checkbox

7. After adding the valid configuration parameters, click on the **Save** button to save the configurations. This is required to access the CYJAX Threat Intelligence APIs used in the actions.
8. After saving the configurations, the user can validate them using the **Test** button
    a. A tick mark appears if the credentials provided are valid.

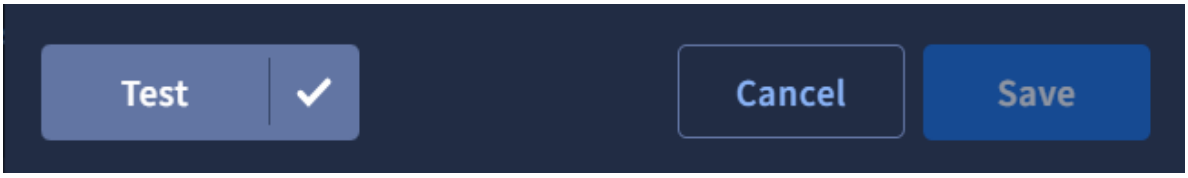

    b. If invalid credentials are provided or any internal issue is faced, a cross mark on the right side of the Test button will appear. The full error message can be displayed by clicking the cross button.

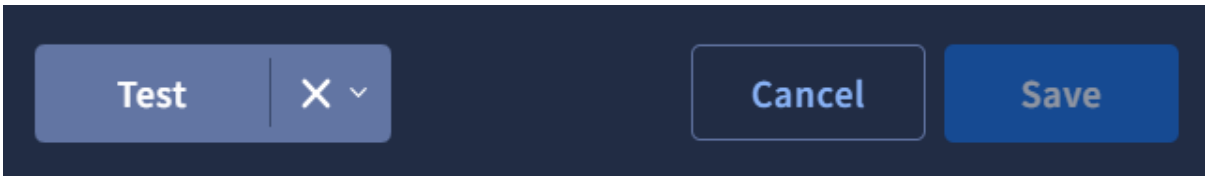

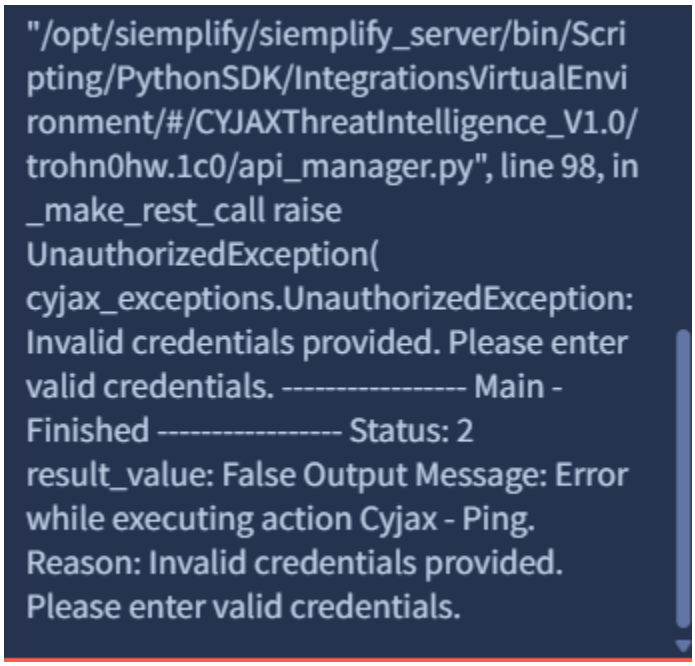

Note:

- After making any changes in the configuration parameters, the user needs to save them before testing again using the Test button.
- When updating the credentials, the user must delete the entire Password from the input first before adding the updated Password.

More information about configuring integrations in Google SecOps can be found *here*.

Actions

This integration implements generic actions for the CYJAX platform on the Google SecOps SOAR Platform. It enables end-users to implement comprehensive use cases on the CYJAX Platform through the below available actions.

Invoking Actions

Invoke Action Manually (from Case)

1. Navigate to the Case **Overview** tab of the case on which the action needs to be performed.
2. In the selected case, click Manual Action (icon) located on the right side under the Case Top Bar. The Manual Action dialog box appears.

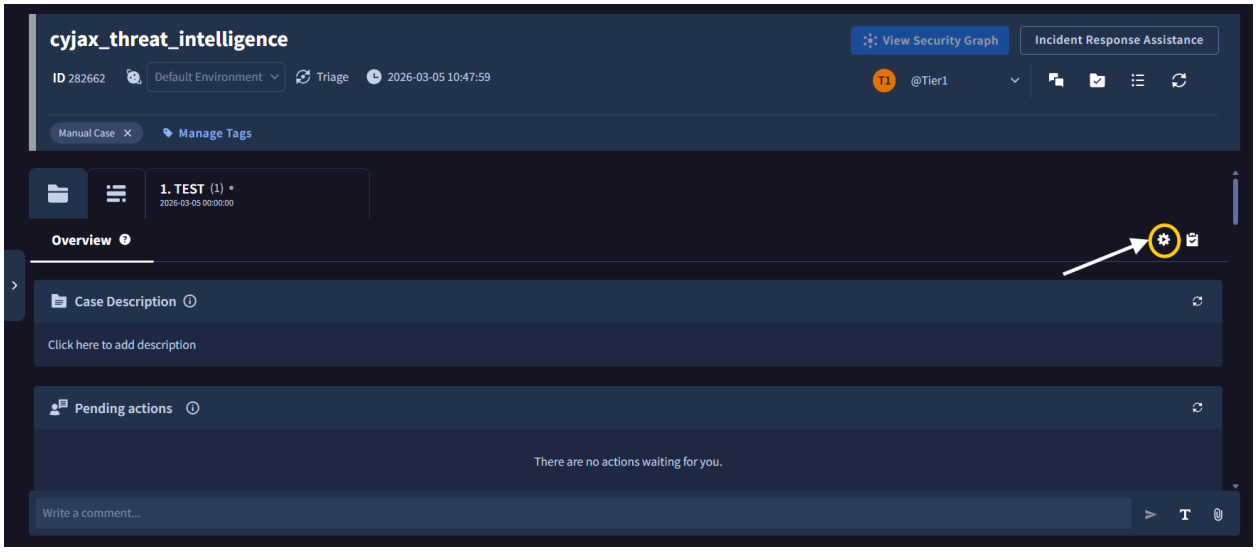

3. Select the required action: **CYJAXThreatIntelligence** > [**Action Name**]. Make sure to fill in the required information.
4. Once the information is added, click on the **Execute** button.
5. Once the action is successfully executed, the result (success or failure) will be displayed on the Case wall.
6. The result contains different JSON output and insights based on different actions.

Invoke Action Automatically (from Playbook/Block)

Actions can be added as a step in a playbook. This action will run when the playbook is executed. Playbooks, in turn, can be triggered on cases and alerts based on the conditions determined by the user.

To add an action as a part of the playbook, follow these steps:

1. Navigate to **Response** > **Playbooks**
2. Select any existing playbook or create a new one.
3. Click on the **+ Open Step Selection** button, and navigate to the Actions tab.
4. Under **CYJAXThreatIntelligence** integration, all the actions available in the integration would be visible. Simply, drag and drop the action required to the playbook step.
5. The action should now be added to the playbook. Make sure to configure the input parameters (if applicable) for the action.

Select Entities for Action

Select Specific Entities for Action

1. Navigate to the Case **Overview** tab of the case on which the action needs to be performed.
2. In the selected case, click Manual Action ('**gear**' icon) located on the right side under the Case Top Bar. The Manual Action dialog box appears.
3. Select the required action: **CYJAXThreatIntelligence** > [**Action Name**].
4. In the Entities section, select **Specific**, dropdown had the list of entities available select the entity.

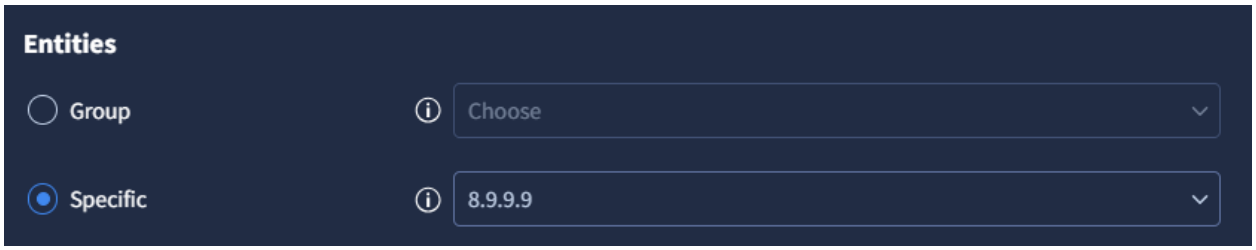

Select All Entities for Action

1. Navigate to the Case **Overview** tab of the case on which the action needs to be performed.
2. In the selected case, click Manual Action ('**gear**' icon) located on the right side under the Case Top Bar. The Manual Action dialog box appears.
3. Select the required action: **CYJAXThreatIntelligence** > [**Action Name**].
4. In Entities, select Group, select **All entities** in dropdown.

Select Entities of Specific Type for Action

1. Navigate to the Case **Overview** tab of the case on which the action needs to be performed.
2. In the selected case, click Manual Action (‘**gear**’ icon) located on the right side under the Case Top Bar. The Manual Action dialog box appears.
3. Select the required action: **CYJAXThreatIntelligence** > [**Action Name**].
4. In Entities, select Group, for example if the user wants to pass all entities with type domain, then select **All domains** in dropdown.

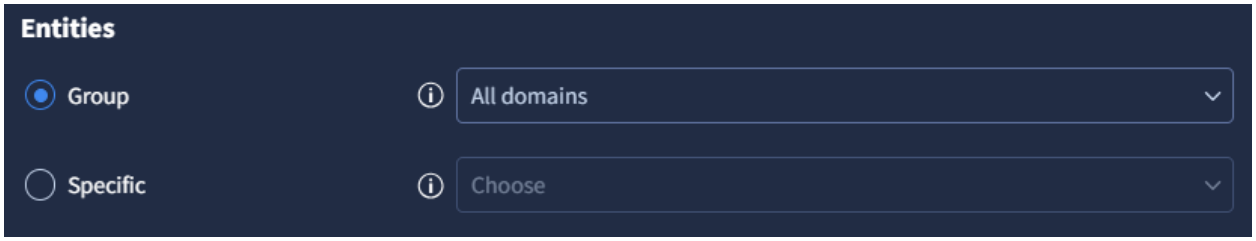

Actions provided in the Integration

Action 1: Ping

- While configuring the CYJAX Threat Intelligence integration, the configured inputs can be tested. This validation of the inputs is done by Ping Action. Hence, Ping Action is responsible for the validation of the configuration parameters when the Integration is configured.
- CYJAX scope required in API token: **indicator**

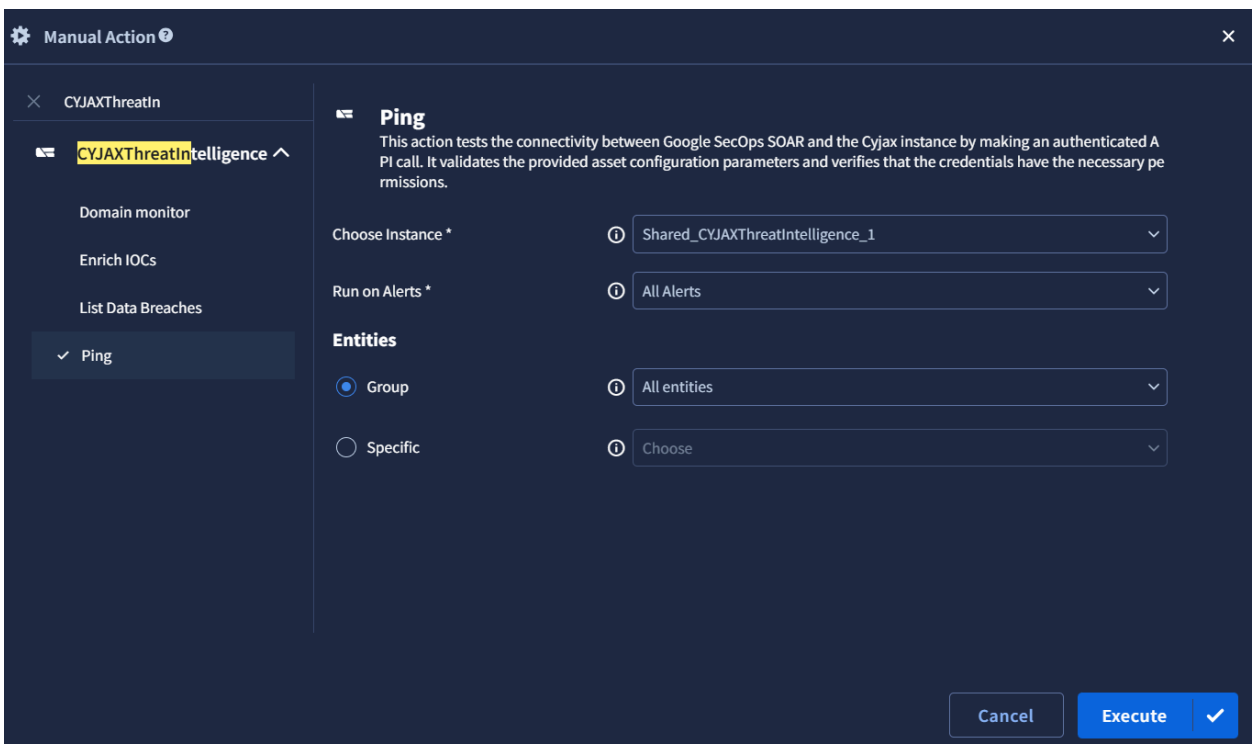

Google SecOps Cases - Ping Action dialog box

Action 2: Enrich IOCs

- This action returns enrichment information for an indicator of compromise as sightings from monitored sources, GeoIP and ASN.
- Refer to these steps to pass entities in action.
- CYJAX scope required in API token: **indicator**

Parameters:

No Action Parameters.

Enrichment of Entities:

- After this action run, Entities (IOCs) will be enriched in Google SecOps.
- Steps to view enrichment details:
  - In case wall, go to **Overview** → **Entities Highlights**
  - On the entity, click on **View Details** as shown below**.**

  - A detailed view with enriched fields will be listed as shown below**.**

CLOUD-INIT@MAIL.IO

Search...

Default

Field Name	Value
IsAttacker	False
IsManuallyCreated	True
Environment	Default Environment
Alert_Id	test_6cc4996d-8ea6-4c4c-9…
Type	ADDRESS
Is Pivot	False
IsArtifact	False
IsEnriched	True
IsVulnerable	False
Cyjax_Sources	OTX AlienVault
Cyjax_Last_Seen	2026-03-02T19:34:30Z
IsInternalAsset	False
OriginalIdentifier	cloud-init@mail.io
Cyjax_Sightings_Count	1

Entity

Run Search

Action Output:

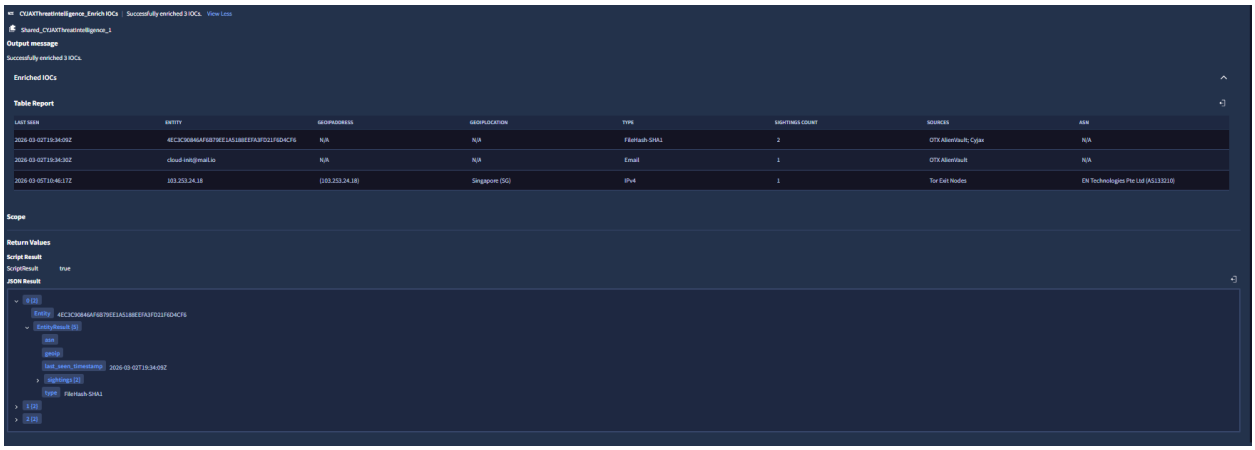

Google SecOps Cases - Enrich IOCs

Output JSON:


```
[
  {
    "Entity":
"490cd9dad3fae1f59521c27a96b32f5d677dd41bf1f706a0bf85e69ca6ebfe75",
    "EntityResult": {
      "type": "FileHash-SHA256",
      "last_seen_timestamp": "2026-02-09T15:01:39Z",
      "geoip": null,
      "asn": null,
      "sightings": [
        {
          "count": 2,
          "last_seen_timestamp": "2026-02-09T15:01:39Z",
          "description": "Public code repository samples: December 2025 -
February 2026",
          "source": "Cyjax"
        }
      ]
    }
  }
]
```

Action 3: Domain Monitor

- This action allows you to retrieve information for the Domain Monitor feature. The feature tracks your brands against newly registered global domains and the certificate transparency logs (CTL).
- CYJAX scope required in API token: **domain-monitor**

Parameters:

Argument Name	**Type**	**Required (Yes / No)**	**Default Value**	**Description**
Query	String	No	-	A query string to search for a domain or part of it.
Since	String	No	-	The start date time in ISO8601 format. Ex: 2026-02-09T15:01:39Z
Until	String	No	-	The end date time in ISO8601 format. Ex: 2026-02-09T15:01:39Z

Action Output:

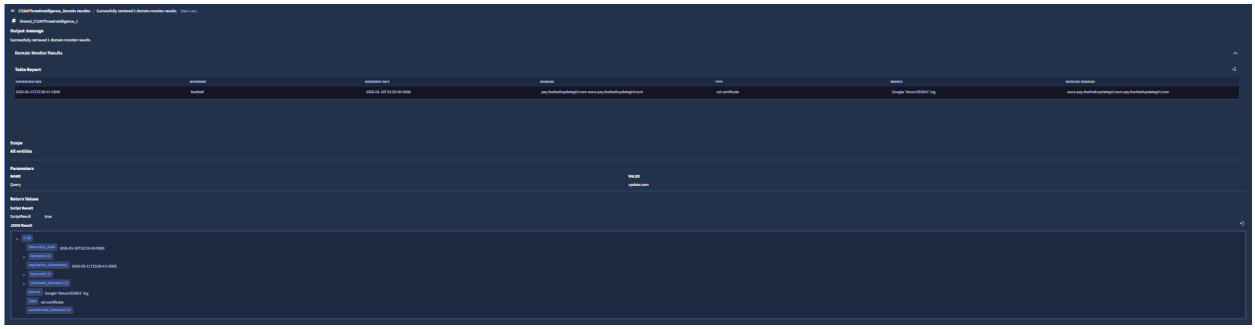

Google SecOps Cases - Domain Monitor

Output JSON:


```
[
    {
        "matched_domains": [

"update.utsrupormlolive-analytics-nginx-remove-each-way-from-football.innovation
management.net"
        ],
        "unmatched_domains": [],
        "domains": [

"update.utsrupormlolive-analytics-nginx-remove-each-way-from-football.innovation
management.net"
        ],
        "type": "ssl-certificate",
        "source": "Sectigo 'Tiger2026h1'",
        "keyword": [
            "football"
        ],
        "discovery_date": "2026-02-18T12:29:59+0000",
        "expiration_timestamp": "2026-05-12T23:59:59+0000"
    }
]
```

Action 4: List Data Breaches

- Lists all email addresses collected from data breaches.
- CYJAX scope required in API token: **data-leak**

Parameters:

Argument Name	Type	Required (Yes / No)	Default Value	Description
Query	String	No	-	A query string to search for an email address or part of it.
Since	String	No	-	The start date time in ISO8601 format. Ex: 2026-02-09T15:01:39Z
Until	String	No	-	The end date time in ISO8601 format. Ex: 2026-02-09T15:01:39Z

Action Output:

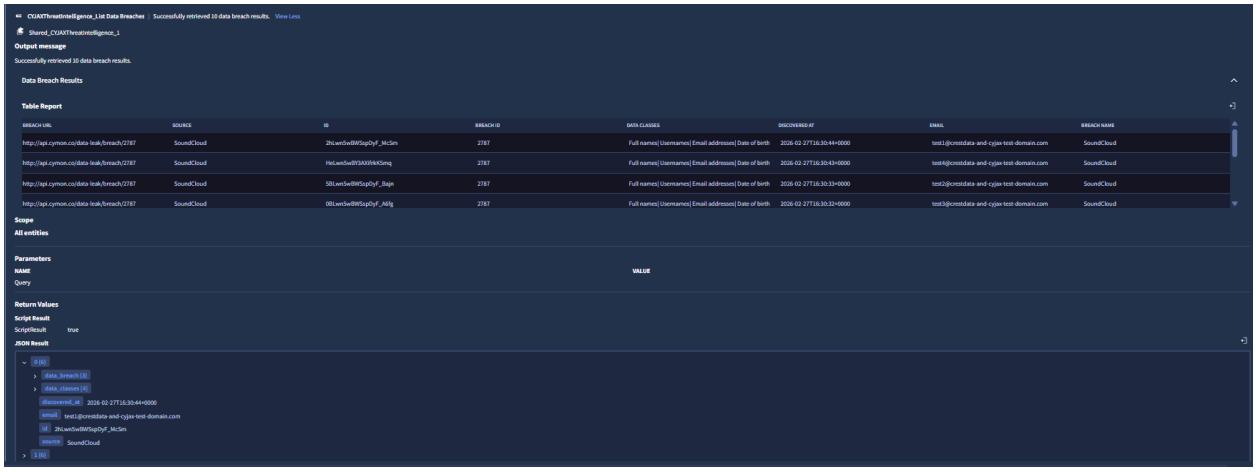

Google SecOps Cases - List Data Breaches

Output JSON:


```
[
  {
    "id": "2hLwn5wBWSspDyF_McSm",
    "email": "test1@crestdata-and-cyjax-test-domain.com",
    "source": "SoundCloud",
    "data_breach": {
      "id": 2787,
      "name": "SoundCloud",
      "url": "http://api.cymon.co/data-leak/breach/2787"
    },
    "data_classes": [
      "Full names",
      "Usernames",
      "Email addresses",
      "Date of birth"
    ],
    "discovered_at": "2026-02-27T16:30:44+0000"
  }
]
```

Uninstalling the Integration

To uninstall the integration, the user must perform the following steps:

1. From the SecOps SOAR platform, navigate to the **Marketplace** section.
2. Search for the **CYJAXThreatIntelligence** Integration.
3. In the bottom left of the CYJAXThreatIntelligence Integration, click on the **Bin** icon to uninstall the integration.
4. Confirmation will be requested from the user to uninstall the integration.

Limitations

- For all the actions in the integration a maximum of 1000 records can be fetched due to limitation on Google SecOps side on Table view rows and JSON payload size.

Known Behaviors

- The script timeout might not work as expected. It has been observed that when specifying the timeout to 10 seconds, the action script would timeout after around 39 seconds. The platform adds ~29 seconds of operation. This behavior differs for every SecOps SOAR instance.
  Reference: Solved: Facing inconsistencies in Script Timeout for Actio... - Google Cloud Community

Troubleshooting

Case 1: PythonProcess Has timed out.

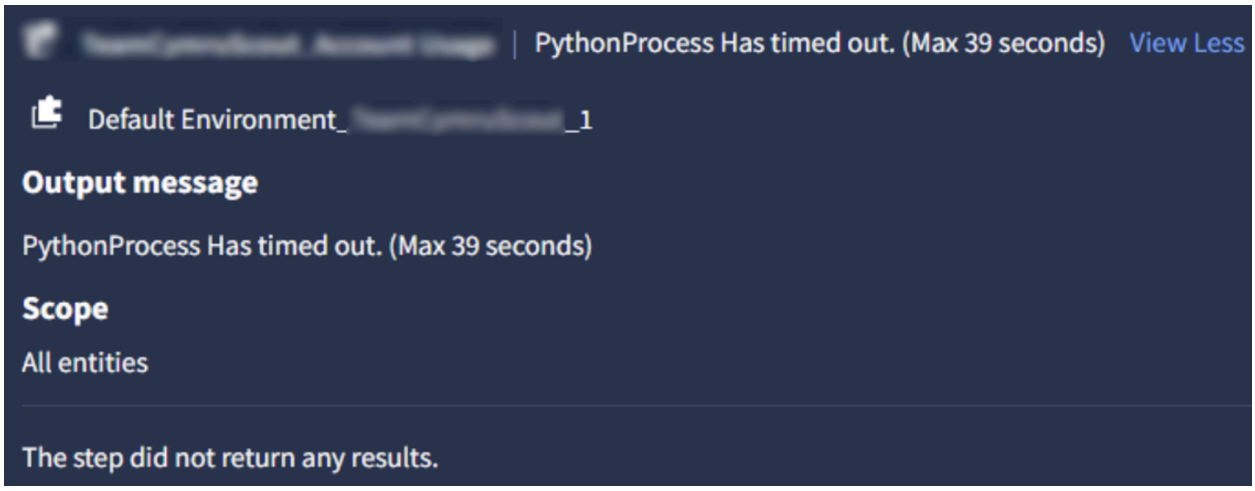

Solution :

1. Increase the script timeout from the Timeout Configuration of an action
    a. From the Sidebar, navigate to **Response** > **IDE**

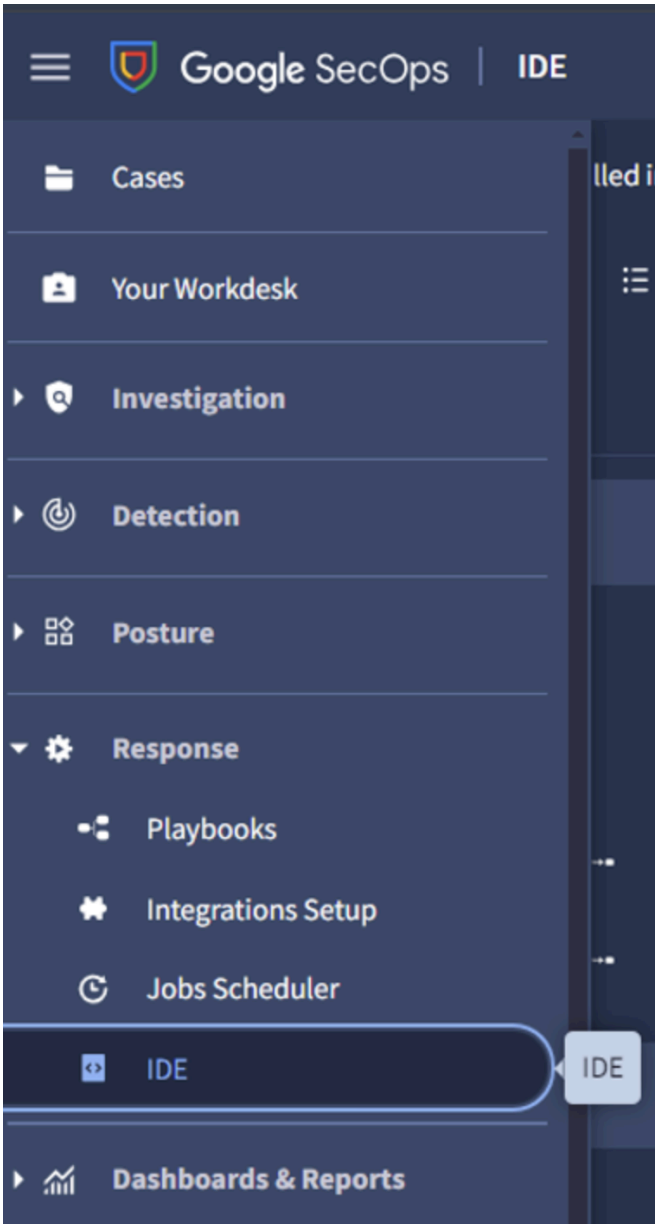

b. Search for the action script and select it. Users will be able to see the codebase of the action, and on the right side, there should be an input field named Timeout Configuration under the details tab. Update the value of Script Timeout based on user's requirement, and Save the action

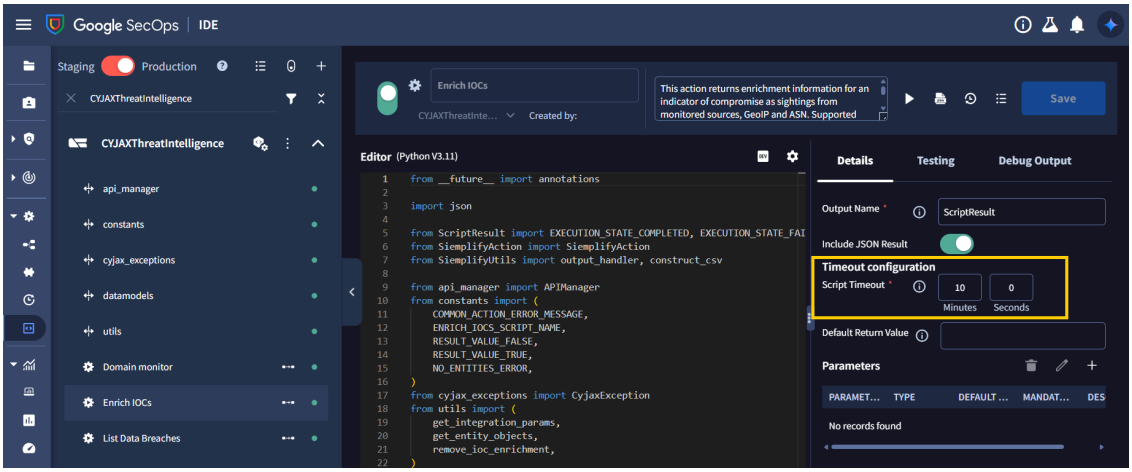

Google SecOps IDE - Action Editor

2. Another way to increase the execution speed of the action is to tweak the query parameters of the API call by reducing the time frame to search and retrieve only filtered subsets instead of all results

Case 2: Unknown error running Action.

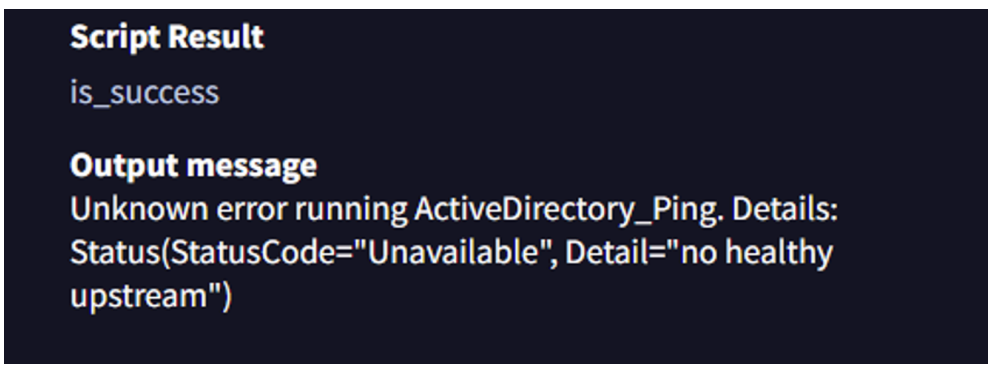

Google SecOps IDE - Running Action

Solution:

The "**no healthy upstream**" error indicates an internal system issue. The most common cause is that all backend servers are currently unavailable or unresponsive. To resolve this problem, users need to contact their system administrator for assistance.

For questions or support, please contact your CYJAX or Google SecOps administrator.