

The O'Reilly logo, featuring the word "O'REILLY" in white, uppercase, sans-serif font, with a registered trademark symbol (®) to the upper right of the "Y". The text is set against a solid red rectangular background.

O'REILLY®

Intermediate SQL

FOR DATA ANALYSIS

A solid orange horizontal bar spanning the entire width of the page at the bottom.

Agenda

Installing SQLiteStudio

Subqueries, Derived Tables, CTE's, and Unions

Regular Expressions

Advanced Joins

Window Functions

Setting Up SQLite

SQLiteStudio or SqliteOnline.com can be accessed here:

<https://sqlitestudio.pl/>

<https://sqliteonline.com>

You can access either of these platforms.

If you cannot install or download any software, you can use SQLiteOnline.com which is an online-only SQLite editor.

Getting Resource Files

The few resources needed for this class are available on GitHub:

https://github.com/thomasnielfd/oreilly_intermediate_sql_for_data

Unzip the contents to a location of your choice, and note where you put them

Contents include:

- A SQLite database file called **thunderbird_manufacturing.db**
- Class notes with all examples (in three formats)
- Slides

Section II Exercise

Bring in all fields from CUSTOMER_ORDER, but for each record show the total quantity ordered for that given CUSTOMER_ID and PRODUCT_ID.

Section III Exercise

Find all customers with an address containing a 3-4 digit street number

INNER JOIN


CUSTOMER

CUSTOMER ID	NAME	REGION	STREET ADDRESS	CITY	STATE	ZIP
1	LITE Industrial	Southwest	729 Ravine Way	Irving	TX	75014
2	Rex Tooling Inc	Southwest	6129 Collie Blvd	Dallas	TX	75201
3	Re-Barre Construction	Southwest	9043 Windy Dr	Irving	TX	75032
4	Prairie Construction	Southwest	264 Long Rd	Moore	OK	62104
5	Marsh Lane Metal Works	Southeast	9143 Marsh Ln	Avondale	LA	79782

CUSTOMER_ORDER

ORDER ID	ORDER DATE	SHIP DATE	CUSTOMER ID	PRODUCT ID	ORDER QTY	SHIPPED
1	2015-05-15	2015-05-18	1	1	450	false
2	2015-05-18	2015-05-21	3	2	600	false
3	2015-05-20	2015-05-23	3	5	300	false
4	2015-05-18	2015-05-22	5	4	375	false
5	2015-05-17	2015-05-20	3	2	500	false

LEFT OUTER JOIN

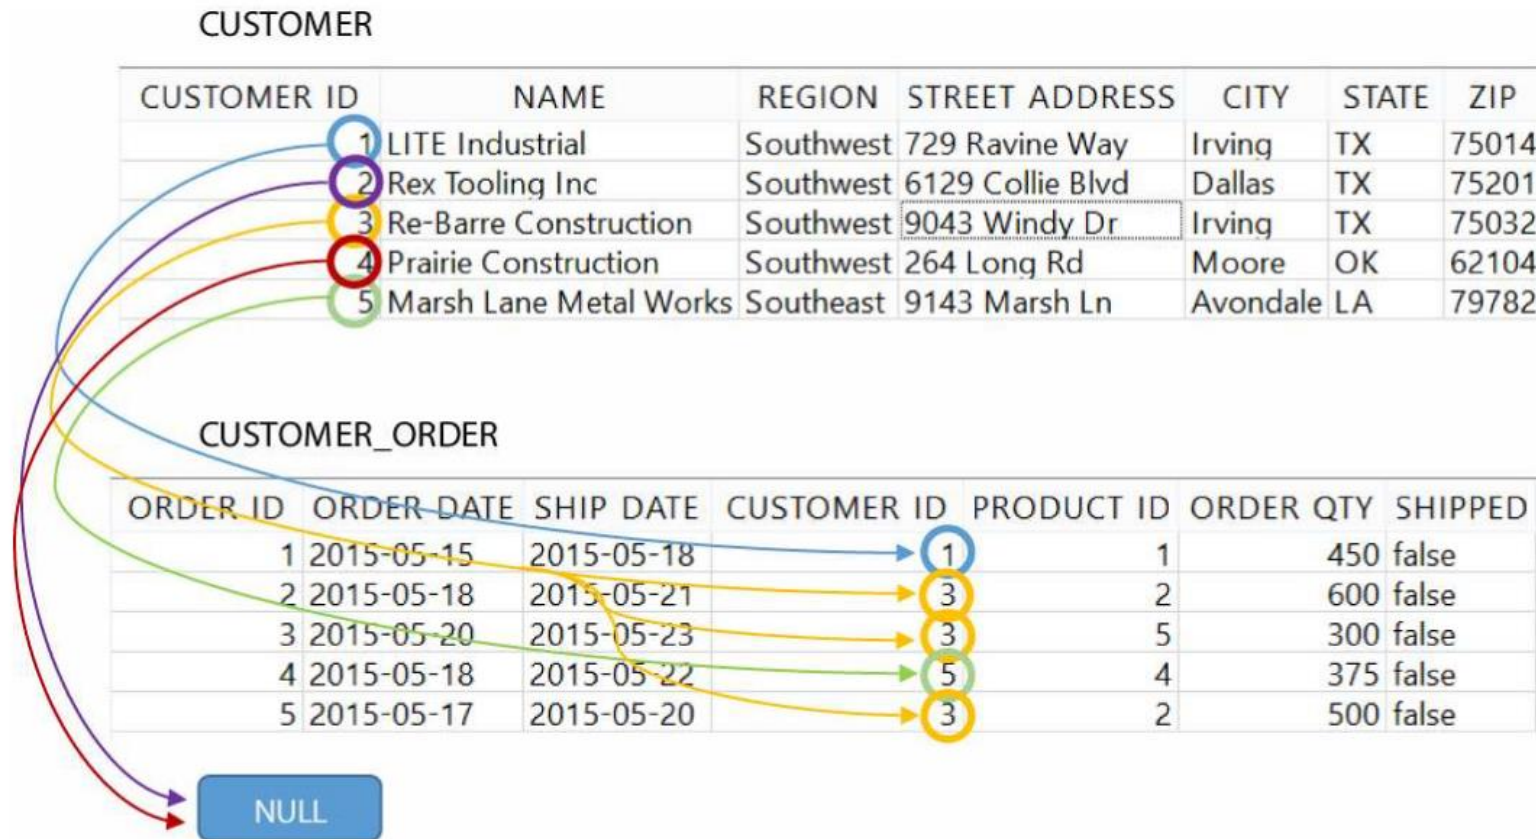

Section VI Exercise

For every CALENDAR_DATE and CUSTOMER_ID, show the total QUANTITY ordered for the date range of 2017-01-01 to 2017-03-31:

Section V Exercise

For the month of March, bring in the rolling sum of QUANTITY ordered (to each ORDER_DATE) by CUSTOMER_ID and PRODUCT_ID.

Windowing Functions Support

Windowing functions are found on many database platforms, including:

- Oracle
- Teradata
- PostgreSQL
- SQL Server
- Apache Spark SQL
- MySQL (as of version 8)
- SQLite (as of version 3.25.0)

These platforms notably do not have windowing functions:

- MySQL (previous to version 8)
- SQLite (previous version 3.25.0)
- MariaDB