

WEEK 2&3

Data processing (following the steps of MLsteps-Python.pdf)

Data collecting & cleaning

GeoNames is main data set which we will use to predict the location of the input city name. We do the first check about this data set.

	latitude	longitude
count	1.106199e+07	1.106199e+07
mean	2.807406e+01	1.508189e+01
std	2.405836e+01	7.962589e+01
min	-9.000000e+01	-1.799836e+02
25%	1.600928e+01	-7.173488e+01
50%	3.288333e+01	1.885294e+01
75%	4.434470e+01	8.174773e+01
max	9.000000e+01	1.800000e+02
Total amount:	11061987	
Deficiency amount:		
country code	13767	
asciiname	115	
longitude	0	
latitude	0	
name	0	
dtype:	int64	

According to the rough check, only 0.1% city lost their country code, and almost each city has its asciiname. So we can ignore these lost their cc or asciiname city to avoid the effect caused by them.

Besides our main predicting goal, the geography data set is used widely. So we choose some data set about many different kinds of countries in the world to analyze and statistics.

- agriculture_GDP.csv
- agriculture_land.csv

- **hiv_adults.csv**
- **children_per_woman.csv**
- **energy_production.csv**
- **income_pre_person.csv**
- ...

We choose these data set from different aspects, so the analysis may be more diverse.

These data set have the common feature that the columns index are the years and the row index are the country name. So we may use the lastest year data in each data set and join them to the **country_location.csv** to get the new data set.

There many deficiency in these dataset ,and the country are only around 200, so we can't ignore them, after discussion, we decide to use lastest and existed data to fill the blank after it and fill **0** to the whole blank line.

```
code  latitude  longitude  ...  chi  agr_y  gdp
12  AR  -38.416097  -63.616672  ...  1.863  7.503740  -0.026220
13  AT  47.516231  14.550072  ...  1.828  1.528136  -4.135938
14  AU  -25.274398  133.775136  ...  1.874  2.365473  -0.646062
15  AZ  40.143105  47.576927  ...  1.824  6.648044  7.054164
16  BA  43.915886  17.679076  ...  1.798  7.838391  -2.742990
17  BB  13.193887  -59.543198  ...  1.926  3.027063  -5.497907
18  BD  23.684994  90.356331  ...  1.772  18.728447  4.625103  .....
```

the brief of the gapminder dataset


- geonameid : integer id of record in geonames database
- name : name of geographical point (utf8) varchar(200)
- asciiname : name of geographical point in plain ascii characters, varchar(200)
- alternatenames : alternatenames, comma separated, ascii names automatically transliterated, convenience attribute from alternatename table, varchar(10000)
- latitude : latitude in decimal degrees (wgs84)
- longitude : longitude in decimal degrees (wgs84)
- feature class : see <http://www.geonames.org/export/codes.html>, char(1)
- feature code : see <http://www.geonames.org/export/codes.html>, varchar(10)
- country code : ISO-3166 2-letter country code, 2 characters
- cc2 : alternate country codes, comma separated, ISO-3166 2-letter country code, 200 characters
- admin1 code : fipscode (subject to change to iso code), see exceptions below, see file admin1Codes.txt for display names of this code; varchar(20)
- admin2 code : code for the second administrative division, a county in the US, see file admin2Codes.txt; varchar(80)
- admin3 code : code for third level administrative division, varchar(20)
- admin4 code : code for fourth level administrative division, varchar(20)

- population : bigint (8 byte int)
- elevation : in meters, integer
- dem : digital elevation model, srtm3 or gtopo30, average elevation of 3"x3" (ca 90mx90m) or 30"x30" (ca 900mx900m) area in meters, integer. srtm processed by cgjar/ciat.
- timezone : the iana timezone id (see file timeZone.txt) varchar(40)
- modification date : date of last modification in yyyy-MM-dd format

the columns of the geoname dataset


Data clustering

Before machine learning, we need to cluster these city by so we choose K-means model to do this job. Considering the huge difference between different country, like location, culture, population, language, GDP and so on, so we use the gapminderto do the K-means method, and we need use the **PCA** method to do dimension reduction analysis.

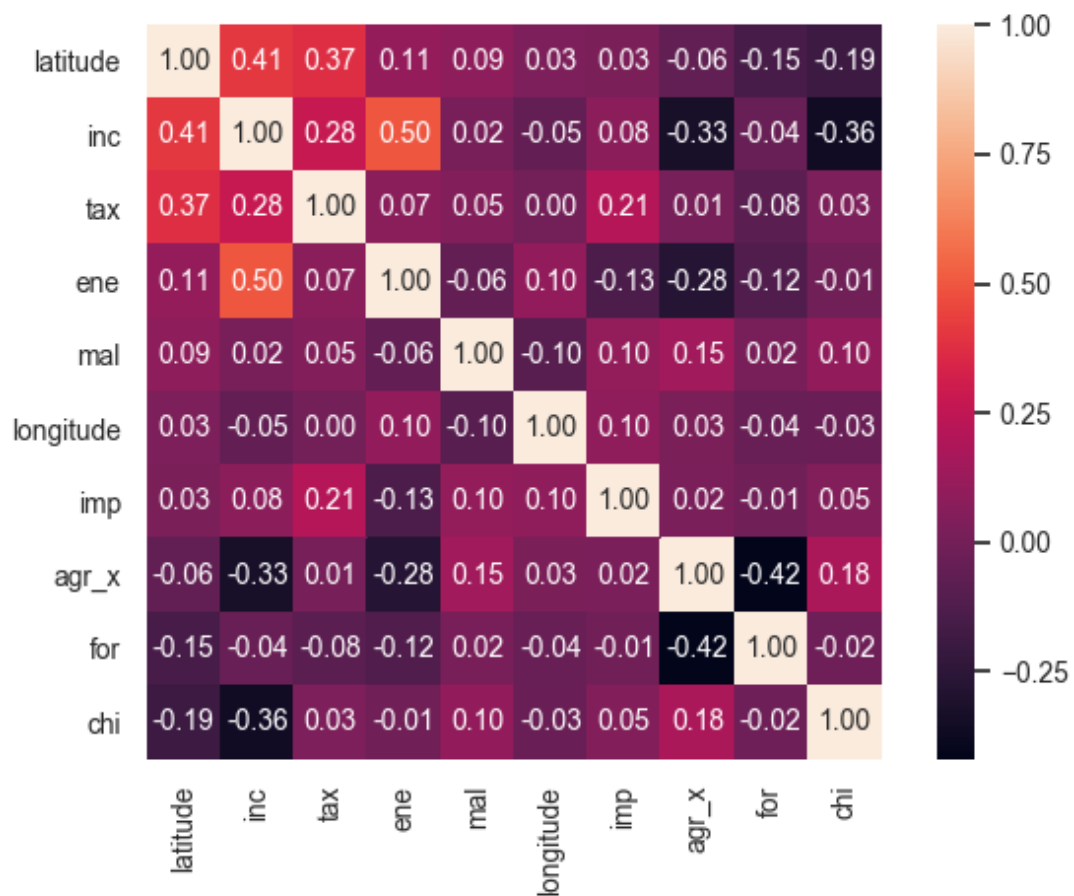

top 10 relation feature

```
data = normalize(np.array(netArr), axis=0)
pca = PCA(n_components=2)
pca.fit(data)
afterData = pca.fit_transform(data)
```

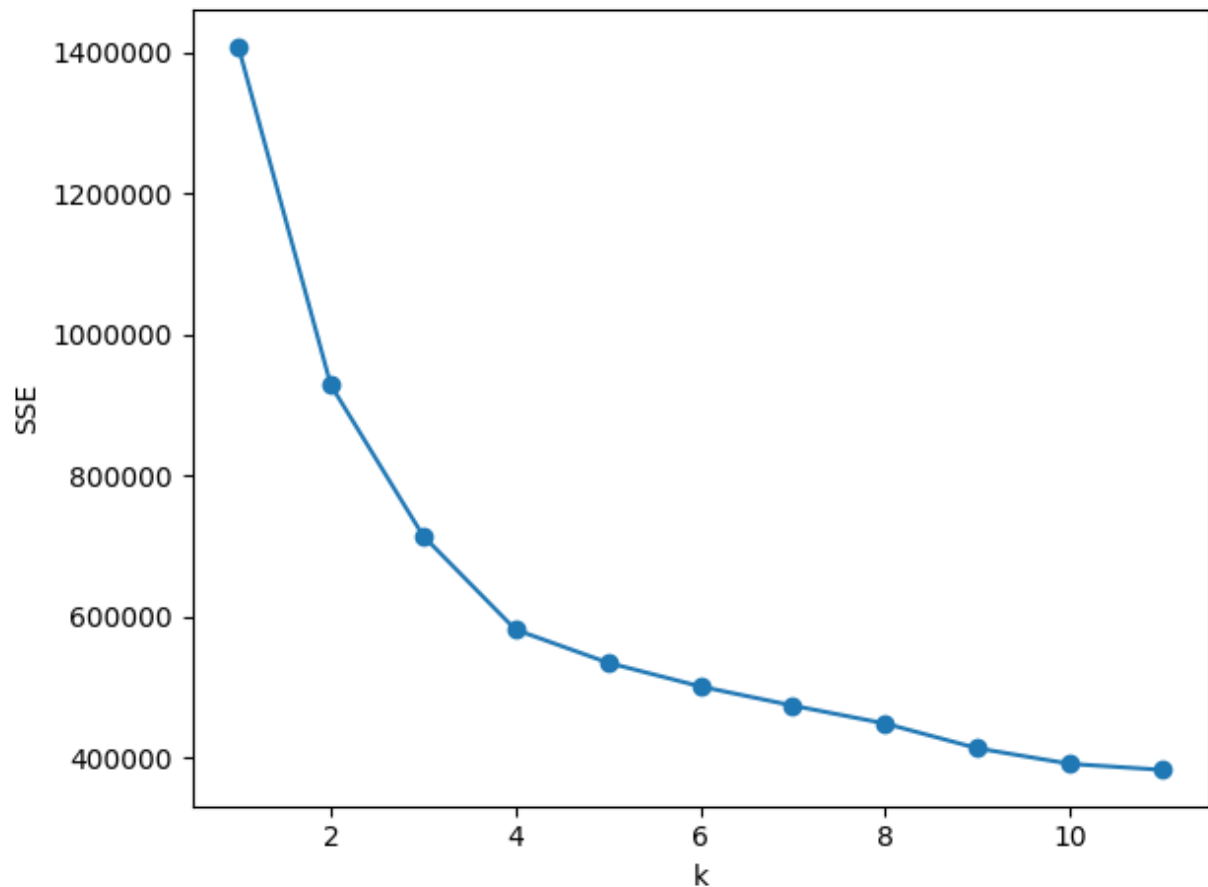

Then we use the **elbow** method to decide the value of **K**. So 9 may be one of the good choices. Next we use K-means to cluster these country.

```
nClusters = 9
kmeans = KMeans(n_clusters=nClusters, random_state=0).fit(afterData)
clusteredArr = []
for i in range(0, nClusters):
    clusteredArr.append([])
id = 0
for country in netDict:
    clusteredTo = kmeans.predict([afterData[id]])[0]
    clusteredArr[clusteredTo].append(country)
    # print("%s in Cluster %s" % (country, kmeans.predict([afterData[id]])))
    id += 1
```

After clustering , in order to be compatible with *Geonames* and *Gapminder*, we use the **country code** to describe these country.

EastAsia CN HK JP KP KR LA MO TW VN

S&SEAsia BD BT BN CC ID IN KH LK MM MV MY NP PH SG TH TL

EnUsAuNz AU CA CX FK IM IO NZ US VG VI

Latinos AG AI AR AW BB BL BO BR BZ CL CO CR CU CW DM DO EC ES GB GD GI GN GQ GT
GY HN HT JM MX NI PA PE PR PT PY SR ST SV TT UY VE

Arabics AE AF BH DZ EG EH IL IQ IR JO KG KW KZ LB LY OM PK PS QA SA SY TJ TM UZ YE

WEurope AD AL AT BE CH DE DK FI FO FR GL GR HR IE IS IT LI LU MC MT NL NO RE RO SE SM
VA

EEurope AM AZ BA BG BA BY CY CZ EE GE HU LT LV MD ME MK MN PL RS RU SI SK UA XK

Oceania AS BM CK FJ FM KI NR PG PW TK TO TV WS

SSAfrica AO BF BI BJ BW CD CF CG CI CM CV DJ ER ET GA GH GM GW KE KM LR LS MA MG ML
MR MU MW MZ NA NE NG RW SC SD SL SN SO SS SZ TD TG TN TZ UG ZA ZM ZW

Here are nine area which we clustered , so next step we need to normalize our city name to tensor.

Data normalize

To represent a single letter, we use a "one-hot vector" of size $\langle 1 \times n_letters \rangle$. A one-hot vector is filled with 0s except for a 1 at index of the current letter, e.g. "b" = $\langle 0 \ 1 \ 0 \ 0 \ 0 \ \dots \rangle$.

To make a word we join a bunch of those into a 2D matrix $\langle line_length \times 1 \times n_letters \rangle$.

That extra 1 dimension is because PyTorch assumes everything is in batches - we're just using a batch size of 1 here.

"bad" may be converted to tensor like:

```
a b c d e f ... z
0 1 0 0 0 0 ... 0
1 0 0 0 0 0 ... 0
0 0 0 1 0 0 ... 0
```

So we can use **one-hot vector** to convert our city name

```
import torch

all_letters = "abcdefghijklmnopqrstuvwxyz`"
n_letters=len(all_letters)

def letterToIndex(letter):
    return all_letters.find(letter)

def letterToTensor(letter):
    tensor = torch.zeros(1, n_letters)
    tensor[0][letterToIndex(letter)] = 1
    return tensor

def lineToTensor(line):
    tensor = torch.zeros(len(line), 1, n_letters)
    for li, letter in enumerate(line):
        tensor[li][0][letterToIndex(letter)] = 1
```

```
return tensor
```

Next step, we will build our recurrent neural network to analysis the data classification.