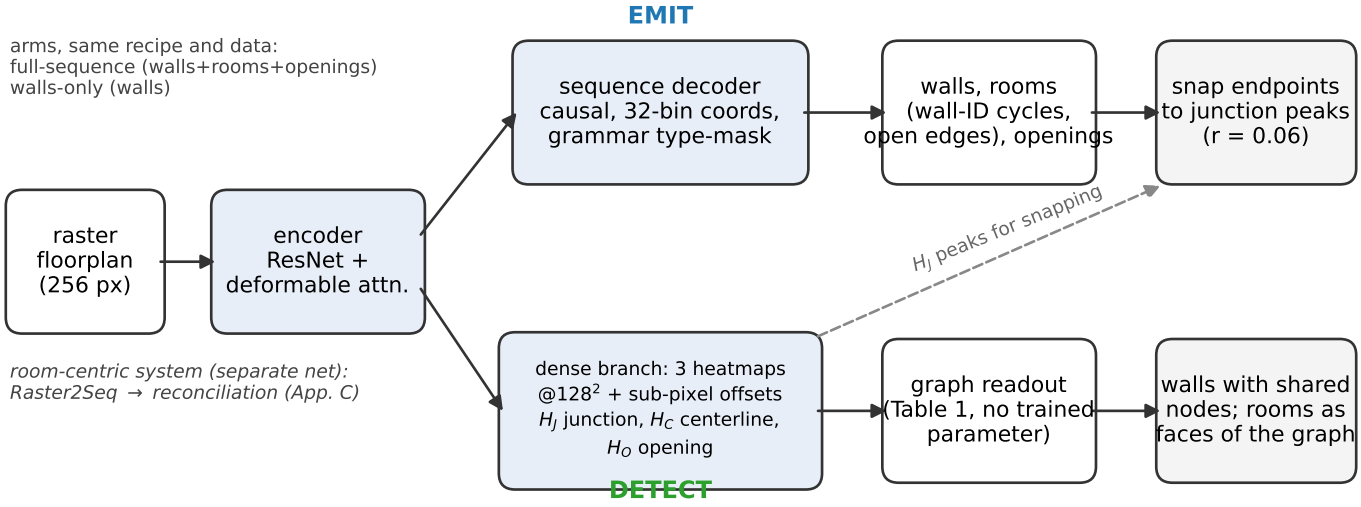
EMIT
arms, same recipe and data:
full-sequence (walls+rooms+openings)
walls-only (walls)
raster floorplan (256 px)
encoder ResNet + deformable attn.
sequence decoder causal, 32-bin coords, grammar type-mask
walls, rooms (wall-ID cycles, open edges), openings
snap endpoints to junction peaks (r = 0.06)
H_J peaks for snapping
dense branch: 3 heatmaps @128² + sub-pixel offsets H_J junction, H_C centerline, H_O opening
graph readout (Table 1, no trained parameter)
walls with shared nodes; rooms as faces of the graph
DETECT
room-centric system (separate net):
Raster2Seq → reconciliation (App. C)