


L'internet

# HTTP


- GET: read data
- POST / PUT: write data
- DELETE: delete data

REST: Representational state transfer

CRUD: Create, Read, Update, Delete

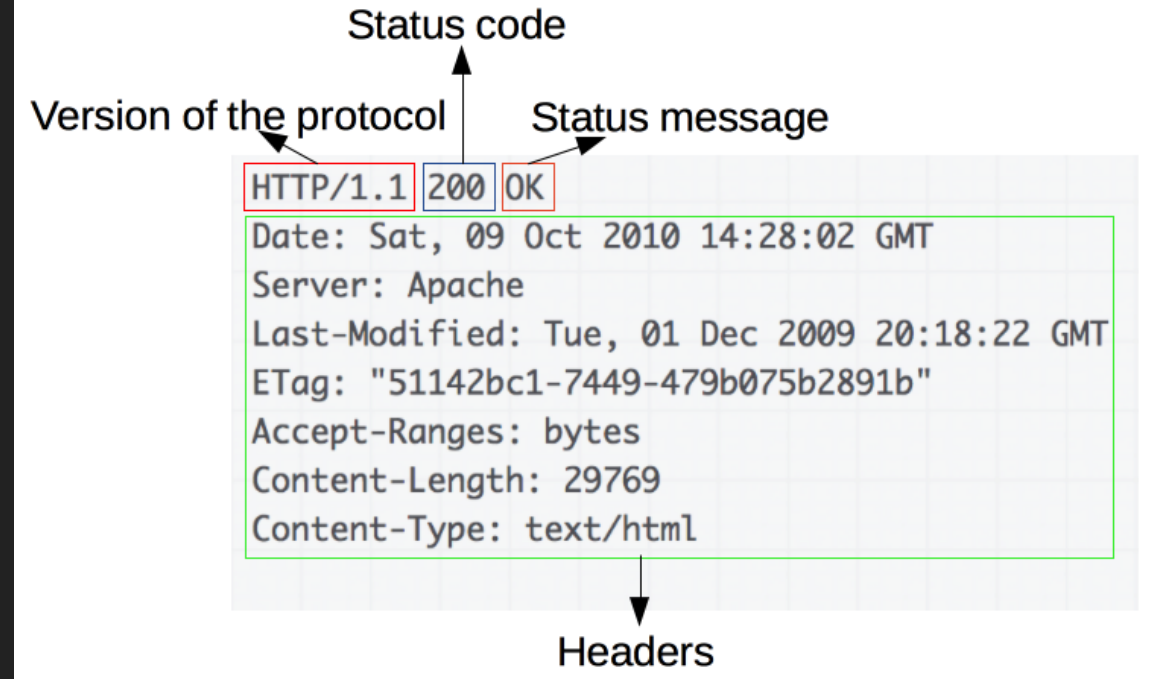

# Request a server

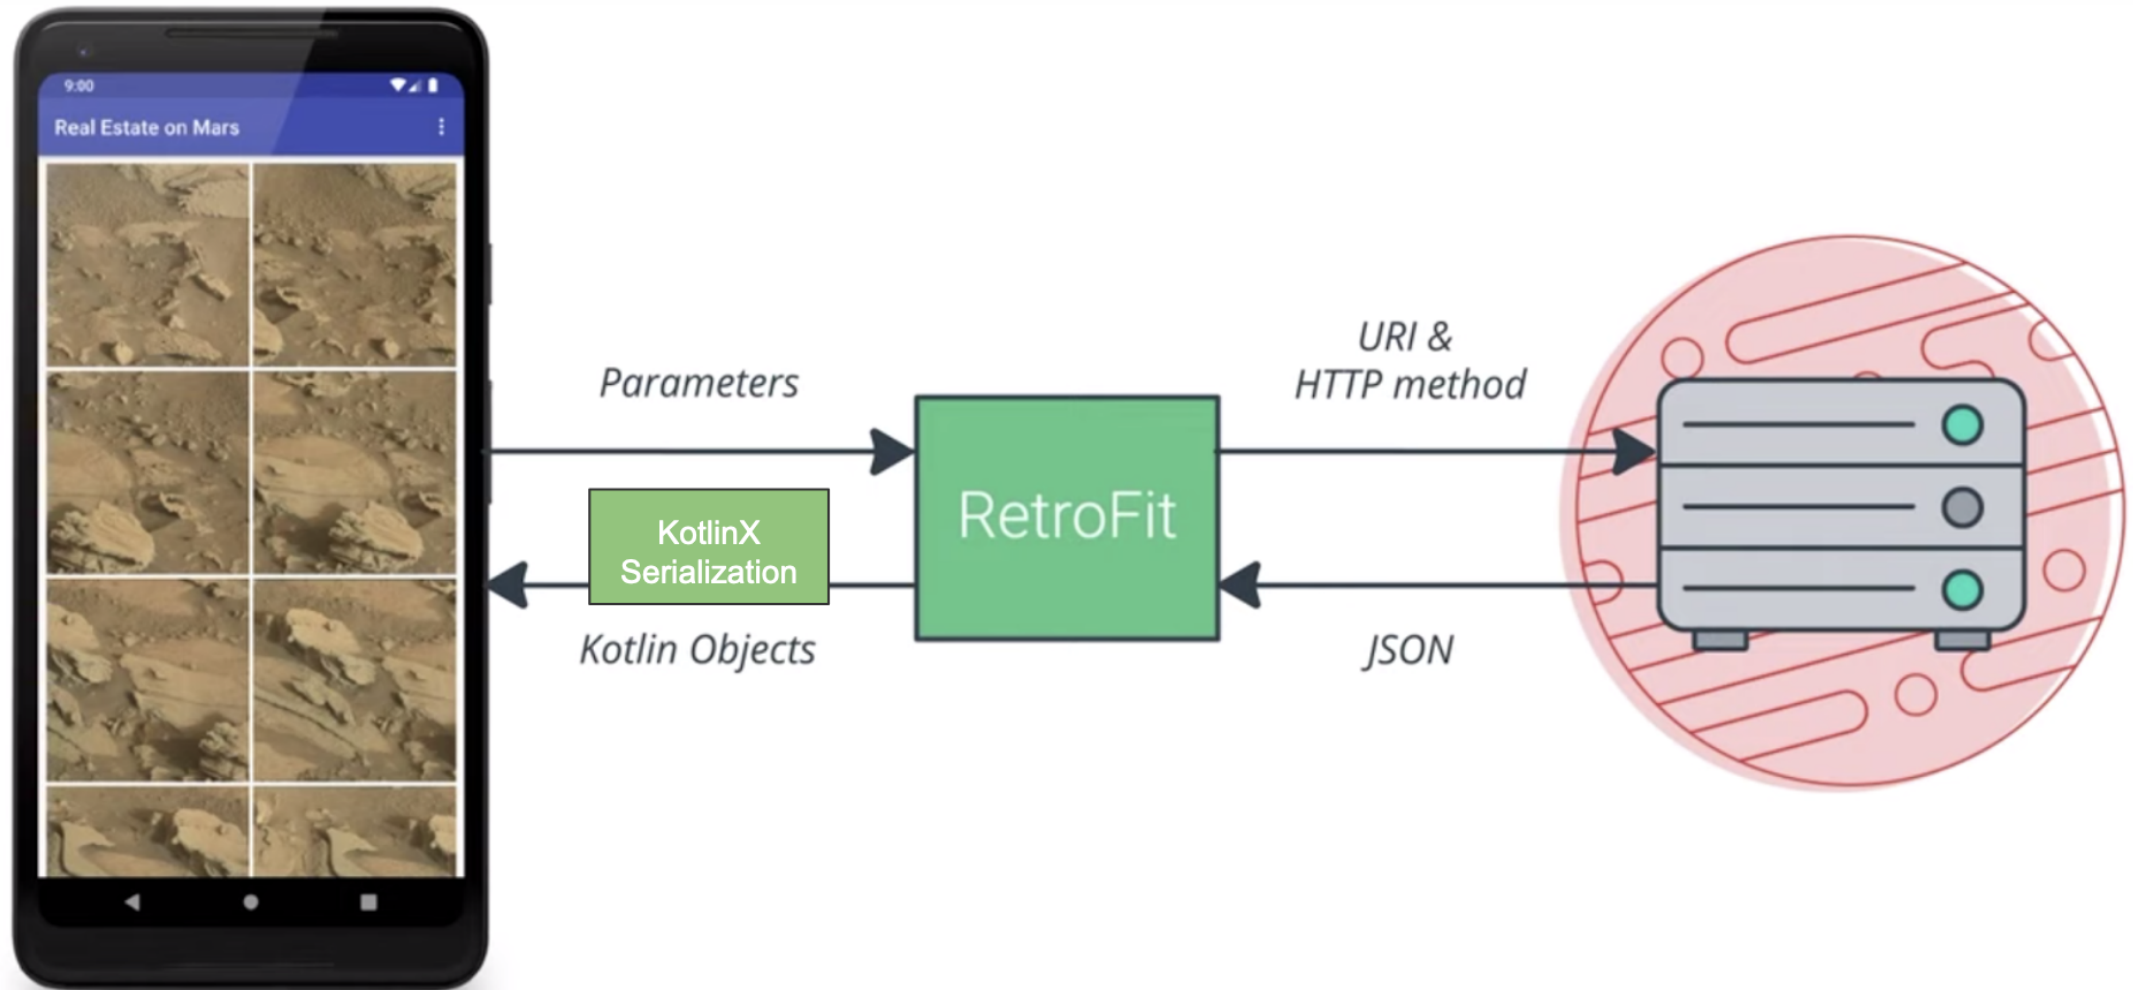

# Build a URI

the old way

```
val BASE_URL = "https://www.googleapis.com/books/v1/volumes?"
val QUERY_PARAM = "q"
val MAX_RESULTS = "maxResults"
val PRINT_TYPE = "printType"
val uri = Uri.parse(BASE_URL).buildUpon()
    .appendQueryParameter(QUERY_PARAM, "pride+prejudice")
    .appendQueryParameter(MAX_RESULTS, "10")
    .appendQueryParameter(PRINT_TYPE, "books").build()
val requestURL = URL(uri.toString())
```

# HTTP Client

with OkHttp

```
private val okHttpClient by lazy {  
    OkHttpClient.Builder()  
        .addInterceptor { chain ->  
            val newRequest = chain.request().newBuilde()  
                .addHeader("Authorization", "Bearer $TOKEN")  
                .build()  
            chain.proceed(newRequest)  
        }  
        .build()  
}
```

# Parsing JSON

with KotlinX Serialization

```
private val jsonSerializer = Json {  
    ignoreUnknownKeys = true  
    coerceInputValues = true  
}  
  
val movieJson = """{  
    \"id\": 19404,  
    \"title\":  
    \"Example Movie\",  
    \"image_path\": \"example-movie-image.jpg\"  
}"""  
  
@Serializable  
data class Movie (  
    val id: Int,  
    val title: String,  
    @SerializedName("image_path")  
    val imagePath: String? = null,  
)
```

# Api Service

with Retrofit

```
interface MovieService {
    @GET("movies/{user_id}")
    suspend fun getMovies(@Path("user_id") userId: String): Response<List<Movie>>
}

val converterFactory =
    jsonSerializer.asConverterFactory("application/json".toMediaType())

val retrofit = Retrofit.Builder()
    .client(okHttpClient)
    .baseUrl(BASE_URL)
    .addConverterFactory(converterFactory)
    .build()

val movieService: MovieService = retrofit.create(MovieService::class.java)
```

# Config

Full implementation example:

```
object MovieApi {  
    private const val BASE_URL = "https://movies.com/API/"  
  
    private val okHttpClient by lazy {  
        OkHttpClient.Builder().addInterceptor { chain ->  
            val newRequest = chain.request().newBuilder().addHeader("Authorization", "Bearer $TOKEN").build()  
            chain.proceed(newRequest)  
        }.build()  
    }  
  
    private val jsonSerializer = Json {  
        ignoreUnknownKeys = true  
        coerceInputValues = true  
    }  
  
    val converterFactory =  
        jsonSerializer.asConverterFactory("application/json".toMediaType())  
  
    val retrofit = Retrofit.Builder()  
        .client(okHttpClient)  
        .baseUrl(BASE_URL)  
        .addConverterFactory(converterFactory)  
        .build()  
  
    val movieService: MovieService by lazy { retrofit.create(MovieService::class.java) }  
}
```



# Permissions

```
// Necessary to make HTTP requests
<uses-permission android:name="android.permission.INTERNET"/>
// Necessary to get wifi, ethernet or mobile data status
<uses-permission android:name="android.permission.ACCESS_NETWORK_STATE"/>
```

# Check Network

```
val connectionManager =  
    getSystemService(Context.CONNECTIVITY_SERVICE) as ConnectivityManager  
  
val networkInfo = connectionManager.activeNetworkInfo  
  
if (networkInfo != null && networkInfo.isConnected) doNetworkStuff()  
else textView.setText("No network connection available.")  
  
val isWifiConnected =  
    connectionManager.getNetworkInfo(ConnectivityManager.TYPE_WIFI).isConnected  
  
val mobileConnected =  
    connectionManager.getNetworkInfo(ConnectivityManager.TYPE_MOBILE).isConnected
```