


How to use multi coordinate view with an editor (plus header), Project 1


Manuel by: Angel Perez-Gonzalez (pid: angelpg)

Header:

The **FILE** button will display the Load, Save, and Save As buttons. This is on the top left side of the web page. See more below.

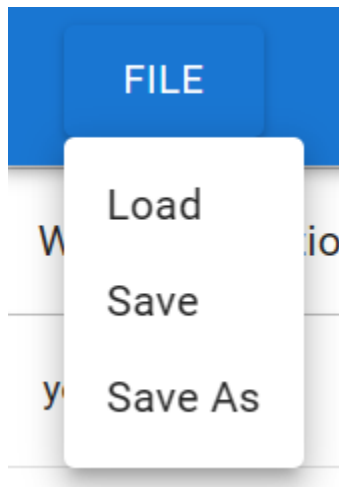

An appbar to display the creator's PID and name of the assignment.



Load: Initial JSON Files population.json and grades.json will always be an option. Switch between them and the selected file will display on the selector button. Your chosen dataset will display its data points alongside a bar graph(and scatter plot). Load only occurs on a newly selected file besides the current one. To create and save files @see Save As and Save.

Save: This will overwrite the current file you are working on.

Exception: population.json and grades.json do not save changes (because they are defaulted to reset every page refresh) so it's best to make a copy with a different file name through Save as.

Save As: This will display a dialog to enter an appropriate JSON name (e.g. someData.json). Do note this will create a copy of the current file you are editing. Files will not save unless done through Save or SaveAs...

LocalStorage: This can be reached by inspecting the browser. If any JSON files are injected, they need to be correct. If the page does not prompt with an error, then the JSON file will be in the Load Menu. Otherwise, it will not display in the Load Menu and you will be met with an error message after a page refresh. To fix this issue, delete or correctly modify the JSON object to be compatible with other JSON attributes.

Storage	
▼ Local storage	
http://localhost:3000	
Key	Value
population.json	{"fileName":"population.json","ax...
grades.json	{"title":"Grade Distribution","fileN...

How to use multi coordinate view with an editor (plus header), Project 1 Manuel by: Angel Perez-Gonzalez (pid: angelpg)

Editor.

Textboxes on the left side of the page give users the ability to modify the current JSON file. Default value simply means the first JSON file loaded when refreshing the page. As seen below:

World population		
year	population	
1950	2.525	
1960	3.018	
1970	3.682	
1980	4.44	
1990	5.31	
2000	6.127	
2010	6.93	
ADD/APPEND POINT		

Editable Title: can be spotted first where the “World population” (default value) textbox is seen. Users can change titles through this textbox. This textbox is only seen on the left side of the editor.

Editable Data Points: Under the “year” (default value) column any set of letters or numbers can be typed. But Under the “population” (default value) column only numbers can be edited due to the bar chart (and scatterplot) requiring computation to dynamically change successfully.


Add/Append Points: Users can add a new data point to their current JSON file. Start by clicking the bottom left button **ADD/APPEND POINT** and edit the new data point. Sorting is not implemented when removing and adding new points. A point is simply appended to the back (rightmost) of the charts.

Removing Points: This can be done by clicking on the trashcan icon. Removing all data on its row. When removing all data points and then adding a new one causes visual issues. To fix it, the page needs to be refreshed. Alternatively, leave at least one point to avoid this problem. Constraint is not made in case the user wants to remove all points.


How to use multi coordinate view with an editor (plus header), Project 1 Manuel by: Angel Perez-Gonzalez (pid: angelpg)

Multi coordinate view is the right side of the page which gives the user a way to graph visualizations and see real-time modifications to their JSON data.

BarChart: dynamically displays data from adding, removing, and loading on the bar chart top right.

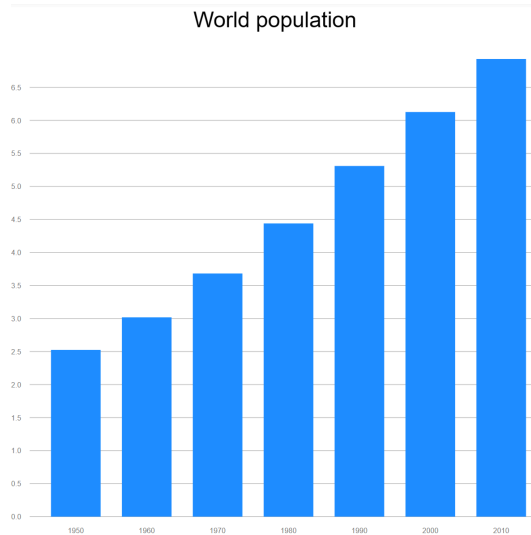

ScatterPlot: dynamically displays data from adding, removing, and loading on scatterplot bottom right.

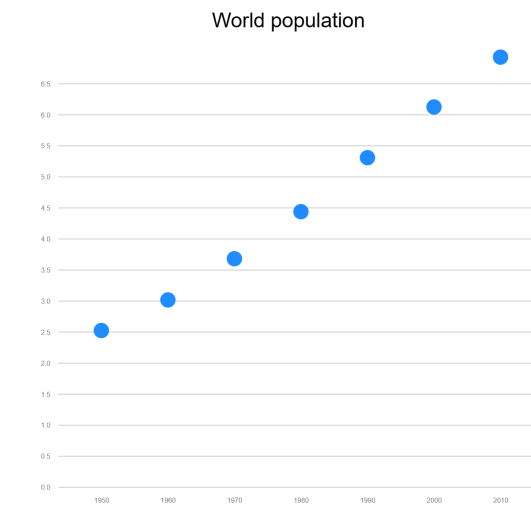

@see Editable Title and Editable Data Points in how to modify the graph but also how to avoid issues with displaying the graphs.