


How to Setup AWS VPC Peering Connections: A Step-By-Step Guide

Step 1: Navigate to VPC Dashboard


- Sign in to your [AWS account](#) with your credentials.



- After Navigate to Console, you look into the following Console Home Page

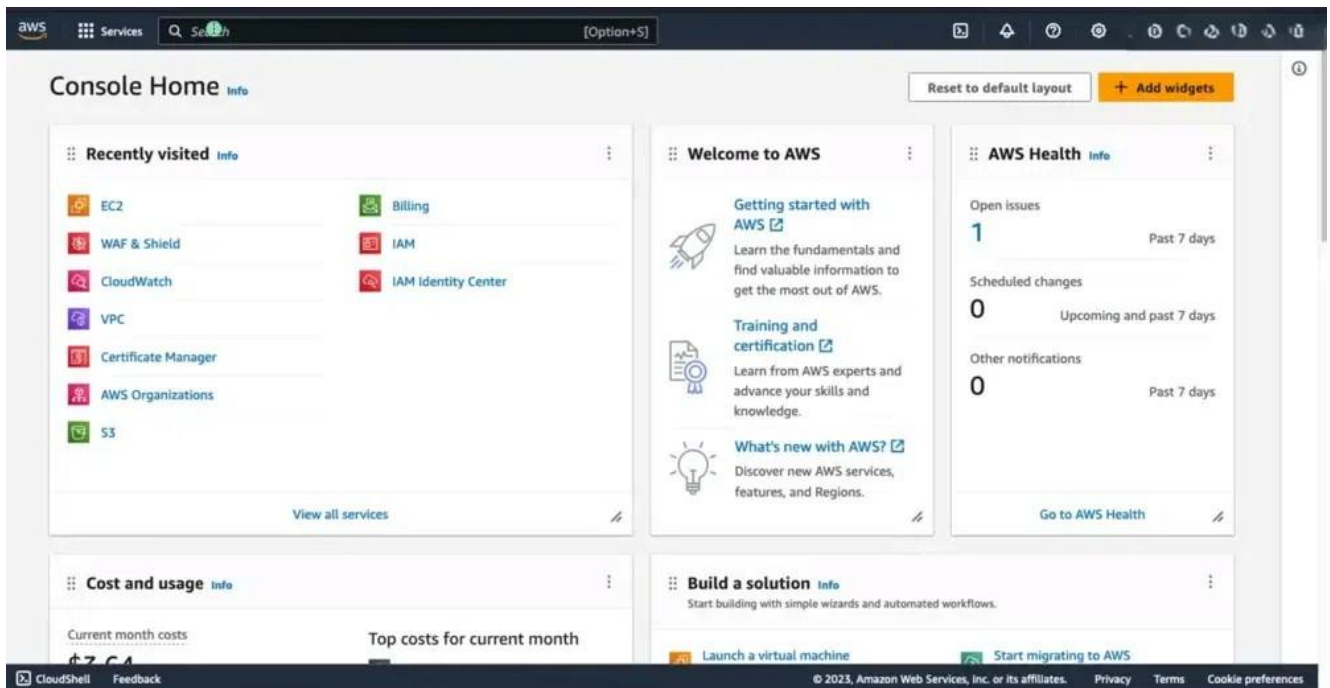


- Select the VPC service in the search box.

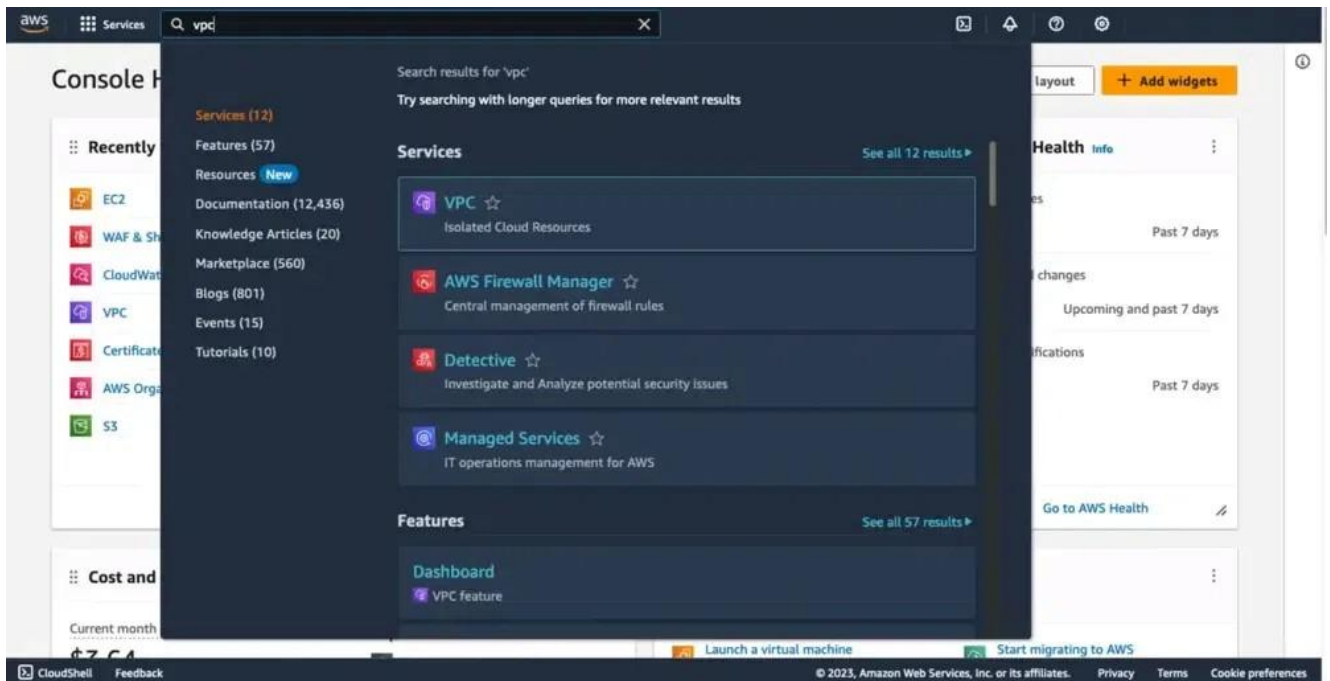


Step 2: Create Virtual Private Network

- Create 2 VPC networks with names test-vpc-1 and test-vpc-2.
- Firstly, Click on the Create VPC button to create VPC.

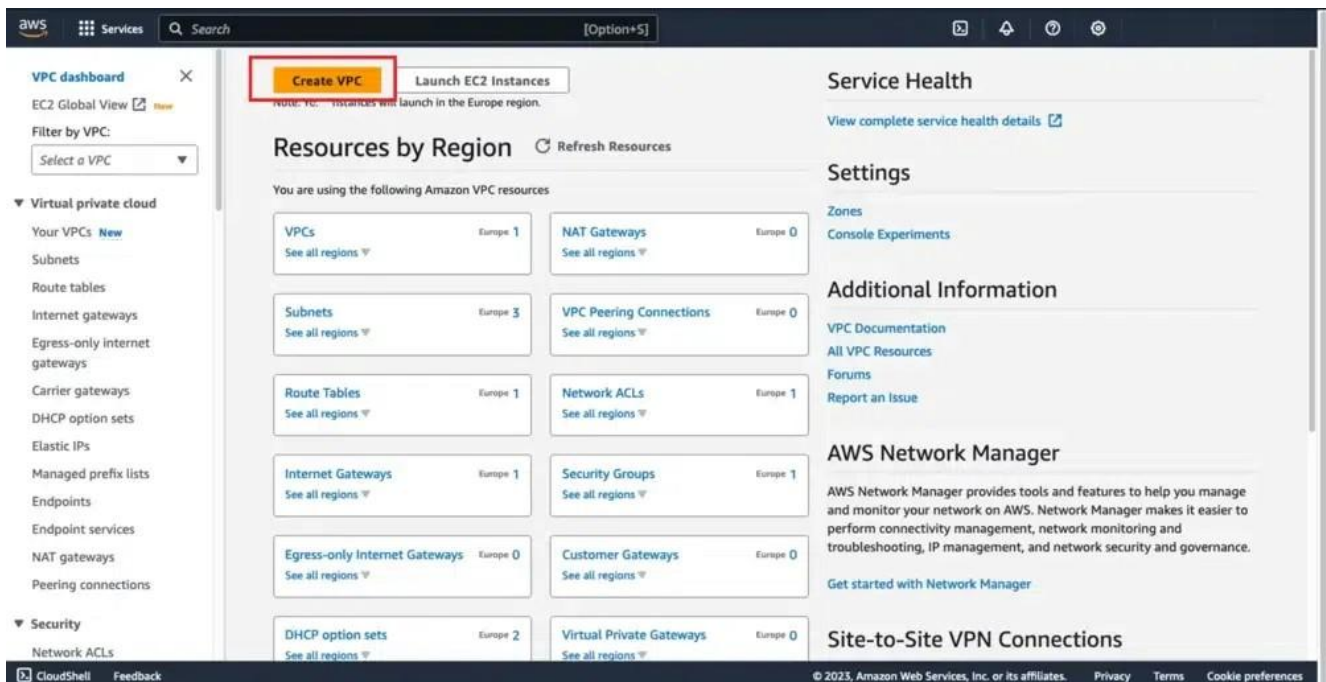

- Configure the VPC details as shown in the below screenshot.

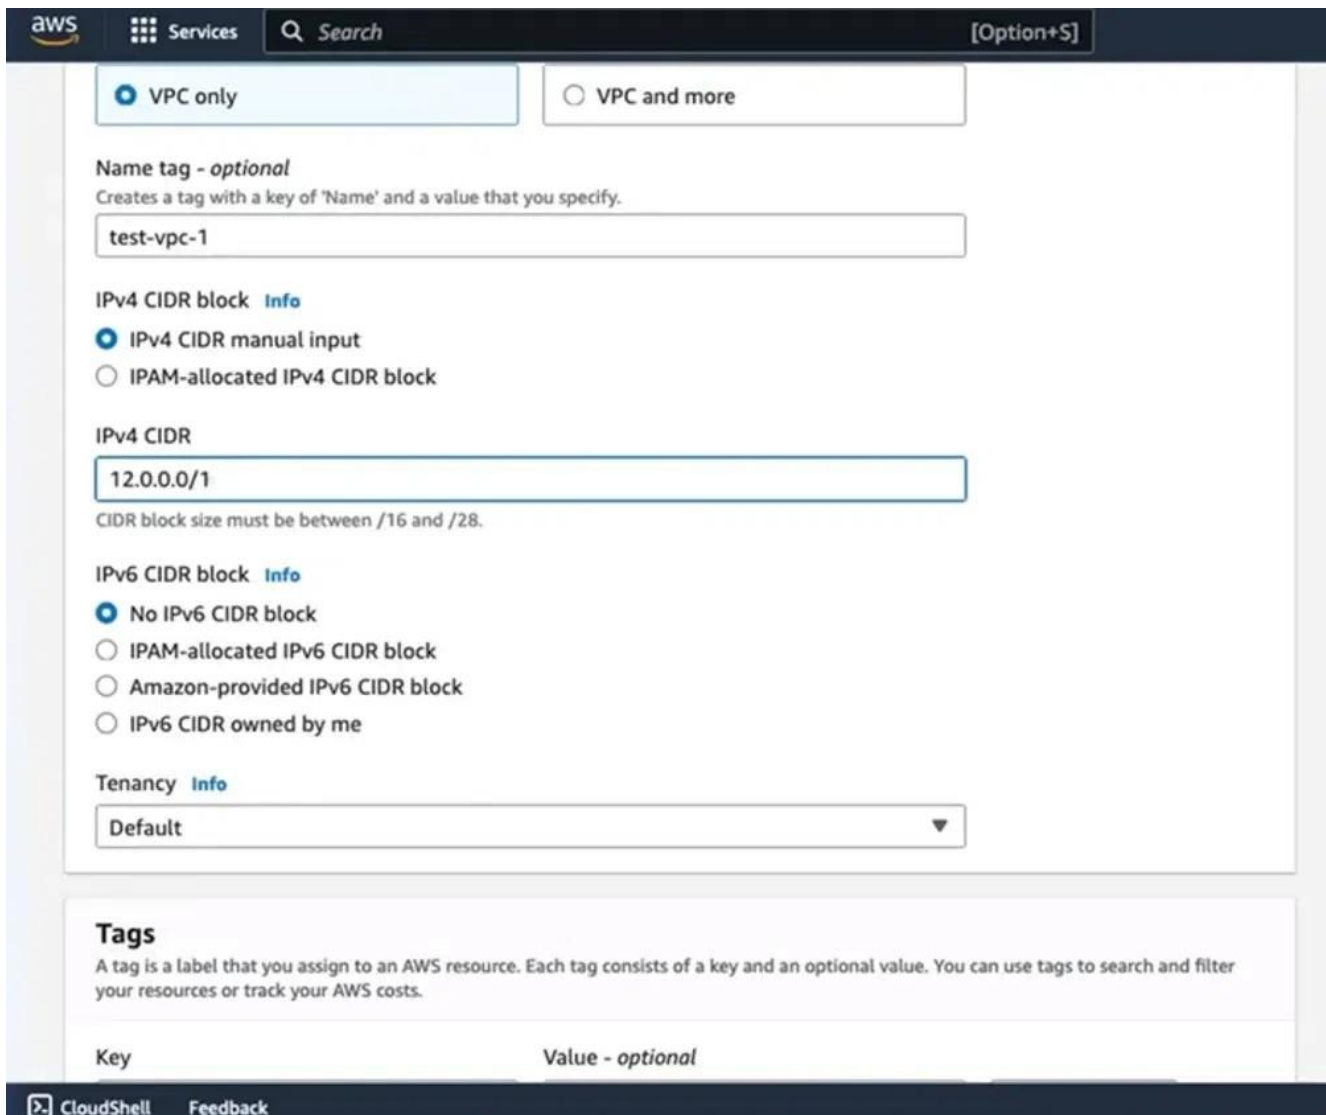

aws

Services

Search

[Option+S]

☒ IPv4 CIDR manual input

☐ IPAM-allocated IPv4 CIDR block

IPv4 CIDR

CIDR block size must be between /16 and /28.

IPv6 CIDR block

☒ No IPv6 CIDR block

☐ IPAM-allocated IPv6 CIDR block

☐ Amazon-provided IPv6 CIDR block

☐ IPv6 CIDR owned by me

Tenancy

Default

Tags

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

Key

X

Value - optional

X

Remove tag

Add tag

You can add 49 more tags

Cancel

Create VPC

CloudShell

Feedback

© 2023

- Similarly define and create second VPC with name test-vpc-2 . Ensure that the CIDR of test-vpc-1 and test-vpc-2 doesn't overlay.

aws

Services

Search

[Option+S]

Resources to create

Create only the VPC resource or the VPC and other networking resources.

☒ VPC only

☐ VPC and more

Name tag - optional

Creates a tag with a key of 'Name' and a value that you specify.

IPv4 CIDR block

☒ IPv4 CIDR manual input

☐ IPAM-allocated IPv4 CIDR block

IPv4 CIDR

CIDR block size must be between /16 and /28.

IPv6 CIDR block

☒ No IPv6 CIDR block

☐ IPAM-allocated IPv6 CIDR block

☐ Amazon-provided IPv6 CIDR block

☐ IPv6 CIDR owned by me

Tenancy

Default

Tags

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.


CloudShell

Feedback


© 2023, Amazon Web Services, Inc.

Step 3: Select "Peering Connections"

- Navigate to VPC Peering, and click on create VPC peering button.

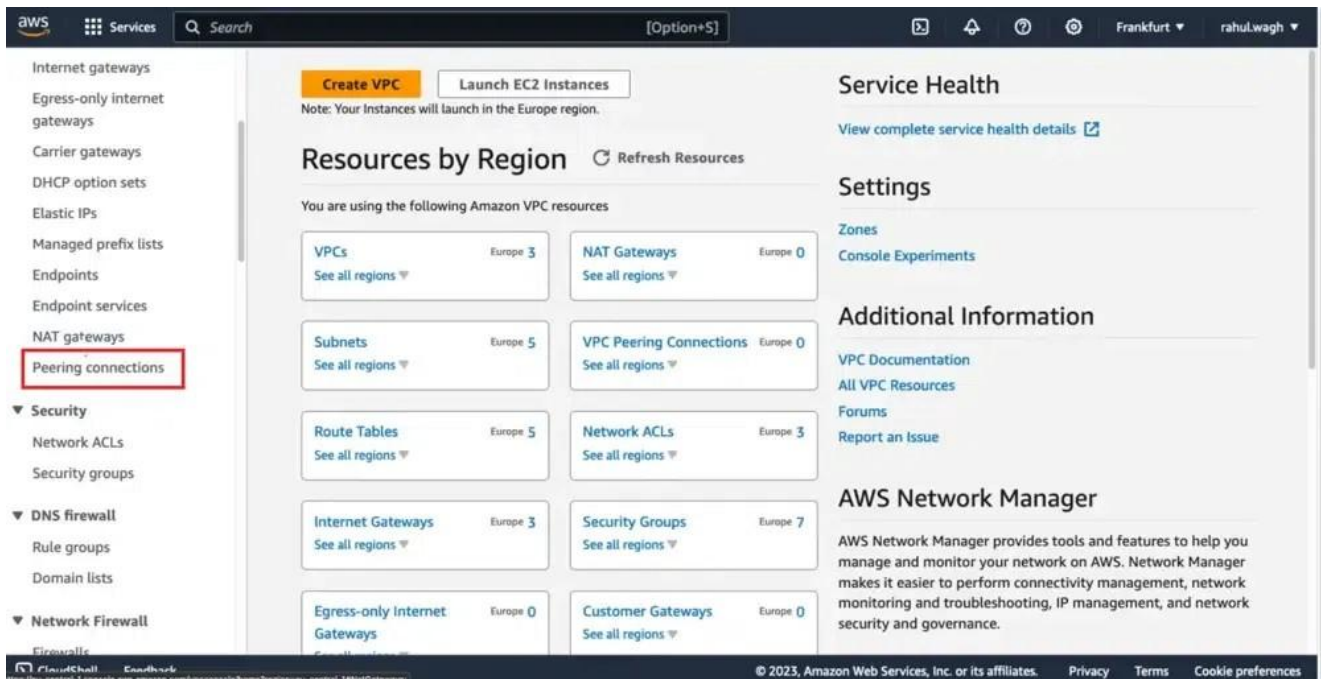


- Provide the acceptor VPC name and receiver VPC name.

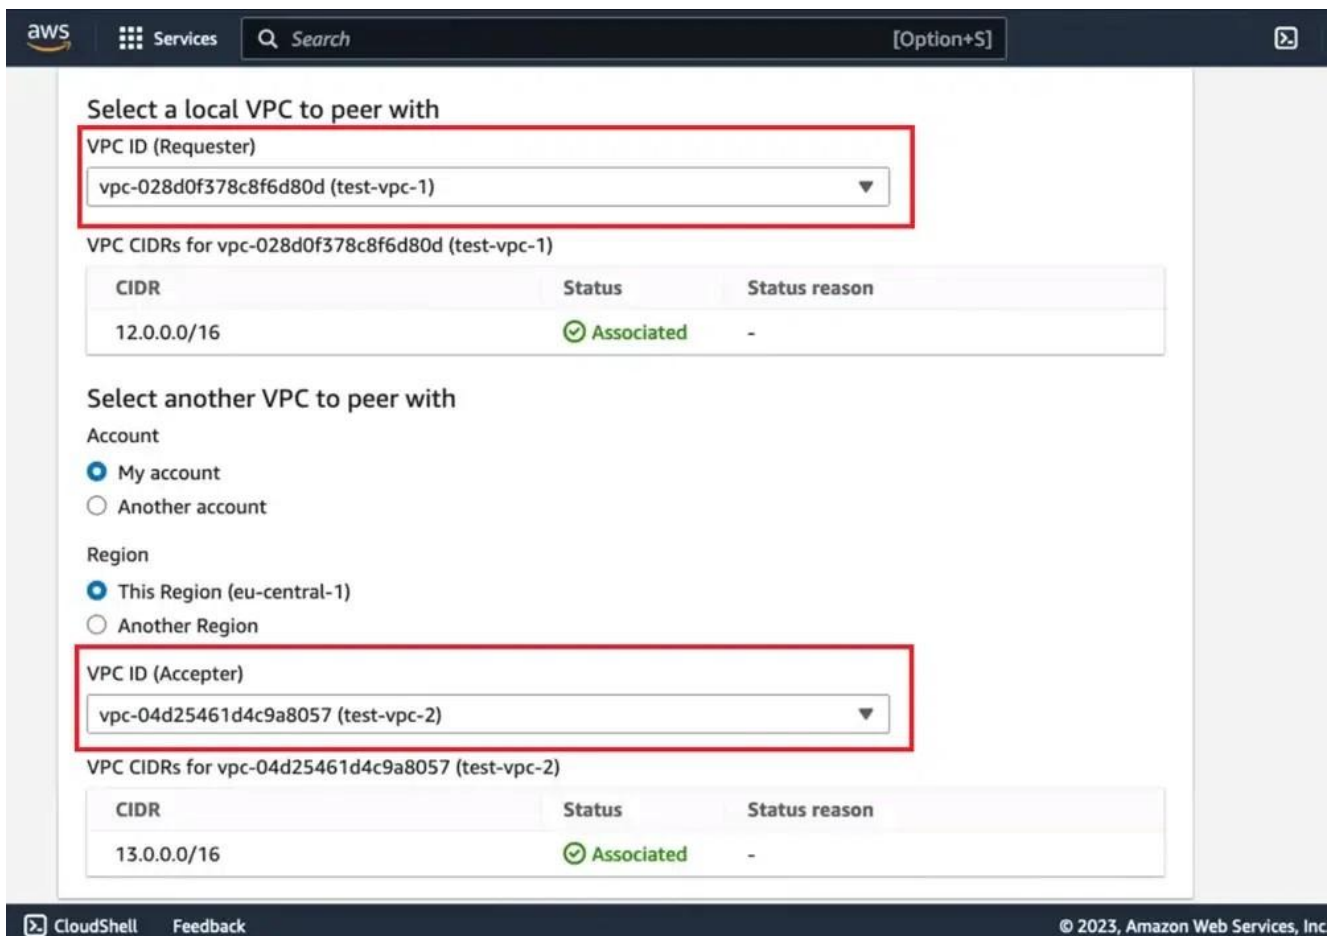


Step 3: Click "Create Peering Connection"


- After creating the VPC peering connection, it will be in pending status .

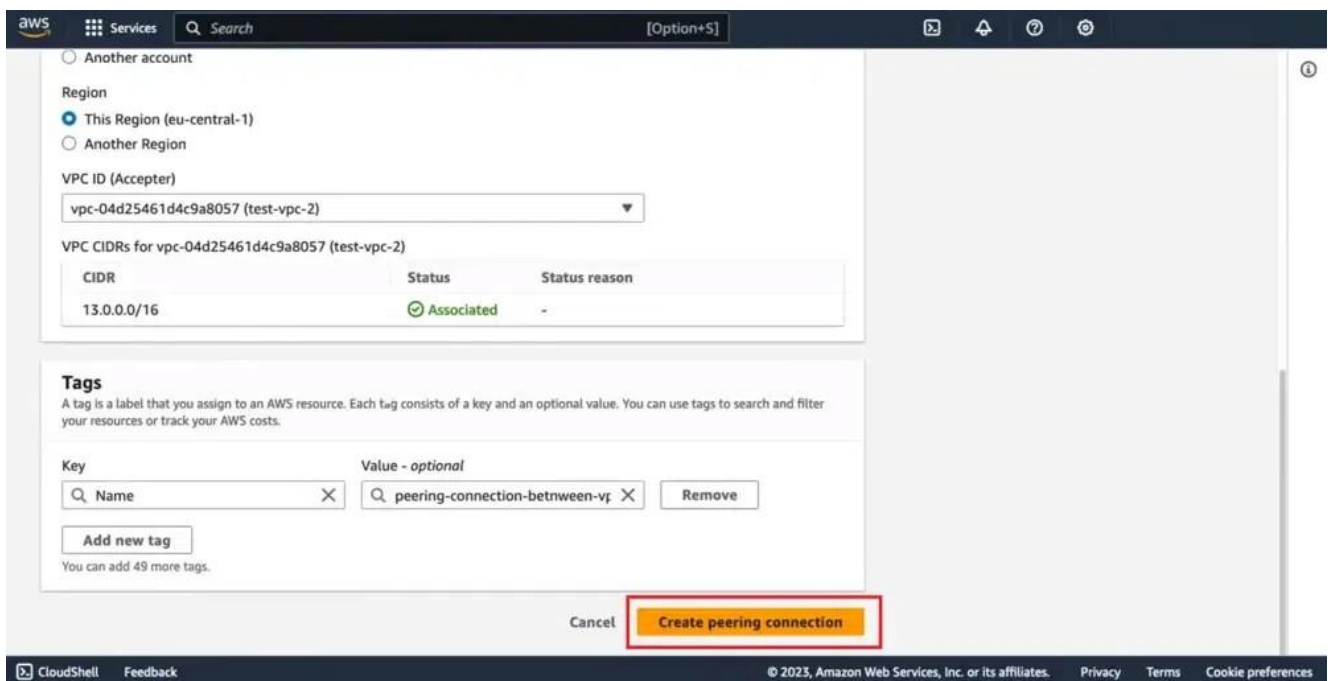

Step 4: Accept Peering Connection


- Now, from the myvpc2 AWS account, go to vpc peering dashboard, click on the **accept request** and accept the peering connection.

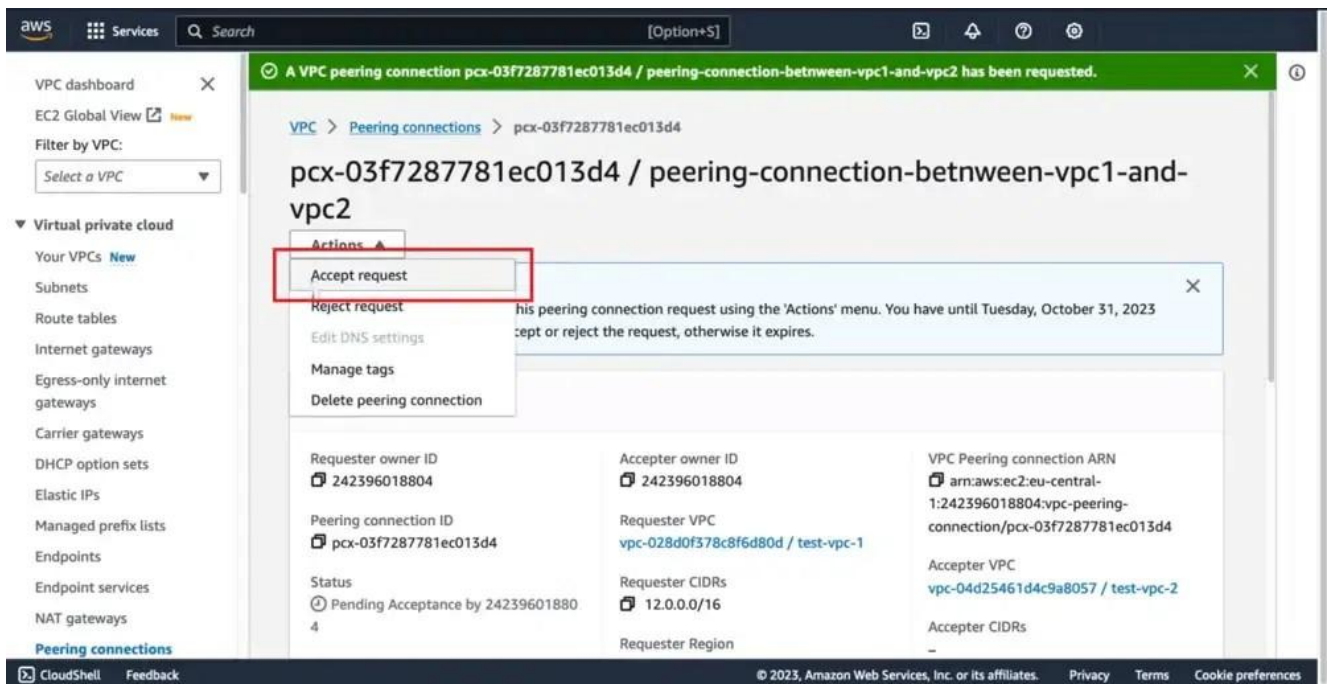

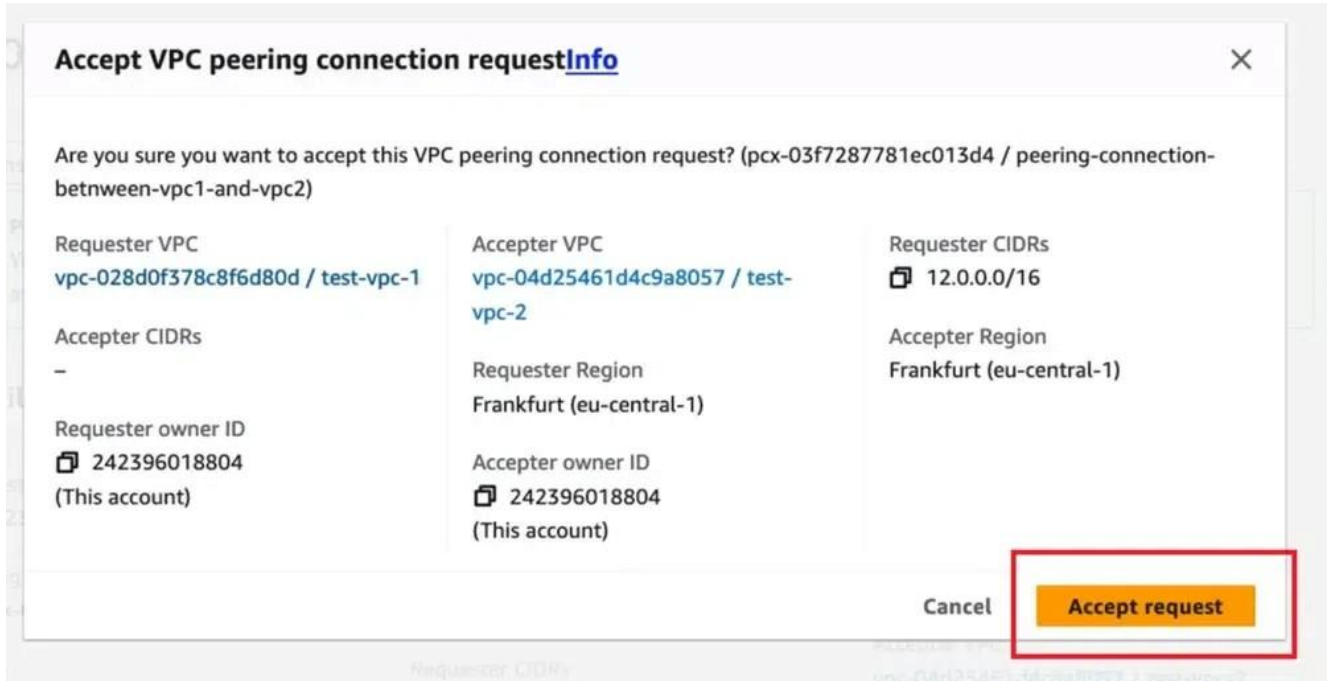



Step 5: Successful VPC Peering Connection

- After once the myvpc2 network accepts the request, the VPC peering connection will become active in status.

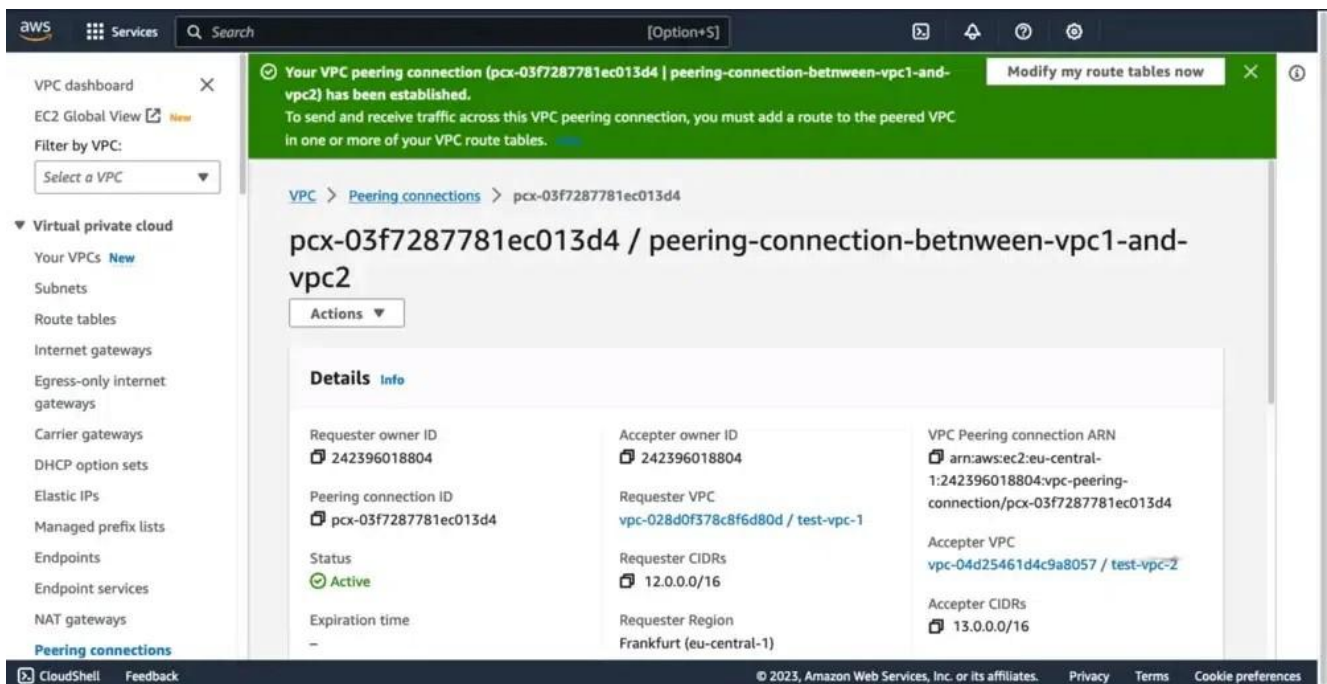


Step 6: Update Route Tables (if necessary)

- Ensure that the route tables for both VPCs are updated to include routes for each other's CIDR blocks, pointing to the peering connection.

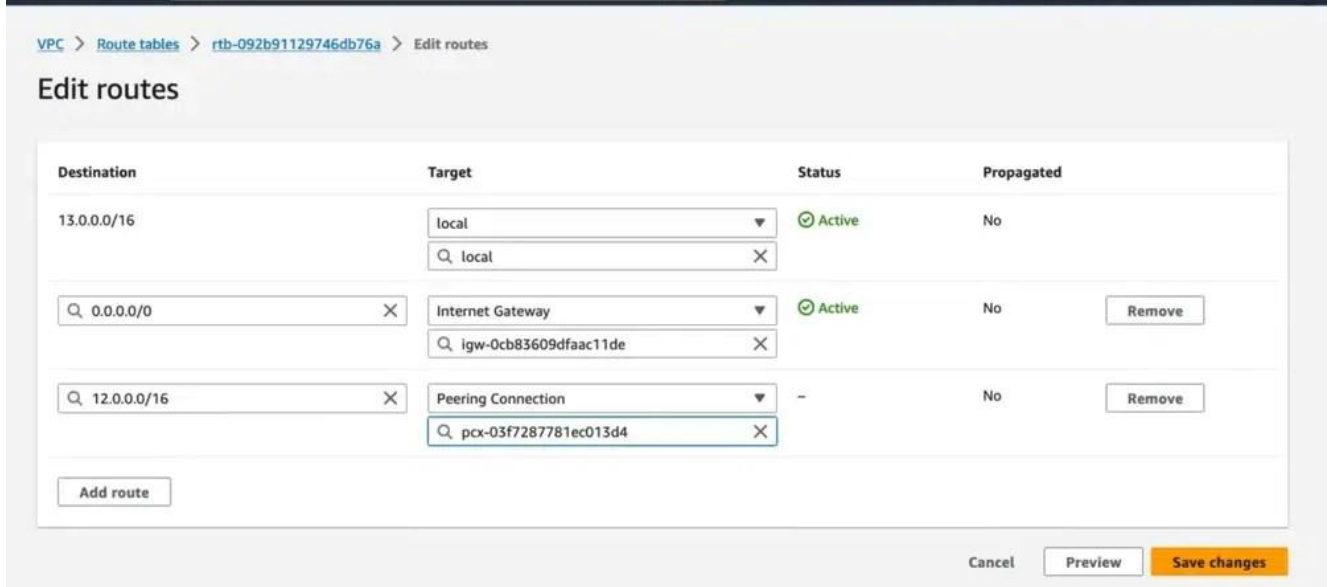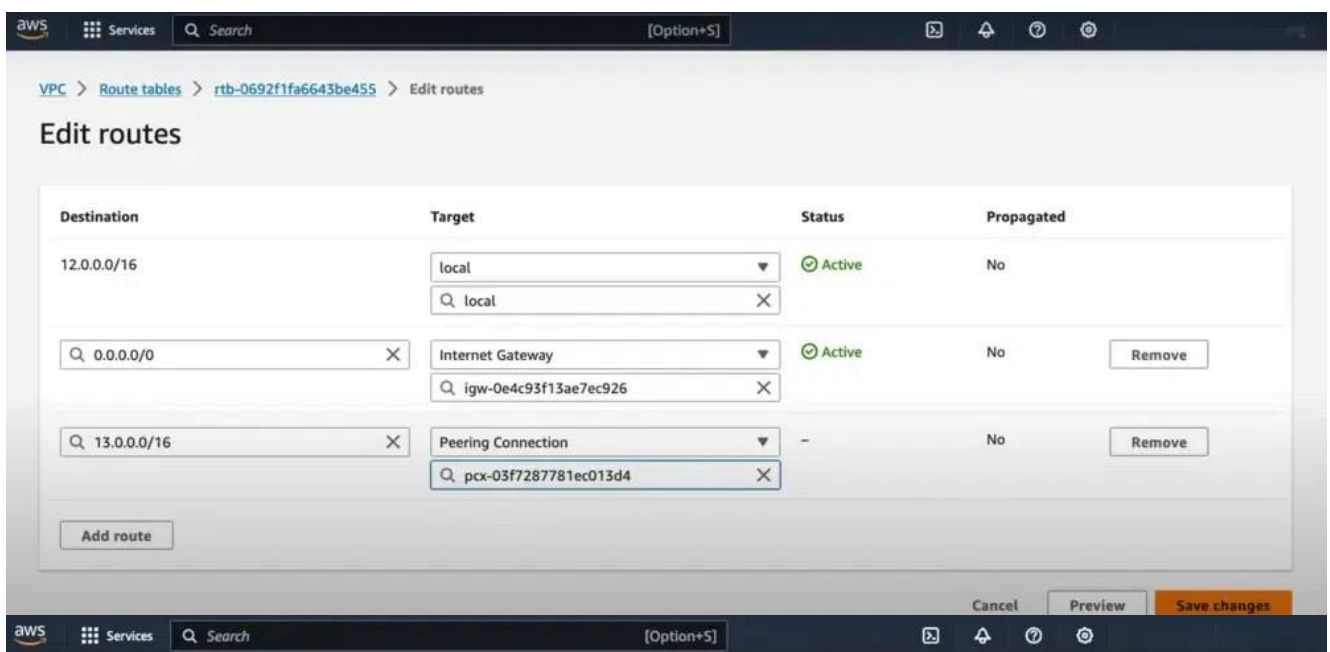

Step 7: Verify Connectivity

- Now, Create an instance on each VPC and try on ping the private IP of instance on each other instance.
- If they are successfully ping then you have established VPC peering successfully.

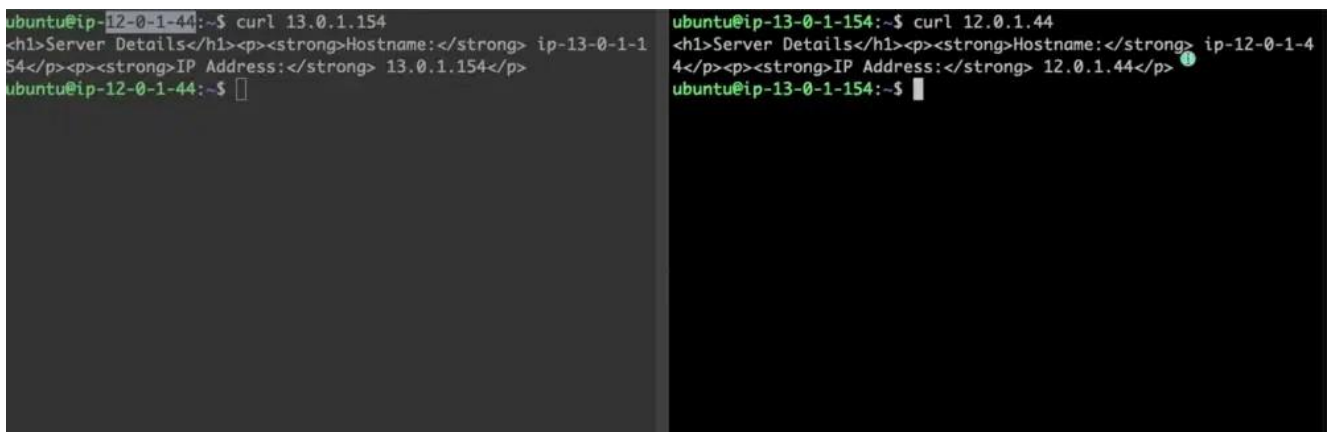

Sometimes we need to allow resources in different VPCs to exchange data based upon the architecture of the service. Regardless of any specific need, using VPC peering is a great way of extending your VPC design.