

Test Your Knowledge 3

Let's take a small quiz!



Quiz on R Operators and Notation

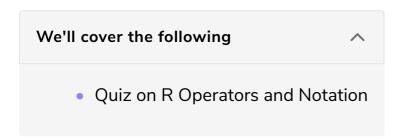

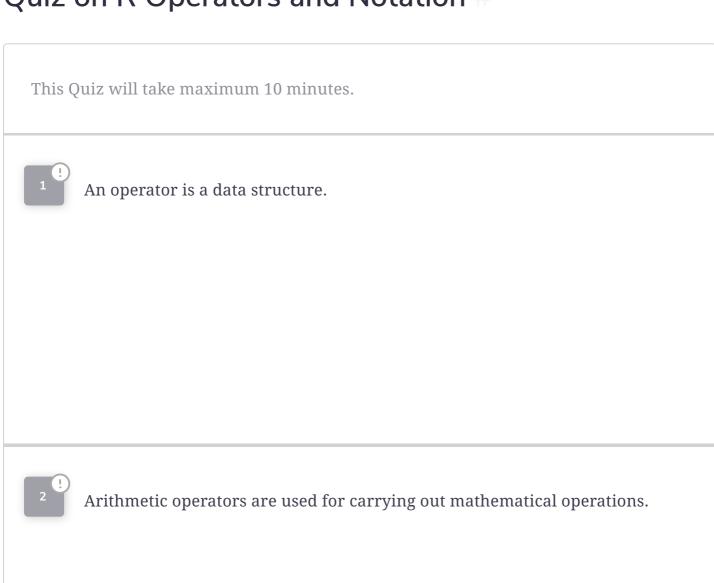

The output of performing arithmetic operations on vectors is an integer.



In R language, arithmetic operations on the following two vectors will not throw any warning.


```
vector1 -> c(0, 9, 1)
vector2 -> c(3, 4, 4, 5, 6, 7)
```




The symbol %/% is used for finding modulus in R language.

The %in% operator is used only on vectors.

The %in% operator does normal element-wise execution on vectors.

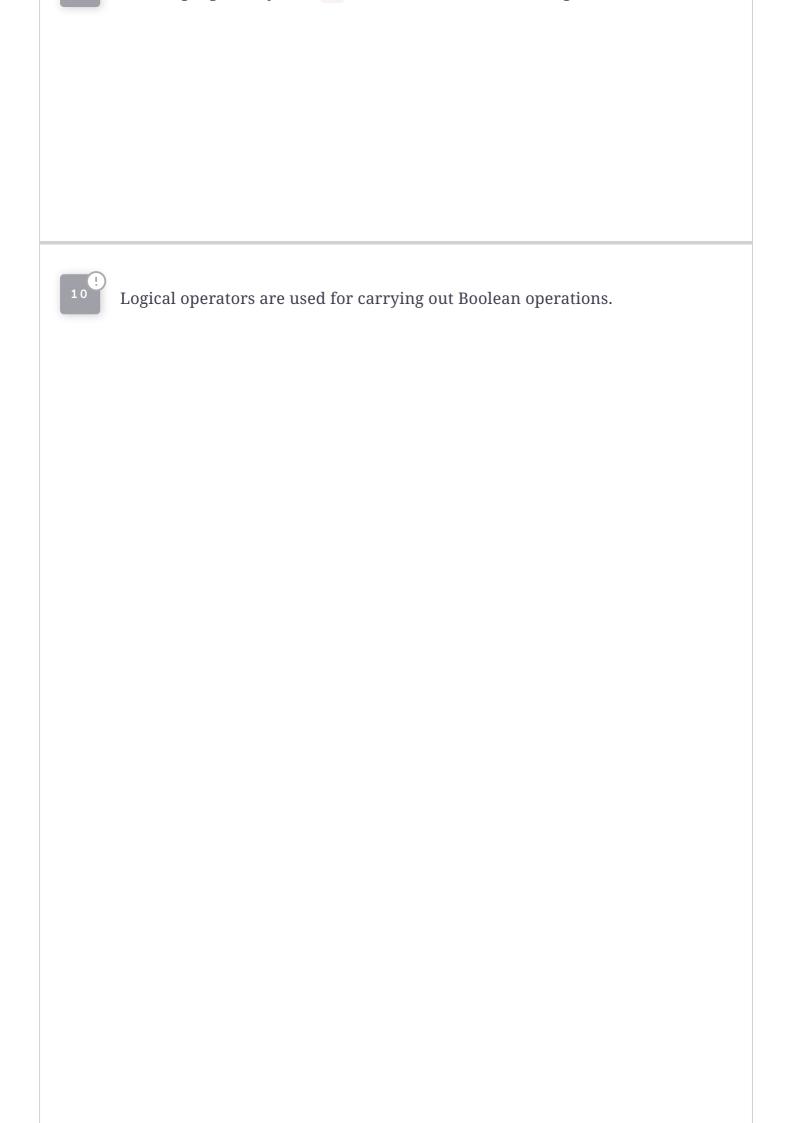

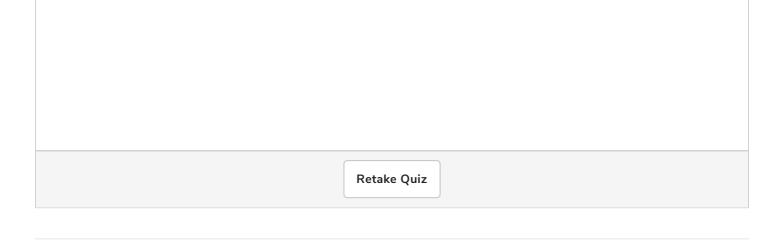

In the next chapter, we will be learning about Conditional Statements in R.