1.)-

1)

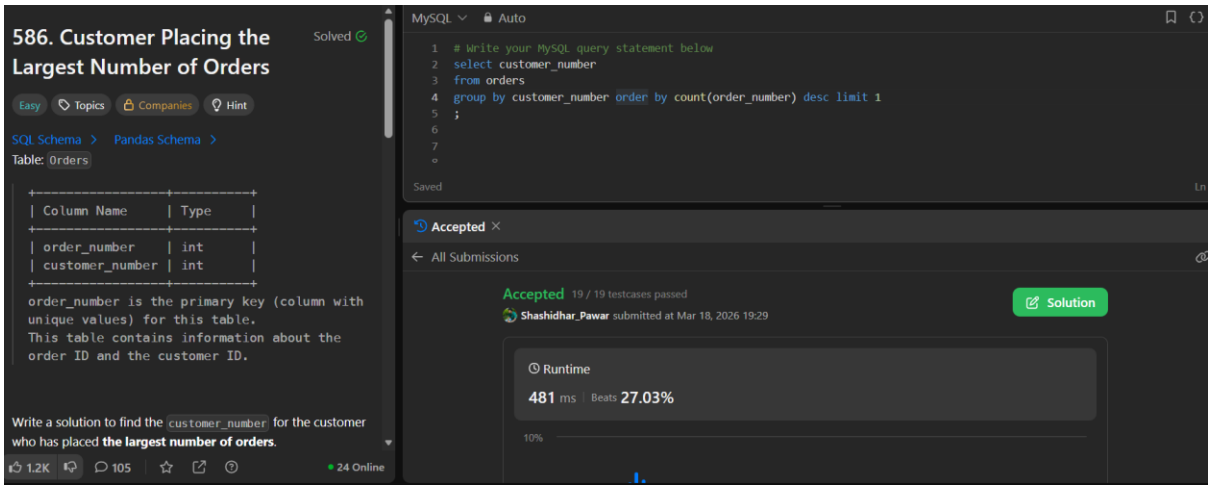
586. Customer Placing the Largest Number of Orders
Solved
Easy
Topics
Companies
Hint
SQL Schema
Pandas Schema
Table: Orders
+----------+----------+
| Column Name | Type |
+----------+----------+
| order_number | int |
| customer_number | int |
+----------+----------+
order_number is the primary key (column with unique values) for this table.
This table contains information about the order ID and the customer ID.
Write a solution to find the customer_number for the customer who has placed the largest number of orders.
1.2K
105
24 Online
MySQL
Auto
# Write your MySQL query statement below
select customer_number
from orders
group by customer_number order by count(order_number) desc limit 1
;
Saved
Accepted
All Submissions
Accepted 19 / 19 testcases passed
Shashidhar_Pawar submitted at Mar 18, 2026 19:29
Solution
Runtime
481 ms | Beats 27.03%
10%

2).-

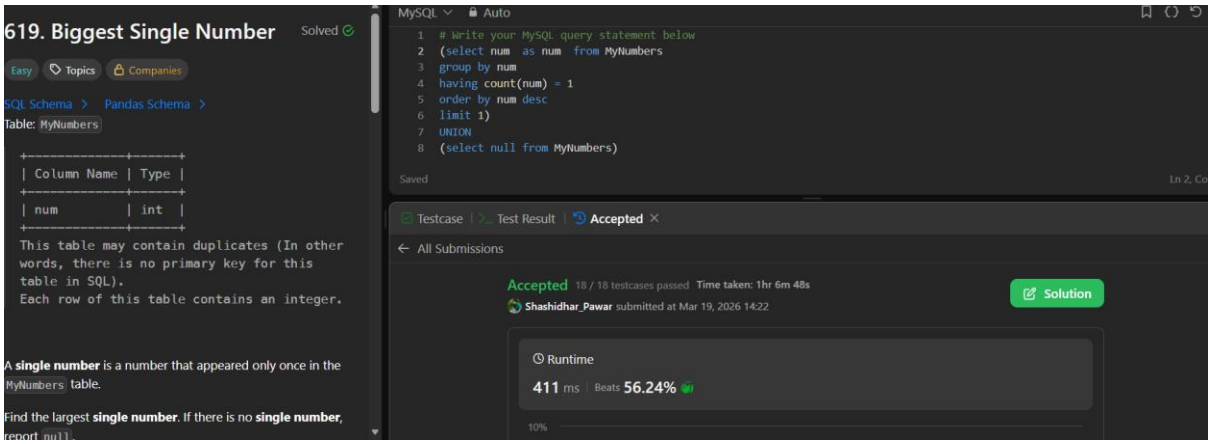
619. Biggest Single Number
Solved
Easy
Topics
Companies
SQL Schema
Pandas Schema
Table: MyNumbers
+----------+------+
| Column Name | Type |
+----------+------+
| num | int |
+----------+------+
This table may contain duplicates (In other words, there is no primary key for this table in SQL).
Each row of this table contains an integer.
A single number is a number that appeared only once in the MyNumbers table.
Find the largest single number. If there is no single number,
MySQL
Auto
# Write your MySQL query statement below
(select num as num from MyNumbers
group by num
having count(num) = 1
order by num desc
limit 1)
UNION
(select null from MyNumbers)
Saved
Testcase
Test Result
Accepted
All Submissions
Accepted 18 / 18 testcases passed Time taken: 1hr 6m 48s
Shashidhar_Pawar submitted at Mar 19, 2026 14:22
Solution
Runtime
411 ms | Beats 56.24%
10%

3.)- 511.

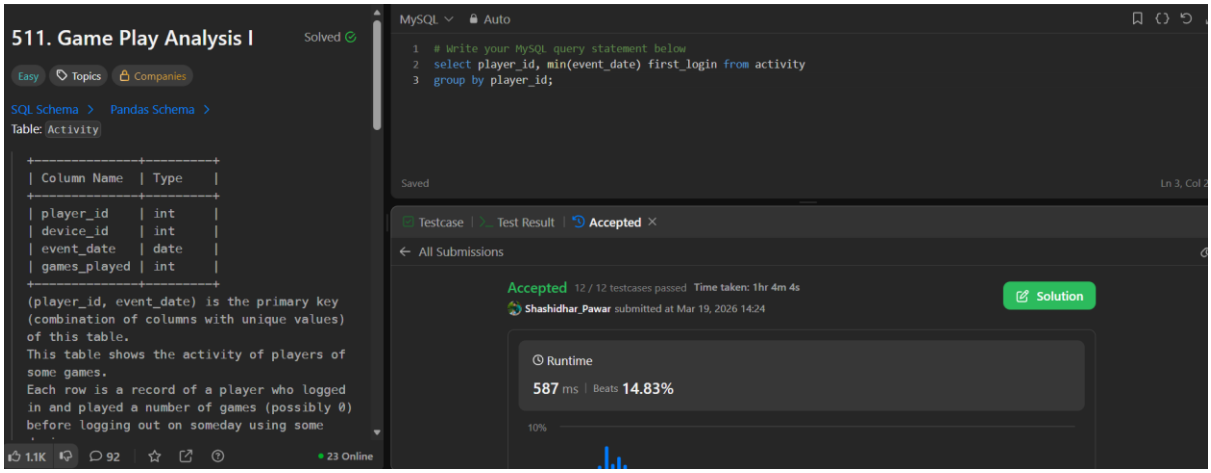
511. Game Play Analysis I
Solved
Easy
Topics
Companies
SQL Schema
Pandas Schema
Table: Activity
+----------+----------+
| Column Name | Type |
+----------+----------+
| player_id | int |
| device_id | int |
| event_date | date |
| games_played | int |
+----------+----------+
(player_id, event_date) is the primary key (combination of columns with unique values) of this table.
This table shows the activity of players of some games.
Each row is a record of a player who logged in and played a number of games (possibly 0) before logging out on someday using some
1.1K
92
23 Online
MySQL
Auto
# Write your MySQL query statement below
select player_id, min(event_date) first_login from activity
group by player_id;
Saved
Testcase
Test Result
Accepted
All Submissions
Accepted 12 / 12 testcases passed Time taken: 1hr 4m 4s
Shashidhar_Pawar submitted at Mar 19, 2026 14:24
Solution
Runtime
587 ms | Beats 14.83%
10%

4.)-

1.)-

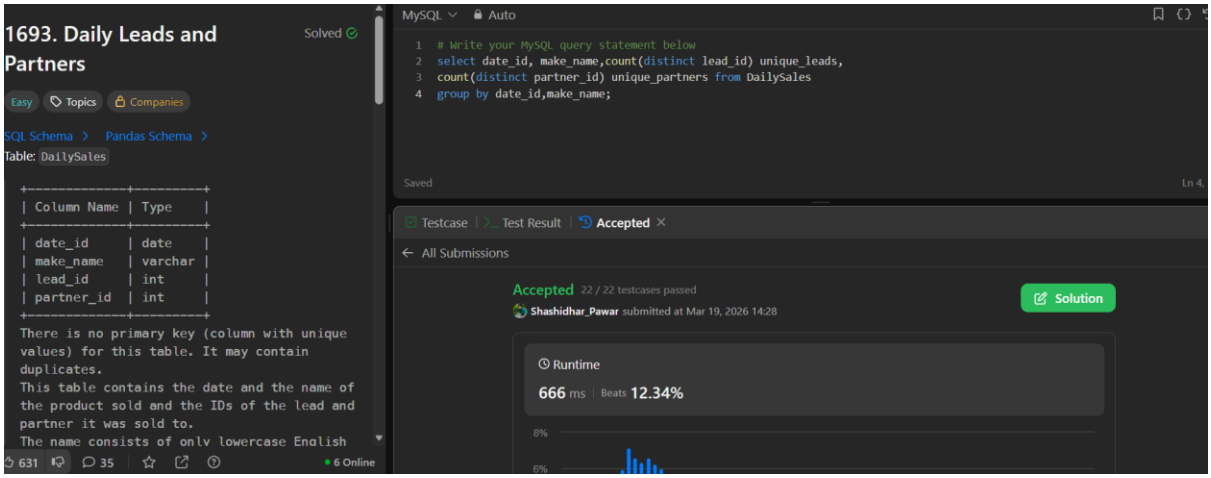
1693. Daily Leads and Partners
Solved
Easy
Topics
Companies
SQL Schema
Pandas Schema
Table: DailySales
+---------+---------+
| Column Name | Type |
+---------+---------+
| date_id | date |
| make_name | varchar |
| lead_id | int |
| partner_id | int |
+---------+---------+
There is no primary key (column with unique values) for this table. It may contain duplicates.
This table contains the date and the name of the product sold and the IDs of the lead and partner it was sold to.
The name consists of only lowercase English
631
35
6 Online
MySQL
Auto
# Write your MySQL query statement below
select date_id, make_name,count(distinct lead_id) unique_leads,
count(distinct partner_id) unique_partners from DailySales
group by date_id,make_name;
Saved
Testcase
Test Result
Accepted
All Submissions
Accepted 22 / 22 testcases passed
Shashidhar_Pawar submitted at Mar 19, 2026 14:28
Solution
Runtime
666 ms
Beats 12.34%
8%

5.)-

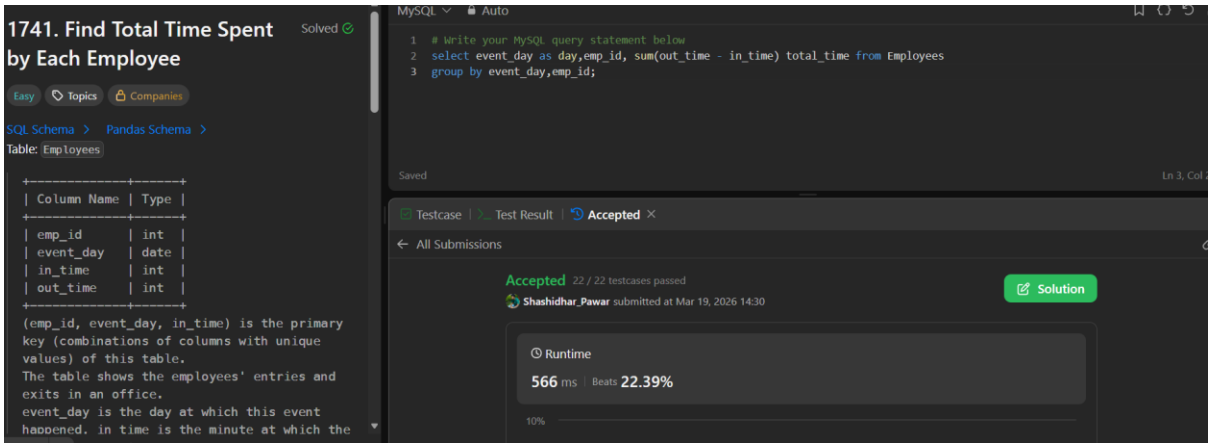
1741. Find Total Time Spent by Each Employee
Solved
Easy
Topics
Companies
SQL Schema
Pandas Schema
Table: Employees
+---------+---------+
| Column Name | Type |
+---------+---------+
| emp_id | int |
| event_day | date |
| in_time | int |
| out_time | int |
+---------+---------+
(emp_id, event_day, in_time) is the primary key (combinations of columns with unique values) of this table.
The table shows the employees' entries and exits in an office.
event_day is the day at which this event
MySQL
Auto
# Write your MySQL query statement below
select event_day as day,emp_id, sum(out_time - in_time) total_time from Employees
group by event_day,emp_id;
Saved
Testcase
Test Result
Accepted
All Submissions
Accepted 22 / 22 testcases passed
Shashidhar_Pawar submitted at Mar 19, 2026 14:30
Solution
Runtime
566 ms
Beats 22.39%
10%

6.)-

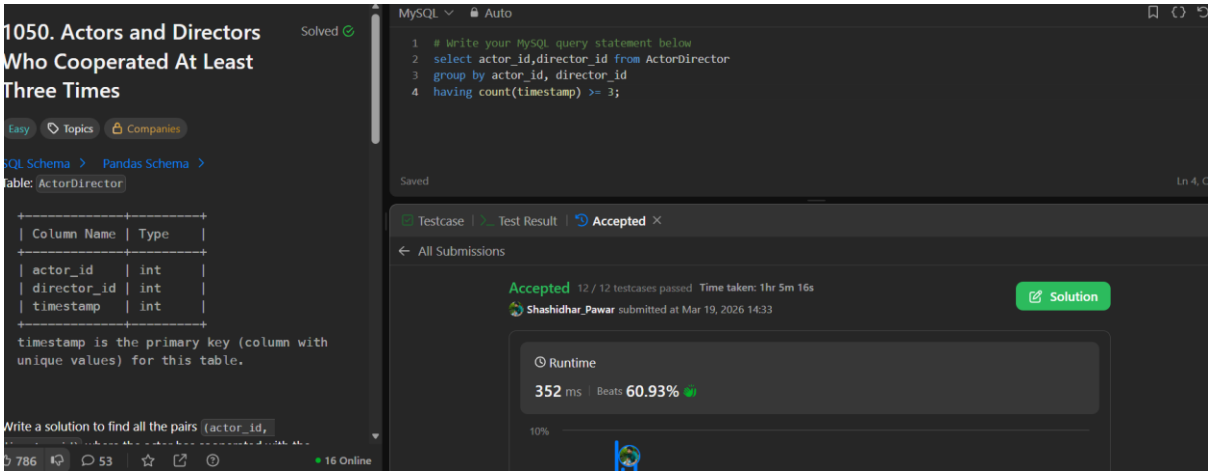
1050. Actors and Directors Who Cooperated At Least Three Times
Solved
Easy
Topics
Companies
Pandas Schema
Table: ActorDirector
+---------+---------+
| Column Name | Type |
+---------+---------+
| actor_id | int |
| director_id | int |
| timestamp | int |
+---------+---------+
timestamp is the primary key (column with unique values) for this table.
Write a solution to find all the pairs (actor_id,
786
53
16 Online
MySQL
Auto
# Write your MySQL query statement below
select actor_id,director_id from ActorDirector
group by actor_id, director_id
having count(timestamp) >= 3;
Saved
Testcase
Test Result
Accepted
All Submissions
Accepted 12 / 12 testcases passed Time taken: 1hr 5m 16s
Shashidhar_Pawar submitted at Mar 19, 2026 14:33
Solution
Runtime
352 ms
Beats 60.93%
10%

7.)-

1.)-

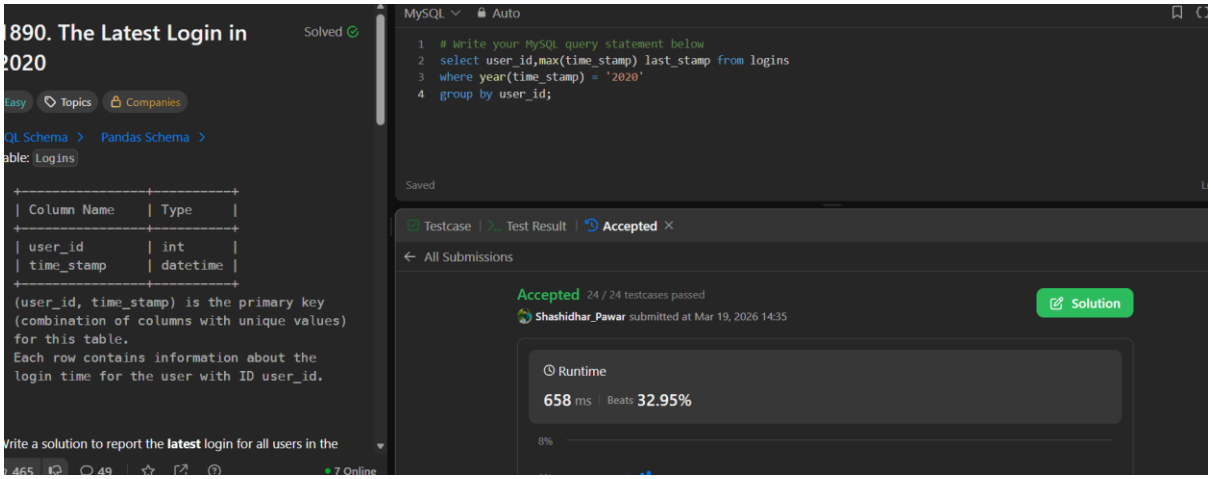
1890. The Latest Login in 2020
Solved
Easy
Topics
Companies
SQL Schema
Pandas Schema
Table: Logins
+----------+----------+
| Column Name | Type |
+----------+----------+
| user_id | int |
| time_stamp | datetime |
+----------+----------+
(user_id, time_stamp) is the primary key (combination of columns with unique values) for this table.
Each row contains information about the login time for the user with ID user_id.
Write a solution to report the latest login for all users in the
MySQL
Auto
# Write your MySQL query statement below
select user_id,max(time_stamp) last_stamp from logins
where year(time_stamp) = '2020'
group by user_id;
Saved
Testcase
Test Result
Accepted
All Submissions
Accepted 24 / 24 testcases passed
Shashidhar_Pawar submitted at Mar 19, 2026 14:35
Solution
Runtime
658 ms
Beats 32.95%

8.)-

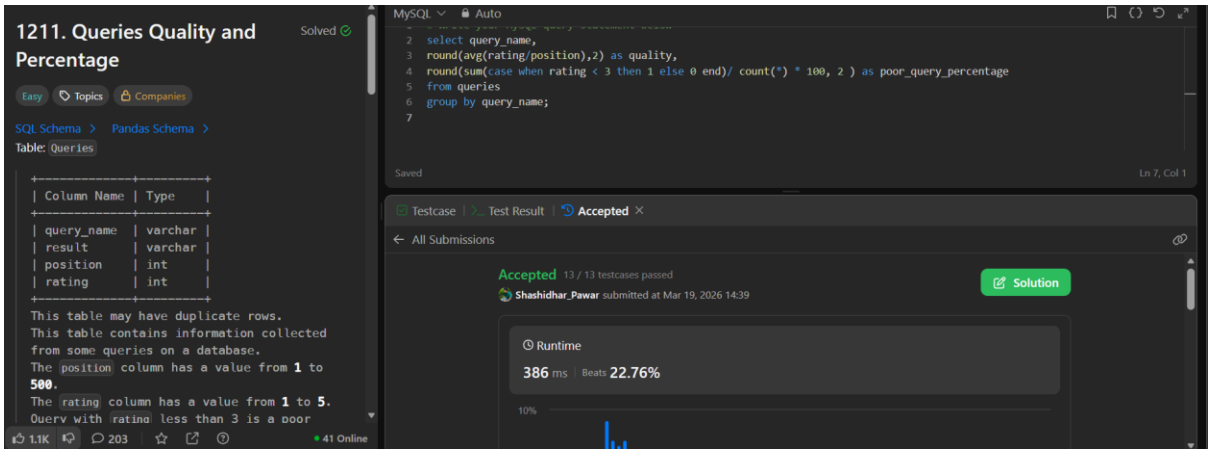
1211. Queries Quality and Percentage
Solved
Easy
Topics
Companies
SQL Schema
Pandas Schema
Table: Queries
+----------+----------+
| Column Name | Type |
+----------+----------+
| query_name | varchar |
| result | varchar |
| position | int |
| rating | int |
+----------+----------+
This table may have duplicate rows.
This table contains information collected from some queries on a database.
The position column has a value from 1 to 500.
The rating column has a value from 1 to 5.
MySQL
Auto
select query_name,
round(avg(rating/position),2) as quality,
round(sum(case when rating < 3 then 1 else 0 end)/ count(*) * 100, 2 ) as poor_query_percentage
from queries
group by query_name;
Saved
Ln 7, Col 1
Testcase
Test Result
Accepted
All Submissions
Accepted 13 / 13 testcases passed
Shashidhar_Pawar submitted at Mar 19, 2026 14:39
Solution
Runtime
386 ms
Beats 22.76%

10)-

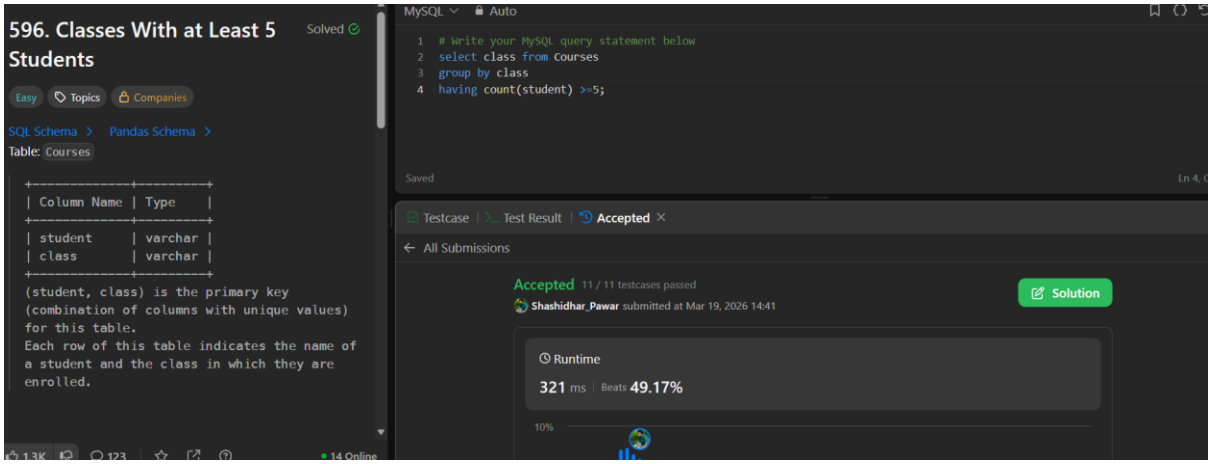
596. Classes With at Least 5 Students
Solved
Easy
Topics
Companies
SQL Schema
Pandas Schema
Table: Courses
+----------+----------+
| Column Name | Type |
+----------+----------+
| student | varchar |
| class | varchar |
+----------+----------+
(student, class) is the primary key (combination of columns with unique values) for this table.
Each row of this table indicates the name of a student and the class in which they are enrolled.
MySQL
Auto
# Write your MySQL query statement below
select class from Courses
group by class
having count(student) >=5;
Saved
Testcase
Test Result
Accepted
All Submissions
Accepted 11 / 11 testcases passed
Shashidhar_Pawar submitted at Mar 19, 2026 14:41
Solution
Runtime
321 ms
Beats 49.17%

**JOINS**

1.)-

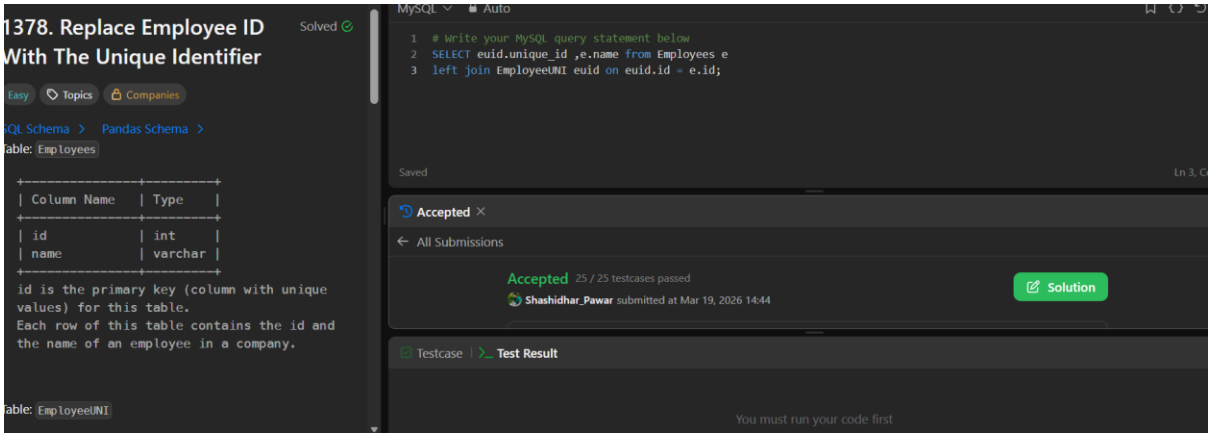
1378. Replace Employee ID With The Unique Identifier
Solved
Easy
Topics
Companies
SQL Schema
Pandas Schema
Table: Employees
| Column Name | Type |
| id | int |
| name | varchar |
id is the primary key (column with unique values) for this table.
Each row of this table contains the id and the name of an employee in a company.
Table: EmployeeUNI
MySQL
Auto
# Write your MySQL query statement below
SELECT euid.unique_id ,e.name from Employees e
left join EmployeeUNI euid on euid.id = e.id;
Saved
Accepted
All Submissions
Accepted 25 / 25 testcases passed
Shashidhar_Pawar submitted at Mar 19, 2026 14:44
Solution
Testcase
Test Result
You must run your code first

2.)-

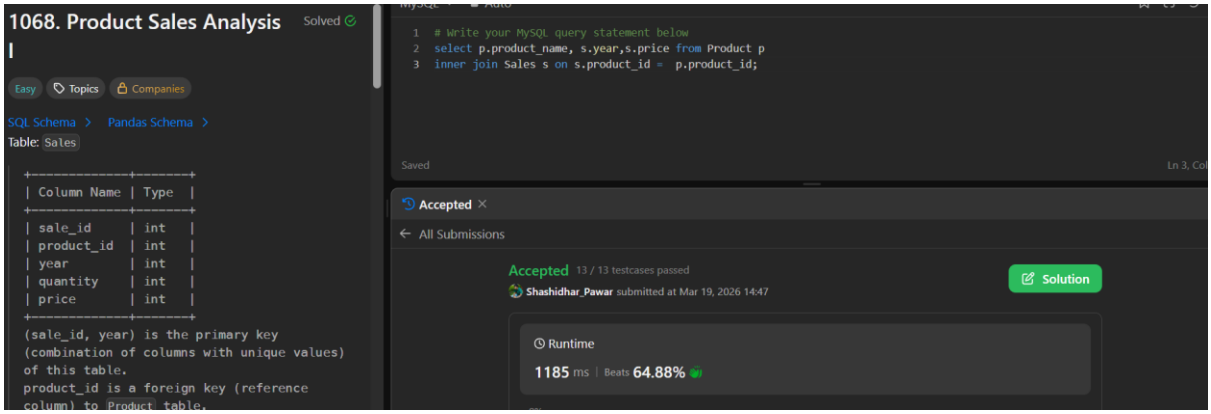
1068. Product Sales Analysis I
Solved
Easy
Topics
Companies
SQL Schema
Pandas Schema
Table: Sales
| Column Name | Type |
| sale_id | int |
| product_id | int |
| year | int |
| quantity | int |
| price | int |
(sale_id, year) is the primary key (combination of columns with unique values) of this table.
product_id is a foreign key (reference column) to Product table.
# Write your MySQL query statement below
select p.product_name, s.year,s.price from Product p
inner join Sales s on s.product_id = p.product_id;
Saved
Accepted
All Submissions
Accepted 13 / 13 testcases passed
Shashidhar_Pawar submitted at Mar 19, 2026 14:47
Solution
Runtime
1185 ms | Beats 64.88%

3.)-

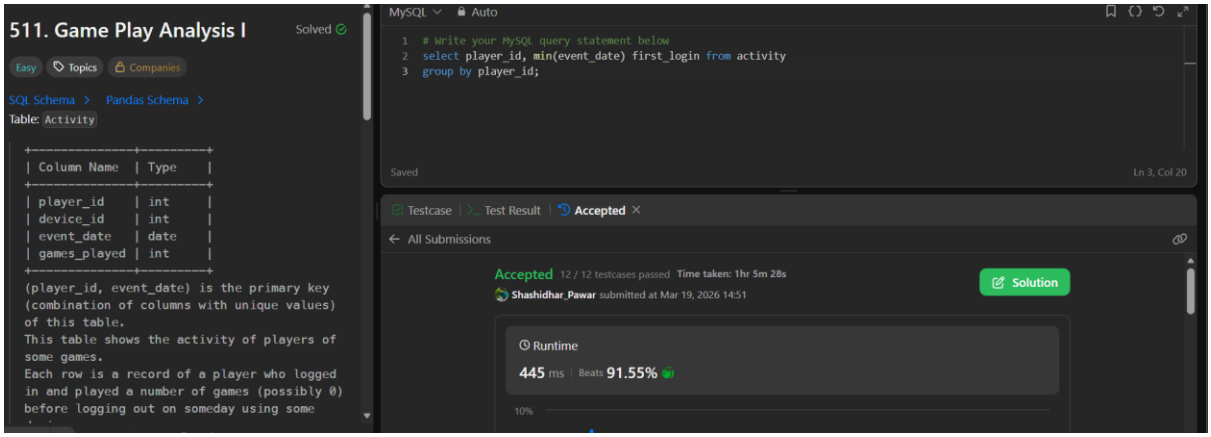
511. Game Play Analysis I
Solved
Easy
Topics
Companies
SQL Schema
Pandas Schema
Table: Activity
| Column Name | Type |
| player_id | int |
| device_id | int |
| event_date | date |
| games_played | int |
(player_id, event_date) is the primary key (combination of columns with unique values) of this table.
This table shows the activity of players of some games.
Each row is a record of a player who logged in and played a number of games (possibly 0) before logging out on someday using some
MySQL
Auto
# Write your MySQL query statement below
select player_id, min(event_date) first_login from activity
group by player_id;
Saved
Ln 3, Col 20
Testcase
Test Result
Accepted
All Submissions
Accepted 12 / 12 testcases passed Time taken: 1hr 5m 28s
Shashidhar_Pawar submitted at Mar 19, 2026 14:51
Solution
Runtime
445 ms | Beats 91.55%
10%

1.)-

4.)-

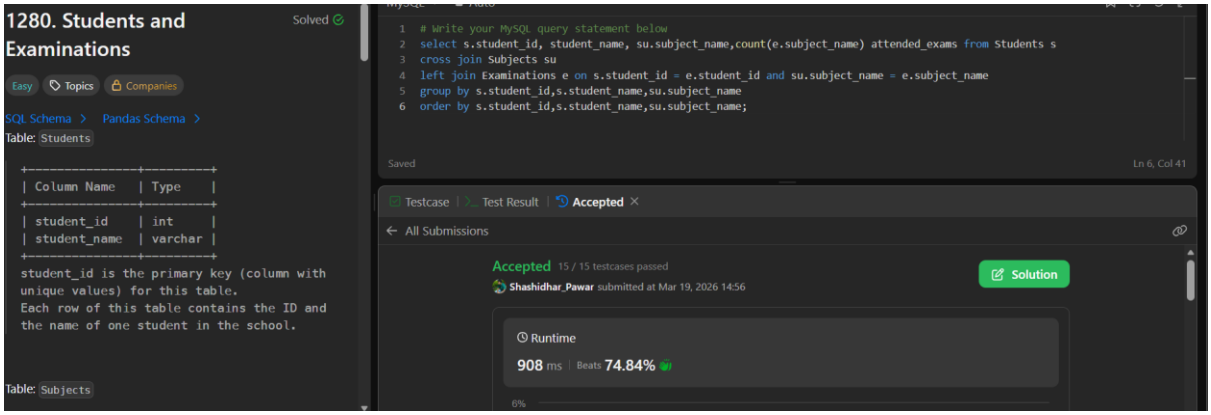
1280. Students and Examinations
Solved
Easy
Topics
Companies
SQL Schema
Pandas Schema
Table: Students
+---------------+---------+
| Column Name | Type |
+---------------+---------+
| student_id | int |
| student_name | varchar |
+---------------+---------+
student_id is the primary key (column with unique values) for this table.
Each row of this table contains the ID and the name of one student in the school.
Table: Subjects
# Write your MySQL query statement below
select s.student_id, student_name, su.subject_name,count(e.subject_name) attended_exams from Students s
cross join Subjects su
left join Examinations e on s.student_id = e.student_id and su.subject_name = e.subject_name
group by s.student_id,s.student_name,su.subject_name
order by s.student_id,s.student_name,su.subject_name;
Saved
Ln 6, Col 41
Testcase
Test Result
Accepted
All Submissions
Accepted 15 / 15 testcases passed
Shashidhar_Pawar submitted at Mar 19, 2026 14:56
Solution
Runtime
908 ms
Beats 74.84%

5.)-

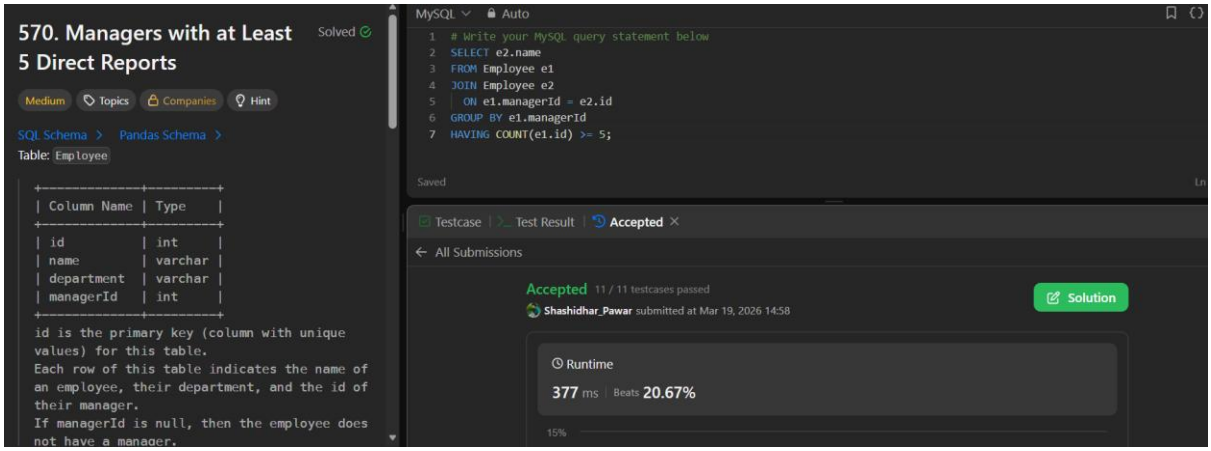
570. Managers with at Least 5 Direct Reports
Solved
Medium
Topics
Companies
Hint
SQL Schema
Pandas Schema
Table: Employee
+-------------+---------+
| Column Name | Type |
+-------------+---------+
| id | int |
| name | varchar |
| department | varchar |
| managerId | int |
+-------------+---------+
id is the primary key (column with unique values) for this table.
Each row of this table indicates the name of an employee, their department, and the id of their manager.
If managerId is null, then the employee does not have a manager.
MySQL
Auto
# Write your MySQL query statement below
SELECT e2.name
FROM Employee e1
JOIN Employee e2
ON e1.managerId = e2.id
GROUP BY e1.managerId
HAVING COUNT(e1.id) >= 5;
Saved
Testcase
Test Result
Accepted
All Submissions
Accepted 11 / 11 testcases passed
Shashidhar_Pawar submitted at Mar 19, 2026 14:58
Solution
Runtime
377 ms
Beats 20.67%

6.)-

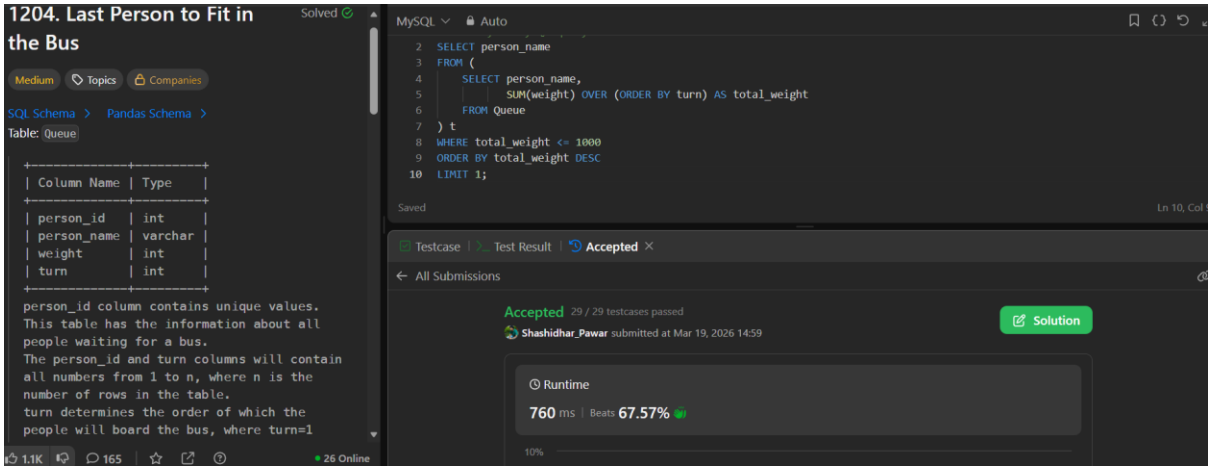
1204. Last Person to Fit in the Bus
Solved
Medium
Topics
Companies
SQL Schema
Pandas Schema
Table: Queue
+-------------+---------+
| Column Name | Type |
+-------------+---------+
| person_id | int |
| person_name | varchar |
| weight | int |
| turn | int |
+-------------+---------+
person_id column contains unique values.
This table has the information about all people waiting for a bus.
The person_id and turn columns will contain all numbers from 1 to n, where n is the number of rows in the table.
turn determines the order of which the people will board the bus, where turn=1
1.1K
165
26 Online
MySQL
Auto
SELECT person_name
FROM (
SELECT person_name,
SUM(weight) OVER (ORDER BY turn) AS total_weight
FROM Queue
) t
WHERE total_weight <= 1000
ORDER BY total_weight DESC
LIMIT 1;
Saved
Testcase
Test Result
Accepted
All Submissions
Accepted 29 / 29 testcases passed
Shashidhar_Pawar submitted at Mar 19, 2026 14:59
Solution
Runtime
760 ms
Beats 67.57%

7.)-

1.)-

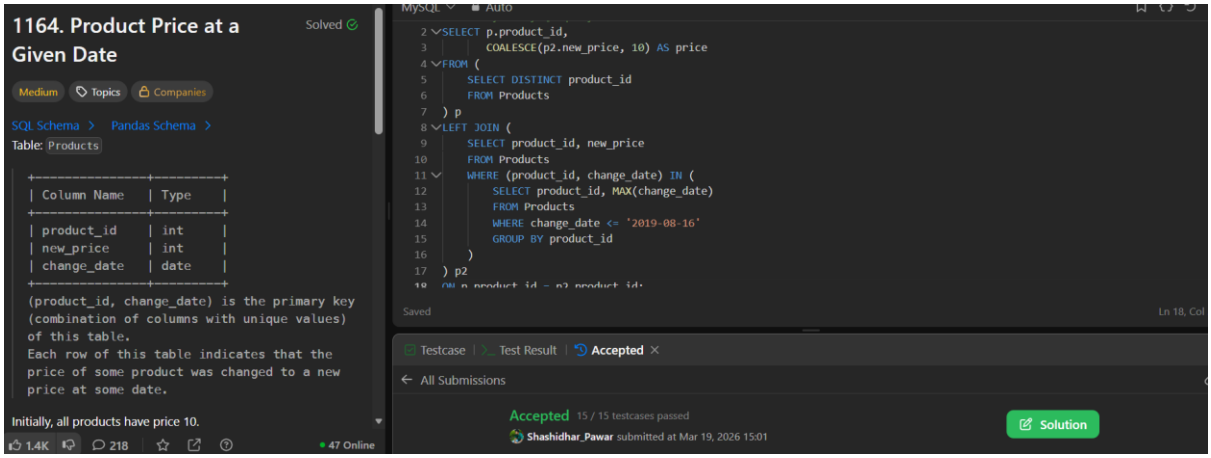


******sub query****

1.)-

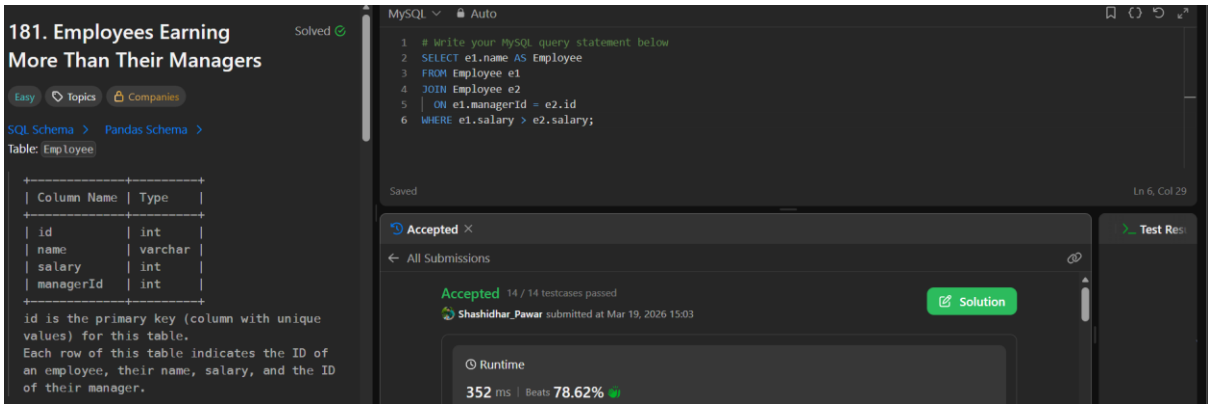


2.)-

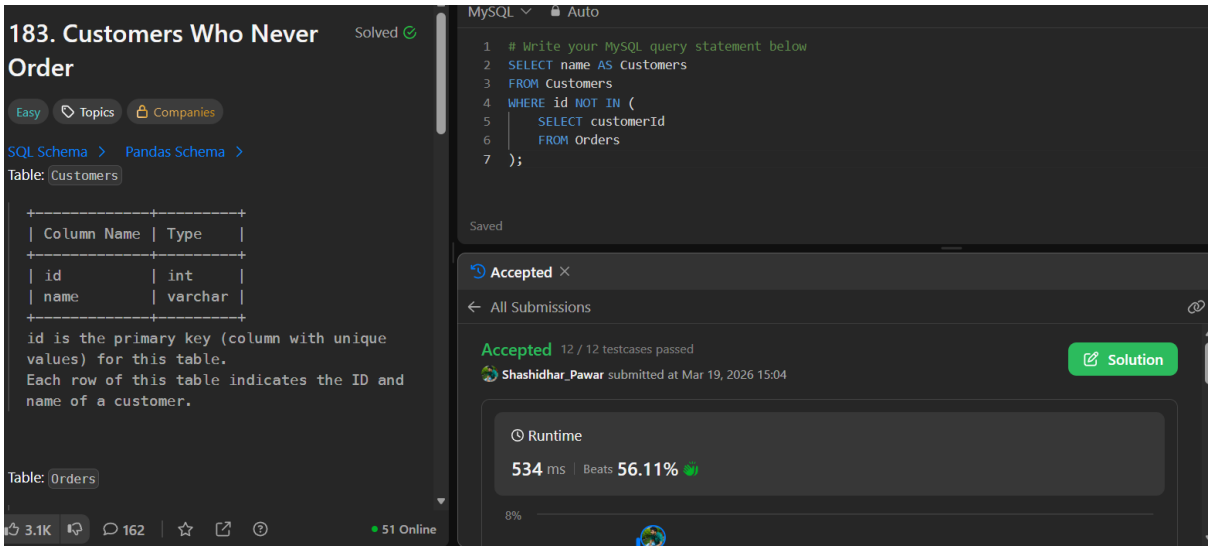


3,)-

1.)-

## 197. Rising Temperature

Solved

Easy | Topics | Companies

SQL Schema > Pandas Schema >

Table: Weather

| Column Name | Type |
|---|---|
| id | int |
| recordDate | date |
| temperature | int |

id is the column with unique values for this table.
There are no different rows with the same recordDate.
This table contains information about the temperature on a certain day.

MySQL | Auto

```mysql
# Write your MySQL query statement below
SELECT w1.id
FROM Weather w1
JOIN Weather w2
  ON DATEDIFF(w1.recordDate, w2.recordDate) = 1
WHERE w1.temperature > w2.temperature;
```

Saved

Testcase | Test Result | Accepted

All Submissions

Accepted 15 / 15 testcases passed

Shashidhar_Pawar submitted at Mar 19, 2026 15:05

Solution

Runtime

557 ms | Beats 14.16%

4.)-

## 607. Sales Person

Solved

Easy | Topics | Companies | Hint

SQL Schema > Pandas Schema >

Table: SalesPerson

| Column Name | Type |
|---|---|
| sales_id | int |
| name | varchar |
| salary | int |
| commission_rate | int |
| hire_date | date |

sales_id is the primary key (column with unique values) for this table.
Each row of this table indicates the name and the ID of a salesperson alongside their salary, commission rate, and hire date.

MySQL | Auto

```mysql
FROM SalesPerson
WHERE sales_id NOT IN (
    SELECT o.sales_id
    FROM Orders o
    JOIN Company c
      ON o.com_id = c.com_id
    WHERE c.name = 'RED'
);
```

Saved

Testcase | Test Result | Accepted

All Submissions

Accepted 21 / 21 testcases passed

Shashidhar_Pawar submitted at Mar 19, 2026 15:07

Solution

Runtime

1337 ms | Beats 58.35%

5.)-

## 175. Combine Two Tables

Solved

Easy | Topics | Companies

SQL Schema > Pandas Schema >

Table: Person

| Column Name | Type |
|---|---|
| personId | int |
| lastName | varchar |
| firstName | varchar |

personId is the primary key (column with unique values) for this table.
This table contains information about the ID of some persons and their first and last names.

Table: Address

```mysql
# Write your MySQL query statement below
SELECT p.firstName,
       p.lastName,
       a.city,
       a.state
FROM Person p
LEFT JOIN Address a
  ON p.personId = a.personId;
```

Saved

Ln 8, Col 30

Testcase | Test Result | Accepted

All Submissions

Accepted 8 / 8 testcases passed

Shashidhar_Pawar submitted at Mar 19, 2026 15:08

Solution

Runtime

376 ms | Beats 80.76%

7)-

1.)-

## 570. Managers with at Least 5 Direct Reports

Solved

Medium | Topics | Companies | Hint

SQL Schema > Pandas Schema >

Table: Employee

```
+-------------+---------+
| Column Name | Type    |
+-------------+---------+
| id          | int     |
| name        | varchar |
| department  | varchar |
| managerId   | int     |
+-------------+---------+
id is the primary key (column with unique
values) for this table.
Each row of this table indicates the name of
an employee, their department, and the id of
their manager.
If managerId is null, then the employee does
not have a manager.
```

MySQL | Auto

```mysql
# Write your MySQL query statement below
SELECT e2.name
FROM Employee e1
JOIN Employee e2
  ON e1.managerId = e2.id
GROUP BY e1.managerId
HAVING COUNT(e1.id) >= 5;
```

Saved

Accepted

All Submissions

Accepted 11 / 11 testcases passed

Shashidhar_Pawar submitted at Mar 19, 2026 15:10

Solution

Runtime

330 ms | Beats 68.34%

Testcase | Test

9.)-

## 196. Delete Duplicate Emails

Solved

Easy | Topics | Companies

SQL Schema > Pandas Schema >

Table: Person

```
+-------------+---------+
| Column Name | Type    |
+-------------+---------+
| id          | int     |
| email       | varchar |
+-------------+---------+
id is the primary key (column with unique
values) for this table.
Each row of this table contains an email.
The emails will not contain uppercase
letters.
```

Write a solution to **delete** all duplicate emails, keeping only one unique email with the smallest `id`.

MySQL | Auto

```mysql
# Write your MySQL query statement below
DELETE p1
FROM Person p1
JOIN Person p2
  ON p1.email = p2.email
  AND p1.id > p2.id;
```

Saved

Testcase | Test Result | Accepted

All Submissions

Accepted 22 / 22 testcases passed

Shashidhar_Pawar submitted at Mar 19, 2026 15:11

Solution

Runtime

854 ms | Beats 40.56%

8%

10)-

## 1204. Last Person to Fit in the Bus

Solved

Medium | Topics | Companies

SQL Schema > Pandas Schema >

Table: Queue

```
+-------------+---------+
| Column Name | Type    |
+-------------+---------+
| person_id   | int     |
| person_name | varchar |
| weight      | int     |
| turn        | int     |
+-------------+---------+
person_id column contains unique values.
This table has the information about all
people waiting for a bus.
The person_id and turn columns will contain
all numbers from 1 to n, where n is the
number of rows in the table.
turn determines the order of which the
```

MySQL | Auto

```mysql
# Write your MySQL query statement below
SELECT person_name
FROM (
    SELECT person_name,
           SUM(weight) OVER (ORDER BY turn) AS total_weight
    FROM Queue
) t
WHERE total_weight <= 1000
ORDER BY total_weight DESC
```

Saved

Ln 5, C

Testcase | Test Result | Accepted

All Submissions

Accepted 29 / 29 testcases passed

Shashidhar_Pawar submitted at Mar 19, 2026 15:13

Solution

Runtime

843 ms | Beats 42.06%

10%

11.)-

1.)-

## 176. Second Highest Salary

Solved

Medium | Topics | Companies

SQL Schema > Pandas Schema >

Table: `Employee`

```
+-------------+------+
| Column Name | Type |
+-------------+------+
| id          | int  |
| salary      | int  |
+-------------+------+
id is the primary key (column with unique
values) for this table.
Each row of this table contains information
about the salary of an employee.
```

Write a solution to find the second highest **distinct** salary from the `Employee` table. If there is no second highest

MySQL | Auto

```mysql
# Write your MySQL query statement below
SELECT (
    SELECT DISTINCT salary
    FROM Employee
    ORDER BY salary DESC
    LIMIT 1 OFFSET 1
) AS SecondHighestSalary;
```

Saved

Accepted

All Submissions

Accepted 10 / 10 testcases passed

Shashidhar_Pawar submitted at Mar 19, 2026 15:14

Solution

Runtime

274 ms | Beats 42.37%