1. Create a new database named CDAC and connect to it.

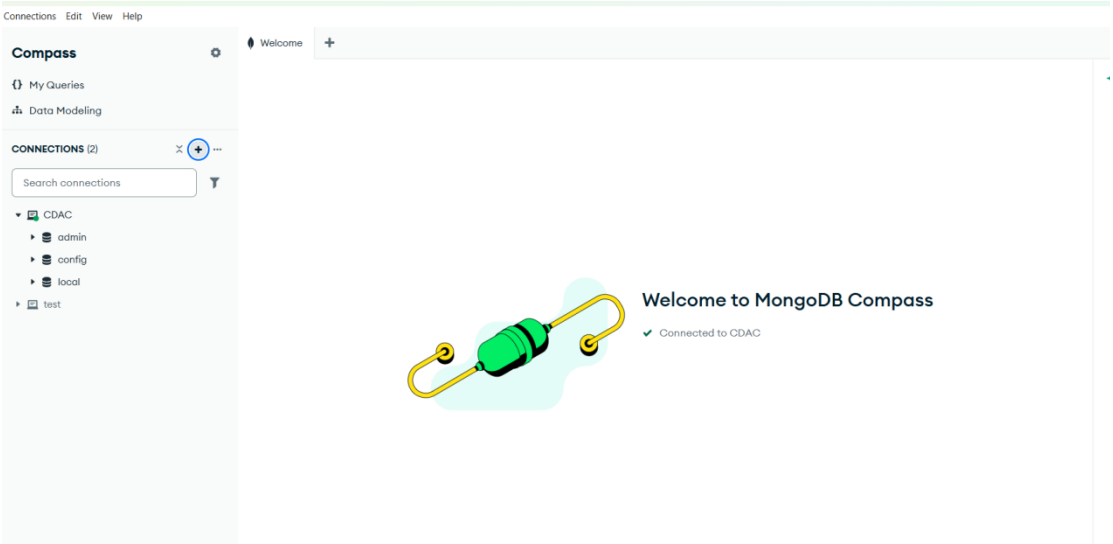

2. Display the list of collections in the CDAC database.

```
Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.

Install the latest PowerShell for new features and improvements! https://aka.ms/PSWindows

PS C:\Users\ACER> mongosh
Current Mongosh Log ID: 69b959b7096cf766197c2906
Connecting to:          mongodb://127.0.0.1:27017/?directConnection=true&serverSelectionTimeoutMS=2000&appName=mongosh+2
.7.0
Using MongoDB:          8.2.5
Using Mongosh:          2.7.0
mongosh 2.8.1 is available for download: https://www.mongodb.com/try/download/shell

For mongosh info see: https://www.mongodb.com/docs/mongodb-shell/

------
   The server generated these startup warnings when booting
   2026-03-17T18:38:26.180+05:30: Access control is not enabled for the database. Read and write access to data and conf
iguration is unrestricted
------

test> use CDAC
switched to db CDAC
CDAC>
```

3. Create a collection named LIBRARY.

```
CDAC> db.library.insert({title:'MongoDB programming',author:'Amit',likes:100
})
DeprecationWarning: Collection.insert() is deprecated. Use insertOne, insert
Many, or bulkWrite.
{
  acknowledged: true,
  insertedIds: { '0': ObjectId('69b95a4b096cf766197c2907') }
}
CDAC>
```

4. Insert a document into LIBRARY with: title: MongoDB programming, author: Amit, likes: 100

```
CDAC> db.library.find()
[
  {
    _id: ObjectId('69b95a4b096cf766197c2907'),
    title: 'MongoDB programming',
    author: 'Amit',
    likes: 100
  }
]
CDAC> |
```

5. Display the inserted document and note the _id field.

```
CDAC> db.library.insert({title:'MySQL programming',author:[{name:'jack'},{name:'jill'}],likes:200})
{
  acknowledged: true,
  insertedIds: { '0': ObjectId('69b95ba5096cf766197c2908') }
}
CDAC> |
```

6. Insert another document into LIBRARY with: title: MySQL programming, authors: [Jack, Jill], likes: 200

```
}
CDAC> db.library.find()
[
  {
    _id: ObjectId('69b95a4b096cf766197c2907'),
    title: 'MongoDB programming',
    author: 'Amit',
    likes: 100
  },
  {
    _id: ObjectId('69b95ba5096cf766197c2908'),
    title: 'MySQL programming',
    author: [ { name: 'jack' }, { name: 'jill' } ],
    likes: 200
  }
]
CDAC> |
```

7. Display all documents in the LIBRARY collection.

```
CDAC> db.library.find().pretty()
[
  {
    _id: ObjectId('69b95a4b096cf766197c2907'),
    title: 'MongoDB programming',
    author: 'Amit Sharma',
    likes: 100
  },
  {
    _id: ObjectId('69b95ba5096cf766197c2908'),
    title: 'MySQL programming',
    author: [ { name: 'jack' }, { name: 'jill' } ],
    likes: 200
  }
```

8. Display only the first inserted document.

```
CDAC> db.library.findOne()
{
  _id: ObjectId('69b95a4b096cf766197c2907'),
  title: 'MongoDB programming',
  author: 'Amit',
  likes: 100
}
CDAC> |
```

9. Display documents using the pretty() method.

```
CDAC> db.library.find().pretty()
[
  {
    _id: ObjectId('69b95a4b096cf766197c2907'),
    title: 'MongoDB programming',
    author: 'Amit Sharma',
    likes: 100
  },
  {
    _id: ObjectId('69b95ba5096cf766197c2908'),
    title: 'MySQL programming',
    author: [ { name: 'jack' }, { name: 'jill' } ],
    likes: 200
  }
```

10. Update the document where author = Amit to Amit Sharma.

```
CDAC> db.library.find().pretty()
[
  {
    _id: ObjectId('69b95a4b096cf766197c2907'),
    title: 'MongoDB programming',
    author: 'Amit Sharma',
    likes: 100
  },
```

11. Delete all documents with likes = 100.

```
  3 |

CDAC> db.library.deleteMany({likes:100})
{ acknowledged: true, deletedCount: 1 }
CDAC> |
```

12. Drop the LIBRARY collection.

```
CDAC> db.drop.collections.library
CDAC.drop.collections.library
CDAC> db.library.drop()
true
CDAC> |
```

13. Drop the CDAC database.

```
CDAC> db.dropDatabase()
{ ok: 1, dropped: 'CDAC' }
CDAC>
```