Problem List

Submit

Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 14 / 14 testcases passed

Aditya_Mahajan_18 submitted at Mar 19, 2026 20:35

Solution

Runtime

911 ms | Beats 9.42%

Code | MySQL

```mysql
SELECT name AS Employee
FROM Employee e
WHERE salary > (
    SELECT m.salary
    FROM Employee m
    WHERE m.id = e.managerId
);
```

Saved

Ln 7, Col 3

Testcase | Test Result

Accepted Runtime: 93 ms

Case 1

Input

Employee =

| id | name | salary | managerId |
|---|---|---|---|
| 1 | Joe | 70000 | 3 |
| 2 | Henry | 80000 | 4 |
| 3 | Sam | 60000 | null |
| 4 | Max | 90000 | null |

Problem List

Submit

Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 12 / 12 testcases passed

Aditya_Mahajan_18 submitted at Mar 19, 2026 20:16

Solution

Runtime

582 ms | Beats 26.70%

0.16% of solutions used 773 ms of runtime

Code | MySQL

```mysql
SELECT name AS Customers
FROM Customers
WHERE id NOT IN (
    SELECT customerId FROM Orders
);
```

Saved Upgrade to Cloud Saving

Ln 5, Col 3

Testcase | Test Result

Accepted Runtime: 112 ms

Case 1

Input

Customers =

| id | name |
|---|---|
| 1 | Joe |
| 2 | Henry |
| 3 | Sam |
| 4 | Max |

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

**Accepted** 15 / 15 testcases passed

Aditya_Mahajan_18 submitted at Mar 19, 2026 20:17

Solution

Runtime

1025 ms | Beats 5.01%

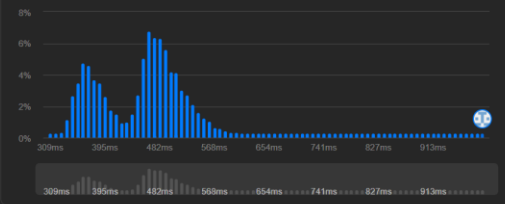


Code | MySQL

```
# Write your MySQL query statement below
SELECT w1.id
FROM Weather w1
```

Code

MySQL | Auto

```
# Write your MySQL query statement below
SELECT w1.id
FROM Weather w1
WHERE w1.temperature > (
    SELECT w2.temperature
    FROM Weather w2
    WHERE w2.recordDate = DATE_SUB(w1.recordDate, INTERVAL 1 DAY)
);

```

Saved Ln 9, Col 1

Testcase | Test Result

**Accepted** Runtime: 68 ms

Case 1

Input

Weather =

| id | recordDate | temperature |
|---|---|---|
| 1 | 2015-01-01 | 10 |
| 2 | 2015-01-02 | 25 |
| 3 | 2015-01-03 | 20 |
| 4 | 2015-01-04 | 30 |

Problem List | Submit | 0 | 02:18:03 | Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

**Accepted** 14 / 14 testcases passed

Aditya_Mahajan_18 submitted at Mar 19, 2026 20:10

Solution

Runtime

411 ms | Beats 24.84%

Code | MySQL

```
# Write your MySQL query statement below
SELECT e.name AS Employee
FROM Employee e
```

Code

MySQL | Auto

```
# Write your MySQL query statement below
SELECT e.name AS Employee
FROM Employee e
JOIN Employee m
ON e.managerId = m.id
WHERE e.salary > m.salary;

```

Saved Ln 1, Col 1

Testcase | Test Result

**Accepted** Runtime: 1328 ms

Case 1

Input

Employee =

| id | name | salary | managerId |
|---|---|---|---|
| 1 | Joe | 70000 | 3 |
| 2 | Henry | 80000 | 4 |
| 3 | Sam | 60000 | null |
| 4 | Max | 90000 | null |

Problem List | Submit | 0 | 02:18:10 | Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

**Accepted** 23 / 23 testcases passed Time taken: 2hrs 18m 10s

Aditya_Mahajan_18 submitted at Mar 19, 2026 20:19

Solution

Runtime

1695 ms | Beats 5.00%

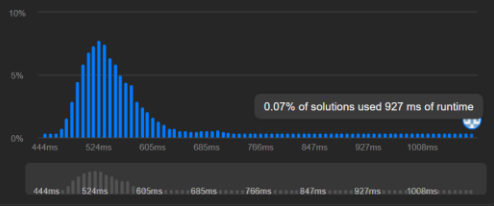


Code | MySQL

```
# Write your MySQL query statement below
SELECT DISTINCT num AS ConsecutiveNums
FROM Logs l1
```

Code

MySQL | Auto

```
FROM Logs l1
WHERE num = (
    SELECT l2.num FROM Logs l2 WHERE l2.id = l1.id + 1
)
AND num = (
    SELECT l3.num FROM Logs l3 WHERE l3.id = l1.id + 2
);
```

Saved | Ln 10, Col 1

Testcase | Test Result

```
| ConsecutiveNums |
| --------------- |
| 1               |
```

Expected

```
| ConsecutiveNums |
| --------------- |
| 1               |
```

Contribute a testcase

Problem List | Submit | 0 | 02:18:03 | Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

**Accepted** 21 / 21 testcases passed

Aditya_Mahajan_18 submitted at Mar 19, 2026 20:18

Solution

Runtime

1486 ms | Beats 29.08%

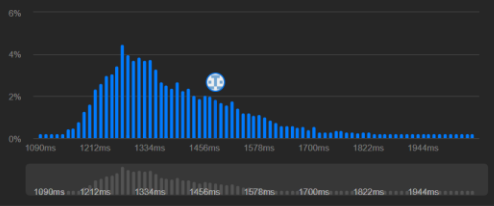


Code | MySQL

```
# Write your MySQL query statement below
SELECT name
FROM SalesPerson
```

Code

MySQL | Auto

```
    SELECT sales_id
    FROM Orders
    WHERE com_id = (
        SELECT com_id
        FROM Company
        WHERE name = 'RED'
    )
);
```

Saved | Ln 12, Col 3

Testcase | Test Result

**Accepted** Runtime: 703 ms

Case 1

Input

SalesPerson =

```
| sales_id | name | salary | commission_rate | hire_date  |
| -------- | ---- | ------ | --------------- | ---------- |
| 1        | John | 100000 | 6               | 4/1/2006   |
| 2        | Amy  | 12000  | 5               | 5/1/2010   |
| 3        | Mark | 65000  | 12              | 12/25/2008 |
| 4        | Pam  | 25000  | 25              | 1/1/2005   |
```

Problem List | Submit | 0 | 02:18:10 | Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

**Accepted** 8 / 8 testcases passed

Aditya_Mahajan_18 submitted at Mar 19, 2026 20:20

Solution

Runtime

592 ms | Beats 7.11%

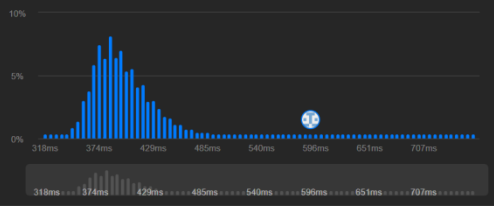


Code | MySQL

```
# Write your MySQL query statement below
SELECT
    firstName,
```

Code

MySQL | Auto

```
    (SELECT city
     FROM Address a
     WHERE a.personId = p.personId) AS city,
    (SELECT state
     FROM Address a
     WHERE a.personId = p.personId) AS state
FROM Person p;
```

Saved | Ln 12, Col 1

Testcase | Test Result

**Accepted** Runtime: 93 ms

Case 1

Input

Person =

```
| personId | lastName | firstName |
| -------- | -------- | --------- |
| 1        | Wang     | Allen     |
| 2        | Alice    | Bob       |
```

Problem List | Submit | 0 | 02:18:10 | Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

**Accepted** 11 / 11 testcases passed

Aditya_Mahajan_18 submitted at Mar 19, 2026 20:26

Solution

Runtime

381 ms | Beats 18.98%

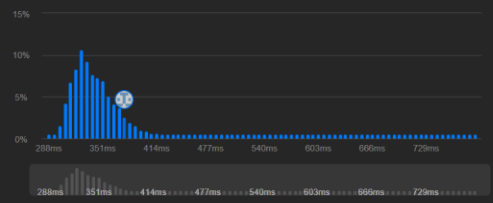


Code | MySQL

```mysql
# Write your MySQL query statement below
SELECT name
FROM Employee
```

Code

MySQL | Auto

```mysql
FROM Employee
WHERE id IN (
    SELECT managerId
    FROM Employee
    WHERE managerId IS NOT NULL
    GROUP BY managerId
    HAVING COUNT(*) >= 5
);
```

Saved | Ln 10, Col 3

Testcase | Test Result

**Accepted** Runtime: 73 ms

Case 1

Input

Employee =

| id | name | department | managerId |
|---|---|---|---|
| 101 | John | A | null |
| 102 | Dan | A | 101 |
| 103 | James | A | 101 |
| 104 | Amy | A | 101 |

Problem List | Submit | 0 | 02:18:10 | Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

**Accepted** 22 / 22 testcases passed

Aditya_Mahajan_18 submitted at Mar 19, 2026 20:28

Solution

Runtime

1536 ms | Beats 5.00%

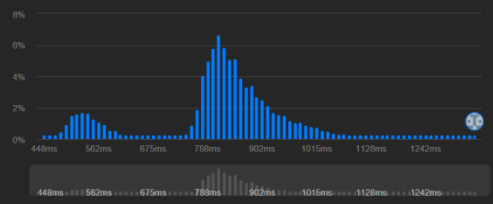


Code | MySQL

```mysql
DELETE FROM Person
WHERE id NOT IN (
    SELECT id FROM (
```

Code

MySQL | Auto

```mysql
DELETE FROM Person
WHERE id NOT IN (
    SELECT id FROM (
        SELECT MIN(id) AS id
        FROM Person
        GROUP BY email
    ) AS temp
);
```

Saved | Ln 8, Col 3

Testcase | Test Result

**Accepted** Runtime: 881 ms

Case 1

Input

Person =

| id | email |
|---|---|
| 1 | john@example.com |
| 2 | bob@example.com |
| 3 | john@example.com |

Problem List | Submit | 0 | 02:18:10 | Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

**Accepted** 11 / 11 testcases passed

Aditya_Mahajan_18 submitted at Mar 19, 2026 20:25

Solution

Runtime

747 ms | Beats 11.14%

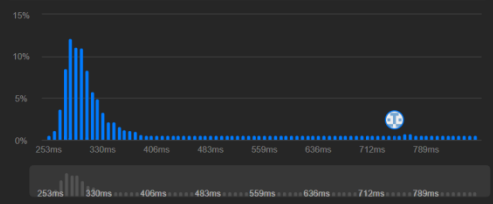


Code | MySQL

```mysql
SELECT
    s1.score,
    (
```

Code

MySQL | Auto

```mysql
        FROM Scores s2
        WHERE s2.score > s1.score
    ) + 1 AS `rank`
FROM Scores s1
ORDER BY s1.score DESC;
```

Saved | Ln 9, Col 24

Testcase | Test Result

| | | |
|---|---|---|
| 4 | 3.85 | |
| 5 | 4 | |
| 6 | 3.65 | |

Output

| score | rank |
|---|---|
| 4 | 1 |
| 4 | 1 |
| 3.85 | 2 |
| 3.65 | 3 |
| 3.65 | 3 |
| 3.5 | 4 |

Problem List

Submit

Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

**Accepted** 10 / 10 testcases passed

Aditya_Mahajan_18 submitted at Mar 19, 2026 20:30

Solution

Runtime

372 ms | Beats 9.59%

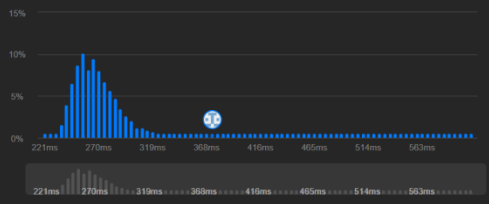


Code | MySQL

```mysql
# Write your MySQL query statement below
SELECT
    (
```

Code

MySQL | Auto

```mysql
# Write your MySQL query statement below
SELECT
    (
        SELECT DISTINCT salary
        FROM Employee
        ORDER BY salary DESC
        LIMIT 1 OFFSET 1
    ) AS SecondHighestSalary;
```

Saved

Ln 8, Col 30

Testcase | Test Result

**Accepted** Runtime: 82 ms

Case 1 | Case 2

Input

Employee =

```
| id | salary |
| -- | ------ |
| 1  | 100    |
| 2  | 200    |
| 3  | 300    |
```