Problem List | Submit | Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 18 / 18 testcases passed

Aditya_Mahajan_18 submitted at Mar 13, 2026 19:08

Solution

Runtime

419 ms | Beats 48.64%

0.06% of solutions used 646 ms of runtime

Code | MySQL

```mysql
# Write your MySQL query statement below
(select num
from MyNumbers
GROUP BY num
HAVING COUNT(num)<=1
) UNION (select NULL )
```

Code

MySQL | Auto

```mysql
# Write your MySQL query statement below
(select num
from MyNumbers
GROUP BY num
HAVING COUNT(num)<=1
) UNION (select NULL )
ORDER BY num DESC
LIMIT 1;
```

Saved | Ln 8, Col 9

Testcase | Test Result

```
| num |
| --- |
| 8   |
| 8   |
| 7   |
| 7   |
| 3   |
| 3   |
```

View more

Output

```
| num  |
| ---- |
| null |
```

Problem List | Submit | Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 12 / 12 testcases passed

Aditya_Mahajan_18 submitted at Mar 13, 2026 19:26

Solution

Runtime

455 ms | Beats 83.65%

Code | MySQL

```mysql
# Write your MySQL query statement below
select player_id,MIN(event_date) As first_login from Activity GROUP BY player_
```

More challenges

Code

MySQL | Auto

```mysql
# Write your MySQL query statement below
select player_id,MIN(event_date) As first_login from Activity GROUP BY player_id ORDER BY
player_id ASC;
```

Saved | Ln 2, Col 105

Testcase | Test Result

Output

```
| player_id | first_login |
| --------- | ----------- |
| 1         | 2016-03-01  |
| 2         | 2017-06-25  |
| 3         | 2016-03-02  |
```

Expected

```
| player_id | first_login |
| --------- | ----------- |
| 1         | 2016-03-01  |
| 2         | 2017-06-25  |
| 3         | 2016-03-02  |
```

Problem List | Submit | Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 19 / 19 testcases passed

Aditya_Mahajan_18 submitted at Mar 13, 2026 18:47

Solution

Runtime

440 ms | Beats 66.11%

Code | MySQL

```mysql
select customer_number FROM Orders GROUP BY customer_number HAVING COUNT(custo
```

More challenges

1068. Product Sales Analysis I | 1741. Find Total Time Spent by Each Employee

Code

MySQL | Auto

```mysql
select customer_number FROM Orders GROUP BY customer_number HAVING COUNT(customer_number) >1
ORDER BY count(customer_number) DESC LIMIT 1;
```

Saved | Ln 1, Col 125

Testcase | Test Result

Accepted Runtime: 87 ms

Case 1

Input

orders =

```
| order_number | customer_number |
| ------------ | --------------- |
| 1            | 1               |
| 2            | 2               |
| 3            | 3               |
| 4            | 3               |
```

Problem List

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 22 / 22 testcases passed

Aditya_Mahajan_18 submitted at Mar 14, 2026 00:22

Solution

Runtime

476 ms | Beats 89.58%

Code | MySQL

```mysql
# Write your MySQL query statement below
select event_day as day,
emp_id,(SUM(out_time) - SUM(in_time)) As total_time
from Employees GROUP BY emp_id,event_day;
```

Saved — Ln 3, Col 38

Testcase | Test Result

```
| 2020-12-09 | 2      | 27         |
```

Expected

```
| day        | emp_id | total_time |
| ---------- | ------ | ---------- |
| 2020-11-28 | 1      | 173        |
| 2020-12-03 | 1      | 41         |
| 2020-11-28 | 2      | 30         |
| 2020-12-09 | 2      | 27         |
```

Contribute a testcase

Problem List

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 12 / 12 testcases passed

Aditya_Mahajan_18 submitted at Mar 14, 2026 00:30

Solution

Runtime

346 ms | Beats 71.37%

Code | MySQL

```mysql
# Write your MySQL query statement below
select actor_id,director_id from ActorDirector group by director_id,actor_id HAVING
COUNT(*)>=3;
```

Saved — Ln 2, Col 97

Testcase | Test Result

```
| actor_id | director_id |
| -------- | ----------- |
| 1        | 1           |
```

Expected

```
| actor_id | director_id |
| -------- | ----------- |
| 1        | 1           |
```

Contribute a testcase

Problem List

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 22 / 22 testcases passed

Aditya_Mahajan_18 submitted at Mar 13, 2026 19:52

Solution

Runtime

520 ms | Beats 59.56%

Code | MySQL

```mysql
# Write your MySQL query statement below
select date_id , make_name ,COUNT(DISTINCT lead_id)AS unique_leads,
COUNT(DISTINCT partner_id) AS unique_partners
from DailySales GROUP BY date_id,make_name;
```

Saved — Ln 2, Col 29

Testcase | Test Result

Accepted Runtime: 66 ms

Case 1

Input

DailySales =

```
| date_id    | make_name | lead_id | partner_id |
| ---------- | --------- | ------- | ---------- |
| 2020-12-8  | toyota    | 0       | 1          |
| 2020-12-8  | toyota    | 1       | 0          |
| 2020-12-8  | toyota    | 1       | 2          |
| 2020-12-7  | toyota    | 0       | 2          |
```

Problem List | Submit | Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 13 / 13 testcases passed

Aditya_Mahajan_18 submitted at Mar 15, 2026 11:28

Solution

Runtime

353 ms | Beats 53.63%

Code | MySQL

```
# Write your MySQL query statement below
select query_name, ROUND(AVG(rating/position),2)As quality,ROUND(SUM(CASE
FROM Queries GROUP BY query_name;
```

Code

MySQL | Auto

```
# Write your MySQL query statement below
select query_name, ROUND(AVG(rating/position),2)As quality,ROUND(SUM(CASE WHEN
rating<3 THEN 1 ELSE 0 END) /COUNT(rating)*100,2) AS poor_query_percentage
FROM Queries GROUP BY query_name;
```

Saved | Ln 2, Col 126

Testcase | Test Result

query_name	quality	poor_query_percentage
Dog	2.5	33.33
Cat	0.66	33.33

Expected

query_name	quality	poor_query_percentage
Dog	2.5	33.33
Cat	0.66	33.33

Contribute a testcase

Problem List | Submit | Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 16 / 16 testcases passed

Aditya_Mahajan_18 submitted at Mar 15, 2026 12:03

Solution

Runtime

429 ms | Beats 97.35%

0.17% of solutions used 710 ms of runtime

Code | MySQL

```
# Write your MySQL query statement below
select activity_date As day,COUNT(Distinct user_id) As active_users
from Activity WHERE activity_date > '2019-06-27' AND Activity_date <='2019
```

Code

MySQL | Auto

```
# Write your MySQL query statement below
select activity_date As day,COUNT(Distinct user_id) As active_users
from Activity WHERE activity_date > '2019-06-27' AND Activity_date <='2019-07-27'
GROUP BY day;
```

Saved | Ln 3, Col 82

Testcase | Test Result

Output

day	active_users
2019-07-20	2
2019-07-21	2

Expected

day	active_users
2019-07-20	2
2019-07-21	2

Problem List | Submit | Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 24 / 24 testcases passed

Aditya_Mahajan_18 submitted at Mar 14, 2026 00:54

Solution

Runtime

557 ms | Beats 95.83%

0.22% of solutions used 526 ms of runtime

Code | MySQL

```
SELECT user_id, MAX(time_stamp) AS last_stamp
FROM Logins
WHERE YEAR(time_stamp) = 2020
```

Code

MySQL | Auto

```
SELECT user_id, MAX(time_stamp) AS last_stamp
FROM Logins
WHERE YEAR(time_stamp) = 2020
GROUP BY 1;
```

Saved | Ln 5, Col 1

Testcase | Test Result

8	2020-12-30 00:46:50
2	2020-01-16 02:49:50

Expected

user_id	last_stamp
6	2020-06-30 15:06:07
8	2020-12-30 00:46:50
2	2020-01-16 02:49:50

Contribute a testcase

Problem List

Submit

Premium

Description | Accepted | Editorial | Solutions | Submissions

All Submissions

Accepted 11 / 11 testcases passed

Aditya_Mahajan_18 submitted at Mar 15, 2026 12:19

Solution

Runtime

297 ms | Beats 88.24%

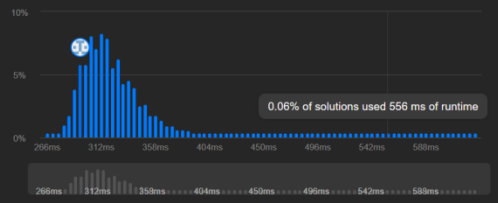

Code | MySQL

```
# Write your MySQL query statement below
select class FROM Courses GROUP BY class HAVING COUNT(*)>=5;
```

Code

MySQL | Auto

```
# Write your MySQL query statement below
select class FROM Courses GROUP BY class HAVING COUNT(*)>=5;
```

Saved

Ln 2, Col 61

Testcase | Test Result

```
| class |
| ----- |
| Math  |
```

Expected

```
| class |
| ----- |
| Math  |
```

Contribute a testcase