

COMP9021 PRINCIPLES OF PROGRAMMING

Term 3, 2022

Assignment 2

1 General presentation

You will design and implement a program that will

- analyse the various characteristics of a *maze*, represented by a particular coding of its basic constituents into numbers stored in a file whose contents is read, and
- – either **display those characteristics**
– or output some **Latex code in a file**, from which a **pictorial** representation of the maze can be produced.

The representation of the maze is based on a coding with the four digits 0, 1, 2 and 3 such that

- 0 codes points that are connected to neither their right nor below neighbours
- 1 codes points that are connected to their right neighbours but not to their below ones: —
- 2 codes points that are connected to their below neighbours but not to their right ones: |
- 3 codes points that are connected to both their right and below neighbours: └

A point that is connected to none of their left, right, above and below neighbours represents a *pillar*: •

Analysing the maze will allow you to also represent:

- *cul-de-sacs*: X
- certain kinds of *paths*: - -

2 Examples

2.1 First example

The file named `maze_1.txt` has the following contents.

```

1  0  2  2  1  2  3  0
3  2  2  1  2  0  2  2
3  0  1  1  3  1  0  0
2  0  3  0  0  1  2  0
3  2  2  0  1  2  3  2
1  0  0  1  1  0  0  0

```


Here is a possible interaction:

```

$ python3
...
>>> from maze import *
>>> maze = Maze('maze_1.txt')
>>> maze.analyse()
The maze has 12 gates.
The maze has 8 sets of walls that are all connected.
The maze has 2 inaccessible inner points.
The maze has 4 accessible areas.
The maze has 3 sets of accessible cul-de-sacs that are all connected.
The maze has a unique entry-exit path with no intersection not to cul-de-sacs.
>>> maze.display()

```

The effect of executing `maze.display()` is to produce a file named `maze_1.tex` that can be given as argument to `pdflatex` to produce a file named `maze_1.pdf` that views as follows.



2.2 Second example


The file named `maze_2.txt` has the following contents.

```
022302120222
222223111032
301322130302
312322232330
001000100000
```

Here is a possible interaction:

```
$ python3
...
>>> from maze import *
>>> maze = Maze('maze_2.txt')
>>> maze.analyse()
The maze has 20 gates.
The maze has 4 sets of walls that are all connected.
The maze has 4 inaccessible inner points.
The maze has 13 accessible areas.
The maze has 11 sets of accessible cul-de-sacs that are all connected.
The maze has 5 entry-exit paths with no intersections not to cul-de-sacs.
>>> maze.display()
```

The effect of executing `maze.display()` is to produce a file named `maze_2.tex` that can be given as argument to `pdflatex` to produce a file named `maze_2.pdf` that views as follows.

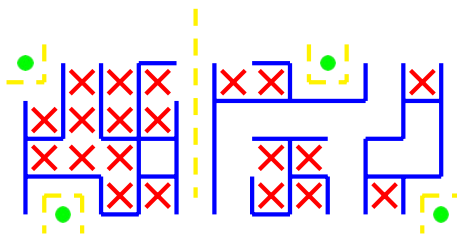

2.3 Third example


The file named `labyrinth.txt` has the following contents.

```
31111111132
21122131202
33023022112
20310213122
31011120202
21230230112
30223031302
03122121212
22203110322
22110311002
11111101110
```

Here is a possible interaction:

```
$ python3
...
>>> from maze import *
>>> maze = Maze('labyrinth.txt')
>>> maze.analyse()
The maze has 2 gates.
The maze has 2 sets of walls that are all connected.
The maze has no inaccessible inner point.
The maze has a unique accessible area.
The maze has 8 sets of accessible cul-de-sacs that are all connected.
The maze has a unique entry-exit path with no intersection not to cul-de-sacs.
>>> maze.display()
```

The effect of executing `maze.display()` is to produce a file named `labyrinth.tex` that can be given as argument to `pdflatex` to produce a file named `labyrinth.pdf` that views as follows.

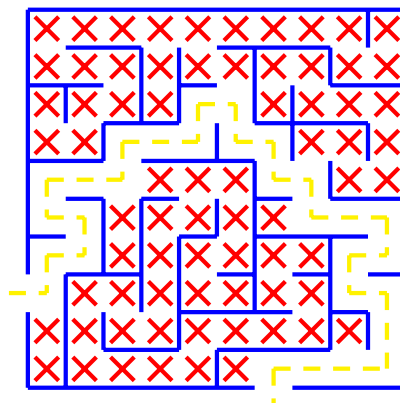

3 Detailed description

3.1 Input

The input is expected to consist of y_{dim} lines of x_{dim} members of $\{0, 1, 2, 3\}$, where x_{dim} and y_{dim} are at least equal to 2 and at most equal to 31 and 41, respectively, with possibly lines consisting of spaces only that will be ignored and with possibly spaces anywhere on the lines with digits. If n is the x^{th} digit of the y^{th} line with digits, with $0 \leq x < x_{dim}$ and $0 \leq y < y_{dim}$, then

- n is to be associated with a point situated $x \times 0.5$ cm to the right and $y \times 0.5$ cm below an origin,
- n is to be connected to the point 0.5 cm to its right just in case $n = 1$ or $n = 3$, and
- n is to be connected to the point 0.5 cm below itself just in case $n = 2$ or $n = 3$.

The last digit on every line with digits cannot be equal to 1 or 3, and the digits on the last line with digits cannot be equal to 2 or 3, which ensures that the input encodes a maze, that is, a grid of width $(x_{dim} - 1) \times 0.5$ cm and of height $(y_{dim} - 1) \times 0.5$ cm (hence of maximum width **15 cm** and of maximum height **20 cm**), with possibly gaps on the sides and inside. A point not connected to any of its neighbours is thought of as a pillar; a point connected to at least one of its neighbours is thought of as part of a wall.

We talk about *inner point* to refer to a point that lies $(x+0.5) \times 0.5$ cm to the right of and $(y+0.5) \times 0.5$ cm below the origin with $0 \leq x < x_{dim} - 1$ and $0 \leq y < y_{dim} - 1$.

3.2 Output

Consider executing from the Python prompt the statement `from maze import *` followed by the statement `maze = Maze(some_filename)`. In case `some_filename` does not exist in the working directory, then Python will raise a `FileNotFoundError` exception, that does not need to be caught. Assume that `some_filename` does exist (in the working directory). If the input is incorrect in that it does not contain only digits in $\{0, 1, 2, 3\}$ besides spaces, or in that it contains either too few or too many nonblank lines, or in that some nonblank lines contain too many or too few digits, or in that two of its nonblank lines do not contain the same number of digits, then the effect of executing `maze = Maze(some_filename)` should be to generate a `MazeError` exception that reads

Traceback (most recent call last):

...

maze.MazeError: Incorrect input.

If the previous conditions hold but the further conditions spelled out above for the input to qualify as a maze (that is, the condition on the last digit on every line with digits and the condition on the digits on the last line) do not hold, then the effect of executing `maze = Maze(some_filename)` should be to generate a `MazeError` exception that reads

Traceback (most recent call last):

...

maze.MazeError: Input does not represent a maze.

If the input is correct and represents a maze, then executing `maze = Maze(some_filename)` should have the effect of outputting a first line that reads one of

The maze has no gate.

The maze has a single gate.

The maze has N gates.

with N an appropriate integer at least equal to 2, a second line that reads one of

The maze has no wall.

The maze has walls that are all connected.

The maze has N sets of walls that are all connected.

with N an appropriate integer at least equal to 2, a third line that reads one of

The maze has no inaccessible inner point.

The maze has a unique inaccessible inner point.

The maze has N inaccessible inner points.

with N an appropriate integer at least equal to 2, a fourth line that reads one of

The maze has no accessible area.

The maze has a unique accessible area.

The maze has N accessible areas.

with N an appropriate integer at least equal to 2, a fifth line that reads one of

The maze has no accessible cul-de-sac.

The maze has accessible cul-de-sacs that are all connected.

The maze has N sets of accessible cul-de-sacs that are all connected.

with N an appropriate integer at least equal to 2, and a sixth line that reads one of

The maze has no entry-exit path with no intersection not to cul-de-sacs.

The maze has a unique entry-exit path with no intersection not to cul-de-sacs.

The maze has N entry-exit paths with no intersections not to cul-de-sacs.

with N an appropriate integer at least equal to 2.

- A gate is any pair of consecutive points on one of the four sides of the maze that are not connected.
- An inaccessible inner point is an inner point that cannot be reached from any gate.
- An accessible area is a maximal set of inner points that can all be accessed from the same gate (so the number of accessible inner points is at most equal to the number of gates).
- A set of accessible cul-de-sacs that are all connected is a maximal set S of connected inner points that can all be accessed from the same gate g and such that for all points p in S , if p has been accessed from g for the first time, then either p is in a dead end or moving on without ever getting back leads into a dead end.
- An entry-exit path with no intersections not to cul-de-sacs is a maximal set S of connected inner points that go from a gate to another (necessarily different) gate and such that for all points p in S , there is only one way to move on from p without getting back and without entering a cul-de-sac.

Pay attention to the expected format, including spaces.

If the input is correct and represents a maze, then executing `maze = Maze(some_filename)` followed by `maze.display()` should have the effect of producing a file named `some_filename.tex` that can be given as argument to `pdflatex` to generate a file named `some_filename.pdf`. The provided examples will show you what `some_filename.tex` should contain.

- Walls are drawn in blue. There is a command for every longest segment that is part of a wall. Horizontal segments are drawn starting with the topmost leftmost segment and finishing with the bottommost rightmost segment. Then vertical segments are drawn starting with the topmost leftmost segment and finishing with the bottommost rightmost segment.
- Pillars are drawn as green circles.
- Inner points in accessible cul-de-sacs are drawn as red crosses.
- The paths with no intersection not to cul-de-sacs are drawn as dashed yellow lines. There is a command for every longest segment on such a path. Horizontal segments are drawn starting with the topmost leftmost segment and finishing with the bottommost rightmost segment, with those segments that end at a gate sticking out by 0.25 cm. Then vertical segments are drawn starting with the topmost leftmost segment and finishing with the bottommost rightmost segment, with those segments that end at a gate sticking out by 0.25 cm.

Pay attention to the expected format, including spaces and blank lines. Lines that start with `%` are comments; there are 4 such lines, that must be present even when there is no item to be displayed of the kind described by the comment. The output of your program redirected to a file will be compared with the expected output saved in a file (of a different name of course) using the `diff` command. For your program to pass the associated test, `diff` should silently exit, which requires that the contents of both files be absolutely identical, character for character, including spaces and blank lines. Check your program on the provided examples using the associated `.tex` files, renaming them as they have the names of the files expected to be generated by your program.

4 Submission and assessment

4.1 Submission

Your program will be stored in a file **which has to be named** [maze.py](#). Your code can be submitted more than once on Ed. The last version and only the last version will be downloaded, run, tested, and marked.

Your assignment is due by **Monday 21 November 2022 @ 10:00am (Week 11)**.

4.2 Assessment

The automarking script will let each of the two assessed methods of your program run for **30 seconds**. Still, you should not take advantage of this and strive for a solution that gives an immediate output.

UNSW has standard late submission penalties as outlined in the UNSW Assessment Implementation Procedure, with no permitted variation. All late assignments (unless extension or exemption previously agreed) will be penalised by 5% of the maximum mark per day (including Saturday, Sunday and public holidays). For example, if you are given a mark of **10** out of 15 for your assignment, and the assignment was handed in **two days late**, it would be penalised by 10%, and the mark would be reduced to **8.5** out of 15.

Late submission is capped at **5 days (120 hours)**. This means that a student cannot submit an assessment more than 5 days (120 hours) after the due date for that assessment.

Please note: The only exception to this rule is if a Special Consideration application has been approved that covers the late period beyond the due date for that assessment.

4.3 Reminder on plagiarism policy

You are permitted, indeed encouraged, to discuss ways to solve the assignment with other people. Such discussions must be in terms of algorithms, not code. But you must implement the solution on your own. Submissions are routinely scanned for similarities that occur when students copy and modify other people's work, or work very closely together on a single implementation. Severe penalties apply.