Basic Linux Commands

1. Man

```
PWD(1)                                  General Commands Manual

NAME
       pwd - Display the full filename of the current working directory.

SYNOPSIS
       pwd [-L|--logical] [-P|--physical] [-h|--help] [-V|--version] [operands]

DESCRIPTION
       Display the full filename of the current working directory.

OPTIONS
       -L, --logical
              use PWD from environment, even if it contains symlinks

       -P, --physical
              avoid all symlinks

       -h, --help
              Print help

       -V, --version
              Print version

VERSION
       v(uutils coreutils) 0.10.0

EXAMPLES
       Print the current directory:

       pwd


       Print the current directory, and resolve all symlinks (i.e. show the "physical" path):

       pwd [-P|--physical]

       Display help:

       pwd --help
```

2. Uname

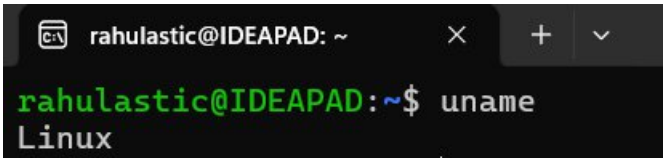

3. PWD



4. Hostname

```
rahulastic@IDEAPAD:~$ hostname
IDEAPAD
```

5. Date

```
rahulastic@IDEAPAD:~$ date
Sat Oct 24 12:02:59 UTC 2026
```

6. Cal

```
rahulastic@IDEAPAD:~$ cal
    October 2026
Su Mo Tu We Th Fr Sa
             1  2  3
 4  5  6  7  8  9 10
11 12 13 14 15 16 17
18 19 20 21 22 23 24
25 26 27 28 29 30 31
```

7. Ls and Dir

```
rahulastic@IDEAPAD:~$ ls
demo01.txt  editor  filename.txt  hello.txt  new_directory  test.txt  vim
rahulastic@IDEAPAD:~$ dir
demo01.txt  editor  filename.txt  hello.txt  new_directory  test.txt  vim
```

8. Cat

```
rahulastic@IDEAPAD:~$ cat > file1.txt
Hello Linux
This is my first file
rahulastic@IDEAPAD:~$ cat file1.txt
Hello Linux
This is my first file
```

9. Cat >>

```
rahulastic@IDEAPAD:~$ cat >> file1.txt
Learning Linux commands
rahulastic@IDEAPAD:~$ cat file1.txt
Hello Linux
This is my first file
Learning Linux commands
```

10. Cp

```
rahulastic@IDEAPAD:~$ cp file1.txt file2.txt
rahulastic@IDEAPAD:~$ cp -r new_directory backup_dir
rahulastic@IDEAPAD:~$ ls
backup_dir  demo01.txt  editor  file1.txt  file2.txt  filename.txt  hello.txt  new_directory
test.txt  vim
```

11. Mv (move)

```
rahulastic@IDEAPAD:~$ mv file2.txt new_directory/
rahulastic@IDEAPAD:~$ ls new_directory
file2.txt
rahulastic@IDEAPAD:~$ ls
backup_dir  demo01.txt  editor  file1.txt  filename.txt  hello.txt  new_directory  test.txt
vim
```

12. Mv (rename)

```
rahulastic@IDEAPAD:~$ mv file1.txt myfile.txt
rahulastic@IDEAPAD:~$ ls
backup_dir  demo01.txt  editor  filename.txt  hello.txt  myfile.txt  new_directory  test.txt
vim
```

13. Tac and Rev

```
rahulastic@IDEAPAD:~$ tac myfile.txt
Learning Linux commands
This is my first file
Hello Linux
rahulastic@IDEAPAD:~$ rev myfile.txt
xuniL olleH
elif tsrif ym si sihT
sdnammoc xuniL gninraeL
```

14. Wc

```
rahulastic@IDEAPAD:~$ wc myfile.txt
 3 10 58 myfile.txt
rahulastic@IDEAPAD:~$ wc -l myfile.txt
3 myfile.txt
rahulastic@IDEAPAD:~$ wc -w myfile.txt
10 myfile.txt
rahulastic@IDEAPAD:~$ wc -c myfile.txt
58 myfile.txt
```

15. Mkdir

```
rahulastic@IDEAPAD:~$ mkdir mydir
rahulastic@IDEAPAD:~$ mkdir -p dir1/dir2/dir3
rahulastic@IDEAPAD:~$ ls
backup_dir  demo01.txt  dir1  editor  filename.txt  hello.txt  mydir  myfile.txt
new_directory  test.txt  vim
rahulastic@IDEAPAD:~$ ls dir1
dir2
```

16. Cd

```
rahulastic@IDEAPAD:~$ cd mydir
rahulastic@IDEAPAD:~/mydir$ pwd
/home/rahulastic/mydir
rahulastic@IDEAPAD:~/mydir$ cd ..
rahulastic@IDEAPAD:~$ pwd
/home/rahulastic
```

17. Rm

```
rahulastic@IDEAPAD:~$ rm new_directory/file2.txt
rahulastic@IDEAPAD:~$ ls new_directory
rahulastic@IDEAPAD:~$ rm -R dir1
rahulastic@IDEAPAD:~$ ls
backup_dir  demo01.txt  editor  filename.txt  hello.txt  mydir  myfile.txt  new_directory
test.txt  vim
```

18. Rmdir

```
rahulastic@IDEAPAD:~$ rmdir mydir
rahulastic@IDEAPAD:~$ ls
backup_dir  demo01.txt  editor  filename.txt  hello.txt  myfile.txt  new_directory  test.txt
vim
```

19. Touch

```
rahulastic@IDEAPAD:~$ ls -l myfile.txt
-rw-r--r-- 1 rahulastic rahulastic 58 Oct 28 10:12 myfile.txt
rahulastic@IDEAPAD:~$ touch myfile.txt
rahulastic@IDEAPAD:~$ ls -l myfile.txt
-rw-r--r-- 1 rahulastic rahulastic 58 Oct 28 10:30 myfile.txt
rahulastic@IDEAPAD:~$ touch a.txt b.txt c.txt
rahulastic@IDEAPAD:~$ ls a.txt b.txt c.txt
a.txt  b.txt  c.txt
```

20. Sort

```
rahulastic@IDEAPAD:~$ cat > fruits.txt
banana
apple
mango
apple
banana
cherry
rahulastic@IDEAPAD:~$ sort fruits.txt
apple
apple
banana
banana
cherry
mango
rahulastic@IDEAPAD:~$ sort -r fruits.txt
mango
cherry
banana
banana
apple
apple
```

21. Uniq

```
rahulastic@IDEAPAD:~$ sort fruits.txt | uniq
apple
banana
cherry
mango
rahulastic@IDEAPAD:~$ sort fruits.txt | uniq -c
      2 apple
      2 banana
      1 cherry
      1 mango
```

22. Head

```
rahulastic@IDEAPAD:~$ seq 1 10 > numbers.txt
rahulastic@IDEAPAD:~$ head -n 3 numbers.txt
1
2
3
rahulastic@IDEAPAD:~$ head -n 5 numbers.txt
1
2
3
4
5
```

23. Tail

```
rahulastic@IDEAPAD:~$ tail -n 3 numbers.txt
8
9
10
rahulastic@IDEAPAD:~$ tail -n 5 numbers.txt
6
7
8
9
10
```

24. Factor

```
rahulastic@IDEAPAD:~$ factor 60
60: 2 2 3 5
rahulastic@IDEAPAD:~$ factor 84
84: 2 2 3 7
rahulastic@IDEAPAD:~$ factor 100
100: 2 2 5 5
```

25. Alias

```
rahulastic@IDEAPAD:~$ alias hi='echo Hello Rahul'
rahulastic@IDEAPAD:~$ hi
Hello Rahul
```

26. Unalias

```
rahulastic@IDEAPAD:~$ unalias hi
rahulastic@IDEAPAD:~$ hi
hi: command not found
```

27. Echo

```
rahulastic@IDEAPAD:~$ echo $HOME
/home/rahulastic
rahulastic@IDEAPAD:~$ echo $USER
rahulastic
rahulastic@IDEAPAD:~$ echo $SHELL
/bin/bash
rahulastic@IDEAPAD:~$ echo $PWD
/home/rahulastic
rahulastic@IDEAPAD:~$ echo $HOSTNAME
IDEAPAD
```

28. Ps

```
rahulastic@IDEAPAD:~$ ps
    PID TTY          TIME CMD
    312 pts/0    00:00:00 bash
    520 pts/0    00:00:00 ps
rahulastic@IDEAPAD:~$ ps -f
UID          PID    PPID  C STIME TTY          TIME CMD
rahulas+     312     301  0 10:05 pts/0    00:00:00 -bash
rahulas+     524     312  0 10:41 pts/0    00:00:00 ps -f
```

29. Kill

```
rahulastic@IDEAPAD:~$ sleep 300 &
[1] 601
rahulastic@IDEAPAD:~$ ps
   PID TTY          TIME CMD
   312 pts/0    00:00:00 bash
   601 pts/0    00:00:00 sleep
   602 pts/0    00:00:00 ps
rahulastic@IDEAPAD:~$ kill 601
[1]+  Terminated              sleep 300
rahulastic@IDEAPAD:~$ sleep 400 &
[1] 640
rahulastic@IDEAPAD:~$ kill -9 640
[1]+  Killed                  sleep 400
```

30. Env

```
rahulastic@IDEAPAD:~$ env
SHELL=/bin/bash
PWD=/home/rahulastic
LOGNAME=rahulastic
HOME=/home/rahulastic
LANG=C.UTF-8
USER=rahulastic
TERM=xterm-256color
HOSTNAME=IDEAPAD
PATH=/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin
```