1.

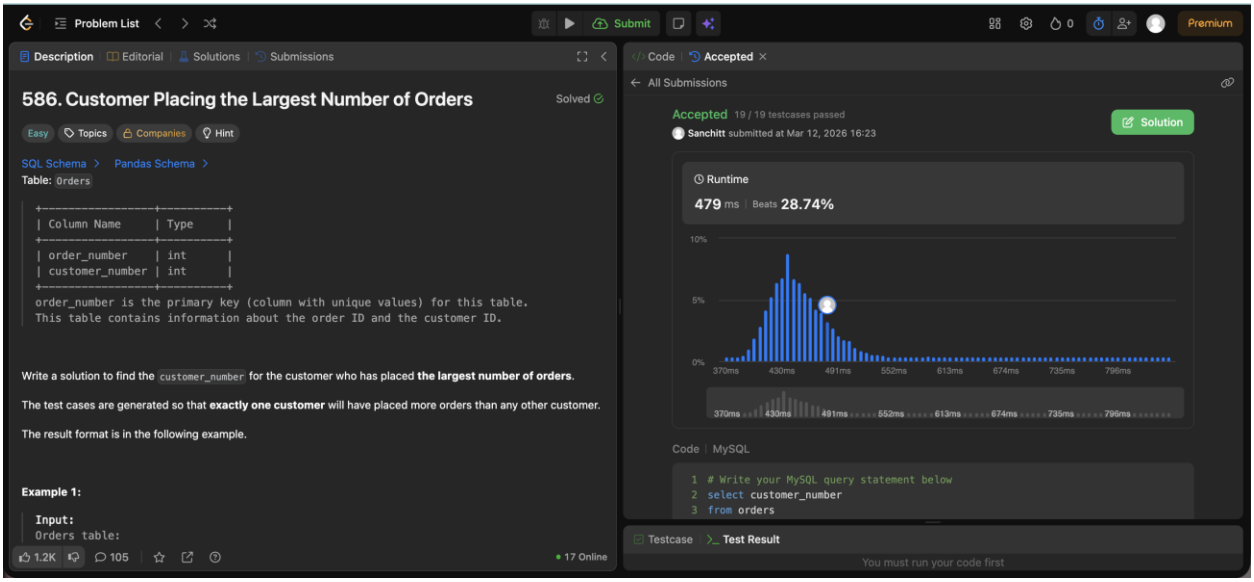
Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
586. Customer Placing the Largest Number of Orders
Solved
Easy
Topics
Companies
Hint
SQL Schema
Pandas Schema
Table: Orders
+----------------+----------+
| Column Name | Type |
+----------------+----------+
| order_number | int |
| customer_number | int |
+----------------+----------+
order_number is the primary key (column with unique values) for this table.
This table contains information about the order ID and the customer ID.
Write a solution to find the customer_number for the customer who has placed the largest number of orders.
The test cases are generated so that exactly one customer will have placed more orders than any other customer.
The result format is in the following example.
Example 1:
Input:
Orders table:
1.2K
105
17 Online
Code
Accepted
All Submissions
Accepted 19 / 19 testcases passed
Sanchitt submitted at Mar 12, 2026 16:23
Solution
Runtime
479 ms | Beats 28.74%
10%
5%
0%
370ms
430ms
491ms
552ms
613ms
674ms
735ms
796ms
Code | MySQL
1 # Write your MySQL query statement below
2 select customer_number
3 from orders
Testcase
Test Result
You must run your code first

2.

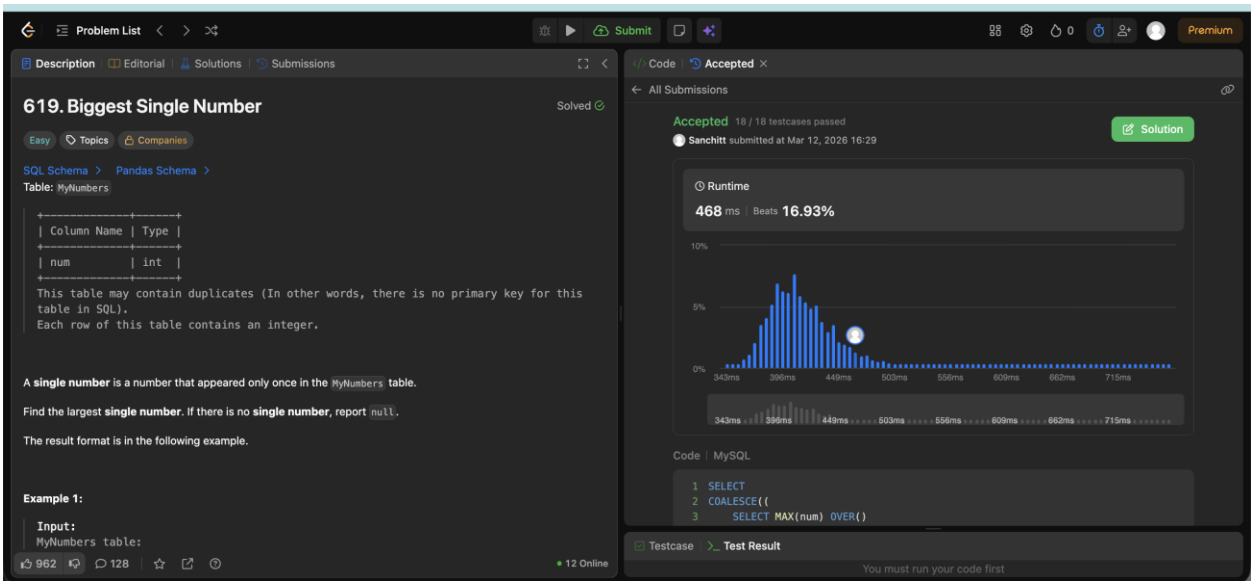
Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
619. Biggest Single Number
Solved
Easy
Topics
Companies
SQL Schema
Pandas Schema
Table: MyNumbers
+-------------+------+
| Column Name | Type |
+-------------+------+
| num | int |
+-------------+------+
This table may contain duplicates (In other words, there is no primary key for this table in SQL).
Each row of this table contains an integer.
A single number is a number that appeared only once in the MyNumbers table.
Find the largest single number. If there is no single number, report null.
The result format is in the following example.
Example 1:
Input:
MyNumbers table:
962
128
12 Online
Code
Accepted
All Submissions
Accepted 18 / 18 testcases passed
Sanchitt submitted at Mar 12, 2026 16:29
Solution
Runtime
468 ms | Beats 16.93%
10%
5%
0%
343ms
396ms
449ms
503ms
556ms
609ms
662ms
715ms
Code | MySQL
1 SELECT
2 COALESCE((
3 SELECT MAX(num) OVER()
Testcase
Test Result
You must run your code first

3.

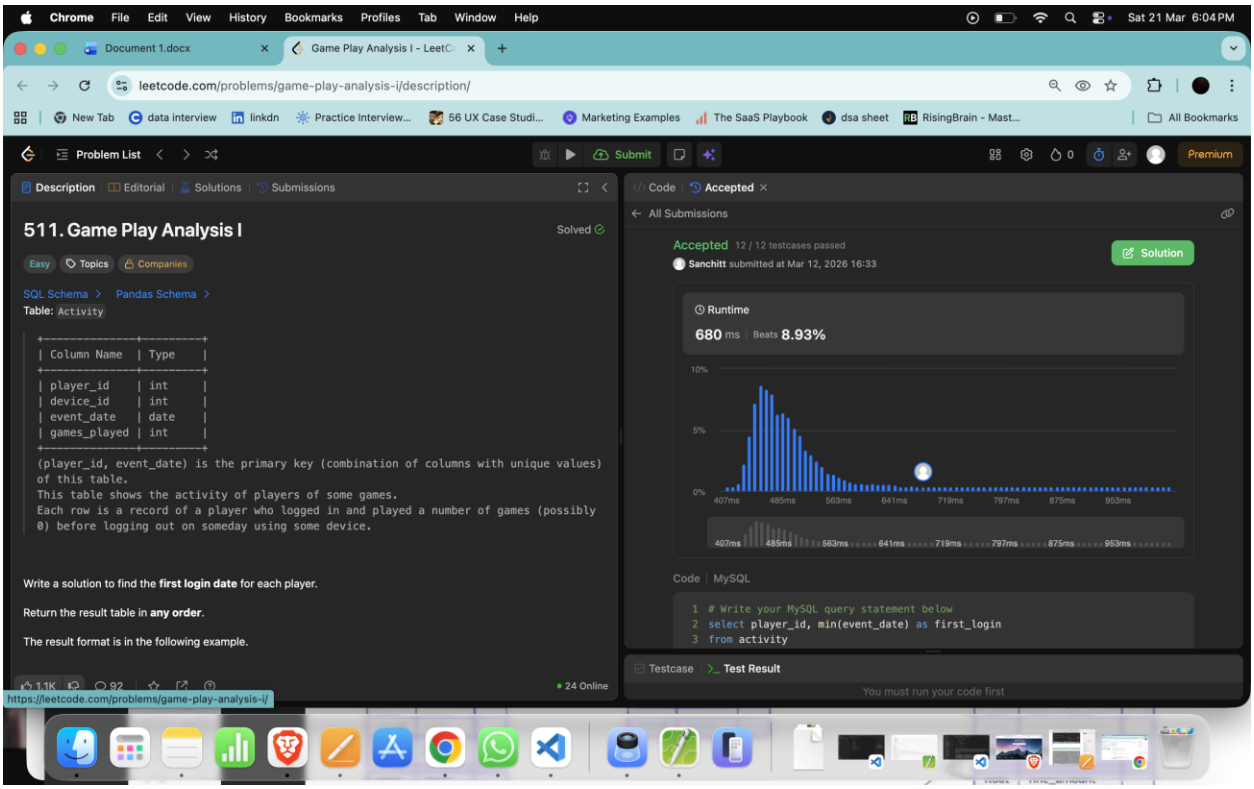
Chrome File Edit View History Bookmarks Profiles Tab Window Help
Sat 21 Mar 6:04 PM
Document 1.docx
Game Play Analysis I - LeetC
leetcode.com/problems/game-play-analysis-i/description/
Problem List
Submit
Premium
Description Editorial Solutions Submissions
511. Game Play Analysis I
Solved
Easy Topics Companies
SQL Schema Pandas Schema
Table: Activity
+---------------+---------+
| Column Name | Type |
+---------------+---------+
player_id	int
device_id	int
event_date	date
games_played	int
+---------------+---------+
(player_id, event_date) is the primary key (combination of columns with unique values) of this table.
This table shows the activity of players of some games.
Each row is a record of a player who logged in and played a number of games (possibly 0) before logging out on someday using some device.
Write a solution to find the first login date for each player.
Return the result table in any order.
The result format is in the following example.
Code Accepted
All Submissions
Accepted 12 / 12 testcases passed
Sanchitt submitted at Mar 12, 2026 16:33
Solution
Runtime
680 ms Beats 8.93%
Code MySQL
1 # Write your MySQL query statement below
2 select player_id, min(event_date) as first_login
3 from activity
Testcase Test Result
You must run your code first
https://leetcode.com/problems/game-play-analysis-i/

4.

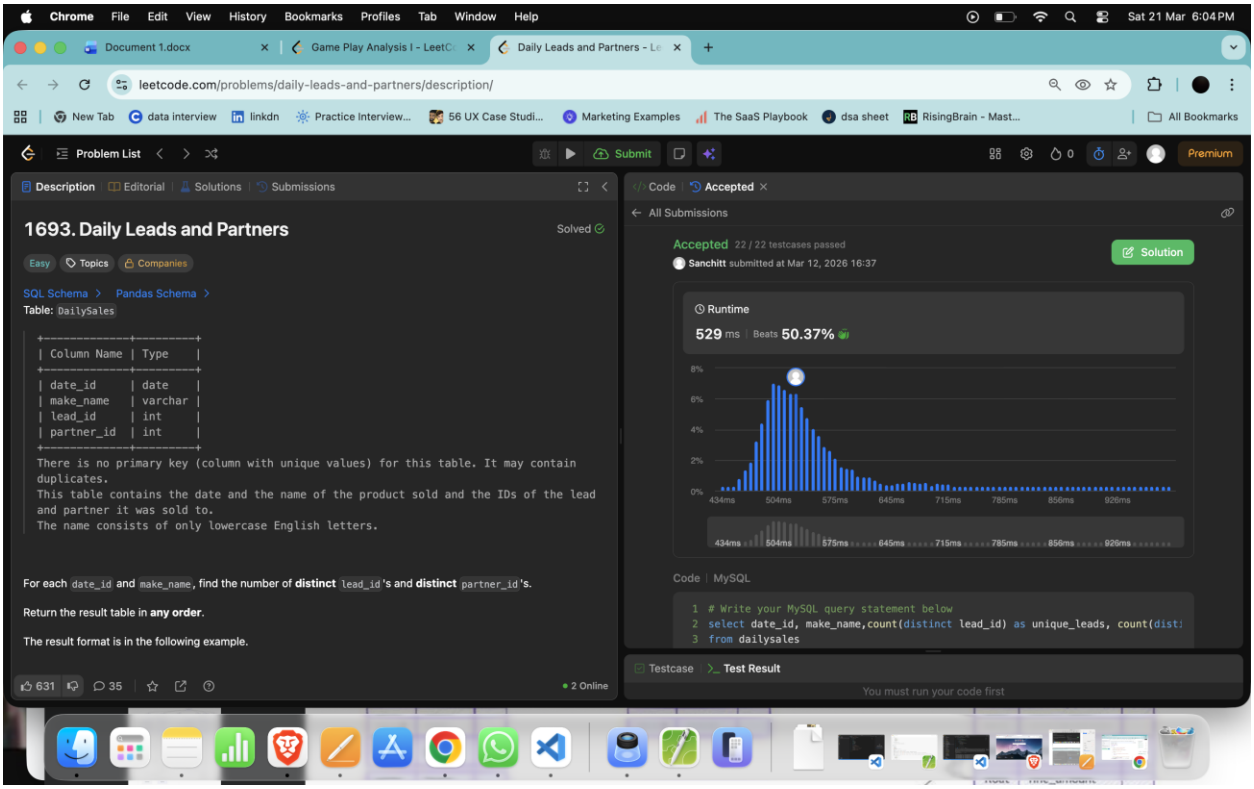
Chrome File Edit View History Bookmarks Profiles Tab Window Help
Sat 21 Mar 6:04 PM
Document 1.docx
Game Play Analysis I - LeetC
Daily Leads and Partners - Le
leetcode.com/problems/daily-leads-and-partners/description/
Problem List
Submit
Premium
Description Editorial Solutions Submissions
1693. Daily Leads and Partners
Solved
Easy Topics Companies
SQL Schema Pandas Schema
Table: DailySales
+-------------+---------+
| Column Name | Type |
+-------------+---------+
date_id	date
make_name	varchar
lead_id	int
partner_id	int
+-------------+---------+
There is no primary key (column with unique values) for this table. It may contain duplicates.
This table contains the date and the name of the product sold and the IDs of the lead and partner it was sold to.
The name consists of only lowercase English letters.
For each date_id and make_name, find the number of distinct lead_id's and distinct partner_id's.
Return the result table in any order.
The result format is in the following example.
Code Accepted
All Submissions
Accepted 22 / 22 testcases passed
Sanchitt submitted at Mar 12, 2026 16:37
Solution
Runtime
529 ms Beats 50.37%
Code MySQL
1 # Write your MySQL query statement below
2 select date_id, make_name,count(distinct lead_id) as unique_leads, count(dist
3 from dailysales
Testcase Test Result
You must run your code first

5.

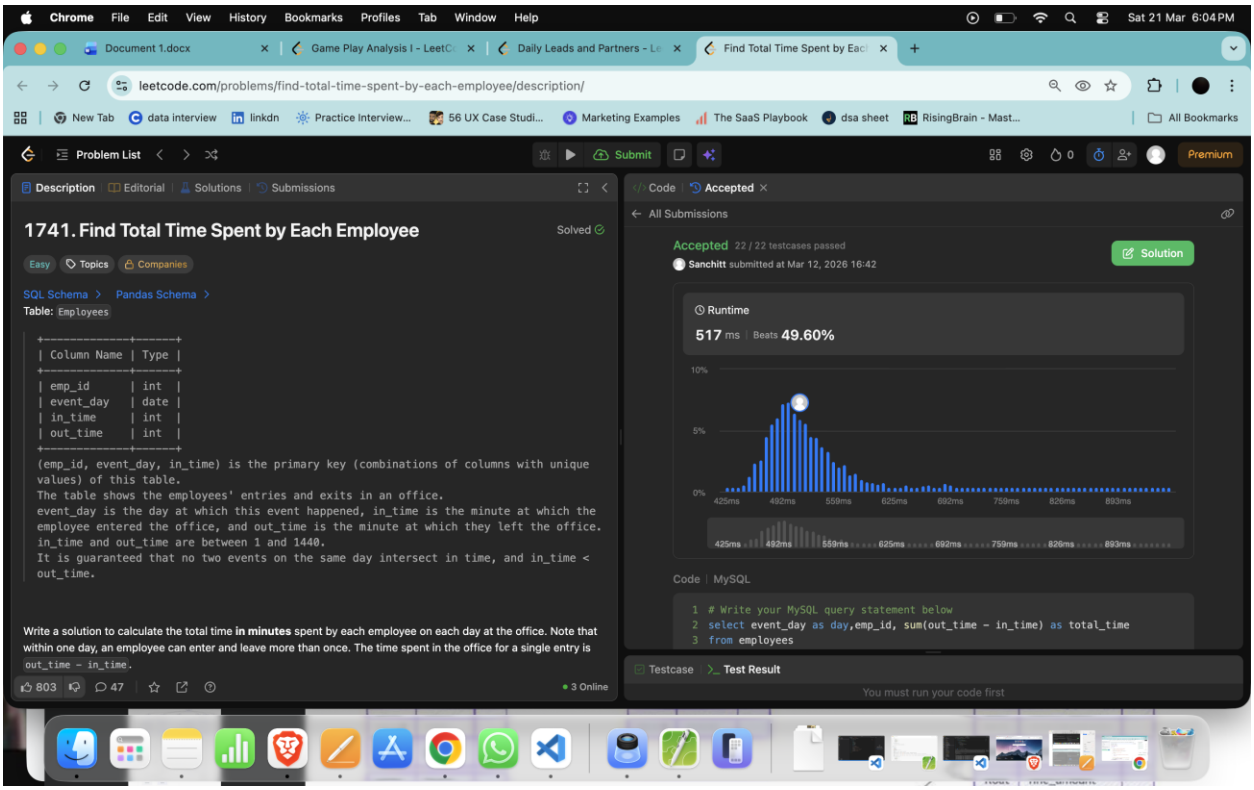
Chrome File Edit View History Bookmarks Profiles Tab Window Help
Sat 21 Mar 6:04 PM
Document 1.docx
Game Play Analysis I - LeetC
Daily Leads and Partners - Le
Find Total Time Spent by Eac
leetcode.com/problems/find-total-time-spent-by-each-employee/description/
New Tab
data interview
linkdn
Practice Interview...
56 UX Case Studi...
Marketing Examples
The SaaS Playbook
dsa sheet
RisingBrain - Mast...
All Bookmarks
Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
1741. Find Total Time Spent by Each Employee
Solved
Easy
Topics
Companies
SQL Schema
Pandas Schema
Table: Employees
+----------+------+
| Column Name | Type |
+----------+------+
emp_id	int
event_day	date
in_time	int
out_time	int
+----------+------+
(emp_id, event_day, in_time) is the primary key (combinations of columns with unique values) of this table.
The table shows the employees' entries and exits in an office.
event_day is the day at which this event happened, in_time is the minute at which the employee entered the office, and out_time is the minute at which they left the office.
in_time and out_time are between 1 and 1440.
It is guaranteed that no two events on the same day intersect in time, and in_time < out_time.
Write a solution to calculate the total time in minutes spent by each employee on each day at the office. Note that within one day, an employee can enter and leave more than once. The time spent in the office for a single entry is out_time - in_time.
803
47
3 Online
Code
Accepted
All Submissions
Accepted 22 / 22 testcases passed
Sanchitt submitted at Mar 12, 2026 16:42
Solution
Runtime
517 ms
Beats 49.60%
Code
MySQL
Write your MySQL query statement below
select event_day as day,emp_id, sum(out_time - in_time) as total_time
from employees
Testcase
Test Result
You must run your code first

6.

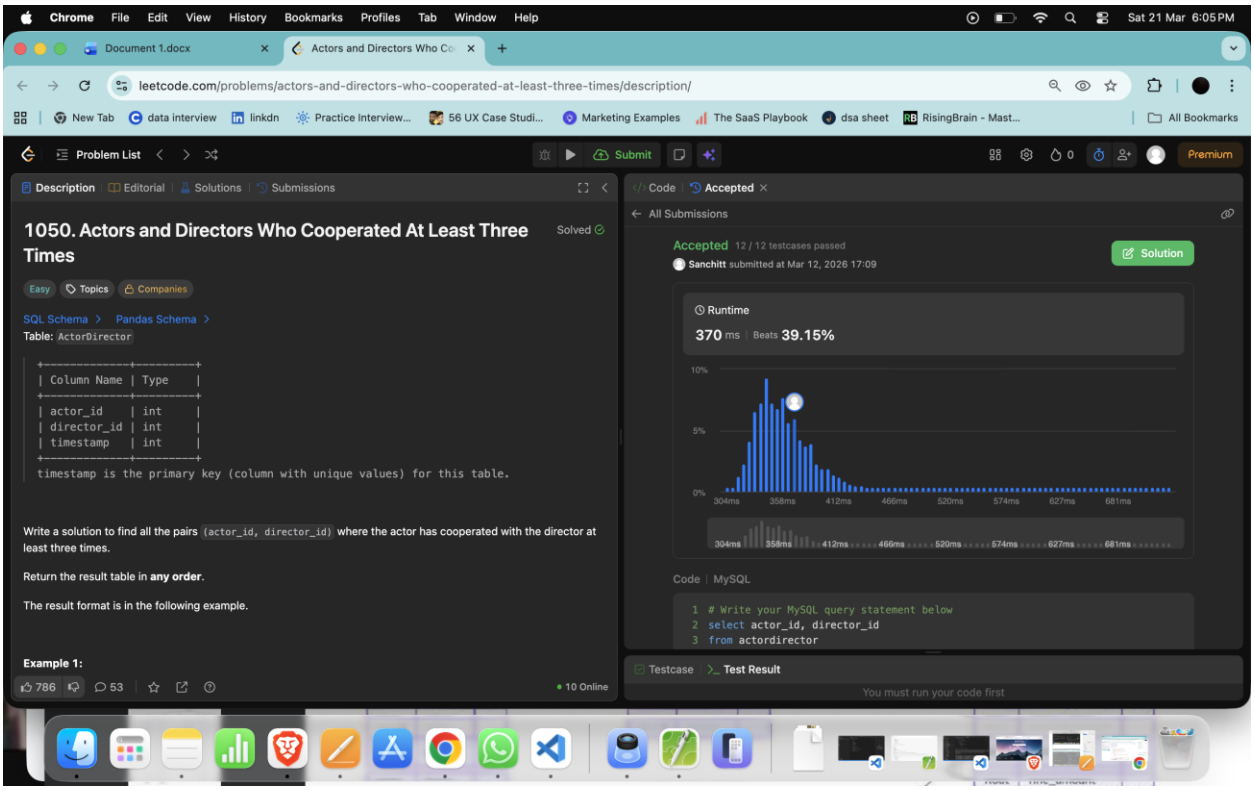
Chrome File Edit View History Bookmarks Profiles Tab Window Help
Sat 21 Mar 6:05 PM
Document 1.docx
Actors and Directors Who Co
leetcode.com/problems/actors-and-directors-who-cooperated-at-least-three-times/description/
New Tab
data interview
linkdn
Practice Interview...
56 UX Case Studi...
Marketing Examples
The SaaS Playbook
dsa sheet
RisingBrain - Mast...
All Bookmarks
Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
1050. Actors and Directors Who Cooperated At Least Three Times
Solved
Easy
Topics
Companies
SQL Schema
Pandas Schema
Table: ActorDirector
+----------+---------+
| Column Name | Type |
+----------+---------+
actor_id	int
director_id	int
timestamp	int
+----------+---------+
timestamp is the primary key (column with unique values) for this table.
Write a solution to find all the pairs (actor_id, director_id) where the actor has cooperated with the director at least three times.
Return the result table in any order.
The result format is in the following example.
Example 1:
786
53
10 Online
Code
Accepted
All Submissions
Accepted 12 / 12 testcases passed
Sanchitt submitted at Mar 12, 2026 17:09
Solution
Runtime
370 ms
Beats 39.15%
Code
MySQL
Write your MySQL query statement below
select actor_id, director_id
from actordirector
Testcase
Test Result
You must run your code first

7.

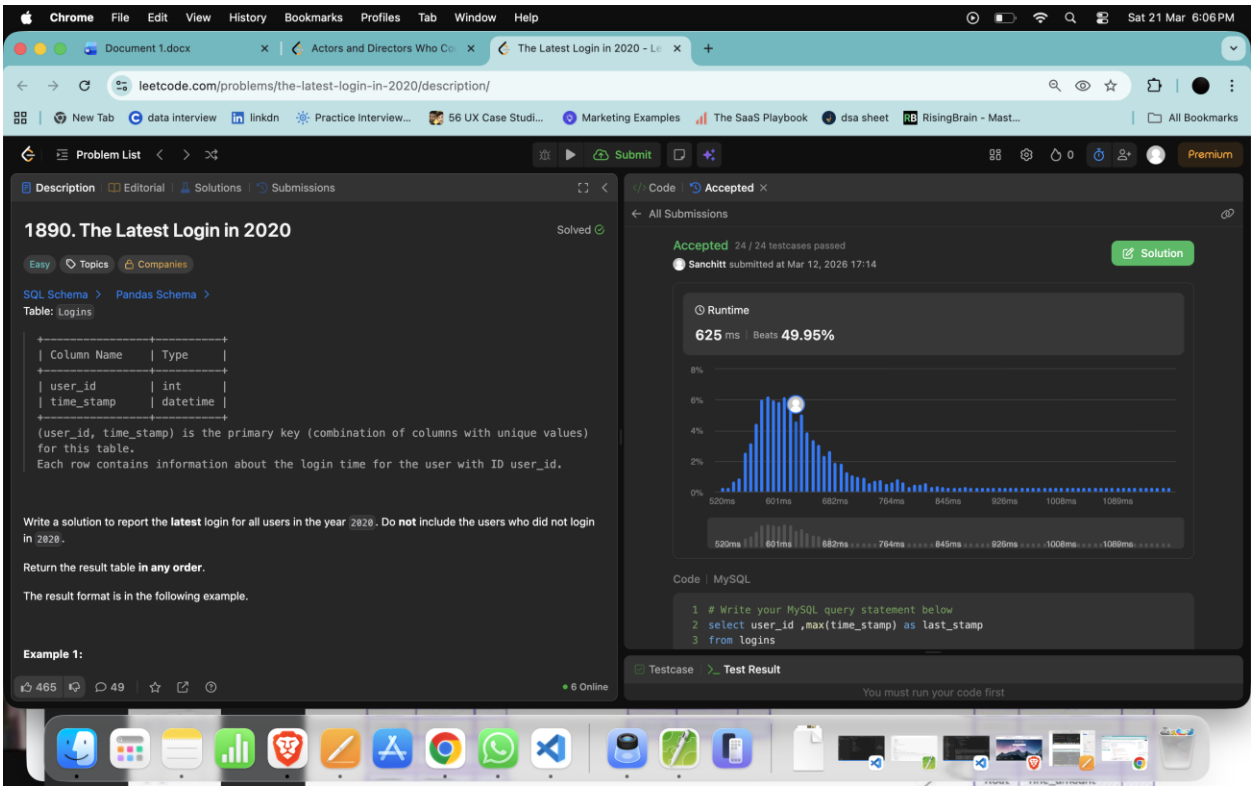
leetcode.com/problems/the-latest-login-in-2020/description/
1890. The Latest Login in 2020
Solved
Easy
Topics
Companies
SQL Schema
Pandas Schema
Table: Logins
+----------------+----------+
| Column Name | Type |
+----------------+----------+
| user_id | int |
| time_stamp | datetime |
+----------------+----------+
(user_id, time_stamp) is the primary key (combination of columns with unique values) for this table.
Each row contains information about the login time for the user with ID user_id.
Write a solution to report the latest login for all users in the year 2020. Do not include the users who did not login in 2020.
Return the result table in any order.
The result format is in the following example.
Example 1:
465
49
6 Online
Accepted 24 / 24 testcases passed
Sanchitt submitted at Mar 12, 2026 17:14
Solution
Runtime
625 ms | Beats 49.95%
Code | MySQL
Write your MySQL query statement below
select user_id ,max(time_stamp) as last_stamp
from logins
Testcase
Test Result
You must run your code first

8.

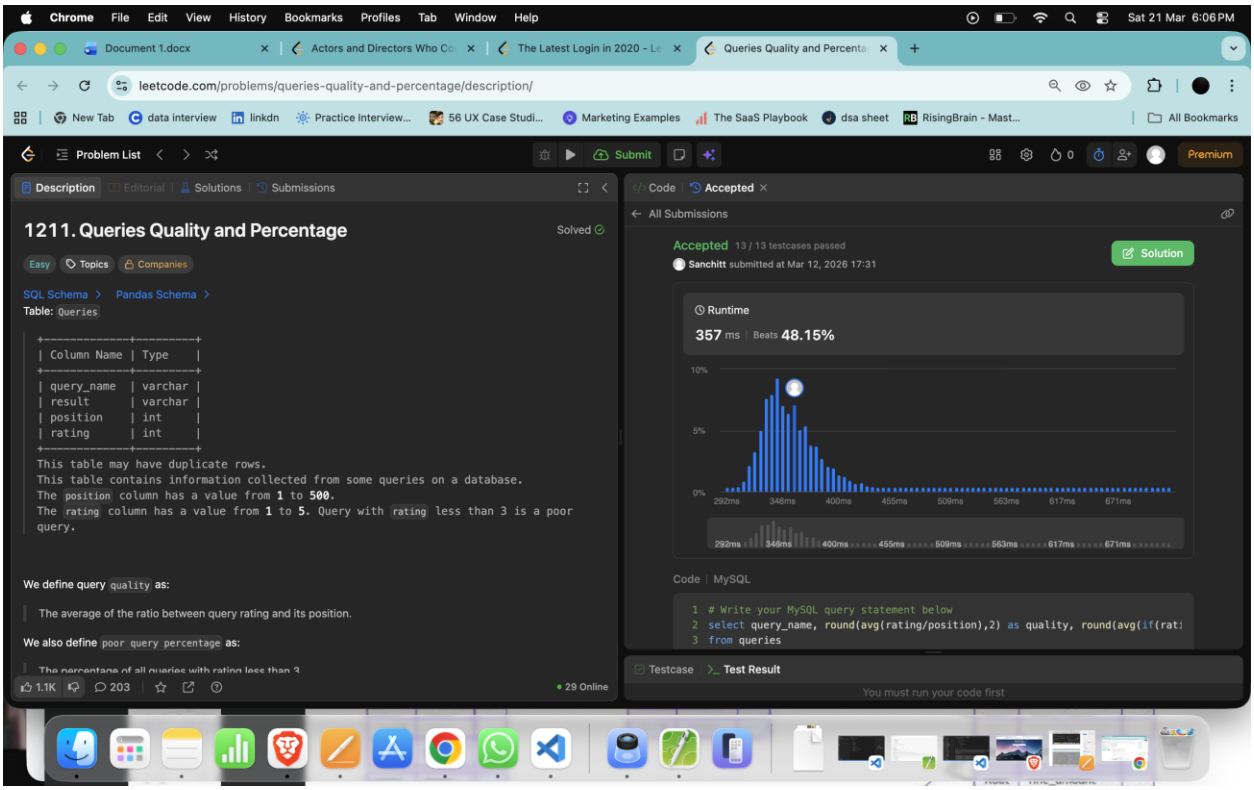
leetcode.com/problems/queries-quality-and-percentage/description/
1211. Queries Quality and Percentage
Solved
Easy
Topics
Companies
SQL Schema
Pandas Schema
Table: Queries
+-------------+---------+
| Column Name | Type |
+-------------+---------+
query_name	varchar
result	varchar
position	int
rating	int
+-------------+---------+
This table may have duplicate rows.
This table contains information collected from some queries on a database.
The position column has a value from 1 to 500.
The rating column has a value from 1 to 5. Query with rating less than 3 is a poor query.
We define query quality as:
The average of the ratio between query rating and its position.
We also define poor query percentage as:
1.1K
203
29 Online
Accepted 13 / 13 testcases passed
Sanchitt submitted at Mar 12, 2026 17:31
Solution
Runtime
357 ms | Beats 48.15%
Code | MySQL
Write your MySQL query statement below
select query_name, round(avg(rating/position),2) as quality, round(avg(if(rat
from queries
Testcase
Test Result
You must run your code first

9.

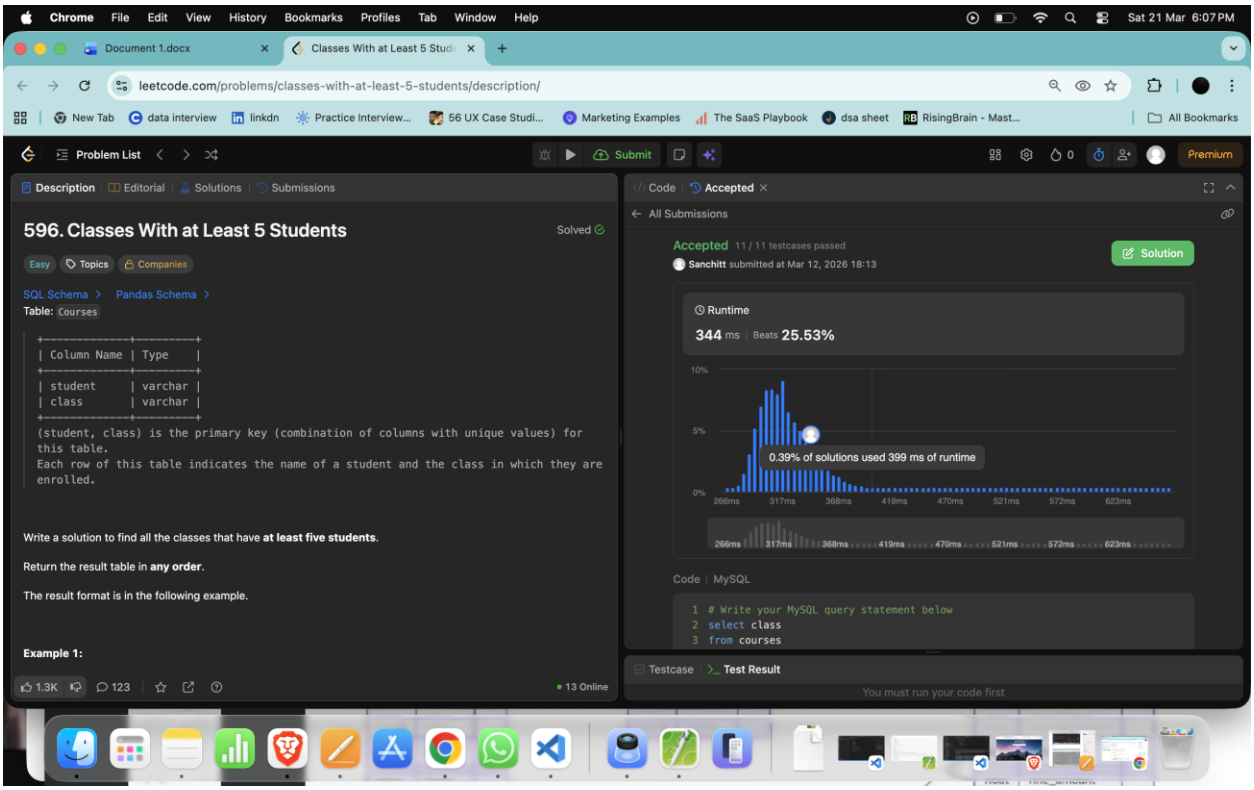
Chrome File Edit View History Bookmarks Profiles Tab Window Help
Sat 21 Mar 6:07 PM
Document 1.docx
Classes With at Least 5 Stud
leetcode.com/problems/classes-with-at-least-5-students/description/
Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
596. Classes With at Least 5 Students
Solved
Easy
Topics
Companies
SQL Schema
Pandas Schema
Table: Courses
+---+---+
| Column Name | Type |
+---+---+
| student | varchar |
| class | varchar |
+---+---+
(student, class) is the primary key (combination of columns with unique values) for this table.
Each row of this table indicates the name of a student and the class in which they are enrolled.
Write a solution to find all the classes that have at least five students.
Return the result table in any order.
The result format is in the following example.
Example 1:
1.3K
123
13 Online
Code
Accepted
All Submissions
Accepted 11 / 11 testcases passed
Sanchitt submitted at Mar 12, 2026 18:13
Solution
Runtime
344 ms Beats 25.53%
0.39% of solutions used 399 ms of runtime
Code MySQL
Write your MySQL query statement below
select class
from courses
Testcase
Test Result
You must run your code first

JOINS

1. 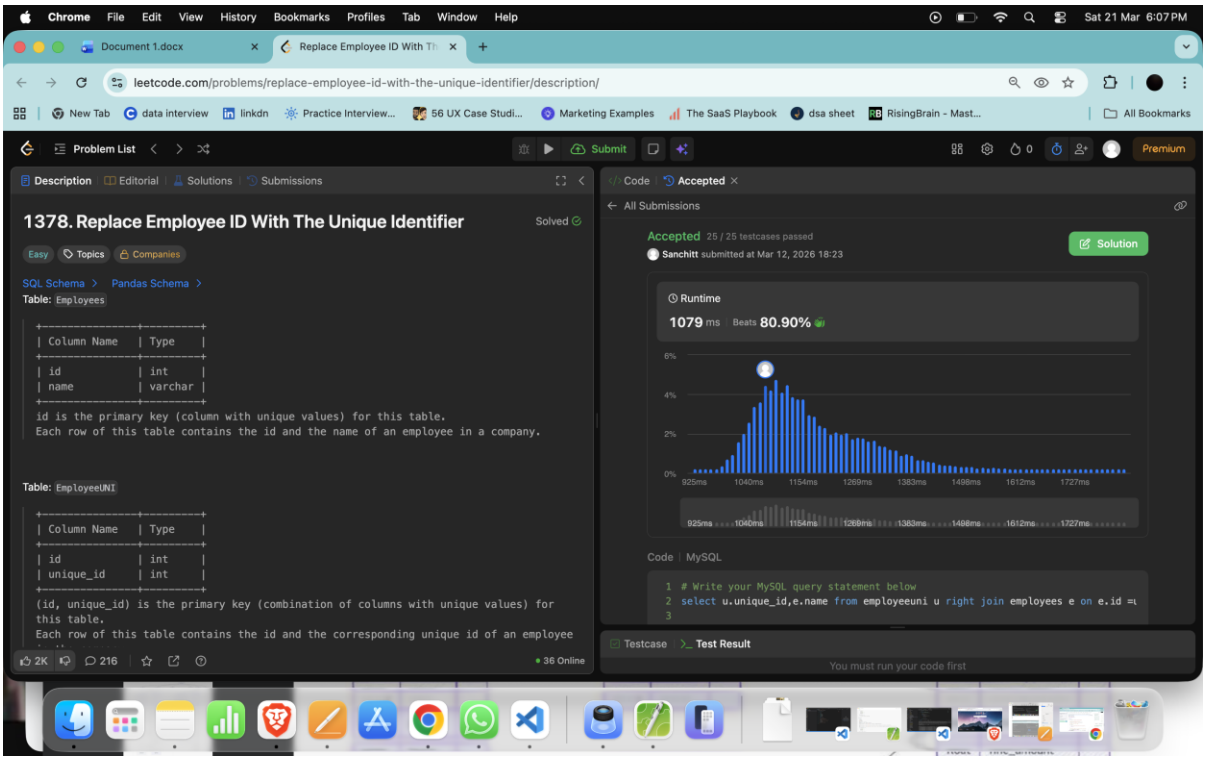
Chrome File Edit View History Bookmarks Profiles Tab Window Help
Sat 21 Mar 6:07 PM
Document 1.docx
Replace Employee ID With Th
leetcode.com/problems/replace-employee-id-with-the-unique-identifier/description/
Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
1378. Replace Employee ID With The Unique Identifier
Solved
Easy
Topics
Companies
SQL Schema
Pandas Schema
Table: Employees
+---+---+
| Column Name | Type |
+---+---+
| id | int |
| name | varchar |
+---+---+
id is the primary key (column with unique values) for this table.
Each row of this table contains the id and the name of an employee in a company.
Table: EmployeeUNI
+---+---+
| Column Name | Type |
+---+---+
| id | int |
| unique_id | int |
+---+---+
(id, unique_id) is the primary key (combination of columns with unique values) for this table.
Each row of this table contains the id and the corresponding unique id of an employee
2K
216
36 Online
Code
Accepted
All Submissions
Accepted 25 / 25 testcases passed
Sanchitt submitted at Mar 12, 2026 18:23
Solution
Runtime
1079 ms Beats 80.90%
Code MySQL
Write your MySQL query statement below
select u.unique_id,e.name from employeeuni u right join employees e on e.id =
Testcase
Test Result
You must run your code first

2. 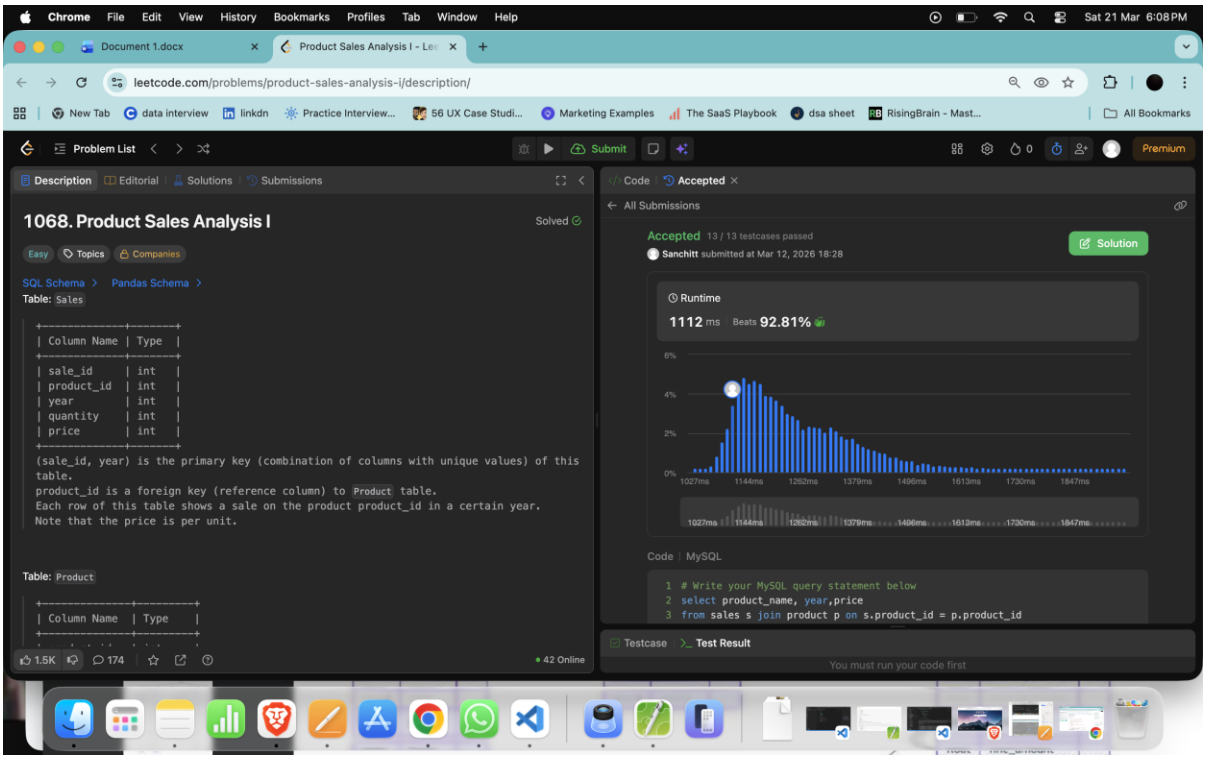
Chrome File Edit View History Bookmarks Profiles Tab Window Help
Sat 21 Mar 6:08 PM
Document 1.docx
Product Sales Analysis I - Lee
leetcode.com/problems/product-sales-analysis-i/description/
Problem List
Submit
Premium
Description Editorial Solutions Submissions
1068. Product Sales Analysis I
Solved
Easy Topics Companies
SQL Schema Pandas Schema
Table: Sales
+---------+-------+
| Column Name | Type |
+---------+-------+
sale_id	int
product_id	int
year	int
quantity	int
price	int
+---------+-------+
(sale_id, year) is the primary key (combination of columns with unique values) of this table.
product_id is a foreign key (reference column) to Product table.
Each row of this table shows a sale on the product product_id in a certain year.
Note that the price is per unit.
Table: Product
+---------+---------+
| Column Name | Type |
+---------+---------+
1.5K 174
42 Online
Code Accepted
All Submissions
Accepted 13 / 13 testcases passed
Sanchitt submitted at Mar 12, 2026 18:28
Solution
Runtime
1112 ms Beats 92.81%
Code MySQL
Write your MySQL query statement below
select product_name, year,price
from sales s join product p on s.product_id = p.product_id
Testcase Test Result
You must run your code first

3. 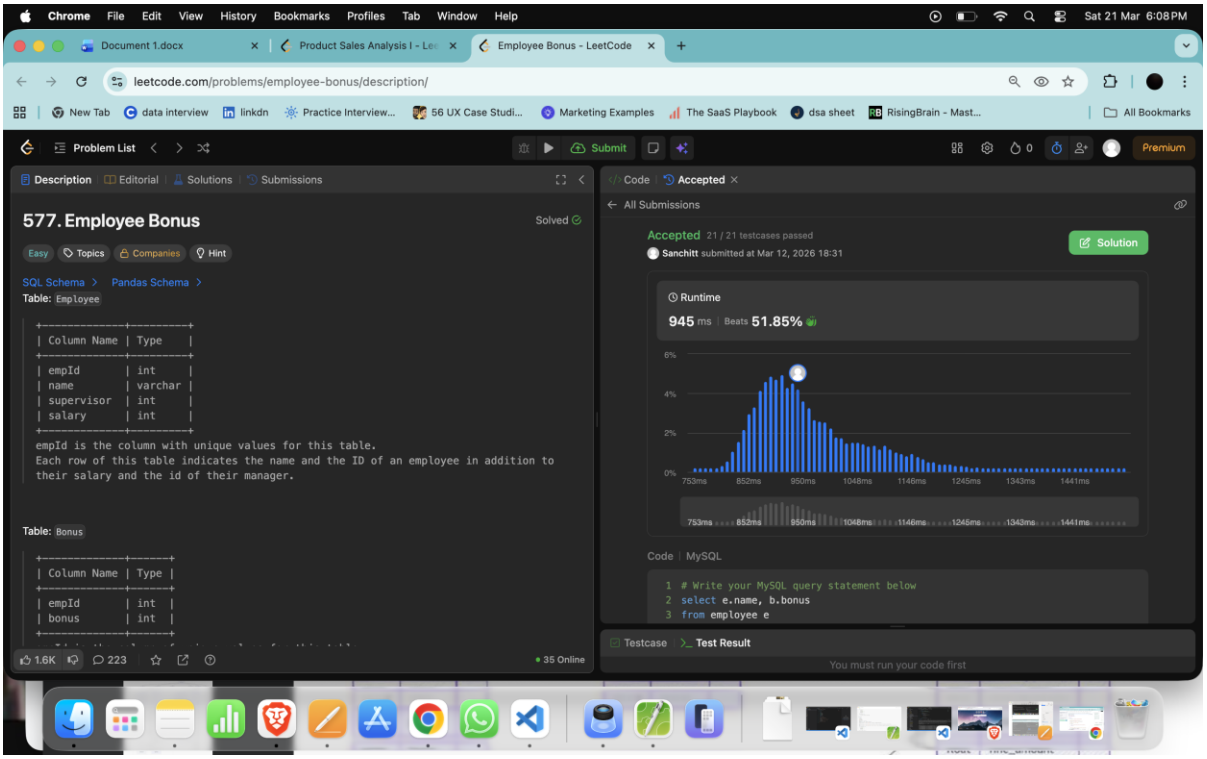
Chrome File Edit View History Bookmarks Profiles Tab Window Help
Sat 21 Mar 6:08 PM
Document 1.docx
Product Sales Analysis I - Lee
Employee Bonus - LeetCode
leetcode.com/problems/employee-bonus/description/
Problem List
Submit
Premium
Description Editorial Solutions Submissions
577. Employee Bonus
Solved
Easy Topics Companies Hint
SQL Schema Pandas Schema
Table: Employee
+---------+---------+
| Column Name | Type |
+---------+---------+
empId	int
name	varchar
supervisor	int
salary	int
+---------+---------+
empId is the column with unique values for this table.
Each row of this table indicates the name and the ID of an employee in addition to their salary and the id of their manager.
Table: Bonus
+---------+-------+
| Column Name | Type |
+---------+-------+
| empId | int |
| bonus | int |
1.6K 223
35 Online
Code Accepted
All Submissions
Accepted 21 / 21 testcases passed
Sanchitt submitted at Mar 12, 2026 18:31
Solution
Runtime
945 ms Beats 51.85%
Code MySQL
Write your MySQL query statement below
select e.name, b.bonus
from employee e
Testcase Test Result
You must run your code first

4. 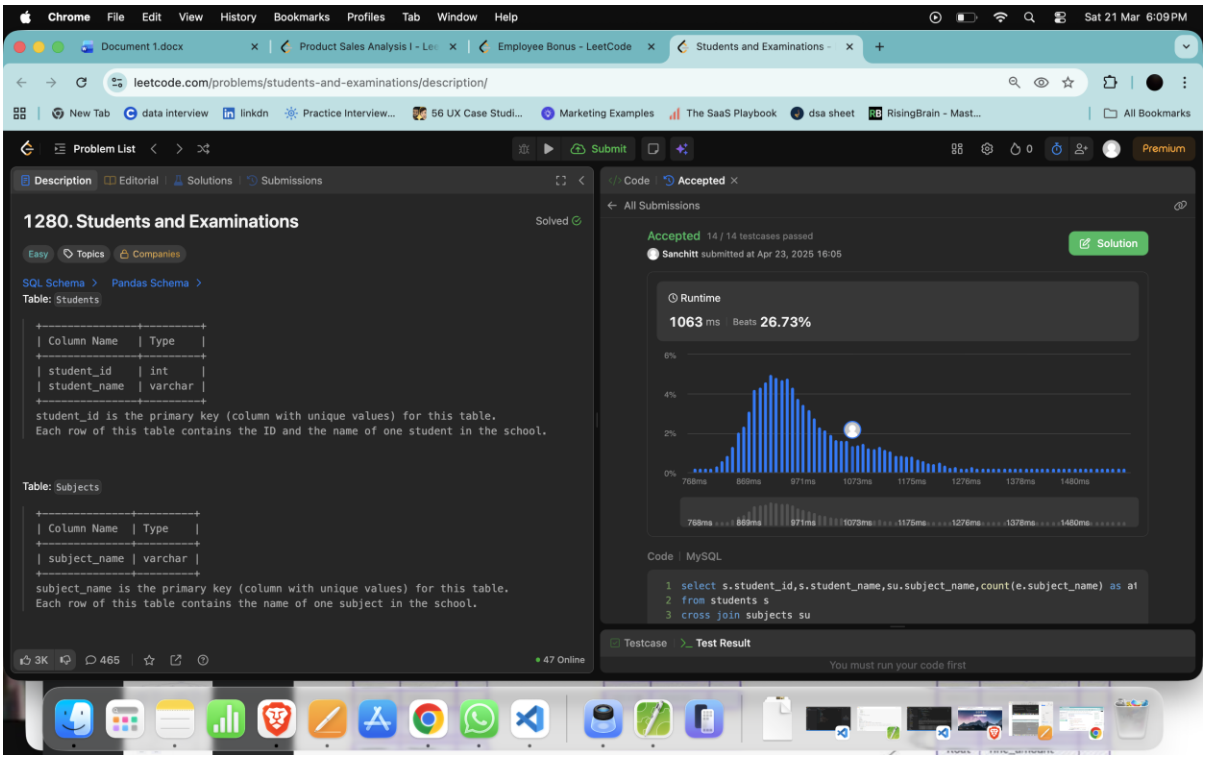

5. 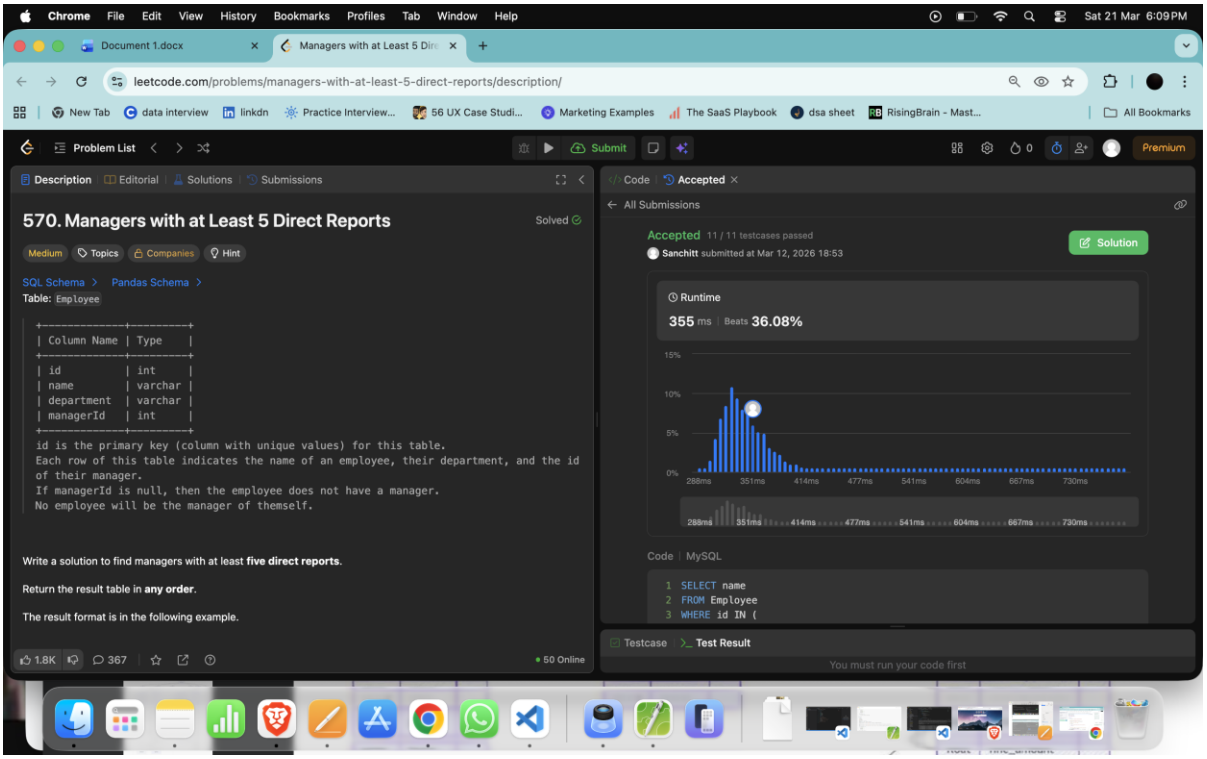

6. X

SUBQUERY

1.

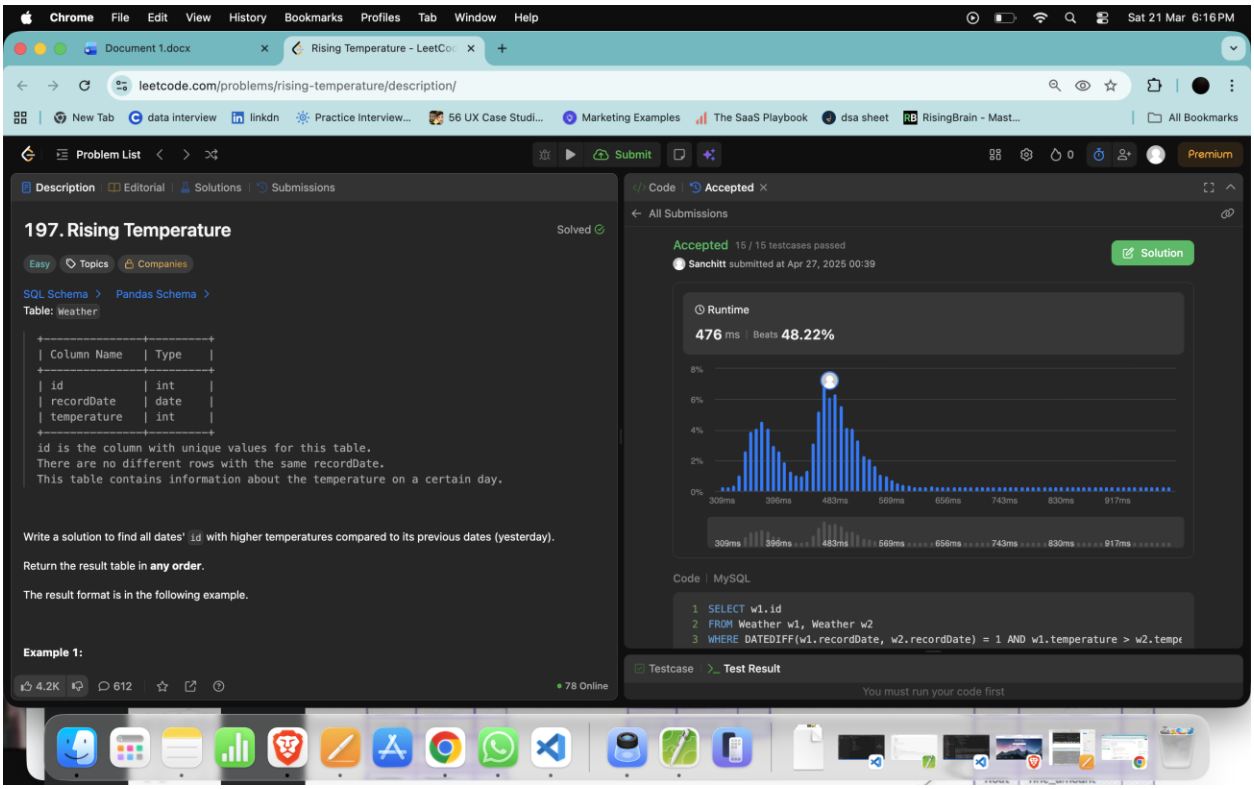
Chrome File Edit View History Bookmarks Profiles Tab Window Help
Sat 21 Mar 6:16 PM
Document 1.docx
Rising Temperature - LeetCo
leetcode.com/problems/rising-temperature/description/
New Tab
data interview
linkdn
Practice Interview...
56 UX Case Studi...
Marketing Examples
The SaaS Playbook
dsa sheet
RisingBrain - Mast...
All Bookmarks
Problem List
Submit
Premium
Description
Editorial
Solutions
Submissions
197. Rising Temperature
Solved
Easy
Topics
Companies
SQL Schema
Pandas Schema
Table: Weather
+---------------+---------+
| Column Name | Type |
+---------------+---------+
id	int
recordDate	date
temperature	int
+---------------+---------+
id is the column with unique values for this table.
There are no different rows with the same recordDate.
This table contains information about the temperature on a certain day.
Write a solution to find all dates' id with higher temperatures compared to its previous dates (yesterday).
Return the result table in any order.
The result format is in the following example.
Example 1:
4.2K
612
78 Online
Code
Accepted
All Submissions
Accepted 15 / 15 testcases passed
Sanchitt submitted at Apr 27, 2025 00:39
Solution
Runtime
476 ms | Beats 48.22%
8%
6%
4%
2%
0%
309ms
396ms
483ms
569ms
656ms
743ms
830ms
917ms
Code | MySQL
1 SELECT w1.id
2 FROM Weather w1, Weather w2
3 WHERE DATEDIFF(w1.recordDate, w2.recordDate) = 1 AND w1.temperature > w2.tempe
Testcase
Test Result
You must run your code first

2.