


PIZZA SALES DATA

HOW DATA LOOKS LIKE ?



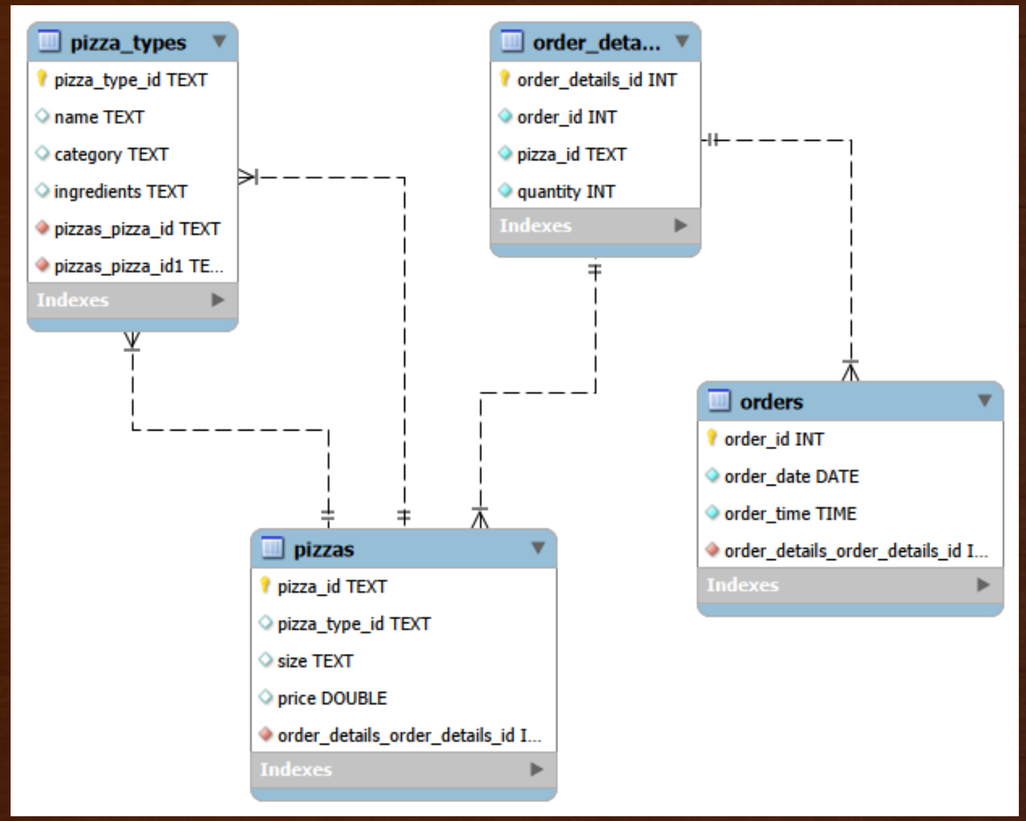

QUERIES RELATED TO DATA

Queries for SQL Project

1.Retrieve the total number of orders placed.
2.Identify the highest-priced pizza.
3.List the top 5 most ordered pizza types along with their quantities.
4.Join the necessary tables to find the total quantity of each pizza category ordered.
5.Join relevant tables to find the category-wise distribution of pizzas.
6.Group the orders by date and calculate the average number of pizzas ordered per day.
7.Determine the top 3 most ordered pizza types based on revenue.
8.Calculate the percentage contribution of each pizza type to total revenue.
9.Analyze the cumulative revenue generated over time.
10.Determine the top 3 most ordered pizza types based on revenue for each pizza category.



1. TOTAL NUMBER OF ORDER PLACED



```sql
SELECT
    COUNT(*) AS total_order_placed
FROM
    orders;
```

Result

Result Grid	
	total_order_placed
▶	21350

2. HIGHEST PRIZE PIZZA

```sql
SELECT
    pizza_types.name, pizzas.size, pizzas.price
FROM
    pizza_types
        JOIN
    pizzas ON pizzas.pizza_type_id = pizza_types.pizza_type_id
ORDER BY pizzas.price DESC
LIMIT 1;
```



Result

Result Grid | Filter Rows:

	name	size	price
▶	The Greek Pizza	XXL	35.95

3. TOP 5 PIZZAZ ALONG QUANTITY



```sql
SELECT
    pizza_types.name, SUM(order_details.quantity) AS quantity
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY quantity DESC
LIMIT 5;
```

Result

Result Grid | Filter Rows:

name	quantity
The Classic Deluxe Pizza	2453
The Barbecue Chicken Pizza	2432
The Hawaiian Pizza	2422
The Pepperoni Pizza	2418
The Thai Chicken Pizza	2371

4. QUANTITY ORDERED WITH CATEGORY

```sql
SELECT
    pizza_types.category,
    SUM(order_details.quantity) AS quantity
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY category ASC;
```



Result

Result Grid | Filter

category	quantity
Chicken	11050
Classic	14888
Supreme	11987
Veggie	11649

5. CATEGORY-WISE DISTRIBUTION

```sql
SELECT
    category, COUNT(name) AS per_type
FROM
    pizza_types
GROUP BY category;
```



Result

Result Grid | Filter

category	per_type
Chicken	6
Classic	8
Supreme	9
Veggie	9

6. AVERAGE PIZZA ORDERED PER DAY

```sql
SELECT
    ROUND(AVG(quantity), 0) AS avg_per_day
FROM
    (SELECT
        orders.order_date, SUM(order_details.quantity) AS quantity
    FROM
        orders
    JOIN order_details ON orders.order_id = order_details.order_id
    GROUP BY orders.order_date) AS order_quantity;
```



Result

Result Grid

avg_per_day
138

7. TOP 3 MOST ORDERED PIZZA BASED ON REVENUE



```sql
SELECT
    pizza_types.name,
    SUM(order_details.quantity * pizzas.price) AS revenue
FROM
    pizza_types
        JOIN
    pizzas ON pizzas.pizza_type_id = pizza_types.pizza_type_id
        JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY revenue DESC
LIMIT 3;
```

Result

Result Grid | Filter Rows:

name	revenue
The Thai Chicken Pizza	43434.25
The Barbecue Chicken Pizza	42768
The California Chicken Pizza	41409.5

8.PERCENTAGE CONTRIBUTION OF EACH PIZZA TYPE

```sql
select pizza_types.name ,round(((total_revenue / sum(total_revenue)over())*100),2)  as percentage
from
(select pizza_types.name as pizza_name ,round(sum(order_details.quantity * pizzas.price),0) as total_revenue
from pizzas join order_details
on pizzas.pizza_id = order_details.pizza_id
join pizza_types
on pizzas.pizza_type_id = pizza_types.pizza_type_id
group by pizza_types.name) as total_R join pizza_types
on total_R.pizza_name = pizza_types.name
group by total_R.pizza_name ;
```



Result

Result Grid | Filter Rows:

name	percentage
The Hawaiian Pizza	3.95
The Classic Deluxe Pizza	4.67
The Five Cheese Pizza	3.19
The Italian Supreme Pizza	4.09
The Mexicana Pizza	3.27
The Thai Chicken Pizza	5.31

9.CUMULATIVE REVENUE GENERATED OVER TIME

```sql
select order_date ,
round(sum(revenue_on_date) over(order by order_date) , 2) as cum_revenue
from
(select orders.order_date , round(sum(order_details.quantity * pizzas.price),2) as revenue_on_date
from pizzas join order_details
on pizzas.pizza_id = order_details.pizza_id
join orders
on order_details.order_id = orders.order_id
group by orders.order_date) as sales;
```



Result

Result Grid | Filter Row

order_date	cum_revenue
2015-01-01	2713.85
2015-01-02	5445.75
2015-01-03	8108.15
2015-01-04	9863.6
2015-01-05	11929.55
2015-01-06	14358.5

10.TOP 3 MOST ORDERED PIZZA TYPE BASED ON THE REVENUE & CATEGORY

```sql
select name , category , total_revenue, rn as position
from
(select category , name ,total_revenue,
rank() over ( partition by category order by total_revenue desc) as rn
from
(select pizza_types.category ,pizza_types.name, round(sum(order_details.quantity * pizzas.price),2) as total_revenue
from pizza_types join pizzas
on pizza_types.pizza_type_id = pizzas.pizza_type_id
join order_details
on pizzas.pizza_id = order_details.pizza_id
group by pizza_types.category , pizza_types.name) as a) as b
where rn <= 3;
```



Result

Result Grid | Filter Rows: | Export: | W

name	category	total_revenue	position
The Thai Chicken Pizza	Chicken	43434.25	1
The Barbecue Chicken Pizza	Chicken	42768	2
The California Chicken Pizza	Chicken	41409.5	3
The Classic Deluxe Pizza	Classic	38180.5	1
The Hawaiian Pizza	Classic	32273.25	2
The Pepperoni Pizza	Classic	30161.75	3

Thank You