

3-state Markov model in R

The DARTH workgroup

Developed by the Decision Analysis in R for Technologies in Health (DARTH) workgroup:

Fernando Alarid-Escudero, PhD (1)

Eva A. Enns, MS, PhD (2)

M.G. Myriam Hunink, MD, PhD (3,4)

Hawre J. Jalal, MD, PhD (5)

Eline M. Krijkamp, MSc (3)

Petros Pechlivanoglou, PhD (6,7)

Alan Yang, MSc (7)

In collaboration of:

1. Division of Public Administration, Center for Research and Teaching in Economics (CIDE), Aguascalientes, Mexico
2. University of Minnesota School of Public Health, Minneapolis, MN, USA
3. Erasmus MC, Rotterdam, The Netherlands
4. Harvard T.H. Chan School of Public Health, Boston, USA
5. University of Pittsburgh Graduate School of Public Health, Pittsburgh, PA, USA
6. University of Toronto, Toronto ON, Canada
7. The Hospital for Sick Children, Toronto ON, Canada

Please cite our publications when using this code:

- Jalal H, Pechlivanoglou P, Krijkamp E, Alarid-Escudero F, Enns E, Hunink MG. An Overview of R in Health Decision Sciences. *Med Decis Making*. 2017; 37(3): 735-746. <https://journals.sagepub.com/doi/abs/10.1177/0272989X16686559>
- Alarid-Escudero F, Krijkamp EM, Enns EA, Yang A, Hunink MGM, Pechlivanoglou P, Jalal H. Cohort State-Transition Models in R: A Tutorial. *arXiv:200107824v2*. 2020:1-48. <http://arxiv.org/abs/2001.07824>
- Krijkamp EM, Alarid-Escudero F, Enns EA, Jalal HJ, Hunink MGM, Pechlivanoglou P. Microsimulation modeling for health decision sciences using R: A tutorial. *Med Decis Making*. 2018;38(3):400-22. <https://journals.sagepub.com/doi/abs/10.1177/0272989X18754513>
- Krijkamp EM, Alarid-Escudero F, Enns E, Pechlivanoglou P, Hunink MM, Jalal H. A Multidimensional Array Representation of State-Transition Model Dynamics. *Med Decis Making*. Online First <https://doi.org/10.1177/0272989X19893973>

Copyright 2017, THE HOSPITAL FOR SICK CHILDREN AND THE COLLABORATING INSTITUTIONS. All rights reserved in Canada, the United States and worldwide. Copyright, trademarks, trade names and any and all associated intellectual property are exclusively owned by THE HOSPITAL FOR SICK CHILDREN and the collaborating institutions. These materials may be used, reproduced, modified, distributed and adapted with proper attribution.

Change eval to TRUE if you want to knit this document.

```
rm(list = ls()) # clear memory (removes all the variables from the workspace)
```

01 Load packages

```
if (!require('pacman')) install.packages('pacman'); library(pacman) # use this package to conveniently
# load (install if required) packages from CRAN
p_load("diagram", "dampack")
# install_github("DARTH-git/darthtools", force = TRUE) Uncomment if there is a newer version
p_load_gh("DARTH-git/darthtools")
```

02 Load functions

```
# all functions are in the darthtools package
```

03 Input model parameters

```
## General setup
n_cycles      <- 60                # number of cycles
v_names_cycles <- paste("cycle", 0:n_cycles) # cycle names
v_names_states <- c("Healthy", "Sick", "Dead") # state names
n_states      <- length(v_names_states)      # number of health states

# Discounting factors
d_c      <- 0.03                # discount rate for costs
d_e      <- 0.03                # discount rate for QALYs

# Strategy names
v_names_str <- c("Standard of Care",      # store the strategy names
                "Treatment A",
                "Treatment B")
n_str      <- length(v_names_str)        # number of strategies

## Transition probabilities
p_HD      <- 0.01 # probability of dying when healthy
p_HS_SoC  <- 0.05 # probability of becoming sick when healthy, conditional on surviving, under standard
p_HS_trtA <- 0.04 # probability of becoming sick when healthy, conditional on surviving, under treatment A
p_HS_trtB <- 0.02 # probability of becoming sick when healthy, conditional on surviving, under treatment B
p_SD      <- 0.1  # probability of dying

## State rewards
# Costs and utilities
c_H      <- 400 # cost of one cycle in healthy state
c_S      <- 1000 # cost of one cycle in sick state
```

```

c_D      <- 0      # cost of one cycle in dead state
c_trtA   <- 800    # cost of treatment A (per cycle) in healthy state
c_trtB   <- 1500   # cost of treatment B (per cycle) in healthy state
u_H      <- 1      # utility when healthy
u_S      <- 0.5    # utility when sick
u_D      <- 0      # utility when dead
d_e      <- 0.03   # discount rate per cycle equal discount of costs and QALYs by 3%
d_c      <- 0.03   # discount rate per cycle equal discount of costs and QAL

# Discount weight (equal discounting is assumed for costs and effects)
v_dwc <- 1 / (1 + d_c) ^ (0:n_cycles)
v_dwe <- 1 / (1 + d_e) ^ (0:n_cycles)


```

Draw the state-transition cohort model

```

m_P_diag <- matrix(0, nrow = n_states, ncol = n_states, dimnames = list(v_names_states, v_names_states))
m_P_diag["Healthy", "Sick" ] = ""
m_P_diag["Healthy", "Dead" ] = ""
m_P_diag["Healthy", "Healthy" ] = ""
m_P_diag["Sick" , "Dead" ] = ""
m_P_diag["Sick" , "Sick" ] = ""
m_P_diag["Dead" , "Dead" ] = ""
layout.fig <- c(2, 1)
plotmat(t(m_P_diag), t(layout.fig), self.cex = 0.5, curve = 0, arr.pos = 0.8,
        latex = T, arr.type = "curved", relsize = 0.85, box.prop = 0.8,
        cex = 0.8, box.cex = 0.7, lwd = 1)

```

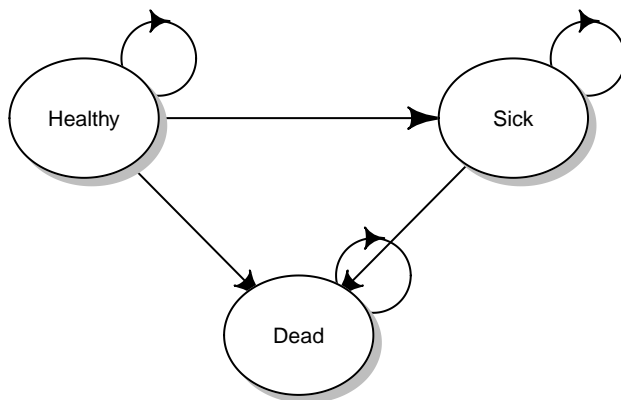

04 Define and initialize matrices and vectors

04.1 Cohort trace

```

## Initial state vector
# All starting healthy
v_s_init <- c("Healthy" = 1, "Sick" = 0, "Dead" = 0)
v_s_init

```

```
## Healthy    Sick    Dead
##          1        0        0
```

```
## Initialize cohort trace for cSTM for all strategies
m_M_SoC <- matrix(0,
                  nrow = (n_cycles + 1), ncol = n_states,
                  dimnames = list(v_names_cycles, v_names_states))
# Store the initial state vector in the first row of the cohort trace
m_M_SoC[1, ] <- v_s_init
## Initialize cohort traces
m_M_trtA <- m_M_trtB <- m_M_SoC # structure and initial states remain the same
```

04.2 Transition probability matrix

```
## Initialize transition probability matrix
# all transitions to a non-death state are assumed to be conditional on survival
m_P_SoC <- matrix(0,
                  nrow = n_states, ncol = n_states,
                  dimnames = list(v_names_states, v_names_states)) # define row and column names
m_P_SoC
```

```
##           Healthy Sick Dead
## Healthy      0      0      0
## Sick         0      0      0
## Dead         0      0      0
```

Fill in the transition probability matrix:

```
## Standard of Care
# from Healthy
m_P_SoC["Healthy", "Healthy"] <- (1 - p_HD) * (1 - p_HS_SoC)
m_P_SoC["Healthy", "Sick"]    <- (1 - p_HD) *      p_HS_SoC
m_P_SoC["Healthy", "Dead"]    <-      p_HD

# from Sick
m_P_SoC["Sick", "Sick"] <- 1 - p_SD
m_P_SoC["Sick", "Dead"] <-      p_SD

# from Dead
m_P_SoC["Dead", "Dead"] <- 1

## Treatment A
m_P_trtA <- m_P_SoC
m_P_trtA["Healthy", "Healthy"] <- (1 - p_HD) * (1 - p_HS_trtA)
m_P_trtA["Healthy", "Sick"]    <- (1 - p_HD) *      p_HS_trtA

## Treatment B
m_P_trtB <- m_P_SoC
m_P_trtB["Healthy", "Healthy"] <- (1 - p_HD) * (1 - p_HS_trtB)
m_P_trtB["Healthy", "Sick"]    <- (1 - p_HD) *      p_HS_trtB
```

Check if transition probability matrices are valid.

```
# Check that transition probabilities are in [0, 1]
check_transition_probability(m_P_SoC, verbose = TRUE)
check_transition_probability(m_P_trtA, verbose = TRUE)
check_transition_probability(m_P_trtB, verbose = TRUE)
# Check that all rows sum to 1
check_sum_of_transition_array(m_P_SoC, n_states = n_states, verbose = TRUE)
check_sum_of_transition_array(m_P_trtA, n_states = n_states, verbose = TRUE)
check_sum_of_transition_array(m_P_trtB, n_states = n_states, verbose = TRUE)
```

05 Run Markov model

```
for (t in 1:n_cycles){ # loop through the number of cycles
  m_M_SoC[t + 1, ] <- m_M_SoC[t, ] %*% m_P_SoC # estimate the state vector for the next cycle (t + 1)
  m_M_trtA[t + 1, ] <- m_M_trtA[t, ] %*% m_P_trtA # estimate the state vector for the next cycle (t + 1)
  m_M_trtB[t + 1, ] <- m_M_trtB[t, ] %*% m_P_trtB # estimate the state vector for the next cycle (t + 1)
}
head(m_M_SoC) # print the first few lines of the matrix
```

```
##           Healthy      Sick      Dead
## cycle 0 1.0000000 0.0000000 0.0000000
## cycle 1 0.9405000 0.0495000 0.0100000
## cycle 2 0.8845403 0.09110475 0.02435500
## cycle 3 0.8319101 0.12577902 0.04231088
## cycle 4 0.7824115 0.15438067 0.06320788
## cycle 5 0.7358580 0.17767197 0.08647006
```


06 Compute and Plot Epidemiological Outcomes

06.1 Cohort trace

```
matplot(m_M_SoC, type = 'l',
        ylab = "Probability of state occupancy",
        xlab = "Cycle",
        main = "Cohort Trace", lwd = 3) # create a plot of the data
legend("right", v_names_states, col = c("black", "red", "green"),
       lty = 1:3, bty = "n") # add a legend to the graph

# plot a vertical line that helps identifying at which cycle the prevalence of sick is highest
abline(v = which.max(m_M_SoC[, "Sick"]), col = "gray")
```

Cohort Trace

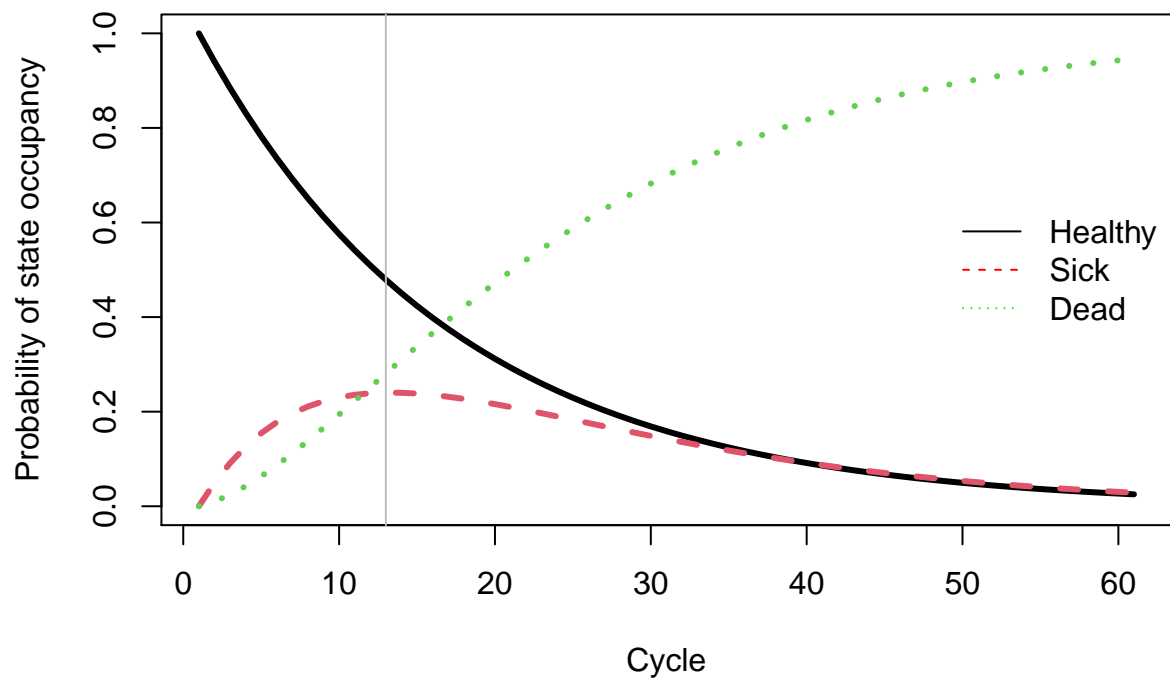


06.2 Overall Survival (OS)

```
v_os <- 1 - m_M_SoC[, "Dead"] # calculate the overall survival (OS) probability
v_os <- rowSums(m_M_SoC[, 1:2]) # alternative way of calculating the OS probability

plot(v_os, type = 'l',
     ylim = c(0, 1),
     ylab = "Survival probability",
     xlab = "Cycle",
     main = "Overall Survival") # create a simple plot showing the OS

# add grid
grid(nx = n_cycles, ny = 10, col = "lightgray", lty = "dotted", lwd = par("lwd"),
     equilogs = TRUE)
```

Overall Survival

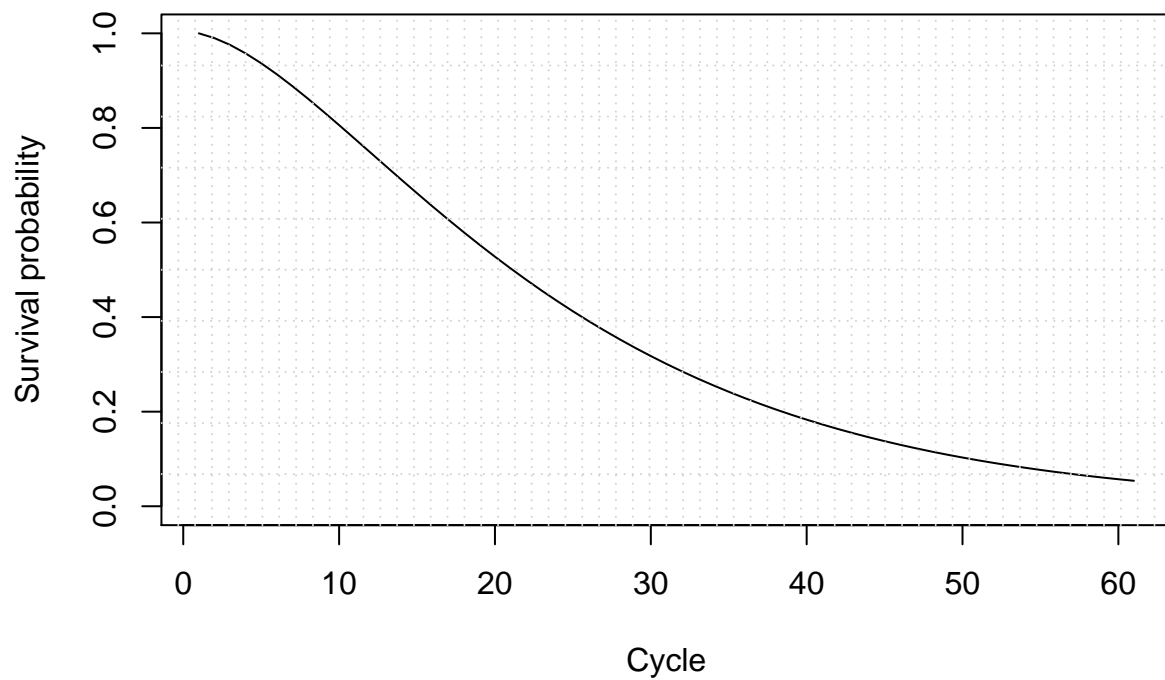


06.2.1 Life Expectancy (LE)

```
v_le <- sum(v_os) # summing probability of OS over time (i.e. life expectancy)
```

06.3 Disease prevalence

```
v_prev <- m_M_SoC[, "Sick"]/v_os  
plot(v_prev,  
      ylim = c(0, 1),  
      ylab = "Prevalence",  
      xlab = "Cycle",  
      main = "Disease prevalence")
```

Disease prevalence

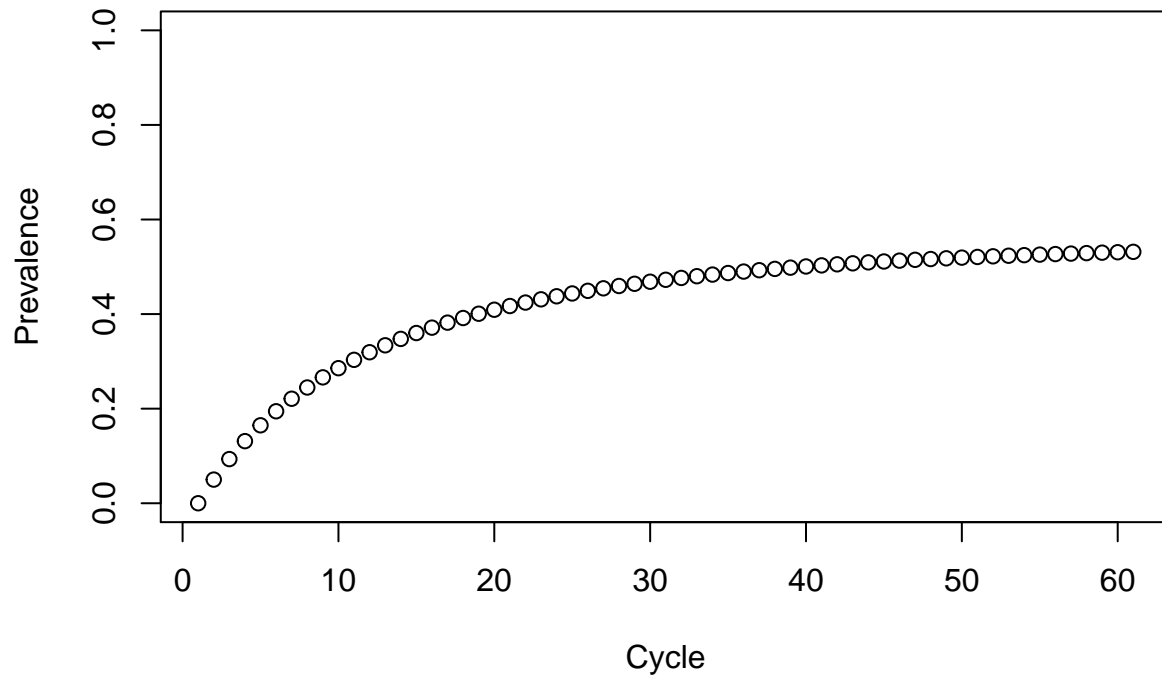

07 Compute Cost-Effectiveness Outcomes

07.1 Mean Costs and QALYs

```
# per cycle
# calculate expected costs by multiplying cohort trace with the cost vector for the different health states
v_tc_SoC <- m_M_SoC %*% c(c_H, c_S, c_D)
v_tc_trtA <- m_M_trtA %*% c(c_H + c_trtA, c_S, c_D)
v_tc_trtB <- m_M_trtB %*% c(c_H + c_trtB, c_S, c_D)

# calculate expected QALYs by multiplying cohort trace with the utilities for the different health states
v_tu_SoC <- m_M_SoC %*% c(u_H, u_S, u_D)
v_tu_trtA <- m_M_trtA %*% c(u_H, u_S, u_D)
v_tu_trtB <- m_M_trtB %*% c(u_H, u_S, u_D)
```

07.2 Discounted Mean Costs and QALYs

```
# Discount costs by multiplying the cost vector with discount weights (v_dwc)
tc_d_SoC <- t(v_tc_SoC) %*% v_dwc
tc_d_trtA <- t(v_tc_trtA) %*% v_dwc
tc_d_trtB <- t(v_tc_trtB) %*% v_dwc

# Discount QALYs by multiplying the QALYs vector with discount weights (v_dwe)
tu_d_SoC <- t(v_tu_SoC) %*% v_dwe
```



```

tu_d_trtA <- t(v_tu_trtA) %*% v_dwe
tu_d_trtB <- t(v_tu_trtB) %*% v_dwe

# Store them into a vector
v_tc_d <- c(tc_d_SoC, tc_d_trtA, tc_d_trtB)
v_tu_d <- c(tu_d_SoC, tu_d_trtA, tu_d_trtB)

# Dataframe with discounted costs and effectiveness
df_ce <- data.frame(Strategy = v_names_str,
                    Cost      = v_tc_d,
                    Effect    = v_tu_d)

df_ce

```

```

##           Strategy      Cost    Effect
## 1 Standard of Care  8915.034 13.62825
## 2      Treatment A 19280.793 14.77798
## 3      Treatment B 34371.418 18.02450

```

07.3 Compute ICERs of the Markov model

```

df_cea <- calculate_icers(cost      = df_ce$Cost,
                          effect    = df_ce$Effect,
                          strategies = df_ce$Strategy
                          )

df_cea

```

```

##           Strategy      Cost    Effect Inc_Cost Inc_Effect      ICER Status
## 1 Standard of Care  8915.034 13.62825      NA      NA      NA      ND
## 2      Treatment B 34371.418 18.02450 25456.38  4.396243 5790.485      ND
## 3      Treatment A 19280.793 14.77798      NA      NA      NA      ED

```

07.4 Plot frontier of the Markov model

```

plot(df_cea, effect_units = "QALYs")

```

