

1 Introduction

DASH conformance software performs the task of validating at least the DASH MPD and also the segments pointed to by that MPD, as shown in Figure 1 [1]. If there is any conformance issue found, it is reported back. This document provides the software architecture, functionality, and basic usage of the conformance software.

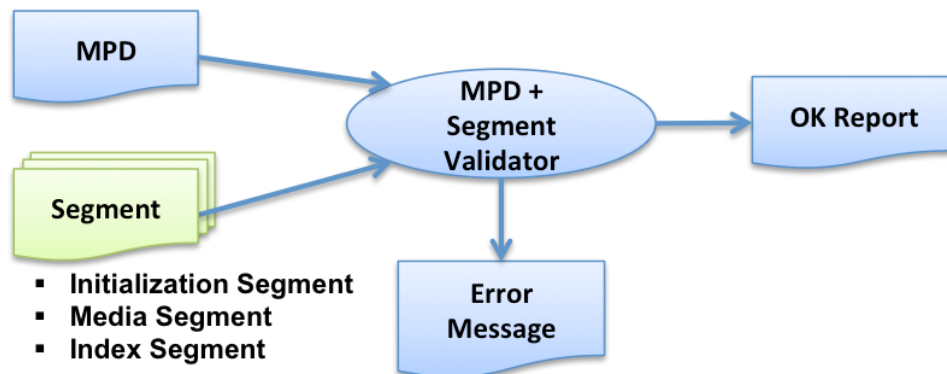


Figure 1: Role of conformance software [1]

Figure 2 shows a relatively detailed process flow.

1. Based on the provided MPD location, it is loaded.
2. XML validation and schema validation is done based on the MPD and the MPD schema, the latter pointed to by the MPD.
3. Schematron rules are validated.
4. If segment conformance testing is required, the MPD information is used to access/fetch the segments.
5. ISO BMFF rules are validated.
6. DASH specific rules are validated:
 - a. General DASH rules (e.g. for sidx, ssix boxes etc).
 - b. MPD information specific rules, e.g.
 - i. Profile specific checks,
 - ii. Encrypted content specific checks etc.
7. Cross-representation checks are made (e.g. segment and subsegment alignment).

Each of the processing green blocks may generate conformance error messages that are provided to the user. Only if none of the blocks generate any error, the content is conforming to the specific DASH profile.

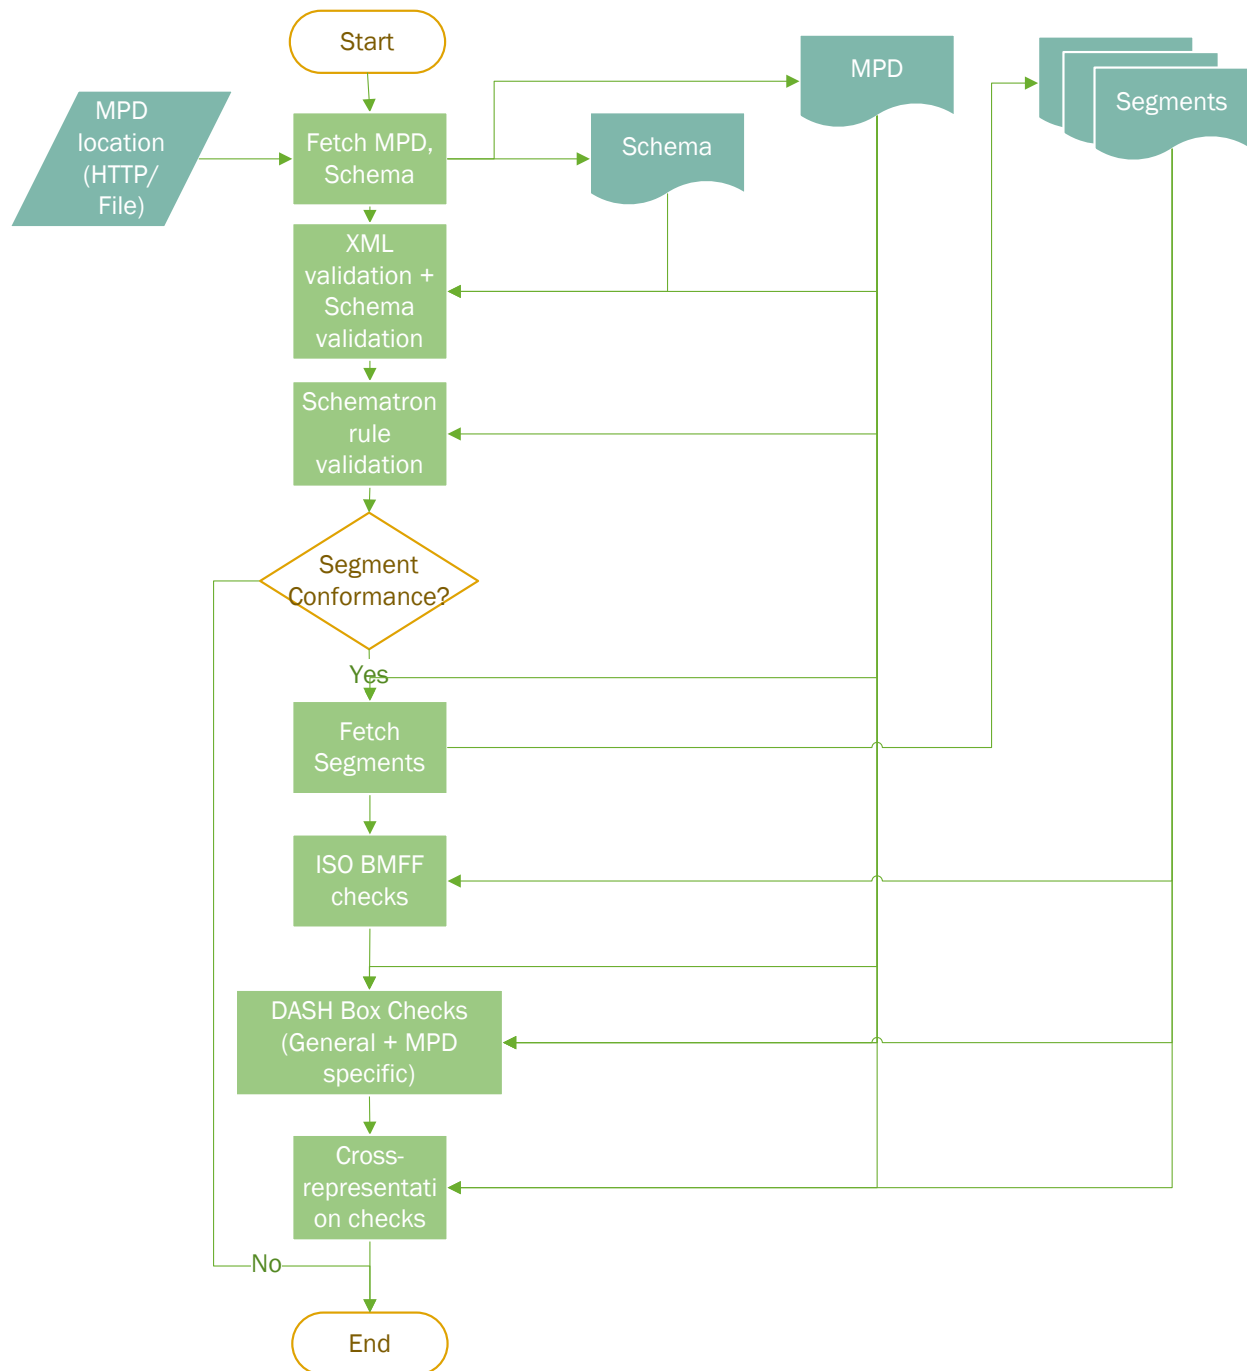


Figure 2: Detailed flow of DASH conformance testing

2 Realization architecture

Figure 3 shows the functional block diagram of how the DASH conformance software has been realized.

- The conformance software resides on the “Test Server”.

- The “Tester” is a web-client, e.g. Google Chrome browser that access the conformance software on the Test Server.
- The Tested provides the MPD (either as an uploaded file, or points to the MPD location on the web) to the conformance software.
- Based on this information, the conformance software accesses the DASH content.
- Conformance testing is done on the Test Server.
- The report of the conformance testing is provided back to the Tester.

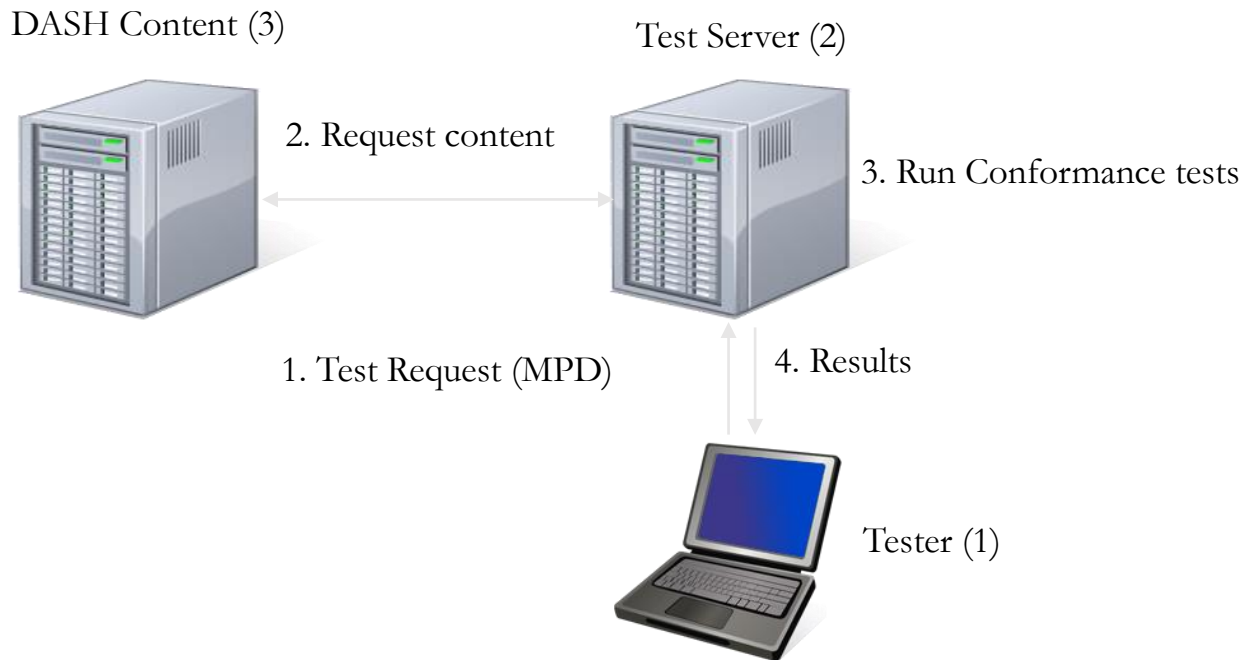


Figure 3: Functional block diagram of realization architecture

2.1.1 Test Server

Linux/Windows based Web server

Frontend code: <https://github.com/Dash-Industry-Forum/Conformance-Software>

Backend code: <https://github.com/Dash-Industry-Forum/Conformance-and-reference-source>

3 Web-user interface

The web-based user interface for interaction with the conformance software is shown in Figure 4.

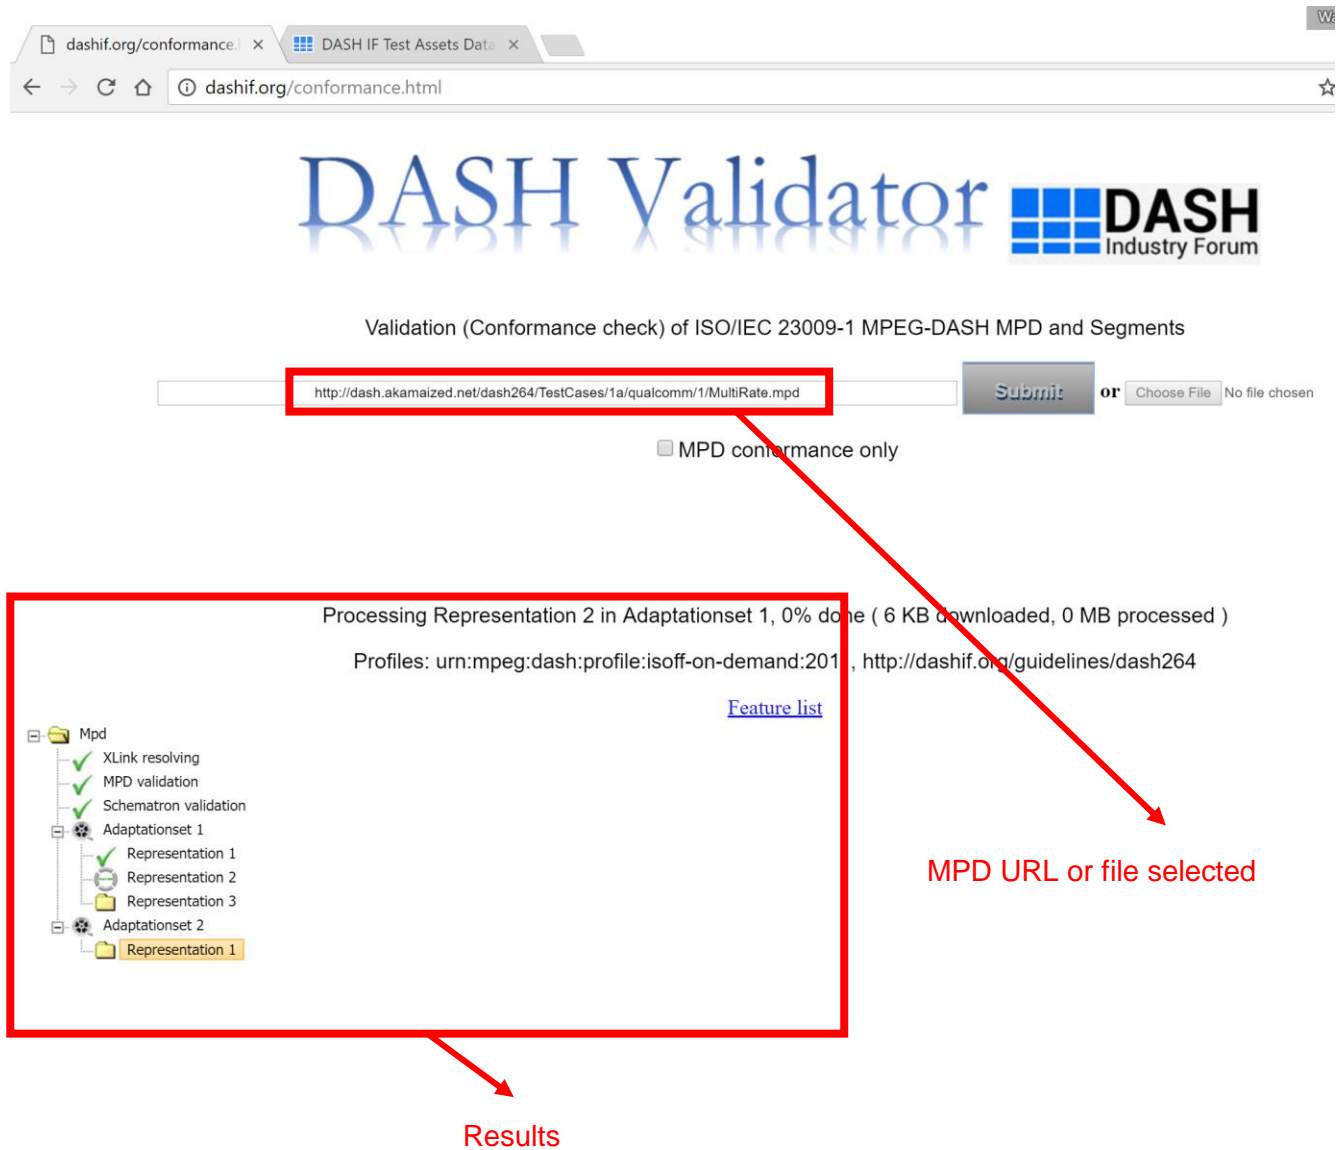


Figure 4: Web user interface of the conformance software.

References

- [1] ISO/IEC 23009-2, “Information technology — Dynamic adaptive streaming over HTTP (DASH) — Part 2: Conformance and reference software”