

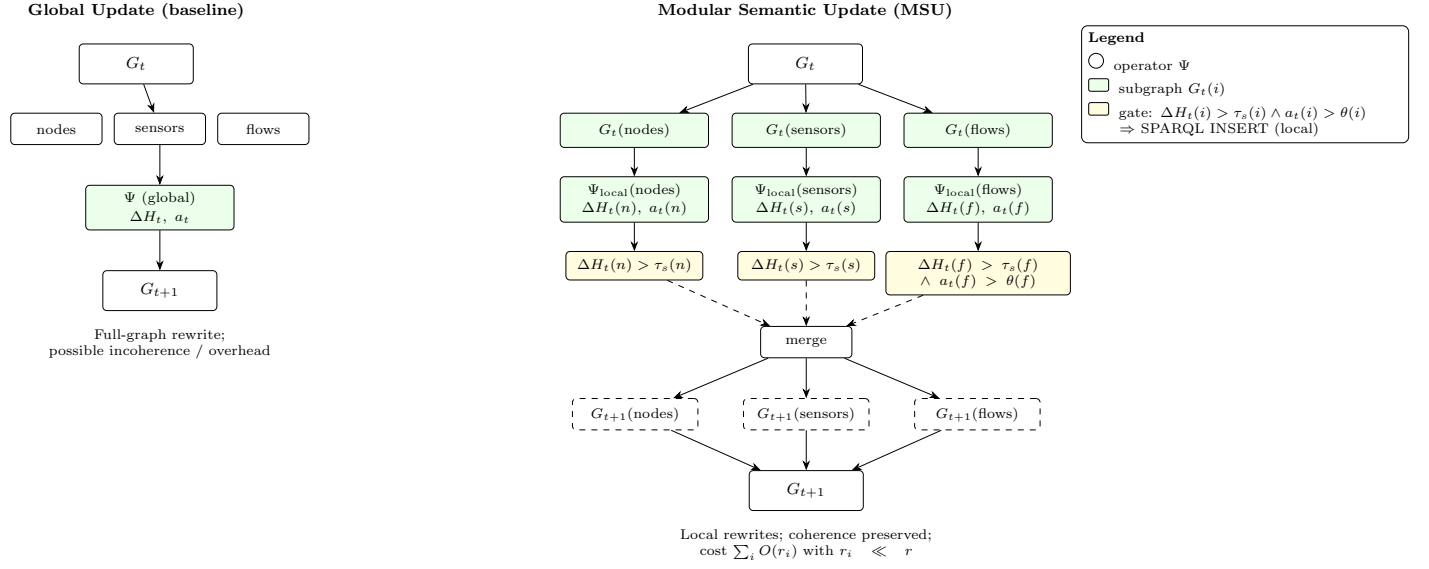


Figure 1: MSU schema: comparison between global update and modular update with Ψ_{local} on sub-graphs $G_t(i)$. The thresholds $\tau_s(i)$ and $\theta(i)$ enable conditional updates, reducing overhead and preserving semantic coherence.