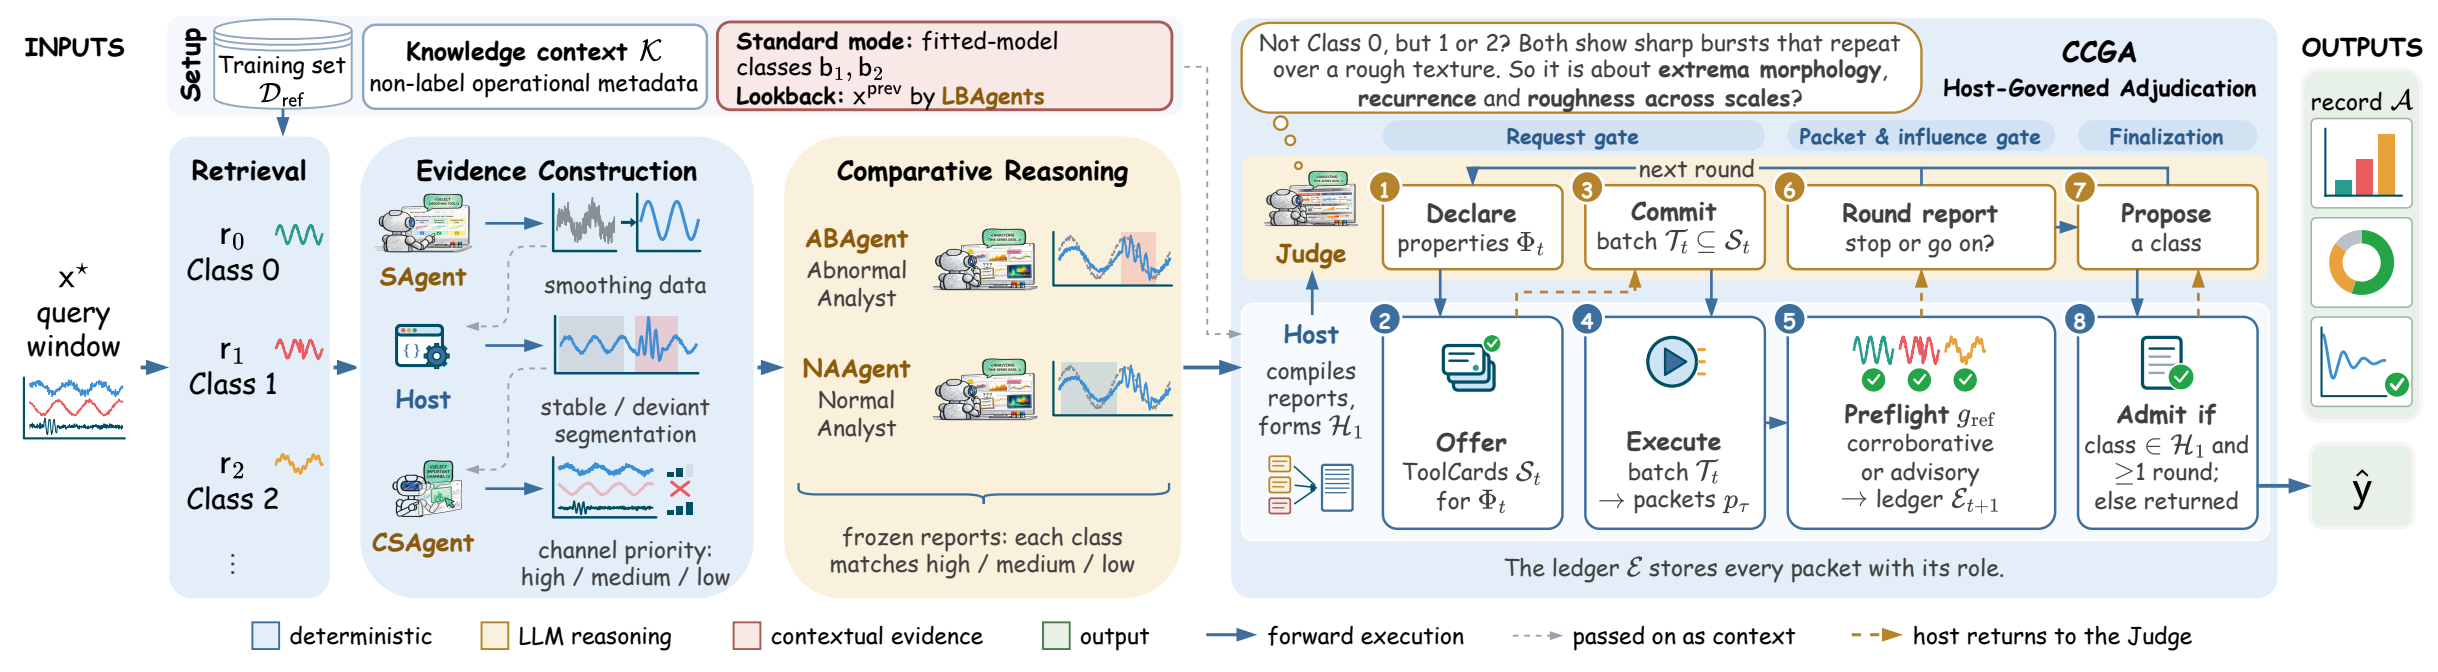

INPUTS
Setup
Training set $\mathcal{D}_{\text{ref}}$
Knowledge context $\mathcal{K}$
non-label operational metadata
Standard mode: fitted-model classes b_1, b_2
Lookback: x^{prev} by LBAgents
$x^\star$ query window
Retrieval
r_0 Class 0
r_1 Class 1
r_2 Class 2
Evidence Construction
SAgent
smoothing data
Host
stable / deviant segmentation
CSAgent
channel priority: high / medium / low
Comparative Reasoning
ABAgent Abnormal Analyst
NAAgent Normal Analyst
frozen reports: each class matches high / medium / low
Not Class 0, but 1 or 2? Both show sharp bursts that repeat over a rough texture. So it is about extrema morphology, recurrence and roughness across scales?
CCGA
Host-Governed Adjudication
Request gate
Packet & influence gate
Finalization
Judge
next round
1 Declare properties Φ_t
3 Commit batch $\mathcal{T}_t \subseteq \mathcal{S}_t$
6 Round report stop or go on?
7 Propose a class
Host compiles reports, forms $\mathcal{H}_1$
2 Offer ToolCards $\mathcal{S}_t$ for Φ_t
4 Execute batch $\mathcal{T}_t$ → packets p_τ
5 Preflight g_{ref} corroborative or advisory → ledger $\mathcal{E}_{t+1}$
8 Admit if class $\in \mathcal{H}_1$ and $\geq$1 round; else returned
The ledger $\mathcal{E}$ stores every packet with its role.
OUTPUTS
record $\mathcal{A}$
$\hat{y}$
deterministic
LLM reasoning
contextual evidence
output
forward execution
passed on as context
host returns to the Judge