



**Tutorials** (<https://www.vogella.com/tutorials/>)  
(<https://www.vogella.com/>)

**Consulting** (<https://www.vogella.com/consulting/>)

**Training** (<https://www.vogella.com/training/>)

**Company** (<https://www.vogella.com/company/>)

# Git - Tutorial

Lars Vogel (c) 2009-2019 vogella GmbH – Version Unspecified,

**Contact us** (<https://www.vogella.com/contact.html>)

*This tutorial explains the usage of the distributed version control system Git via the command line. The examples were done on Linux (Ubuntu), but should also work on other operating systems like Microsoft Windows.*

Learn more in the Learning Portal. Check out our

**Git Online Training** !

(<https://learn.vogella.com/courses/details/git-version-control-system>)

1. Introduction into version control systems
  - 1.1. What is a version control system?
  - 1.2. Localized and centralized version control systems
  - 1.3. Distributed version control systems
2. Introduction into Git
  - 2.1. What is Git?
  - 2.2. Git repositories
  - 2.3. Working tree
  - 2.4. Adding to a Git repository via staging and committing
  - 2.5. Synchronizing with other Git repositories (remote repositories)
  - 2.6. The concept of branches
  - 2.7. Summary of the core Git terminology
3. The details of the commit objects
  - 3.1. Commit object (commit)
  - 3.2. Technical details of a commit object
  - 3.3. Hash and abbreviated commit hash
4. Commit references
  - 4.1. Predecessor commits, parents and commit references
  - 4.2. Branch references and the HEAD reference
  - 4.3. Parent and ancestor commits
  - 4.4. Using caret and tilde for commit references
  - 4.5. Commit ranges with the double dot operator
  - 4.6. Commit ranges with the triple dot operator
5. Git tooling

## VOGELLA COMMERCIAL OFFERINGS

- [Read Pre](#)  
[Content..](#)  
(<https://lea>)
- [Book Ons](#)  
(<https://wv>)
- [Consultin](#)  
(<https://wv>)

## TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(<https://wv>)



**Tutorials** (<https://www.vogella.com/tutorials/>) **Training** (<https://www.vogella.com/training/>) **Search** (<https://www.vogella.com/search/>)

**Consulting** (<https://www.vogella.com/consulting/>) **Company** (<https://www.vogella.com/company/>)

**Contact us** (<https://www.vogella.com/contact.html>)

- 5.3. Eclipse IDE
- 5.4. Other graphical tools for Git
6. Installation of the Git command line tooling
  - 6.1. Ubuntu, Debian and derived systems
  - 6.2. Fedora, Red Hat and derived systems
  - 6.3. Other Linux systems
  - 6.4. Windows
  - 6.5. Mac OS
7. Git configuration
  - 7.1. Git configuration levels
  - 7.2. User credential configuration
  - 7.3. Push configuration
  - 7.4. Avoid merge commits for pulling
  - 7.5. Allow rebasing with uncommitted changes
  - 7.6. Color Highlighting
  - 7.7. Setting the default editor
  - 7.8. Setting the default merge tool
  - 7.9. More settings
  - 7.10. Query Git settings
8. Configure files and directories to ignore
  - 8.1. Ignoring files and directories with a .gitignore file
  - 8.2. Stop tracking files based on the .gitignore file
  - 8.3. Global (cross-repository) .gitignore settings
  - 8.4. Local per-repository ignore rules
  - 8.5. Tracking empty directories with Git
9. Exercise: Setting up Git via the command line
10. Exercise: Performing a local Git workflow via the command line
  - 10.1. Create a directory
  - 10.2. Create a new Git repository
  - 10.3. Create new content
  - 10.4. See the current status of your repository
  - 10.5. Add changes to the staging area
  - 10.6. Change files that are staged
  - 10.7. Commit staged changes to the repository
  - 10.8. Viewing the Git commit history
  - 10.9. Viewing the changes of a commit
  - 10.10. Review the resulting directory structure
  - 10.11. Remove files
  - 10.12. Revert changes in files in the working tree
  - 10.13. Correct the changes of the commit with git amend
  - 10.14. Ignore files and directories with the .gitignore file
  - 10.15. Commit the .gitignore file
11. Remote repositories
  - 11.1. What are remotes?

## VOGELLA COMMERCIAL OFFERINGS

- [Read Preparing Content ..](#)  
(<https://leaa.vogella.com/>)
- [Book Online Training](#)  
(<https://www.vogella.com/training/>)
- [Consulting](#)  
(<https://www.vogella.com/consulting/>)

## TRAINING EVENTS

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(<https://www.vogella.com/training/eclipse-r-schulung-hamburg/>)



**Tutorials** (<https://www.vogella.com/tutorials/>) **Training** (<https://www.vogella.com/training/>) **Search**

(<https://www.vogella.com/>)

**Consulting** (<https://www.vogella.com/consulting/>) **Company** (<https://www.vogella.com/company/>)

**Contact us** (<https://www.vogella.com/contact.html>)

- 11.4. Cloning a repository
- 11.5. Adding remote repositories
- 11.6. Rename remote repositories
- 11.7. Remote operations via HTTP
- 11.8. Using a proxy
- 11.9. Adding a remote repository
- 11.10. Synchronizing with remote repositories
- 11.11. Show the existing remotes
- 11.12. Push changes to another repository
- 11.13. Pull changes from a remote repository
- 12. Exercise: Working with a (local) remote repository
  - 12.1. Create a bare Git repository via the clone operation
  - 12.2. Exercise: Clone your bare repository
  - 12.3. Exercise: Using the push command
  - 12.4. Exercise: Using the pull command
- 13. Using Branches
  - 13.1. What are branches?
  - 13.2. List available branches
  - 13.3. Create new branch
  - 13.4. Checkout branch
  - 13.5. Rename a branch
  - 13.6. Delete a branch
  - 13.7. Push changes of a branch to a remote repository
  - 13.8. Switching branches with untracked files
  - 13.9. Switching branches with uncommitted changes
  - 13.10. Differences between branches
- 14. Using tags in Git
- 15. Using Tags
  - 15.1. Creating signed tags
  - 15.2. Checkout tags
  - 15.3. Push tags
  - 15.4. Delete tags
  - 15.5. Search by pattern for a tag
  - 15.6. Using tags for software releases
  - 15.7. Creating of a release log based on tags
- 16. Comparing changes
  - 16.1. Listing changed files
  - 16.2. Example: Using git status
  - 16.3. Using git diff
- 17. Analyzing the commit history with git log
  - 17.1. Using git log
  - 17.2. Helpful parameters for git log
  - 17.3. View the change history of a file
  - 17.4. Configuring output format
  - 17.5. Filtering based on the commit message via regular expressions

## VOGELLA COMMERCIAL OFFERINGS

- [Read Preparing Content ..](#)  
(<https://leaver.me>)
- [Book Online](#)  
(<https://www.vogella.com/training/>)
- [Consulting](#)  
(<https://www.vogella.com/consulting/>)

## TRAINING EVENTS

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(<https://www.vogella.com/training/>)



**Tutorials** (<https://www.vogella.com/tutorials/>) **Training** (<https://www.vogella.com/training/>) **Search**

(<https://www.vogella.com/>)

**Consulting** (<https://www.vogella.com/consulting/>) **Company** (<https://www.vogella.com/company/>)

**Contact us** (<https://www.vogella.com/contact.html>)

- 18.1. See the differences introduced by a commit
- 18.2. See the difference between two commits
- 18.3. See the files changed by a commit
19. Using the Git blame command
  - 19.1. Analyzing line changes with git blame
  - 19.2. Example: git blame
20. Commit history of a repository or certain files
21. git shortlog for release announcements
22. Stashing changes in Git
  - 22.1. The git stash command
  - 22.2. When to use git stash
  - 22.3. Example: Using the git stash command
  - 22.4. Create a branch from a stash
23. Remove untracked files with git clean
  - 23.1. Removing untracked files
  - 23.2. Example: Using git clean
24. Revert uncommitted changes in tracked files
  - 24.1. Use cases
  - 24.2. Remove staged changes from the staging area
  - 24.3. Remove changes in the working tree
  - 24.4. Remove changes in the working tree and the staging area
  - 24.5. Remove staging area based on last commit change
25. Using Git reset
  - 25.1. Moving the HEAD and branch pointer
  - 25.2. Not moving the HEAD pointer with git reset
26. Resetting changes with git reset
  - 26.1. Finding commits that are no longer visible on a branch
27. Deleting changes in the working tree and staging area for tracked files
  - 27.1. Using git reset to squash commits
28. Retrieving files from the history
  - 28.1. View file in different revision
  - 28.2. Restore a deleted file in a Git repo
29. See which commit deleted a file
30. Revert commits
  - 30.1. Reverting a commit
  - 30.2. Example: Reverting a commit
31. Resetting the working tree based on a commit
  - 31.1. Checkout based on commits and working tree
  - 31.2. Example: Checkout a commit
32. Recovering lost commits
  - 32.1. Detached HEAD
  - 32.2. git reflog
  - 32.3. Example
33. Remote and local tracking branches

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Preparing Content ..](#)  
(<https://leaver.me/>)
- [Book Online](#)  
(<https://www.vogella.com/>)
- [Consulting](#)  
(<https://www.vogella.com/>)

TRAINING EVENTS

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(<https://www.vogella.com/>)



**Tutorials** (<https://www.vogella.com/tutorials/>) **Training** (<https://www.vogella.com/training/>) **Search** (<https://www.vogella.com/search/>)  
**Consulting** (<https://www.vogella.com/consulting/>) **Company** (<https://www.vogella.com/company/>)

**Contact us** (<https://www.vogella.com/contact.html>)

- 33.5. Tracking branches
- 34. Updating your remote-tracking branches with git fetch
  - 34.1. Fetch
  - 34.2. Fetch from all remote repositories
  - 34.3. Compare remote-tracking branch with local branch
  - 34.4. Rebase your local branch onto the remote-tracking branch
  - 34.5. Fetch compared with pull
- 35. Merging
  - 35.1. Fast-forward merge
  - 35.2. Merge commit
  - 35.3. Merge strategies - Octopus, Subtree, Ours
  - 35.4. Using the git merge command
  - 35.5. Specifying merge strategies
  - 35.6. Specifying parameters for the default merge strategy
  - 35.7. Enforcing the creation of a merge commit
- 36. Rebasing branches
  - 36.1. Rebasing branches
  - 36.2. Good practice for rebase
  - 36.3. Example for a rebase
- 37. Editing history with the interactive rebase
  - 37.1. Example: Interactive rebase
- 38. Using the Git cherry-pick command
  - 38.1. Applying a single commit with cherry-pick
  - 38.2. Example: Using cherry-pick
- 39. Solving merge conflicts
  - 39.1. What is a conflict during a merge operation?
- 40. Keep a version of a file during a merge conflict
- 41. Example: Solving a conflict during a merge operation
  - 41.1. Create a conflict
  - 41.2. Review the conflict in the file
  - 41.3. Solve a conflict in a file
- 42. Solving rebase conflicts
  - 42.1. What is a conflict during a rebase operation?
- 43. Handling a conflict during a rebase operation
- 44. Aborting a rebase operation
- 45. Picking theirs or ours for conflicting file
- 46. Define alias
  - 46.1. Using an alias
  - 46.2. Alias examples
- 47. Error search with git bisect
  - 47.1. Using git bisect
  - 47.2. git bisect example
- 48. Rewriting commit history with git filter-branch
  - 48.1. Using the git filter branch command (filter-branch)
  - 48.2. filter-branch examples

## VOGELLA COMMERCIAL OFFERINGS

- [Read Preparing for Production](#) (<https://leanpub.com/vogella-git>)
- [Book Online Training](#) (<https://www.vogella.com/training/>)
- [Consulting](#) (<https://www.vogella.com/consulting/>)

## TRAINING EVENTS

- [Eclipse RCP Schulung Hamburg](#) (<https://www.vogella.com/training/eclipse-rcp-schulung-hamburg/>)



**Tutorials** (<https://www.vogella.com/tutorials/>) **Training** (<https://www.vogella.com/training/>) **Search**

(<https://www.vogella.com/>)

49.2. Create and apply patches

49.3. Create a patch for a selected commit

**Consulting** (<https://www.vogella.com/consulting/>) **Company** (<https://www.vogella.com/company/>)

50. Git commit and other hooks

50.1. Usage of Git hooks

50.2. Client and server side commit hooks

50.3. Restrictions

51. Handling line endings on different platforms

51.1. Line endings of the different platforms

51.2. Configuring line ending settings as developer

51.3. Configuring line ending settings per repository

52. Migrating from SVN

53. Frequently asked questions

53.1. Can Git handle symlinks?

54. Further reading on Git

55. Get this tutorial as book

56. Links and Literature

57. vogella training and consulting support

Appendix A: Copyright, License and Source code

**Contact us** (<https://www.vogella.com/contact.html>)

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(<https://lea>)
- [Book Ons](#)  
(<https://wv>)
- [Consultin](#)  
(<https://wv>)

TRAINING EV


- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(<https://wv>)

## 1. Introduction into version control systems

### 1.1. What is a version control system?

A version control system (VCS) allows you to track the history of a collection of files. It supports creating different versions of this collection. Each version captures a snapshot of the files at a certain point in time and the VCS allows you to switch between these versions. These versions are stored in a specific place, typically called a *repository*.

You may, for example, revert the collection of files to a state from 2 days ago. Or you may switch between versions of your files for experimental features. The process of creating different versions (snapshots) in the repository is depicted in the following graphic. Please note that this picture fits primarily to Git. Other version control systems like *Concurrent Versions System* (CVS) don't create snapshots of the files but store file deltas.

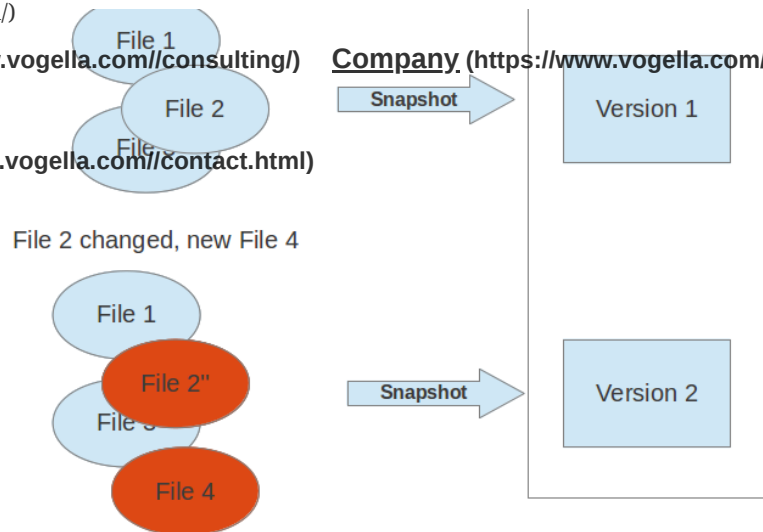

## VOGELLA COMMERCIAL OFFERINGS

- [Read Preferences](https://www.vogella.com/read-preferences/)  
(https://www.vogella.com/read-preferences/)
- [Book Oversight](https://www.vogella.com/book-oversight/)  
(https://www.vogella.com/book-oversight/)
- [Consulting](https://www.vogella.com/consulting/)  
(https://www.vogella.com/consulting/)

## TRAINING EVENTS

- [Eclipse R Schulung Hamburg](https://www.vogella.com/eclipse-rschulung-hamburg/)  
(https://www.vogella.com/eclipse-rschulung-hamburg/)

VCS are typically used to track changes in text files. These text files can for example be source code for a programming language, HTML or configuration files. Of course, version control systems are not limited to text files, they can also handle other types of files. For example, you may use a VCS to track the different versions of a png file.

## 1.2. Localized and centralized version control systems

A localized version control system keeps local copies of the files. This approach can be as simple as creating a manual copy of the relevant files.

A centralized version control system provides a server software component which stores and manages the different versions of the files. A developer can copy (checkout) a certain version from the central server onto their individual computer.

Both approaches have the drawback that they have one single point of failure. In a localized version control systems it is the individual computer and in a centralized version control systems it is the server machine. Both system makes it also harder to work in parallel on different features.

## 1.3. Distributed version control systems

In a distributed version control system each user has a complete local copy of a repository on his individual computer. The user can copy an existing repository. This copying process is typically called *cloning* and the resulting repository can be referred to as a *clone*.


Every clone contains the full history of the collection of files and a cloned repository has the same functionality as the original repository.



**Tutorials** (<https://www.vogella.com/tutorials/>) **Training** (<https://www.vogella.com/training/>) **Search**

**Consulting** (<https://www.vogella.com/consulting/>) **Company** (<https://www.vogella.com/company/>)

A repository running on a server which is, unlike the local machine of a developer, always online. Typically, there is a central server for keeping a repository but each cloned repository is a full copy of this repository. The decision which of the copies is considered to be the central server repository is pure convention.

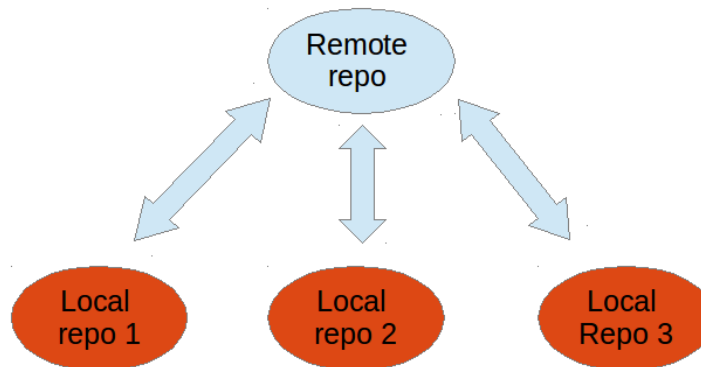

## 2. Introduction into Git

### 2.1. What is Git?

Git is currently the most popular implementation of a distributed version control system.

Git originates from the Linux kernel development and was founded in 2005 by Linus Torvalds. Nowadays it is used by many popular open source projects, e.g., the Android or the Eclipse developer teams, as well as many commercial organizations.

The core of Git was originally written in the programming language C, but Git has also been re-implemented in other languages, e.g., Java, Ruby and Python.

### 2.2. Git repositories

A Git repository contains the history of a collection of files starting from a certain directory. The process of copying an existing Git repository via the Git tooling is called *cloning*. After cloning a repository the user has the complete repository with its history on his local machine. Of course, Git also supports the creation of new repositories.

If you want to delete a Git repository, you can simply delete the folder which contains the repository.

If you clone a Git repository, by default, Git assumes that you want to work in this repository as a user. Git also supports the creation of repositories targeting the usage on a server.

## VOGELLA COMMERCIAL OFFERINGS

- [Read Pre-Content ..](#)  
(<https://le>)
- [Book On ..](#)  
(<https://wv>)
- [Consultin ..](#)  
(<https://wv>)

## TRAINING EV

- [Eclipse R ..](#)  
[Schulung ..](#)  
[Hamburg ..](#)  
(<https://wv>)





[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[\(https://www.vogella.com/\)](https://www.vogella.com/) not allow the user to modify locally files and to create new

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/) [versions for the repository based on these modifications](https://www.vogella.com/contact.html)

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

- *non-bare repositories* target the user. They allow you to create new changes through modification of files and to create new versions in the repository. This is the default type which is created if you do not specify any parameter during the clone operation.

A *local non-bare Git repository* is typically called *local repository*.

## 2.3. Working tree

A local repository provides at least one collection of files which originate from a certain version of the repository. This collection of files is called the *working tree*. It corresponds to a checkout of one version of the repository with potential changes done by the user.

The user can change the files in the *working tree* by modifying existing files and by creating and removing files.

A file in the working tree of a Git repository can have different states. These states are the following:

- *untracked*: the file is not tracked by the Git repository. This means that the file never staged nor committed.
- *tracked*: committed and not staged
- *staged*: staged to be included in the next commit
- *dirty / modified*: the file has changed but the change is not staged

After doing changes in the working tree, the user can add these changes to the Git repository or revert these changes.

## 2.4. Adding to a Git repository via staging and committing

After modifying your *working tree* you need to perform the following two steps to persist these changes in your local repository:

- add the selected changes to the *staging area* (also known as *index*) via the `git add` command
- commit the staged changes into the Git repository via the `git commit` command

This process is depicted in the following graphic.

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre-Content ..](#)  
(https://lea
- [Book Ons](#)  
(https://wv
- [Consultin](#)  
(https://wv

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv




[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[\(https://www.vogella.com/\)](https://www.vogella.com/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/)

[Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

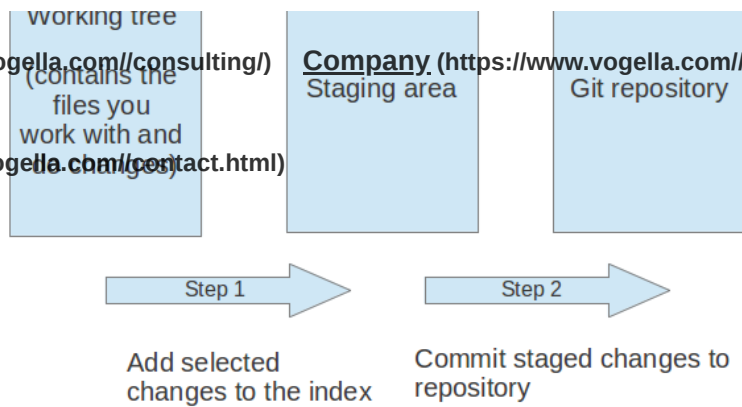

The `git add` command stores a snapshot of the specified files in the staging area. It allows you to incrementally modify files, stage them, modify and stage them again until you are satisfied with your changes.

Some tools and Git user prefer the usage of the *index* instead of staging area. Both terms mean the same thing.

After adding the selected files to the staging area, you can *commit* these files to add them permanently to the Git repository. *Committing* creates a new persistent snapshot (called *commit* or *commit object*) of the staging area in the Git repository. A commit object, like all objects in Git, is immutable.

The *staging area* keeps track of the snapshots of the files until the staged changes are committed.

For committing the staged changes you use the `git commit` command.

If you commit changes to your Git repository, you create a new *commit object* in the Git repository. See *Commit object (commit)* for information about the commit object.

## 2.5. Synchronizing with other Git repositories (remote repositories)

Git allows the user to synchronize the local repository with other (remote) repositories.

Users with sufficient authorization can send new version in their local repository to remote repositories via the *push* operation. They can also integrate changes from other repositories into their local repository via the *fetch* and *pull* operation.

## 2.6. The concept of branches


Git supports *branching* which means that you can work on different versions of your collection of files. A branch allows the user to switch between these versions so that he can work on different

### VOGELLA COMMERCIAL OFFERINGS

- [Read Preparing Content .. \(https://leavogella.com/\)](#)
- [Book Online \(https://www.vogella.com/\)](#)
- [Consulting \(https://www.vogella.com/consulting/\)](#)

### TRAINING EVENTS

- [Eclipse RMP \(https://www.vogella.com/training/eclipse-rmp/\)](#)
- [Schulung Hamburg \(https://www.vogella.com/training/schulung-hamburg/\)](#)



Tutorials (<https://www.vogella.com/tutorials/>)

Training (<https://www.vogella.com/training/>)

Search (<https://www.vogella.com/search/>)

Consulting (<https://www.vogella.com/consulting/>)

Company (<https://www.vogella.com/company/>)

Contact us (<https://www.vogella.com/contact.html>)

branch and make the changes in this branch. This does not affect the state of your files in other branches. For example, you can work independently on a branch called *production* for bugfixes and on *development* for implementing a new feature.

Branches in Git are local to the repository. A branch created in a local repository does not need to have a counterpart in a remote repository. Local branches can be compared with other local branches and with *remote-tracking* branches. A remote-tracking branch proxies the state of a branch in another remote repository.

Git supports the combination of changes from different branches. The developer can use Git commands to combine the changes at a later point in time.

### 2.7. Summary of the core Git terminology

The following table provides a summary of important *Git* terminology discussed in this section.

Table 1. Git terminology

Term	Definition
Branch	<p>A <i>branch</i> is a named pointer to a commit. Selecting a branch in Git terminology is called <i>to checkout</i> a branch. If you are working in a certain branch, the creation of a new commit advances this pointer to the newly created commit.</p> <p>Each commit knows their parents (predecessors). Successors are retrieved by traversing the commit graph starting from branches or other refs, symbolic references (for example: HEAD) or explicit commit objects. This way a branch defines its own line of descendants in the overall version graph formed by all commits in the repository.</p> <p>You can create a new branch from an existing one and change the code independently from other branches. One of the branches is the default (typically named <i>master</i> ). The default branch is the one for which a local branch is automatically created when cloning the repository.</p>

#### VOGELLA COMMERCIAL OFFERINGS

- [Read Pre-Release Content ..](#)  
(<https://leadr.com/vogella>)
- [Book Online Consulting](#)  
(<https://www.vogella.com/consulting/>)
- [Consulting](#)  
(<https://www.vogella.com/consulting/>)

#### TRAINING EVENTS

- [Eclipse RCP Development Schulung Hamburg](#)  
(<https://www.vogella.com/training/eclipse-rcp-development-schulung-hamburg/>)



	<p>When you commit your changes into a repository, this creates a new <i>commit object</i> in the Git repository. This <i>commit object</i> uniquely identifies a new revision of the content of the repository.</p> <p>This revision can be retrieved later, for example, if you want to see the source code of an older version. Each commit object contains the author and the committer. This makes it possible to identify who did the change. The author and committer might be different people. The author did the change and the committer applied the change to the Git repository. This is common for contributions to open source projects.</p>
HEAD	<p><i>HEAD</i> is a symbolic reference most often pointing to the currently checked out branch.</p> <p>Sometimes the <i>HEAD</i> points directly to a commit object, this is called <i>detached HEAD mode</i>. In that state creation of a commit will not move any branch.</p> <p>If you switch branches, the <i>HEAD</i> pointer points to the branch pointer which in turn points to a commit. If you checkout a specific commit, the <i>HEAD</i> points to this commit directly.</p>
Index	<p><i>Index</i> is an alternative term for the <i>staging area</i>.</p>
Repository	<p>A <i>repository</i> contains the history, the different versions over time and all different branches and tags. In Git each copy of the repository is a complete repository. If the repository is not a bare repository, it allows you to checkout revisions into your working tree and to capture changes by creating new commits. Bare repositories are only changed by transporting changes from other repositories.</p> <p>This description uses the term <i>repository</i> to talk about a non-bare repository. If it talks about a bare repository, this is explicitly mentioned.</p>

## VOGELLA COMMERCIAL OFFERINGS

- [Read Pre-Recorded Content ..](#) (https://le
- [Book Online Training](#) (https://wv
- [Consulting Services](#) (https://wv

## TRAINING EVENTS

- [Eclipse RMP Training](#) (https://wv



Revision	Represents a version of the source code. Git implements revisions as <i>commit objects</i> (or short <i>commits</i> ). These are identified by an SHA-1 hash.
Staging area	The <i>staging area</i> is the place to store changes in the working tree before the commit. The <i>staging area</i> contains a snapshot of the changes in the working tree (changed or new files) relevant to create the next commit and stores their mode (file type, executable bit).
Tag	<p>A <i>tag</i> points to a commit which uniquely identifies a version of the Git repository. With a tag, you can have a named point to which you can always revert to. You can revert to any point in a Git repository, but tags make it easier. The benefit of tags is to mark the repository for a specific reason, e.g., with a release.</p> <p>Branches and tags are named pointers, the difference is that branches move when a new commit is created while tags always point to the same commit. Tags can have a timestamp and a message associated with them.</p>
URL	A URL in Git determines the location of the repository. Git distinguishes between <i>fetchurl</i> for getting new data from other repositories and <i>pushurl</i> for pushing data to another repository.
Working tree	The <i>working tree</i> contains the set of working files for the repository. You can modify the content and commit the changes as new commits to the repository.

## VOGELLA COMMERCIAL OFFERINGS

- [Read Pre-Release Content ..](#)  
(https://le...
- [Book Online](#)  
(https://wv...
- [Consulting](#)  
(https://wv...

## TRAINING EVENTS

- [Eclipse RCP Schulung Hamburg](#)  
(https://wv...

## 3. The details of the commit objects

### 3.1. Commit object (commit)

Conceptually a commit object (short:commit) represents a version of all files tracked in the repository at the time the commit was created. Commits know their parent(s) and this way capture the version history of the repository.

### 3.2. Technical details of a commit object




[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/) [Directories \(https://www.vogella.com/directories/\)](https://www.vogella.com/directories/) [Complete history \(https://www.vogella.com/complete-history/\)](https://www.vogella.com/complete-history/) [Up to the new commit \(https://www.vogella.com/up-to-the-new-commit/\)](https://www.vogella.com/up-to-the-new-commit/) [Commit message \(https://www.vogella.com/commit-message/\)](https://www.vogella.com/commit-message/) [Several other factors \(https://www.vogella.com/several-other-factors/\)](https://www.vogella.com/several-other-factors/) [Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

This means that Git is safe, you cannot manipulate a file or the repository without Git noticing that corresponding hash does not fit anymore to the content.

The *commit object* points to the individual files in this commit via a *tree* object. The files are stored in the Git repository as *blob* objects and might be packed by Git for better performance and more compact storage. Blobs are addressed via their SHA-1 hash.

Packing involves storing changes as deltas, compression and storage of many objects in a single *pack file*. *Pack files* are accompanied by one or multiple index files which speedup access to individual objects stored in these packs.

A commit object is depicted in the following picture.

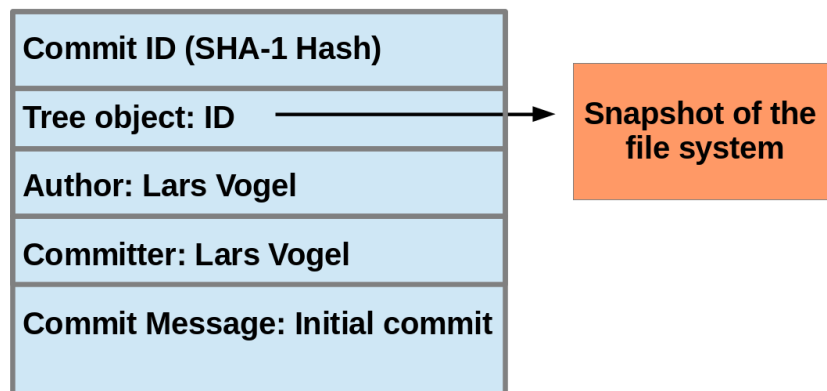

The above picture is simplified. Tree objects point to other tree objects and file blobs. Objects which didn't change between commits are reused by multiple commits.

### 3.3. Hash and abbreviated commit hash

A Git commit object is identified by its hash (SHA-1 checksum). SHA-1 produces a 160-bit (20-byte) hash value. A SHA-1 hash value is typically rendered as a hexadecimal number, 40 digits long.

In a typical Git repository you need fewer characters to uniquely identify a commit object. As a minimum you need 4 characters and in a typical Git repository 5 or 6 are sufficient. This short form is called the abbreviated commit hash or abbreviated hash. Sometimes it is also called the shortened SHA-1 or abbreviated SHA-1.

Several commands, e.g., the `git log` command can be instructed to use the shortened SHA-1 for their output.

## 4. Commit references

### VOGELLA COMMERCIAL OFFERINGS

- [Read Pre-Content ..](#) (https://lea)
- [Book Ons](#) (https://wv)
- [Consultin](#) (https://wv)

### TRAINING EV

- [Eclipse R](#)
- [Schulung](#)
- [Hamburg](#)
- (https://wv)




[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

## 4.1. Predecessor commits, parents and commit references

Each commit has zero or more direct predecessor commits. The first commit has zero parents, merge commits have two or more parents, most commits have one parent.

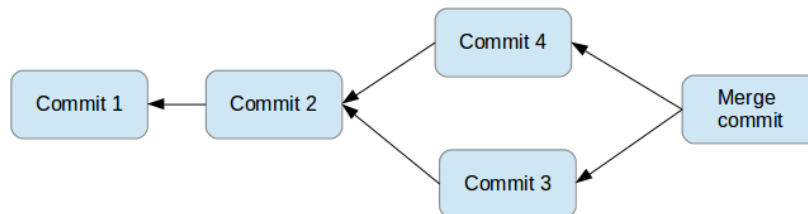

In Git you frequently want to refer to certain commits. For example, you want to tell Git to show you all changes which were done in the last three commits. Or you want to see the differences introduced between two different branches.

Git allows addressing commits via *commit reference* for this purpose.

A commit reference can be a *simple reference* (simple ref), in this case it points directly to a commit. This is the case for a commit hash or a tag. A commit reference can also be *symbolic reference* (symbolic ref, symref). In this case it points to another reference (either simple or symbolic). For example HEAD is a symbolic ref for a branch, if it points to a branch. HEAD points to the branch pointer and the branch pointer points to a commit.

## 4.2. Branch references and the HEAD reference

A branch points to a specific commit. You can use the branch name as reference to the corresponding commit. You can also use HEAD to reference the corresponding commit.

## 4.3. Parent and ancestor commits

You can use ^ (caret) and ~ (tilde) to reference predecessor commit objects from other references. You can also combine the ^ and ~ operators. See Using caret and tilde for commit references for their usage.

The Git terminology is *parent* for ^ and *ancestor* for ~.

## 4.4. Using caret and tilde for commit references

[reference]~1 describes the first predecessor of the commit object accessed via [reference]. [reference]~2 is the first predecessor of the first predecessor of the [reference] commit. [reference]~3 is the first

### VOGELLA COMMERCIAL OFFERINGS

- [Read Pre-Recorded Content.. \(https://leaprog.com/\)](#)
- [Book One-on-One Coaching \(https://www.vogella.com/coaching/\)](#)
- [Consulting \(https://www.vogella.com/consulting/\)](#)

### TRAINING EVENTS

- [Eclipse RMP Certification Schulung Hamburg \(https://www.vogella.com/training/eclipse-rmp-certification-schulung-hamburg/\)](#)





[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[\(https://www.vogella.com/\)](https://www.vogella.com/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)


[reference]~ is an abbreviation for [reference]^1.

For example, you can use the `HEAD~1` or `HEAD~` reference to access the first parent of the commit to which the `HEAD` pointer currently points.

[reference]^1 also describes the first predecessor of the commit object accessed via [reference].

For example `HEAD^` is the same as `HEAD~` and is the same as `HEAD~3`.

The difference is that [reference]^2 describes the second parent of a commit. A merge commit typically has two predecessors. `HEAD^3` means 'the third parent of a merge' and in most cases this won't exist (merges are generally between two commits, though more is possible).

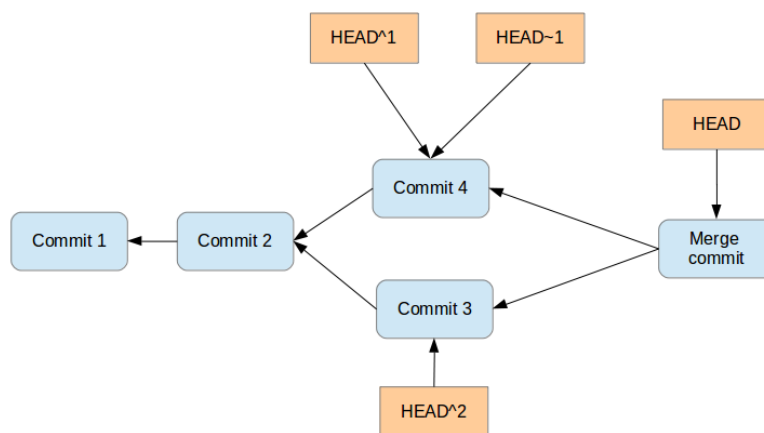

[reference]^ is an abbreviation for [reference]^1.

## 4.5. Commit ranges with the double dot operator

You can also specify ranges of commits. This is useful for certain Git commands, for example, for seeing the changes between a series of commits.

The double dot operator allows you to select all commits which are reachable from a commit `c2` but not from commit `c1`. The syntax for this is `c1..c2`. A commit `A` is reachable from another commit `B` if `A` is a direct or indirect parent of `B`.



Think of `c1..c2` as *all commits as of c1 (not including c1) until commit c2*.

For example, you can ask Git to show all commits which happened between `HEAD` and `HEAD~4`.

## VOGELLA COMMERCIAL OFFERINGS

- [Read Pre-Content..](#)  
(https://lea)
- [Book On..](#)  
(https://wv)
- [Consultin..](#)  
(https://wv)

## TRAINING EV

- [Eclipse R..](#)  
[Schulung..](#)  
[Hamburg..](#)  
(https://wv)





[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

This also works for branches. To list all commits which are in the *master* branch but not in the *testing* branch, use the following command.

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

```
git log testing..master
```

CONSOLE

You can also list all commits which are in the *testing* but not in the *master* branch.

```
git log master..testing
```

CONSOLE

## 4.6. Commit ranges with the triple dot operator

The triple dot operator allows you to select all commits which are reachable either from commit c1 or commit c2 but not from both of them.

This is useful to show all commits in two branches which have not yet been combined.

```
# show all commits which
# can be reached by master or testing
# but not both
git log master...testing
```

CONSOLE

## 5. Git tooling

### 5.1. The Git command line tools

The core Git development team provides tooling for the command line via the `git` command. Without any arguments, this command lists its options and the most common commands. You can get help for a certain Git command via the `help` command online option followed by the command.

```
git help [command to get help for]
```

See all possible commands, use the `git help --all` command.

Git supports for several commands a short and a long version, similar to other Unix commands. The short version uses a single hyphen and the long version uses two hyphen. The following two commands are equivalent.

```
git commit -m "This is a message"

git commit --message "This is a message"
```

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Preparing Content .. \(https://leavogella.com/\)](#)
- [Book Online \(https://www.vogella.com/training/\)](#)
- [Consulting \(https://www.vogella.com/consulting/\)](#)

TRAINING EVENTS

- [Eclipse R Hamburg \(https://www.vogella.com/training/eclipse-r-hamburg/\)](#)


[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/)
[Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/)
[Search](#)
[\(https://www.vogella.com/\)](https://www.vogella.com/)
[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/)
[Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)
[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

## 5.2. Separating parameters and file arguments in Git commands

The double hyphens (--) in Git separates out any references or other options from a path (usually file names). For example, HEAD has a special meaning in Git. Using double hyphens allows you to distinguish between looking at a file called HEAD from a Git commit reference called HEAD.

In case Git can determine the correct parameters and options automatically the double hyphens can be avoided.

```
# seeing the git log for the HEAD file
git log -- HEAD
```

CONSOLE

```
# seeing the git log for the HEAD reference
git log HEAD --
```

```
# if there is no HEAD file you can use HEAD as commit reference
git log HEAD
```

## 5.3. Eclipse IDE

The [Eclipse IDE \(https://www.eclipse.org/downloads/\)](https://www.eclipse.org/downloads/) provides excellent support for working with Git repositories.

See [Using Git with the Eclipse IDE](https://www.vogella.com/tutorials/EclipseGit/article.html)

(<https://www.vogella.com/tutorials/EclipseGit/article.html>) for an introduction into the usage of Git with Eclipse.

## 5.4. Other graphical tools for Git

You can also use graphical tools.

See [GUI Clients \(http://git-scm.com/downloads/guis\)](http://git-scm.com/downloads/guis) for an overview of other available tools. Graphical tools like Visual Studio Code, Netbeans or IntelliJ provide also integrated Git Tooling but are not covered in this description.

# 6. Installation of the Git command line tooling

## 6.1. Ubuntu, Debian and derived systems

On Ubuntu and similar systems you can install the Git command line tool via the following command:

```
sudo apt-get install git
```

CONSOLE

## 6.2. Fedora, Red Hat and derived systems

On Fedora, Red Hat and similar systems you can install the Git command line tool via the following command:

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(<https://lea>)
- [Book On](#)  
(<https://wv>)
- [Consultin](#)  
(<https://wv>)

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(<https://wv>)



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[\(https://www.vogella.com/\)](https://www.vogella.com/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/)

[Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

## 6.3. Other Linux systems

To install Git on other Linux distributions please check the documentation of your distribution. The following listing contains the commands for the most popular ones.

```
# Arch Linux
sudo pacman -S git

# Gentoo
sudo emerge -av git

# SUSE
sudo zypper install git
```

CONSOLE

## 6.4. Windows

A Windows version of Git can be found on the [Git download page](http://git-scm.com/downloads) (<http://git-scm.com/downloads>). This website provides native installers for each operating system. The homepage of the Windows Git project is [git for window](https://git-for-windows.github.io/) (<https://git-for-windows.github.io/>).

## 6.5. Mac OS

The easiest way to install Git on a Mac is via the [Git download page](http://git-scm.com/downloads) (<http://git-scm.com/downloads>) and to download and run the installer for Mac OS X.

Git is also installed by default with the Apple Developer Tools on Mac OS X.

# 7. Git configuration

## 7.1. Git configuration levels

The `git config` command allows you to configure your Git settings. These settings can be system wide, user or repository specific.

A more specific setting overwrites values in the previous level. A setting for the repository overrides the user setting and a user setting overrides a system wide setting.

### 7.1.1. Git system-wide configuration

You can provide a system wide configuration for your Git settings. A system wide configuration is not very common. Most settings are user specific or repository specific as described in the next chapters.

On a Unix based system, Git uses the `/etc/gitconfig` file for this system-wide configuration. To set this up, ensure you have sufficient rights, i.e. root rights, in your OS and use the `--system` option for the `git config` command.

### 7.1.2. Git user configuration

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(<https://lea>)
- [Book Ons](#)  
(<https://wv>)
- [Consultin](#)  
(<https://wv>)

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(<https://wv>)



**Tutorials** (<https://www.vogella.com/tutorials/>) **Training** (<https://www.vogella.com/training/>) **Search** (<https://www.vogella.com/search/>)

**Consulting** (<https://www.vogella.com/consulting/>) **Company** (<https://www.vogella.com/company/>)  
For example Git stores the committer and author of a change in each commit. This and additional information can be stored in the Git

**Contact us** (<https://www.vogella.com/contact.html>)

In each Git repository you can also configure the settings for this repository. User configuration is done if you include the `--global` option in the `git config` command.

### 7.1.3. Repository specific configuration

You can also store repository specific settings in the `.git/config` file of a repository. Use the `--local` or use no flag at all. If neither the `--system` not the `--global` parameter is used, the setting is specific for the current Git repository.

## 7.2. User credential configuration

You have to configure at least your user and email address to be able to commit to a Git repository because this information is stored in each commit.

```
# configure the user which will be used by Git
# this should be not an acronym but your full name
git config --global user.name "Firstname Lastname"

# configure the email address
git config --global user.email "your.email@example.org"
```

CONSOLE

## 7.3. Push configuration

If you are using Git in a version below 2.0 you should also execute the following command.

```
# set default so that only the current branch is pushed
git config --global push.default simple
```

CONSOLE

This configures Git so that the `git push` command pushes only the active branch to your Git remote repository. As of Git version 2.0 this is the default and therefore it is good practice to configure this behavior.

You learn about the push command in Push changes to another repository.

## 7.4. Avoid merge commits for pulling

By default, Git runs the `git fetch` followed by the `git merge` command if you use the `git pull` command. You can configure git to use `git rebase` instead of `git merge` for the pull command via the following setting.

### VOGELLA COMMERCIAL OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(<https://lea>)
- [Book Ons](#)  
(<https://wv>)
- [Consultin](#)  
(<https://wv>)

### TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(<https://wv>)



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/)  
(https://www.vogella.com/)

[Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)



This setting helps avoiding merge commits during the pull operation which synchronizes your Git repository with a remote repository. The author of this description always uses this setting for his Git repositories.

## 7.5. Allow rebasing with uncommitted changes

If you want Git to automatically save your uncommitted changes before a rebase you can activate autoStash. After the rebase is done your changes will get reapplied. For an explanation of `git stash` please see Stashing changes in Git.

```
git config --global rebase.autoStash true
```

CONSOLE



Before Git v2.6 `git pull --rebase` didn't respected this setting.

## 7.6. Color Highlighting

The following commands enables color highlighting for Git in the console.

```
git config --global color.ui auto
```

CONSOLE

## 7.7. Setting the default editor

By default Git uses the system default editor which is taken from the `VISUAL` or `EDITOR` environment variables if set. You can configure a different one via the following setting.

```
# setup vim as default editor for Git (Linux)
git config --global core.editor vim
```

CONSOLE

## 7.8. Setting the default merge tool

File conflicts might occur in Git during an operation which combines different versions of the same files. In this case the user can directly edit the file to resolve the conflict.

Git allows also to configure a merge tool for solving these conflicts. You have to use third party visual merge tools like `tortoisemerge`, `p4merge`, `kdifff3` etc. A Google search for these tools help you to install them on your platform. Keep in mind that such tools are not required, you can always edit the files directly in a text editor.

Once you have installed them you can set your selected tool as default merge tool with the following command.

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(https://lea
- [Book Ons](#)  
(https://wv
- [Consultin](#)  
(https://wv

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[\(https://www.vogella.com/\)](https://www.vogella.com/)

# to install it under Ubuntu use

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

## 7.9. More settings

All possible Git settings are described under the following link: [git-config manual page](https://www.kernel.org/pub/software/scm/git/docs/git-config.html)

(<https://www.kernel.org/pub/software/scm/git/docs/git-config.html>)

## 7.10. Query Git settings

To query your Git settings, execute the following command:

```
git config --list
```

CONSOLE

If you want to query the global settings you can use the following command.

```
git config --global --list
```

CONSOLE

# 8. Configure files and directories to ignore

## 8.1. Ignoring files and directories with a .gitignore file

Git can be configured to ignore certain files and directories for repository operations. This is configured via one or several `.gitignore` files. Typically, this file is located at the root of your Git repository but it can also be located in sub-directories. In the second case the defined rules are only valid for the sub-directory and below.

You can use certain wildcards in this file. `*` matches several characters. More patterns are possible and described under the following URL: [gitignore manpage](https://www.kernel.org/pub/software/scm/git/docs/gitignore.html)

(<https://www.kernel.org/pub/software/scm/git/docs/gitignore.html>)

For example, the following `.gitignore` file tells Git to ignore the `bin` and `target` directories and all files ending with a `~`.

```
# ignore all bin directories
# matches "bin" in any subfolder
bin/

# ignore all target directories
target/

# ignore all files ending with ~
*~
```

CONSOLE

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Preparing for Production](#) (https://le...
- [Book Online](#) (https://wv...
- [Consulting](#) (https://wv...

TRAINING EVENTS

- [Eclipse R](#)
- [Schulung](#)
- [Hamburg](#)
- (https://wv...



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)



The `gitignore` file tells Git to ignore the specified files in Git commands. You can still add ignored files to the *staging area* of the Git repository by using the `--force` parameter, i.e. with the `git add --force [paths]` command.

This is useful if you want to add, for example, auto-generated binaries, but you need to have a fine control about the version which is added and want to exclude them from the normal workflow.

It is good practice to commit the local `.gitignore` file into the Git repository so that everyone who clones this repository have it.

## 8.2. Stop tracking files based on the `.gitignore` file

Files that are tracked by Git are not automatically removed if you add them to a `.gitignore` file. Git never ignores files which are already tracked, so changes in the `.gitignore` file only affect new files. If you want to ignore files which are already tracked you need to explicitly remove them.

The following command demonstrates how to remove the `.metadata` directory and the `doNotTrackFile.txt` file from being tracked. This is example code, as you did not commit the corresponding files in your example, the command will not work in your Git repository.

CONSOLE

```
# remove directory .metadata from git repo
git rm -r --cached .metadata
# remove file test.txt from repo
git rm --cached doNotTrackFile.txt
```

Adding a file to the `.gitignore` file does not remove the file from the repository history. If the file should also be removed from the history, have a look at the `git filter-branch` command which allows you to rewrite the commit history. See Using the `git filter-branch` command (`filter-branch`) for details.

## 8.3. Global (cross-repository) `.gitignore` settings

You can also setup a global `.gitignore` file valid for all Git repositories via the `core.excludesfile` setting. The setup of this setting is demonstrated in the following code snippet.

### VOGELLA COMMERCIAL OFFERINGS

- [Read Pre-Recorded Content .. \(https://leaves.vogella.com/\)](#)
- [Book Online Trainings \(https://www.vogella.com/training/\)](#)
- [Consulting \(https://www.vogella.com/consulting/\)](#)

### TRAINING EVENTS

- [Eclipse RMP Schulung Hamburg \(https://www.vogella.com/training/eclipse-rmp-schulung-hamburg/\)](#)



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search](#)

[\(https://www.vogella.com/\)](https://www.vogella.com/) --

`touch .gitignore`

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

`# Exclude bin and .metadata directories`

`echo "bin" >> .gitignore`

`echo ".metadata" >> .gitignore`

`echo "*~" >> .gitignore`

`echo "target/" >> .gitignore`

`# for Mac`

`echo ".DS_Store" >> .gitignore`

`echo ".*" >> .gitignore`

`# Configure Git to use this file`

`# as global .gitignore`

`git config --global core.excludesfile ~/.gitignore`

The global `.gitignore` file is only locally available.

## 8.4. Local per-repository ignore rules

You can also create local per-repository rules by editing the `.git/info/exclude` file in your repository. These rules are not committed with the repository so they are not shared with others.

This allows you to exclude, for example, locally generated files.

## 8.5. Tracking empty directories with Git

Git ignores empty directories, i.e., it does not put them under version control. If you want to track an empty directory in your Git repository, it is a good practice to put a file called `.gitignore` in the directory. As the directory now contains a file, Git includes it into its version control mechanism.



The file could be called anything. Some people suggest to call the file `.gitkeep`. One problem with this approach is that `.gitkeep` is unlikely to be ignored by build systems. This may result in the `.gitkeep` file being copied to the output repository, which is typically not desired.

## 9. Exercise: Setting up Git via the command line

After the installation of the Git tooling for the command line you need to configure Git.

The minimum required information to use Git is the user name and the email which Git should use.

You also configure Git to use *rebase* during a pull operation which is also a common setting for Git.

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(https://lea
- [Book Ons](#)  
(https://wv
- [Consultin](#)  
(https://wv

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv





[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search](#)

[\(https://www.vogella.com/\)](https://www.vogella.com/) # configure the user which will be used by Git

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

# configure the email address

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html) git config --global user.email "your.email@example.org"

# use rebase instead of merge in the `git pull` command.  
# this avoids merge commits during the pull operation  
git config --global branch.autosetuprebase always

## 10. Exercise: Performing a local Git workflow via the command line

In this exercise, you learn how to create and work with a local Git repository.

Open a command shell for the operations. Some commands are Linux specific, e.g., appending to a file or creating a directory. Substitute these commands with the commands of your operating system. The comments (marked with #) before the commands explain the specific actions.

### 10.1. Create a directory

The following commands create an empty directory which is used later in this exercise to contain the working tree and the Git repository.

```
# switch to the home directory
cd

# create a directory and switch into it
mkdir repo01
cd repo01

# create a new directory
mkdir datafiles
```

CONSOLE

### 10.2. Create a new Git repository

You now create a new Git repository with a working tree.

Every Git repository is stored in the `.git` folder of the directory in which the Git repository has been created. This directory contains the complete history of the repository. The `.git/config` file contains the configuration for the repository.

Use the `git init` command to create a Git repository in the current directory. Git does not care whether you start with an empty directory or if it contains already files.

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Preparing Content..](#)  
(https://lea)
- [Book Online](#)  
(https://wv)
- [Consulting](#)  
(https://wv)

TRAINING EVENTS

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv)


[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/)
[Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/)
[Search](#)
[\(https://www.vogella.com/\)](https://www.vogella.com/)

```
# initialize the Git repository
```

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/)
[Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

```
git init
```

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

All files inside the repository folder, excluding the `.git` folder, are the *working tree* for a Git repository.

### 10.3. Create new content

Use the following commands to create several new files.

```
# switch to your Git repository
cd ~/repo01

# create an empty file in a new directory
touch datafiles/data.txt

# create a few files with content
ls > test01
echo "bar" > test02
echo "foo" > test03
```

CONSOLE

### 10.4. See the current status of your repository

The `git status` command shows the status of the working tree, i.e. which files have changed, which are staged and which are not part of the staging area. It also shows which files have conflicts and gives an indication what the user can do with these changes, e.g., add them to the staging area or remove them, etc.

Run it via the following command.

```
git status
```

CONSOLE

The output looks similar to the following listing.

```
On branch master

Initial commit

Untracked files:
  (use "git add <file>..." to include in what will be
  committed)

    datafiles/
    test01
    test02
    test03

nothing added to commit but untracked files present (use "git
add" to track)
```

CONSOLE

### 10.5. Add changes to the staging area

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Preparing Content..](#)  
(https://lea)
- [Book Online](#)  
(https://wv)
- [Consulting](#)  
(https://wv)

TRAINING EVENTS

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv)



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/) [Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

git add . command allows adding changes in the file system to the staging area. It creates a snapshot of the affected files. You can add all changes to the staging area with the `.` option or changes in individual files but specifying a file pattern as option.

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

```
# add all files to the index of the Git repository
git add .
```

CONSOLE

Afterwards run the `git status` command again to see the current status. The following listing shows the output of this command.

```
On branch master
```

CONSOLE

```
Initial commit
```

```
Changes to be committed:
```

```
(use "git rm --cached <file>..." to unstage)
```

```
new file:   datafiles/data.txt
new file:   test01
new file:   test02
new file:   test03
```

## 10.6. Change files that are staged

In case you change one of the staged files before committing, you need to add the changes again to the staging area, to commit the new changes. This is because Git creates a snapshot of the content of a staged file. All new changes must again be staged.

```
# append a string to the test03 file
echo "foo2" >> test03

# see the result
git status
```

CONSOLE

Validate that the new changes are not yet staged.

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre-Release Content..](#) (https://le...
- [Book Online](#) (https://wv...
- [Consulting](#) (https://wv...

TRAINING EV

- [Eclipse R](#)
- [Schulung](#)
- [Hamburg](#) (https://wv...



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

Initial commit

Changes to be committed:

(use "git rm --cached <file>..." to unstage)

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

```
new file:   datafiles/data.txt
new file:   test01
new file:   test02
new file:   test03
```

Changes not staged for commit:

(use "git add <file>..." to update what will be committed)

(use "git checkout -- <file>..." to discard changes in working directory)

```
modified:   test03
```

Add the new changes to the staging area.

```
# add all files to the index of the Git repository
git add .
```

CONSOLE

Use the `git status` command again to see that all changes are staged.

On branch master

CONSOLE

Initial commit

Changes to be committed:

(use "git rm --cached <file>..." to unstage)

```
new file:   datafiles/data.txt
new file:   test01
new file:   test02
new file:   test03
```

## 10.7. Commit staged changes to the repository

After adding the files to the Git staging area, you can commit them to the Git repository with the `git commit` command. This creates a new commit object with the staged changes in the Git repository and the HEAD reference points to the new commit. The `-m` parameter (or its long version: `--message`) allows you to specify the commit message. If you leave this parameter out, your default editor is started and you can enter the message in the editor.

```
# commit your file to the local repository
git commit -m "Initial commit"
```

CONSOLE

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre-Recorded Content..](#) (https://le...
- [Book Online Courses](#) (https://wv...
- [Consulting Services](#) (https://wv...

TRAINING EVENTS

- [Eclipse RCP Development Schulung Hamburg](#) (https://wv...


[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/)
[Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/)
[Search](#)
[\(https://www.vogella.com/\)](https://www.vogella.com/)
[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/)
[Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)
[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

After you quit the mode you will be asked to provide a commit message in your editor.

```
git commit --interactive
```

TERMINAL

## 10.8. Viewing the Git commit history

The Git operations you performed have created a local Git repository in the `.git` folder and added all files to this repository via one commit. Run the `git log` command to see the history.

```
# show the Git log for the change
git log
```

CONSOLE

You see an output similar to the following.

```
commit 30605803fcbd507df36a3108945e02908c823828
Author: Lars Vogel <Lars.Vogel@vogella.com>
Date: Mon Dec 1 10:43:42 2014 +0100
```

CONSOLE

Initial commit

## 10.9. Viewing the changes of a commit

Use the `git show` command to see the changes of a commit. If you specify a commit reference as third parameter, this is used to determine the changes, otherwise the `HEAD` reference is used.

## 10.10. Review the resulting directory structure


Review the resulting directory structure. Your directory contains the Git repository as well as the Git working tree for your files. This directory structure is depicted in the following screenshot.

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre](#)  
[Content..](#)  
(https://lea
- [Book Ons](#)  
(https://wv
- [Consultin](#)  
(https://wv

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv

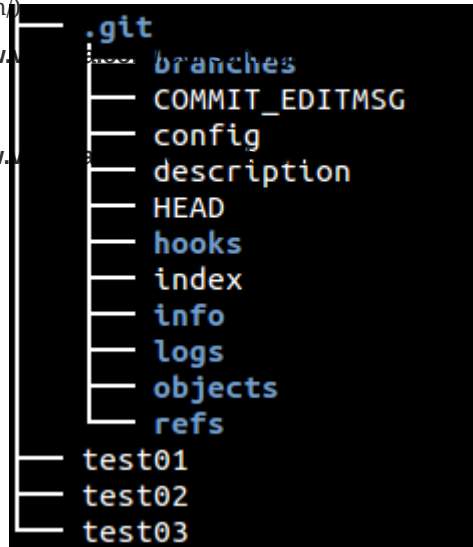

### 10.11. Remove files

If you delete a file, you use the `git rm` command to add the deletion of a file to the staging area.

```
# remove the "test03" file
rm test03
# add and commit the removal
git add .
# if you use Git version < 2.0 use: git add -A .
git commit -m "Removes the test03 file"
```

CONSOLE

Alternatively you can use the `git rm` command to delete the file from your working tree and record the deletion of the file in the staging area.

### 10.12. Revert changes in files in the working tree

Use the `git checkout` command to reset a tracked file (a file that was once staged or committed) to its latest staged or commit state. The command removes the changes of the file in the working tree. This command cannot be applied to files which are not yet staged or committed.

```
echo "useless data" >> test02
echo "another unwanted file" >> unwantedfile.txt

# see the status
git status

# remove unwanted changes from the working tree
# CAREFUL this deletes the local changes in the tracked file
git checkout test02

# unwantedstaged.txt is not tracked by Git simply delete it
rm unwantedfile.txt
```

CONSOLE

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Preparing Content..](#)  
(https://le...
- [Book Online](#)  
(https://wv...
- [Consulting](#)  
(https://wv...

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv...



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

On branch master  
nothing to commit, working directory clean

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)



Use this command carefully. The `git checkout` command deletes the unstaged and uncommitted changes of tracked files in the working tree and it is not possible to restore this deletion via Git.

## 10.13. Correct the changes of the commit with `git amend`

The `git commit --amend` command makes it possible to rework the changes of the last commit. It creates a new commit with the adjusted changes.



The amended commit is still available until a clean-up job removes it. But it is not included in the `git log` output hence it does not distract the user. See `git reflog` for details.

Assume the last commit message was incorrect as it contained a typo. The following command corrects this via the `--amend` parameter.

```
# assuming you have something to commit
git commit -m "message with a typo here"
```

CONSOLE

```
# amend the last commit
git commit --amend -m "More changes - now correct"
```

CONSOLE

You should use the `git --amend` command only for commits which have not been pushed to a public branch of another Git repository. The `git --amend` command creates a new commit ID and people may have based their work already on the existing commit. If that would be the case, they would need to migrate their work based on the new commit.

## 10.14. Ignore files and directories with the `.gitignore` file

Create the following `.gitignore` file in the root of your Git directory to ignore the specified directory and file.

```
cd ~/repo01
touch .gitignore
echo ".metadata/" >> .gitignore
echo "doNotTrackFile.txt" >> .gitignore
```

CONSOLE

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Preparing for Production \(https://www.vogella.com/leap/\)](#)
- [Book One \(https://www.vogella.com/book-one/\)](#)
- [Consulting \(https://www.vogella.com/consulting/\)](#)

TRAINING EVENTS

- [Eclipse RCP Schulung Hamburg \(https://www.vogella.com/eclipse-rcp-schulung-hamburg/\)](#)



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[\(https://www.vogella.com/\)](https://www.vogella.com/)



[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

use your favorite text editor to create the file. This editor must save the file as plain text. Editors which do this are for example *gedit* under Ubuntu or *Notepad* under Windows.

The resulting file looks like the following listing.

```
.metadata/  
doNotTrackFile.txt
```

CONSOLE

## 10.15. Commit the .gitignore file

It is good practice to commit the `.gitignore` file into the Git repository. Use the following commands for this.

```
# add the .gitignore file to the staging area  
git add .gitignore  
# commit the change  
git commit -m "Adds .gitignore file"
```

CONSOLE

## 11. Remote repositories

### 11.1. What are remotes?

Git allows that you can synchronize your repository with more than one remote repository.

In the local repository you can address each remote repository by a shortcut. This shortcut is simply called *remote*. Such a *remote* repository point to another remote repository that can hosted on the Internet, locally or on the network.

You can specify properties for the remove, e.g. URL, branches to fetch or branches to push.



Think of *remotes* as shorter bookmarks for repositories. You can always connect to a remote repository if you know its URL and if you have access to it. Without *remotes* the user would have to type the URL for each and every command which communicates with another repository.

It is possible that users connect their individual repositories directly, but a typically Git workflow involves one or more remote repositories which are used to synchronize the individual repository. Typically the remote repository which is used for synchronization is located on a server which is always available.


## VOGELLA COMMERCIAL OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(https://lea
- [Book Ons](#)  
(https://wv
- [Consultin](#)  
(https://wv

## TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv



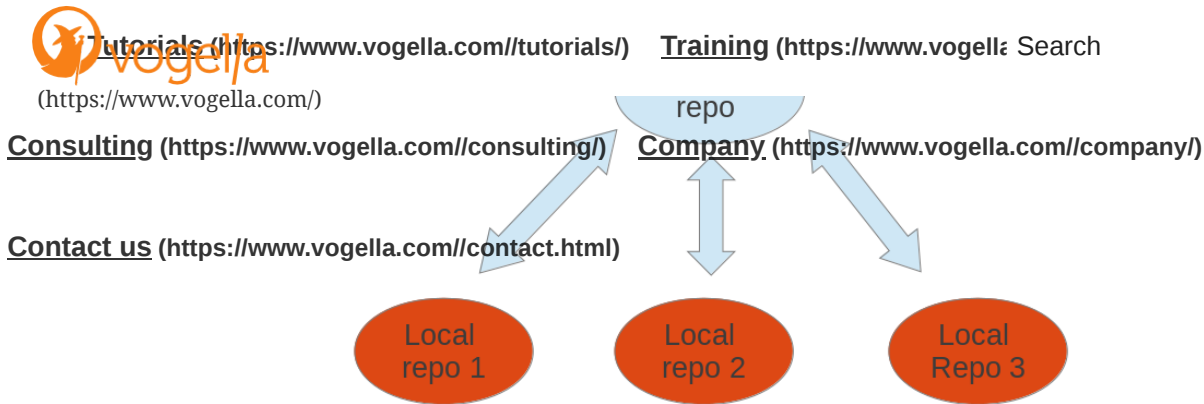

A remote repository can also be hosted in the local file system.

## 11.2. Bare repositories

A remote repository on a server typically does not require a *working tree*. A Git repository without a *working tree* is called a *bare repository*. You can create such a repository with the `--bare` option. The command to create a new empty bare remote repository is displayed below.

```
# create a bare repository
git init --bare
```

CONSOLE

By convention the name of a bare repository should end with the `.git` extension.

To create a bare Git repository in the Internet you would, for example, connect to your server via the SSH protocol or you use some Git hosting platform, e.g., GitHub.com.

## 11.3. Convert a Git repository to a bare repository

Converting a normal Git repository to a bare repository is not directly supported by Git.

You can convert it manually by moving the content of the `.git` folder into the root of the repository and by removing all other files from the working tree. Afterwards you need to update the Git repository configuration with the `git config core.bare true` command.

As this is officially not supported, you should prefer cloning a repository with the `--bare` option.

## 11.4. Cloning a repository

The `git clone` command copies an existing Git repository. This copy is a working Git repository with the complete history of the cloned repository. It can be used completely isolated from the original repository.

### VOGELLA COMMERCIAL OFFERINGS

- [Read Preparing Content ..](https://www.vogella.com/leaving.html) (https://leaving.html)
- [Book Online](https://www.vogella.com/books.html) (https://www.vogella.com/books.html)
- [Consulting](https://www.vogella.com/consulting.html) (https://www.vogella.com/consulting.html)

### TRAINING EVENTS

- [Eclipse R&D Schulung Hamburg](https://www.vogella.com/eclipse-training.html) (https://www.vogella.com/eclipse-training.html)



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search](https://www.vogella.com/search/)

[\(https://www.vogella.com/\)](https://www.vogella.com/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

The following command clones an existing repository using the Git protocol. The Git protocol uses the port 9148 which might be blocked by firewalls.

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

```
# switch to a new directory
mkdir ~/online
cd ~/online

# clone online repository
git clone git://github.com/vogella/gitbook.git
```

CONSOLE

If you have SSH access to a Git repository, you can also use the `ssh` protocol. The name preceding `@` is the user name used for the SSH connection.

```
# clone online repository
git clone ssh://git@github.com/vogella/gitbook.git

# older syntax
git clone git@github.com:vogella/gitbook.git
```

CONSOLE

Alternatively you could clone the same repository via the `http` protocol.

```
# the following will clone via HTTP
git clone http://github.com/vogella/gitbook.git
```

CONSOLE

## 11.5. Adding remote repositories

If you clone a repository, Git implicitly creates a *remote* named *origin* by default. The *origin remote* links back to the cloned repository.

You can push changes to this repository via `git push` as Git uses *origin* as default. Of course, pushing to a remote repository requires write access to this repository.

You can add more *remotes* via the `git remote add [name] [URL_to_Git_repo]` command. For example, if you cloned the repository from above via the Git protocol, you could add a new remote with the name *github\_http* for the `http` protocol via the following command.

```
# add the HTTPS protocol
git remote add github_http
https://vogella@github.com/vogella/gitbook.git
```

CONSOLE

## 11.6. Rename remote repositories

To rename an existing remote repository use the `git remote rename` command. This is demonstrated by the following listing.

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Preparing Content ..](#)  
(https://lea)
- [Book Online](#)  
(https://www)
- [Consulting](#)  
(https://www)

TRAINING EVENTS

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://www)



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

If you create a Git repository from scratch with the `git init` command, the *origin* remote is not created automatically.

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

## 11.7. Remote operations via HTTP

HTTP as Git protocol proxy support in Git It is possible to use the HTTP protocol to clone Git repositories. This is especially helpful if your firewall blocks everything except HTTP or HTTPS.

```
git clone
http://git.eclipse.org/gitroot/platform/eclipse.platform.ui.git
```

CONSOLE

For secured SSL encrypted communication you should use the SSH or HTTPS protocol in order to guarantee security.

## 11.8. Using a proxy

Git also provides support for HTTP access via a proxy server. The following Git command could, for example, clone a repository via HTTP and a proxy. You can either set the proxy variable in general for all applications or set it only for Git.

The following listing configures the proxy via environment variables.

```
# Linux and Mac
export http_proxy=http://proxy:8080
export https_proxy=https://proxy:8443

# Windows
set http_proxy http://proxy:8080
set https_proxy http://proxy:8080

git clone
http://git.eclipse.org/gitroot/platform/eclipse.platform.ui.git
```

CONSOLE

The following listing configures the proxy via Git config settings.

```
# set proxy for git globally
git config --global http.proxy http://proxy:8080
# to check the proxy settings
git config --get http.proxy
# just in case you need to you can also revoke the proxy
settings
git config --global --unset http.proxy
```

CONSOLE



Git is able to store different proxy configurations for different domains, see `core.gitProxy` in [Git config manpage \(http://git-scm.com/docs/git-config\)](http://git-scm.com/docs/git-config).

### VOGELLA COMMERCIAL OFFERINGS

- [Read Pre-Release Content.. \(https://leaves.vogella.com/\)](#)
- [Book Online Training \(https://www.vogella.com/training/\)](#)
- [Consulting \(https://www.vogella.com/consulting/\)](#)

### TRAINING EVENT

- [Eclipse RCP Schulung Hamburg \(https://www.vogella.com/training/eclipse-rcp-schulung-hamburg/\)](#)



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/) [Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/) [Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

## 11.9. Adding a remote repository

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

You add as many *remotes* to your repository as desired. For this you use the `git remote add` command.

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

You created a new Git repository from scratch earlier. Use the following command to add a remote to your new bare repository using the *origin* name.

```
# add ../remote-repository.git with the name origin
git remote add origin ../remote-repository.git
```

CONSOLE

## 11.10. Synchronizing with remote repositories

You can synchronize your local Git repository with remote repositories. These commands are covered in detail in later sections but the following command demonstrates how you can send changes to your remote repository.

```
# do some changes
echo "I added a remote repo" > test02

# commit
git commit -a -m "This is a test for the new remote origin"

# to push use the command:
# git push [target]
# default for [target] is origin
git push origin
```

CONSOLE

## 11.11. Show the existing remotes

To see the existing definitions of the remote repositories, use the following command.

```
# show the details of the remote repo called origin
git remote show origin
```

CONSOLE

To see the details of the *remotes*, e.g., the URL use the following command.

```
# show the existing defined remotes
git remote

# show details about the remotes
git remote -v
```

CONSOLE

## 11.12. Push changes to another repository

The `git push` command allows you to send data to other repositories. By default it sends data from your current branch to the same branch of the remote repository.

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Preparing Content .. \(https://le...](#)
- [Book Online \(https://wv...](#)
- [Consulting \(https://wv...](#)

TRAINING EVENTS

- [Eclipse R Schulung Hamburg \(https://wv...](#)



**Tutorials** (<https://www.vogella.com/tutorials/>) **Training** (<https://www.vogella.com/training/>) **Search** (<https://www.vogella.com/search/>) **Repository** (<https://www.vogella.com/repository/>) **Fast-forward merge** (<https://www.vogella.com/fast-forward-merge/>) **Fast-forward merge to learn about fast-forward merges** (<https://www.vogella.com/fast-forward-merge-to-learn-about-fast-forward-merges/>) **Consulting** (<https://www.vogella.com/consulting/>) **Company** (<https://www.vogella.com/company/>)

See Push changes of a branch to a remote repository for details on

**Contact us** (<https://www.vogella.com/contact.html>) **Git push manpage** (<https://www.kernel.org/pub/software/scm/git/docs/git-push.html>) for general

information.

## 11.13. Pull changes from a remote repository

The `git pull` command allows you to get the latest changes from another repository for the current branch.

The `git pull` command is actually a shortcut for `git fetch` followed by the `git merge` or the `git rebase` command depending on your configuration. In Avoid merge commits for pulling you configured your Git repository so that `git pull` is a fetch followed by a rebase. See Fetch for more information about the fetch command.

## 12. Exercise: Working with a (local) remote repository

This exercise is based on Exercise: Performing a local Git workflow via the command line. You now create a local bare repository based on your existing Git repository. In order to simplify the examples, the Git repository is hosted locally in the filesystem and not on a server in the Internet.

Afterwards you pull from and push to your bare repository to synchronize changes between your repositories.

### 12.1. Create a bare Git repository via the clone operation

Execute the following commands to create a bare repository based on your existing Git repository.

```
# switch to the first repository
cd ~/repo01

# create a new bare repository by cloning the first one
git clone --bare . ../remote-repository.git

# check the content of the git repo, it is similar
# to the .git directory in repo01
# files might be packed in the bare repository

ls ~/remote-repository.git
```

CONSOLE

### 12.2. Exercise: Clone your bare repository

Clone your bare repository and checkout a working tree in a new directory via the following commands.

## VOGELLA COMMERCIAL OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(<https://lea>)
- [Book Ons](#)  
(<https://wv>)
- [Consultin](#)  
(<https://wv>)

## TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(<https://wv>)


[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/)
[Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/)
[Search](#)
[\(https://www.vogella.com/\)](https://www.vogella.com/) --

```
# make new directory
```

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/)
[Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

```
# switch to new directory
```

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

```
# clone
```

```
git clone ../remote-repository.git .
```

### 12.3. Exercise: Using the push command

Make some changes in one of your non-bare local repositories and push them to your bare repository via the following commands.

CONSOLE

```
# make some changes in the first repository
cd ~/repo01

# make some changes in the file
echo "Hello, hello. Turn your radio on" > test01
echo "Bye, bye. Turn your radio off" > test02

# commit the changes, -a will commit changes for modified files
# but will not add automatically new files
git commit -a -m "Some changes"

# push the changes
git push ../remote-repository.git
```

### 12.4. Exercise: Using the pull command

To test the `git pull` in your example Git repositories, switch to other non-bare local repository. Pull in the recent changes from the remote repository. Afterwards make some changes and push them again to your remote repository.

CONSOLE

```
# switch to second directory
cd ~/repo02

# pull in the latest changes of your remote repository
git pull

# make changes
echo "A change" > test01

# commit the changes
git commit -a -m "A change"

# push changes to remote repository
# origin is automatically created as we cloned original from
this repository
git push origin
```

You can pull in the changes in your first example repository with the following commands.

#### VOGELLA COMMERCIAL OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(https://lea
- [Book On](#)  
(https://wv
- [Consultin](#)  
(https://wv

#### TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search](#)

(<https://www.vogella.com/>)

```
git pull ../remote-repository.git/
```

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

```
# check the changes
```

```
git status
```

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(<https://lea>)
- [Book Ons](#)  
(<https://wv>)
- [Consultin](#)  
(<https://wv>)

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(<https://wv>)

## 13. Using Branches

### 13.1. What are branches?

Git allows you to create *branches*, i.e. named pointers to commits. You can work on different branches independently from each other. The default branch is most often called *master*.

A branch pointer in Git is 41 bytes large, 40 bytes of characters and an additional new line character. Therefore, the creating of branches in Git is very fast and cheap in terms of resource consumption. Git encourages the usage of branches on a regular basis.

If you decide to work on a branch, you *checkout* this branch. This means that Git populates the *working tree* with the version of the files from the commit to which the branch points and moves the *HEAD* pointer to the new branch.

As explained in Summary of the core Git terminology *HEAD* is a symbolic reference usually pointing to the branch which is currently checked out.

### 13.2. List available branches

The `git branch` command lists all local branches. The currently active branch is marked with `*`.

```
# lists available branches
git branch
```

CONSOLE

If you want to see all branches (including remote-tracking branches), use the `-a` for the `git branch` command. See Remote tracking branches for information about remote-tracking branches.

```
# lists all branches including the remote branches
git branch -a
```

CONSOLE

The `-v` option lists more information about the branches.

In order to list branches in a remote repository use the `git branch -r` command as demonstrated in the following example.

```
# lists branches in the remote repositories
git branch -r
```

CONSOLE

### 13.3. Create new branch



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[FAQ \(https://www.vogella.com/faq/\)](https://www.vogella.com/faq/) [Remote \(https://www.vogella.com/remote/\)](https://www.vogella.com/remote/) [Local \(https://www.vogella.com/local/\)](https://www.vogella.com/local/) [Branch \(https://www.vogella.com/branch/\)](https://www.vogella.com/branch/) [Commit \(https://www.vogella.com/commit/\)](https://www.vogella.com/commit/) [HEAD \(https://www.vogella.com/head/\)](https://www.vogella.com/head/) [Reference \(https://www.vogella.com/reference/\)](https://www.vogella.com/reference/) [Points \(https://www.vogella.com/points/\)](https://www.vogella.com/points/) [Points \(https://www.vogella.com/points/\)](https://www.vogella.com/points/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/) [Points \(https://www.vogella.com/points/\)](https://www.vogella.com/points/) [Points \(https://www.vogella.com/points/\)](https://www.vogella.com/points/)

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

```
# syntax: git branch <name> <hash>
# <hash> in the above is optional
git branch testing
```

CONSOLE

## 13.4. Checkout branch

To start working in a branch you have to *checkout* the branch. If you *checkout* a branch, the HEAD pointer moves to the last commit in this branch and the files in the working tree are set to the state of this commit.

The following commands demonstrate how you switch to the branch called *testing*, perform some changes in this branch and switch back to the branch called *master*.

```
# switch to your new branch
git checkout testing

# do some changes
echo "Cool new feature in this branch" > test01
git commit -a -m "new feature"

# switch to the master branch
git checkout master

# check that the content of
# the test01 file is the old one
cat test01
```

CONSOLE

To create a branch and to switch to it at the same time you can use the `git checkout` command with the `-b` parameter.

```
# create branch and switch to it
git checkout -b bugreport12

# creates a new branch based on the master branch
# without the last commit
git checkout -b mybranch master~1
```

CONSOLE

## 13.5. Rename a branch

Renaming a branch can be done with the following command.

```
# rename branch
git branch -m [old_name] [new_name]
```

CONSOLE

## 13.6. Delete a branch

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(https://lea
- [Book Ons](#)  
(https://wv
- [Consultin](#)  
(https://wv

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv





[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

Uncommitted changes if you did the previous examples step by step.  
Use force delete (uppercase -D) to delete it anyway.

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

```
# delete branch testing
git branch -D testing
# force delete testing
git branch -D testing
# check if branch has been deleted
git branch
```

CONSOLE

## 13.7. Push changes of a branch to a remote repository

You can push the changes in a branch to a remote repository by specifying the target branch. This creates the target branch in the remote repository if it does not yet exist.

If you do not specify the remote repository, the `origin` is used as default

```
# push current branch to a branch called "testing" to remote repository
git push origin testing

# switch to the testing branch
git checkout testing

# some changes
echo "News for you" > test01
git commit -a -m "new feature in branch"

# push current HEAD to origin
git push

# make new branch
git branch anewbranch
# some changes
echo "More news for you" >> test01
git commit -a -m "a new commit in a feature branch"
# push anewbranch to the master in the origin
git push origin anewbranch:master

# get the changes into your local master
git checkout master
git pull
```

CONSOLE

This way you can decide which branches you want to push to other repositories and which should be local branches. You learn more about branches and remote repositories in Remote tracking branches.

## 13.8. Switching branches with untracked files

Untracked files (never added to the staging area) are unrelated to any branch. They exist only in the working tree and are ignored by Git until they are committed to the Git repository. This allows you to

### VOGELLA COMMERCIAL OFFERINGS

- [Read Pre-Recorded Content .. \(https://leaproschool.com/\)](#)
- [Book Online Courses \(https://www.vogella.com/training/\)](#)
- [Consulting \(https://www.vogella.com/consulting/\)](#)

### TRAINING EVENTS

- [Eclipse RMP Hamburg \(https://www.vogella.com/training/eclipse-rmp-hamburg/\)](#)


[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/)
[Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/)
[Search](#)
[\(https://www.vogella.com/\)](https://www.vogella.com/)
[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/)
[Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

## 13.9. Switching branches with uncommitted changes

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

Similar to untracked files you can switch branches with unstaged or staged modifications which are not yet committed.

You can switch branches if the modifications do not conflict with the files from the branch.

If Git needs to modify a changed file during the checkout of a branch, the checkout fails with a `checkout conflict` error. This avoids that you lose changes in your files.

In this case the changes must be committed, reverted or stashed (see The git stash command). You can also always create a new branch based on the current HEAD.

### 13.10. Differences between branches

To see the difference between two branches you can use the following command.

```
# shows the differences between
# current head of master and your_branch

git diff master your_branch
```

CONSOLE

You can use commit ranges as described in Commit ranges with the double dot operator and Commit ranges with the triple dot operator. For example, if you compare a branch called *your\_branch* with the *master* branch the following command shows the changes in *your\_branch* and *master* since these branches diverged.

```
# shows the differences in your
# branch based on the common
# ancestor for both branches

git diff master...your_branch
```

CONSOLE

See Viewing changes with git diff and git show for more examples of the git diff command.

## 14. Using tags in Git

## 15. Using Tags

Git has the option to add additional metadata to commits. This can be used to document for example a commit which is used to perform a software release.

This is done via *tags*.

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(https://lea
- [Book On](#)  
(https://wv
- [Consultin](#)  
(https://wv

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search](#)

[\(https://www.vogella.com/\)](https://www.vogella.com/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

A *lightweight tag* is a named pointer to a commit, without any additional information about the tag. An *annotated tag* contains additional meta data:

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

- the name and email of the person who created the tag
- tagging message similar to a commit message
- the date of the tagging

Annotated tags can also be signed and verified with *GNU Privacy Guard (GPG)*.

You can list the available tags via the following command:

```
git tag
```

CONSOLE



### Creating lightweight tags

To create a lightweight tag don't use the `-m`, `-a` or `-s` option.

Lightweight tags in Git are sometimes used to identify the input for a build.

```
# create lightweight tag
git tag 1.7.1

# see the tag
git show 1.7.1
```

CONSOLE

You can create a new annotated tag via the `git tag -a` command. To specify the tag message, use the `-m` parameter. The following command tags the commit to which the current active HEAD points.

```
# create tag
git tag 1.6.1 -m 'Release 1.6.1'

# show the tag
git show 1.6.1
```

CONSOLE

You can also create tags for a certain commit id.

```
git tag 1.5.1 -m 'version 1.5' [commit id]
```

CONSOLE

## 15.1. Creating signed tags

You can use the option `-s` to create a signed tag. These tags are signed with *GNU Privacy Guard (GPG)* and can also be verified with GPG. For details on this please see the following URL: [Git tag](#)

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre-Release Content ..](#)  
(https://le...
- [Book Online](#)  
(https://wv...
- [Consulting](#)  
(https://wv...

TRAINING EVENTS

- [Eclipse RCP Schulung Hamburg](#)  
(https://wv...



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[\(https://www.vogella.com/\)](https://www.vogella.com/)

**15.2. Checkout tags**  
[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

If you want to use the code associated with the tag, use:

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

```
git checkout <tag_name>
```

CONSOLE



If you checkout a tag, you are in the *detached head mode* and commits created in this mode are harder to find after you checkout a branch again. See Detached HEAD for details.

### 15.3. Push tags

By default the `git push` command does not transfer tags to remote repositories. You explicitly have to push the tag with the following command.

```
# push a tag or branch called tagname
git push origin [tagname]

# to explicitly push a tag and not a branch
git push origin tag <tagname>

# push all tags
git push --tags
```

CONSOLE

### 15.4. Delete tags

You can delete tags with the `-d` parameter. This deletes the tag from your local repository. By default Git does not push tag deletions to a remote repository, you have to trigger that explicitly.

The following commands demonstrate how to push a tag deletion.

```
# delete tag locally
git tag -d 1.7.0

# delete tag in remote repository
# called origin
git push origin :refs/tags/1.7.0
```

CONSOLE

### 15.5. Search by pattern for a tag

You can use the `-l` parameter in the `git tag` command to search for a pattern in the tag.

```
git tag -l <pattern>
```

CONSOLE

### 15.6. Using tags for software releases

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre-release Content ..](#)  
(https://le...
- [Book Online](#)  
(https://wv...
- [Consulting](#)  
(https://wv...

TRAINING EVENTS

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv...



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search](https://www.vogella.com/search/)

[\(https://www.vogella.com/\)](https://www.vogella.com/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

Convention is that release tags are labeled based on the [major].[minor].[patch] naming scheme. These release tags follow the semantic versioning of the software release.

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

- the *patch* version is incremented if (only) backwards compatible bug fixes are introduced
- the *minor* version is incremented if backwards compatible functionality of the user of the public API are introduced
- the *major* version is incremented if incompatible changes are introduced in the public API

For example "1.0.0" or "v1.0.0".

If software build tools like Maven or Gradle are used, the released version should also follow the semantic versioning. In this case the tag is typically the same as the release version.

See [Semantic versioning \(http://semver.org/\)](http://semver.org/) for more information.

## 15.7. Creating of a release log based on tags

Git allows to list the commits between any reference; this includes tags.

This allows to create a release log, for example via the following commands.

```
# show log between two tags
git log tag1..tag1

# show shortlog between two tags
git shortlog tag1..tag1
```

CONSOLE

## 16. Comparing changes

### 16.1. Listing changed files

The `git status` command shows the current status of your repository and possible actions which you can perform.

It shows which files have changed, which are staged and which are not part of the staging area. It also shows which files have merge conflicts and gives an indication what the user can do with these changes, e.g., add them to the staging area or remove them, etc.



`git status -u` shows all untracked files. Otherwise, if you have a new directory with several files, only the directory is shown.

### 16.2. Example: Using git status

#### VOGELLA COMMERCIAL OFFERINGS

- [Read Pre-release Content ..](#)  
(https://le...
- [Book Online](#)  
(https://wv...
- [Consulting](#)  
(https://wv...

#### TRAINING EVENTS

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv...



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

```
# and have been committed in the past
echo "This is a new change to the file" > test01
echo "and this is another new change" > test02

# create a new file
ls > newfileanalysis.txt
```

Now use the status command.

```
git status
```

The output of the command looks like the following listing.

```
# On branch master
# Your branch is ahead of 'origin/master' by 1 commit.
#   (use "git push" to publish your local commits)
#
# Changes not staged for commit:
#   (use "git add <file>..." to update what will be committed)
#   (use "git checkout -- <file>..." to discard changes in
working directory)
#
#   modified:   test01
#   modified:   test02
#
# Untracked files:
#   (use "git add <file>..." to include in what will be
committed)
#
#   newfileanalysis.txt
no changes added to commit (use "git add" and/or "git commit -
a")
```

### 16.3. Using git diff

The `git diff` command allows you to compare changes between commits, the staging area and working tree, etc. Via an optional third parameter you can specify a path to filter the displayed changes path can be a file or directory `git diff [path]`.

The following example code demonstrate the usage of the `git diff` command.

*Make some changes in your working tree*

```
echo "This is a change" > test01
echo "and this is another change" > test02
```

*Use the git diff command*

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(https://lea
- [Book Ons](#)  
(https://wv
- [Consultin](#)  
(https://wv

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

```
git diff -- [file_reference]
```

4

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

- 1 shows the changes introduced in the working tree compared with the staging area
- 2 shows the differences between the staging area and the last commit
- 3 shows the differences introduced between two commits references
- 4 shows the differences introduced in the working tree compared with the staging area for [file\_reference]

## 17. Analyzing the commit history with git log

### 17.1. Using git log

The `git log` command shows the history of the Git repository. If no commit reference is specified it starts from the commit referred to by the HEAD pointer.

```
git log
```

CONSOLE

```
git log HEAD~10
```

1

```
git log COMMIT_REF
```

2

- 1 shows the history of commits starting from the HEAD~10 commit
- 2 shows the history of commits starting from the COMMIT\_REF commit

### 17.2. Helpful parameters for git log

The following gives an overview of useful parameters for the `git log` command.

```
git log --oneline
```

1

```
git log --abbrev-commit
```

2

```
git log --graph --oneline
```

3

```
git log --decorate
```

4

- 1 `--oneline` - fits the output of the `git log` command in one line. `--online` is a shorthand for "`--pretty=oneline --abbrev-commit`"

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(https://lea
- [Book Ons](#)  
(https://wv
- [Consultin](#)  
(https://wv

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv



Tutorials (<https://www.vogella.com/tutorials/>) Training (<https://www.vogella.com/training/>) Search

(<https://www.vogella.com/>)

Consulting (<https://www.vogella.com/consulting/>) Company (<https://www.vogella.com/company/>)

unique. This parameter uses 7 characters by default, but you can specify a number of characters by using the `abbrev=4`.

**Contact us** (<https://www.vogella.com/contact.html>) **graph** - draws a text-based graphical representation of the branches and the merge history of the Git repository.

**decorate** - adds symbolic pointers to the log output

For more options on the `git log` command see the [Git log manpage](https://www.kernel.org/pub/software/scm/git/docs/git-log.html) (<https://www.kernel.org/pub/software/scm/git/docs/git-log.html>).

## 17.3. View the change history of a file

To see changes in a file you can use the `-p` option in the `git log` command.

```
git log -- [file_reference]
git log -p -- [file_reference]
git log --follow -p -- [file_reference]
```

- 1 - shows the list of commits for this file
- 2 - the `-p` parameter triggers that the diffs of each commit is shown
- 3 - `--follow` allow include renames in the log output

## 17.4. Configuring output format

You can use the `--pretty` parameter to configure the output.

```
# command must be issued in one line, do not enter the line
break
git log --pretty=format:'%Cred%h%Creset %d%Creset %s
%Cgreen(%cr)
%C(bold blue)<an>%Creset' --abbrev-commit
```

This command creates the output.

```
(HEAD, master) Bug 441244 - Remove unnecessary (non-Javadoc) statements (15 hours ago) <Lars Vogel>
origin/master, origin/HEAD Bug 441244 - Remove unnecessary (non-Javadoc) statements (15 hours ago) <Lars Vogel>
Revert "Bug 443661 - Remove unused dependency to org.hamcrest and org.objenesis from gorg.eclipse.e4.ui.tests.css.swt" (19 hours ago) <Lars Vogel>
(tag: 120140902-1330) Bug 442255 - need to add pcode support for swt, launcher & resources (12 hours ago) <Steve Francisco>
Bug 438468 - [CSS] Move org.eclipse.e4.ui.tests.css.core tests to junit4 (12 hours ago) <Lars Vogel>
(RefX for Bug 372614 - ensure that the PerspectiveStack gets made visible again if it was minimized while empty... (26 hours ago) <Eric Hoffatt>
(tag: 120140902-8880) Bug 441244 - Remove unnecessary (non-Javadoc) statements (15 hours ago) <Lars Vogel>
Bug 441244 - Remove unnecessary (non-Javadoc) statements (15 hours ago) <Lars Vogel>
Bug 443661 - Remove unused dependency to org.hamcrest and org.objenesis from gorg.eclipse.e4.ui.tests.css.swt (31 hours ago) <Lars Vogel>
Bug 438468 - [Perspectives] Views without sash to resize and complete loss of views (1 days ago) <Eric Hoffatt>
Bug 442343 - Additional cleanup work in the JFace snippets (1 days ago) <Simon Scholz>
Bug 442278 - Use getStructuredSelection() from StructuredViewer in platform.ui code (1 days ago) <Simon Scholz>
Bug 425962 - [New Contributors] Remove (non-Javadoc) @see statements if @Override is used (1 days ago) <Simon Scholz>
Fixed SNOP11 error -> "Smart Heaps"
Bug 442343 - Additional cleanup work in the JFace snippets (1 days ago) <Lars Vogel>
Bug 442627 - Delete unused files from org.eclipse.ui.tests (1 days ago) <Lars Vogel>
Bug 440975 - Remove unused CoolbarPopupManager from WorkbenchActionBuilder (1 days ago) <Lars Vogel>
(lars) Bug 442777 - Add @Override and @Deprecated annotations to org.eclipse.ui.navigator (1 days ago) <Lars Vogel>
Bug 441116 - Update org.eclipse.ui.navigator to Java 1.0 (1 days ago) <Lars Vogel>
Fixed bug 442010: TVT Hebi: Command field must be LTR (1 days ago) <Markus Keller>
Bug 442278 - Use getStructuredSelection() from StructuredViewer in platform.ui code (1 days ago) <Lars Vogel>
Bug 442350 - Project settings for org.eclipse.ui.monitoring and org.eclipse.ui.monitoring.tests (1 days ago) <Lars Vogel>
Bug 442642 - Use skipTests Instead of maven.test.skip in parent pom for the Eclipse platform (1 days ago) <Lars Vogel>
```

You can define an alias for such a long command. See [Using an alias](#) for information how to define an alias.

## 17.5. Filtering based on the commit message via regular expressions

### VOGELLA COMMERCIAL OFFERINGS

- [Read Pre-Content ..](#) (<https://lea>)
- [Book Ons](#) (<https://wv>)
- [Consultin](#) (<https://wv>)

### TRAINING EV

- [Eclipse R](#)
- [Schulung](#)
- [Hamburg](#) (<https://wv>)





[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/) [Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/) [Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

For example the following command instructs the log command to specify a regular expression pattern with the `--grep=<pattern>` and `--grep-reflog=<pattern>` option.

```
git log --oneline --grep="workspace"
```

CONSOLE  
1

- 1 Greps in commit message for "workspace", oneline parameter included for better readability of the output

There is also the `--invert-grep=<pattern>` option. When this option is used, git log lists the commits that don't match the specified pattern.

## 17.6. Filtering the log output based on author or committer

You can use the `--author=<pattern>` or `--committer=<pattern>` to filter the log output by author or committer. You do not need to use the full name, if a substring matches, the commit is included in the log output.

The following command lists all commits with an author name containing the word "Vogel".

```
git log --author="Vogel"
```

CONSOLE

See also git shortlog for release announcements.

## 18. Viewing changes with git diff and git show

### 18.1. See the differences introduced by a commit

To see the changes introduced by a commit use the following command.

```
git show <commit_id>
```

CONSOLE

### 18.2. See the difference between two commits

To see the differences introduced between two commits you use the `git diff` command specifying the commits. For example, the following command shows the differences introduced in the last commit.

## VOGELLA COMMERCIAL OFFERINGS

- [Read Pre-Release Content ..](#) (https://le...
- [Book Online](#) (https://wv...
- [Consulting](#) (https://wv...

## TRAINING EV

- [Eclipse R](#)
- [Schulung](#)
- [Hamburg](#) (https://wv...


[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/)
[Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/)
[Search](#)
[\(https://www.vogella.com/\)](https://www.vogella.com/)
[# using commit ranges](#)
[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/)
[Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)
[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

## 18.2. See the files changed by a commit

To see the files which have been changed in a commit use the `git diff-tree` command. The `name-only` tells the command to show only the names of the files.

```
git diff-tree --name-only -r <commit_id>
```

CONSOLE

## 19. Using the Git blame command

### 19.1. Analyzing line changes with git blame

Using the Git log command and filtering the history is a useful tool for inspecting the project history. However, if you look at a particular file and find a bug in a particular line of code you would like to instantly know who was the last person who changed this line of code. Additionally, you would like to know why the developer did that i.e. locate the commit in which the change was done.

In Git, this feature is called *git blame* or *git annotate*. The `git blame` command allows you to see which commit and author modified a file on a per line base. That is very useful to identify the person or the commit which introduced a change.

### 19.2. Example: git blame

The following code snippet demonstrates the usage of the `git blame` command.

```
# git blame shows the author and commit per
# line of a file
git blame [filename]

# the -L option allows limiting the selection
# for example by line number

# only show line 1 and 2 in git blame
git blame -L 1,2 [filename]
```

CONSOLE

The `git blame` command can also ignore whitespace changes with the `-w` parameter.

## 20. Commit history of a repository or certain files

[Gitk \(http://git-scm.com/docs/gitk\)](http://git-scm.com/docs/gitk) can be used to visualize the history of a repository or certain files.

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Preparing Content ..](#)  
(https://le...
- [Book Online](#)  
(https://wv...
- [Consulting](#)  
(https://wv...

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv...



**Tutorials** (<https://www.vogella.com/tutorials/>) **Training** (<https://www.vogella.com/training/>) **Search**


(<https://www.vogella.com/>) in the target git repository and use the `gitk [filename]` command

**Consulting** (<https://www.vogella.com/consulting/>) to see all commits of a file in a clear UI. **Company** (<https://www.vogella.com/company/>)

**Contact us** (<https://www.vogella.com/contact.html>) by using the `gitk ShowViewHandler.java`

In this screenshot we can see all commits of the

command:

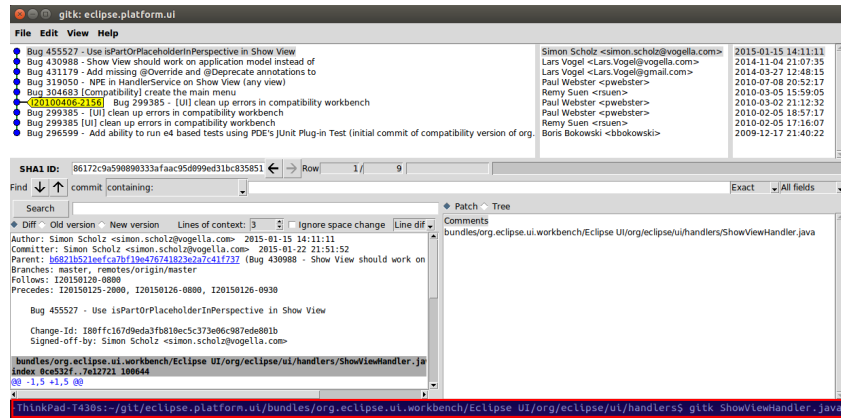

On Linux you can easily install gitk by using the `sudo apt-get install gitk` command in a terminal.

See <http://git-scm.com/docs/gitk> for further information.

## 21. git shortlog for release announcements

`git shortlog` The `git shortlog` command summarizes the `git log` output. It groups all commits by author and includes the first line of the commit message.

The `-s` option suppresses the commit message and provides a commit count. The `-n` option sorts the output based on the number of commits by author.

```
# gives a summary of the changes by author
git shortlog

# compressed summary
# -s summary, provides a commit count summary only
# -n sorted by number instead of name of the author
git shortlog -sn
```

CONSOLE

This command also allows you to see the commits done by a certain author or committer.

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre-Release Content ..](#) (<https://leakod.com/>)
- [Book Online Training](#) (<https://www.vogella.com/training/>)
- [Consulting](#) (<https://www.vogella.com/consulting/>)

TRAINING EVENT

- [Eclipse RCP Schulung Hamburg](#) (<https://www.vogella.com/training/eclipse-rcp-schulung-hamburg/>)


[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/)
[Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/)
[Search](#)
[\(https://www.vogella.com/\)](https://www.vogella.com/)

```
# see the commits by the author "Lars Vogel"
```

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/)
[Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

```
git shortlog --author="Lars Vogel" --since=2years
```

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

```
# see the number of commits by the author "Lars Vogel"
```

```
git shortlog -s --author="Lars Vogel" --since=2years
```

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(https://lea
- [Book On](#)  
(https://wv
- [Consultin](#)  
(https://wv

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv

## 22. Stashing changes in Git

### 22.1. The git stash command

Git provides the `git stash` command which allows you to record the current state of the working directory and the staging area and to revert to the last committed revision.

This allows you to pull in the latest changes or to develop an urgent fix. Afterwards you can restore the stashed changes, which will reapply the changes to the current version of the source code.

### 22.2. When to use git stash

In general using the stash command should be the exception in using Git. Typically, you would create new branches for new features and switch between branches. You can also commit frequently in your local Git repository and use interactive rebase to combine these commits later before pushing them to another Git repository.

Even if you prefer not to use branches, you can avoid using the `git stash` command. In this case you commit the changes you want to put aside and amend the commit with the next commit. If you use the approach of creating a commit, you typically put a marker in the commit message to mark it as a draft, e.g., "[DRAFT] implement feature x".

### 22.3. Example: Using the git stash command

The following commands will save a stash and reapply them after some changes.

```
# create a stash with uncommitted changes
git stash

# do changes to the source, e.g., by pulling
# new changes from a remote repo

# afterwards, re-apply the stashed changes
# and delete the stash from the list of stashes
git stash pop
```

CONSOLE

It is also possible to keep a list of stashes.



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

```
# see the list of available stashes
# result might be something like:
stash@{0}: WIP on master: 273e4a0 Resize issue in Dialog
stash@{1}: WIP on master: 273e4b0 Silly typo in Classname
stash@{2}: WIP on master: 273e4c0 Silly typo in Javadoc

# you can use the ID to apply a stash
git stash apply stash@{0}

# or apply the latest stash and delete it afterwards
git stash pop

# you can also remove a stashed change
# without applying it
git stash drop stash@{0}

# or delete all stashes
git stash clear
```

## 22.4. Create a branch from a stash

You can also create a branch for your stash if you want to continue to work on the stashed changes in a branch. This can be done with the following command.

```
# create a new branch from your stack and
# switch to it
git stash branch newbranchforstash
```

CONSOLE

## 23. Remove untracked files with git clean

### 23.1. Removing untracked files

If you have untracked files in your working tree which you want to remove, you can use the `git clean` command.



Be careful with this command. All untracked files are removed if you run this command. You will not be able to restore them, as they are not part of your Git repository.

### 23.2. Example: Using git clean

The following commands demonstrate the usage of the `git clean` command.

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre-Release Content .. \(https://leaver.me/\)](#)
- [Book Online \(https://www.vogella.com/book/\)](#)
- [Consulting \(https://www.vogella.com/consulting/\)](#)

TRAINING EVENTS

- [Eclipse RCP Development Schulung Hamburg \(https://www.vogella.com/training/eclipse-rcp-development-schulung-hamburg/\)](#)


[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/)
[Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/)
[Search](#)
[\(https://www.vogella.com/\)](https://www.vogella.com/)
[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/)
[Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)
[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

```
# make a dry-run to see what would happen
git clean -n

# delete -f is required if
# variable clean.requireForce is not set to false
git clean -f

# use -d flag to delete new directories
# use -x to delete hidden files, e.g., ".example"
git clean -fdx
```

## 24. Revert uncommitted changes in tracked files

### 24.1. Use cases

If you have a tracked file in Git, you can always recreate the file content based on the staging area or based on a previous commit. You can also remove staged changes from the staging area to avoid that these changes are included in the next commit. This chapter explain you how you can do this.

### 24.2. Remove staged changes from the staging area

Staging area, remove staged changes You can use the `git reset [paths]` command to remove staged changes from the staging area. This means that `git reset [paths]` is the opposite of `git add [paths]`. It avoids that the changes are included in the next commit. The changes are still available in the working tree, e.g., you will not lose your changes and can stage and commit them at a later point.

In the following example you create a new file and change an existing file. Both changes are staged.

```
# do changes
touch unwantedstaged.txt
echo "more.." >> test02

// add changes to staging area
git add unwantedstaged.txt
git add test02

# see the status
git status
```

CONSOLE

The output of `git status` command should look similar to the following.

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre](#)  
[Content..](#)  
(https://lea
- [Book Ons](#)  
(https://wv
- [Consultin](#)  
(https://wv

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

new file: unwantedstaged.txt

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

Remove the changes from the staging area with the following command.

```
# remove test02 from the staging area
git reset test02

# remove unwantedstaged.txt from the staging area
git reset unwantedstaged.txt
```

CONSOLE

Use the `git status` command to see the result.

```
On branch master
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git checkout -- <file>..." to discard changes in
working directory)

    modified:   test02

Untracked files:
  (use "git add <file>..." to include in what will be
committed)

    unwantedstaged.txt

no changes added to commit (use "git add" and/or "git commit -
a")
```

CONSOLE

The `git reset` behaves differently depending on the options you provide.

## 24.3. Remove changes in the working tree



Be careful with the following command. It allows you to override the changes in files in your working tree. You will not be able to restore these changes.

Changes in the working tree which are not staged can be undone with `git checkout` command. This command resets the file in the working tree to the latest staged version. If there are no staged changes, the latest committed version is used for the restore operation.

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(https://lea
- [Book Ons](#)  
(https://wv
- [Consultin](#)  
(https://wv

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv


[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/)
[Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/)
[Search](#)
[\(https://www.vogella.com/\)](https://www.vogella.com/)
[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/)
[Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)
[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

```
# revert the deletion
git checkout -- test01

# note git checkout test01 also works but using
# the -- causes that Git understands that test01
# is a path and not a parameter

# change a file
echo "override" > test01

# restore the file
git checkout -- test01
```

For example, you can restore the content of a directory called `data` with the following command.

```
git checkout -- data
```

CONSOLE

## 24.4. Remove changes in the working tree and the staging area

If you want to undo a staged but uncommitted change, you use the `git checkout [commit-pointer] [paths]` command. This version of the command resets the working tree and the staged area.

The following demonstrates the usage of this to restore a delete directory.

```
# create a demo directory
mkdir checkoutdemo
touch checkoutdemo/myfile
git add .
git commit -m "Adds new directory"

# now delete the directory and add the change to
# the staging area
rm -rf checkoutdemo
# Use git add . -A for Git version < 2.0
git add .

# restore the working tree and reset the staging area
git checkout HEAD -- your_dir_to_restore
```

CONSOLE

The additional commit pointer parameter instructs the `git checkout` command to reset the working tree and to also remove the staged changes.

## 24.5. Remove staging area based on last commit change

When you have added the changes of a file to the staging area, you can also revert the changes in the staging area based on the last commit.

### VOGELLA COMMERCIAL OFFERINGS

- [Read Pre-Recorded Content..](#)  
(https://le...
- [Book Online](#)  
(https://wv...
- [Consulting](#)  
(https://wv...

### TRAINING EVENTS

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv...





```
# add the file to the staging area
```

```
# restores the file based on HEAD in the staging area
```


- [Read Preparing Content ..](#)  
(https://le...
- [Book Online](#)  
(https://wv...
- [Consulting](#)  
(https://wv...

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv...

## 25. Using Git reset

### 25.1. Moving the HEAD and branch pointer

Sometimes you want to change the commit your branch pointer is pointing to. The `git reset` command allows you to manually set the current HEAD pointer (and its associated branch) to a specified commit. This is for example useful to undo a particular change or to build up a different commit history.

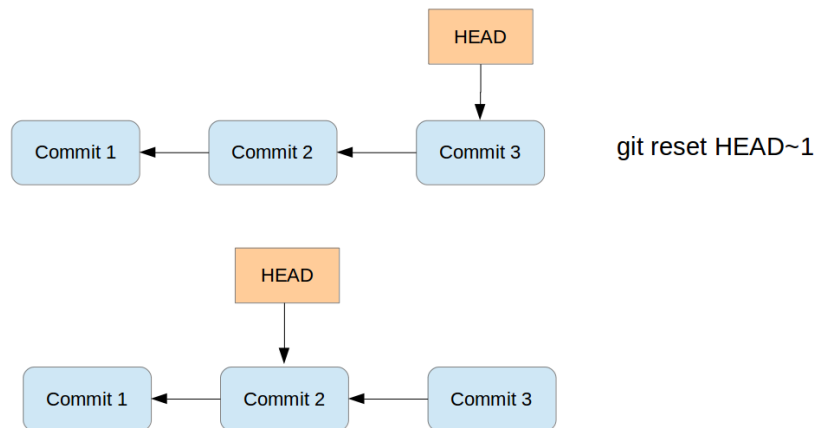

All commits which were originally pointed to by the HEAD pointer and the commit pointed to by HEAD after the reset, are *reset*, e.g., not directly visible anymore from the current HEAD and branch pointer.

Via parameters you can decide what happens to the changes in the working tree and changes which were included in the commits between the original commit and the commit now referred to by the HEAD pointer. As a reminder, the working tree contains the files and the staging area contains the changes which are marked to be included in the next commit. Depending on the specified parameters the `git reset` command performs the following:

1. If you specify the `--soft` parameter, the `git reset` command moves the HEAD pointer. Changes in the working tree will be left unchanged and all changes which were committed included in commits which are reset are staged.
2. If you specify the `--mixed` parameter (the default), the `git reset` command moves the HEAD pointer and resets the staging area to the new HEAD. Any file change between the original commit and the one you reset to shows up as modifications (or untracked files) in your working tree. Use this option to remove



**Tutorials** (<https://www.vogella.com/tutorials/>) **Training** (<https://www.vogella.com/training/>) **Search** (<https://www.vogella.com/search/>)

**Consulting** (<https://www.vogella.com/consulting/>) **Company** (<https://www.vogella.com/company/>)

When you specify the `--hard` parameter, the `git reset` command moves the HEAD pointer and resets the staging area and the working tree to the new HEAD. This effectively removes the changes you have done between the original commit and the one you reset to.

Via parameters you can define if the staging area and the working tree is updated. These parameters are listed in the following table.

*Table 2. git reset options*

Reset	Branch pointer	Working tree	Staging area
soft	Yes	No	No
mixed (default)	Yes	No	Yes
hard	Yes	Yes	Yes

The `git reset` command does not remove untracked files. See [Remove untracked files with git clean command](#) for this purpose.

## 25.2. Not moving the HEAD pointer with git reset

If you specify a path via the `git reset [path]` command, Git does not move the HEAD pointer. It updates the staging area or also the working tree depending on your specified option.

## 26. Resetting changes with git reset

### 26.1. Finding commits that are no longer visible on a branch

If you reset the branch pointer of a branch to a certain commit, the `git log` command does not show the commits which exist after this branch pointer. For example assume you have two commits A → B, where B is the commit after A. If you reset your branch pointer to A, the `git log` command does not include B anymore.

Commits like B can still be found via the `git reflog` command. See [Recovering lost commits](#).

## 27. Deleting changes in the working tree and staging area for tracked files

The `git reset --hard` command makes the working tree exactly match HEAD.

### VOGELLA COMMERCIAL OFFERINGS

- [Read Pre-Recorded Content ..](#) (<https://leaproschool.com/>)
- [Book Online Courses](#) (<https://www.vogella.com/training/>)
- [Consulting Services](#) (<https://www.vogella.com/consulting/>)

### TRAINING EVENTS

- [Eclipse RCP Development Schulung Hamburg](#) (<https://www.vogella.com/training/>)



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)



If you have tracked files with modifications, you lose these changes with the above command.

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)



The reset command does not delete untracked files. If you want to delete them also see [Recovering lost commits](#).

## 27.1. Using git reset to squash commits

git reset, squash commits As a soft reset does not remove your change to your files and index, you can use the `git reset --soft` command to squash several commits into one commit.

As the staging area is not changed with a soft reset, you keep it in the desired state for your new commit. This means that all the file changes from the commits which were reseted are still part of the staging area.

```
# squashes the last two commits
git reset --soft HEAD~1 && git commit -m "new commit message"
```

CONSOLE

The interactive rebase adds more flexibility to squashing commits and allows to use the existing commit messages. See [Editing history with the interactive rebase](#) for details.

## 28. Retrieving files from the history

### 28.1. View file in different revision

The `git show` command allows to see and retrieve files from branches, commits and tags. It allows seeing the status of these files in the selected branch, commit or tag without checking them out into your working tree.

By default, this command addresses a file from the root of the repository, not the current directory. If you want the current directory then you have to use the `./` specifier. For example to address the `pom.xml` file the current directory use: `./pom.xml`

The following commands demonstrate that. You can also make a copy of the file.

## VOGELLA COMMERCIAL OFFERINGS

- [Read Preparing for Production](#) (https://leavogella.com/read-preparing-for-production/)
- [Book Online Training](#) (https://www.vogella.com/training/)
- [Consulting](#) (https://www.vogella.com/consulting/)

## TRAINING EVENTS

- [Eclipse RCP Schulung Hamburg](#) (https://www.vogella.com/training/eclipse-rcp-schulung-hamburg/)



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

```
git show [reference]:[file_path]
# to make a copy to copiedfile.txt

git show [reference]:[file_path] > copiedfile.txt

# assume you have two pom.xml files. One in the root of the Git
# repository and one in the current working directory

# address the pom.xml in the git root folder
git show HEAD:pom.xml

# address the pom in the current directory
git show HEAD:./pom.xml
```

## 28.2. Restore a deleted file in a Git repo

You can checkout a file from the commit. To find the commit which deleted the file you can use the `git log` or the `git ref-list` command as demonstrated by the following command.

```
# see history of file
git log -- <file_path>

# checkout file based on predecessors the last commit which
# affect it
# this was the commit which delete the file
git checkout [commit] ^ -- <file_path>

# alternatively use git rev-list
git rev-list -n 1 HEAD -- <file_path>

# afterwards, the same checkout based on the predecessors
git checkout [commit] ^ -- <file_path>
```

## 29. See which commit deleted a file

The `git log` command allows you to determine which commit deleted a file. You can use the `--` option in `git log` to see the commit history for a file, even if you have deleted the file.

```
# see the changes of a file, works even
# if the file was deleted
git log --full-history -- [file_path]

# limit the output of Git log to the
# last commit, i.e. the commit which delete the file
# -1 to see only the last commit
# use 2 to see the last 2 commits etc
git log --full-history -1 -- [file_path]

# include stat parameter to see
# some statics, e.g., how many files were
# deleted
git log --full-history -1 --stat -- [file_path]
```

## 30. Revert commits

### VOGELLA COMMERCIAL OFFERINGS

- [Read Preparing Content .. \(https://leaver.me/\)](#)
- [Book Online Trainings \(https://www.vogella.com/training/\)](#)
- [Consulting \(https://www.vogella.com/consulting/\)](#)

### TRAINING EVENTS

- [Eclipse RCP Schulung Hamburg \(https://www.vogella.com/training/eclipse-rcp-schulung-hamburg/\)](#)



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[\(https://www.vogella.com/\)](https://www.vogella.com/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

## 30.1. Reverting a commit

git revert You can revert commits via the `git revert` command.

This command reverts the changes of a commit.

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

Such commits are useful to document that a change was withdrawn.

## 30.2. Example: Reverting a commit

The following command demonstrates the usage of the `git revert` command.

```
# revert a commit
git revert commit_id
```

CONSOLE

## 31. Resetting the working tree based on a commit

### 31.1. Checkout based on commits and working tree

git checkout, based on commit ID

You can check out arbitrary revisions of your file system via the `git checkout` command followed by the commit ID. This command will reset your complete *working tree* to the status described by this commit.

The commit ID is shown if you enter the `git log` command.

The following command shows the log.

```
# displays the commit history of the repository
# which contains the commit ID, author, message etc.
git log
```

CONSOLE

The following listing shows an example output of a Git log command.

```
commit 046474a52e0ba1f1435ad285eae0d8ef19d529bf
Author: Lars Vogel <Lars.Vogel@gmail.com>
Date: Wed Jun 5 12:13:04 2013 +0200

    Bug 409373 - Updates version number of e4 tools

    Repairs the build

commit 2645d7eef0e24195fc407137200fe7e1795ecf49
Author: Lars Vogel <Lars.Vogel@gmail.com>
Date: Wed Jun 5 12:00:53 2013 +0200

    Bug 409373 - Updates version number of e4 CSS spy features
```

CONSOLE

### 31.2. Example: Checkout a commit

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Preparing Content .. \(https://leaver.me/\)](#)
- [Book Online \(https://www.vogella.com/book-online/\)](#)
- [Consulting \(https://www.vogella.com/consulting/\)](#)

TRAINING EVENTS

- [Eclipse RCP Schulung Hamburg \(https://www.vogella.com/eclipse-rcp-schulung-hamburg/\)](#)



Tutorials (<https://www.vogella.com/tutorials/>) **Training** (<https://www.vogella.com/training/>) Search

(<https://www.vogella.com/>) # checkout the older revision via

**Consulting** (<https://www.vogella.com/consulting/>) **Company** (<https://www.vogella.com/company/>)

```
git checkout [commit id]
# based on the example output this could be
git checkout 046474a52e0ba1f1435ad285eae0d8ef19d529bf
# or you can use the abbreviated version
git checkout 046474a5
```

**Contact us** (<https://www.vogella.com/contact.html>)



If you checkout a commit, you are in the *detached head mode* and commits in this mode are harder to find after you checkout another branch. Before committing it is good practice to create a new branch. See Detached HEAD for details.

## 32. Recovering lost commits

### 32.1. Detached HEAD

If you checkout a commit or a tag, you are in the so-called *detached HEAD mode*. If you commit changes in this mode, you have no branch which points to this commit. After you checkout a branch you cannot see the commit you did in detached head mode in the `git log` command.

To find such commits you can use the `git reflog` command.

### 32.2. git reflog

Reflog is a mechanism to record the movements of the *HEAD* and the branches references.

The reflog command gives a history of the complete changes of the *HEAD* reference.

```
git reflog
# <output>
# ... snip ...
1f1a73a HEAD@{2}: commit: More changes - typo in the commit
message
45ca204 HEAD@{3}: commit: These are new changes
cf616d4 HEAD@{4}: commit (initial): Initial commit
```

CONSOLE

The `git reflog` command also list commits which you have removed.



There are multiple reflogs: one per branch and one for HEAD. For branches use the `git reflog [branch]` command and for HEAD use the `git reflog` or the `git reflog HEAD` command.

### 32.3. Example

#### VOGELLA COMMERCIAL OFFERINGS

- [Read Pre-Release Content ..](#) (<https://leaver.me/>)
- [Book Online Training](#) (<https://www.vogella.com/training/>)
- [Consulting](#) (<https://www.vogella.com/consulting/>)

#### TRAINING EVENTS

- [Eclipse RCP Development Schulung Hamburg](#) (<https://www.vogella.com/training/eclipse-rcp-development-schulung-hamburg/>)



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/) [Current branch any more. \(https://www.vogella.com/current-branch-any-more/\)](https://www.vogella.com/current-branch-any-more/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

```
# assume the ID for the second commit is
# 45ca2045be3aeda054c5418ec3c4ce63b5f269f7
```

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

```
# resets the head for your tree to the second commit
git reset --hard 45ca2045be3aeda054c5418ec3c4ce63b5f269f7

# see the log
git log

# output shows the history until the 45ca2045be commit

# see all the history including the deletion
git reflog

# <output>
cf616d4 HEAD@{1}: reset: moving to
45ca2045be3aeda054c5418ec3c4ce63b5f269f7
# ... snip ...
1f1a73a HEAD@{2}: commit: More changes - typo in the commit
message
45ca204 HEAD@{3}: commit: These are new changes
cf616d4 HEAD@{4}: commit (initial): Initial commit

git reset --hard 1f1a73a
```

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(https://lea
- [Book Ons](#)  
(https://wv
- [Consultin](#)  
(https://wv

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv

## 33. Remote and local tracking branches

### 33.1. Remote tracking branches

Your local Git repository contains references to the state of the branches on the remote repositories to which it is connected. These local references are called *remote-tracking branches*.

You can see your remote-tracking branches with the following command.

```
# list all remote branches
git branch -r
```

CONSOLE

To update remote-tracking branches without changing local branches you use the `git fetch` command. See [Updating your remote-tracking branches with git fetch](#) for more information.

It is safe to delete a remote branch in your local Git repository, this does not affect a remote repository. The next time you run the `git fetch` command, the remote branch is recreated. You can use the following command for that.

```
# delete remote branch from origin

git branch -d -r origin/[remote_branch]
```

CONSOLE

### 33.2. Delete a remote branch



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/) [Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

```
git push [remote] --delete [branch]
```

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

### 33.3. Tracking branches

Branches can track another branch. This is called *to have an upstream branch* and such branches can be referred to as *tracking branches*.

*Tracking branches* allow you to use the `git pull` and `git push` command directly without specifying the branch and repository.

If you clone a Git repository, your local *master* branch is created as a *tracking branch* for the *master* branch of the *origin* repository (short: *origin/master* ) by Git.

You create new *tracking branches* by specifying the *remote branch* during the creation of a branch. The following example demonstrates that.

```
# setup a tracking branch called newbranch
# which tracks origin/newbranch
git checkout -b newbranch origin/newbranch
```

CONSOLE

Instead of using the `git checkout` command you can also use the `git branch` command.

```
# origin/master used as example, but can be replaced

# create branch based on remote branch
git branch [new_branch] origin/master

# use --track,
# default when the start point is a remote-tracking branch
git branch --track [new_branch] origin/master
```

CONSOLE

The `--no-track` allows you to specify that you do not want to track a branch. You can explicitly add a tracking branch with the `git branch -u` command later.

```
# instruct Git to create a branch which does
# not track another branch
git branch --no-track [new_branch_notrack] origin/master

# update this branch to track the origin/master branch
git branch -u origin/master [new_branch_notrack]
```

CONSOLE

To see the tracking branches for a remote repository (short: remote) you can use the following command.

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre-Release Content ..](#) (https://le...
- [Book Online](#) (https://wv...
- [Consulting](#) (https://wv...

TRAINING EVENTS

- [Eclipse RCP Schulung Hamburg](#) (https://wv...





## Contact us (https://www.vogella.com/contact.html)

```
* remote origin
Fetch URL:
ssh://test@git.eclipse.org/gitroot/e4/org.eclipse.e4.tools.git
Push URL:
ssh://test@git.eclipse.org/gitroot/e4/org.eclipse.e4.tools.git
HEAD branch: master
Remote branches:
  integration          tracked
  interm_rc2           tracked
  master               tracked
  smcela/HandlerAddonUpdates tracked
Local branches configured for 'git pull':
  integration rebases onto remote integration
  master      rebases onto remote master
  testing     rebases onto remote master
Local refs configured for 'git push':
  integration pushes to integration (up to date)
  master      pushes to master      (up to date)
```

CONSOLE

## 34. Updating your remote-tracking branches with git fetch

### 34.1. Fetch

The `git fetch` command updates your remote-tracking branches, i.e., it updates the local copy of branches stored in a remote repository. The following command updates the remote-tracking branches from the repository called *origin*.

```
git fetch origin
```

CONSOLE

The `fetch` command only updates the *remote-tracking branches* and none of the local branches. It also does not change the working tree of the Git repository. Therefore, you can run the `git fetch` command at any point in time.

After reviewing the changes in the remote tracking branchm you can merge the changes into your local branches or rebase your local branches onto the remote-tracking branch.

Alternatively you can also use the `git cherry-pick commit_id` command to take over only selected commits.

See Applying a single commit with cherry-pick for information about cherry-pick. See Merging for the merge operation and Rebasing branches. for the rebase command.

### 34.2. Fetch from all remote repositories

## VOGELLA COMMERCIAL OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(https://lea
- [Book Ons](#)  
(https://wv
- [Consultin](#)  
(https://wv

## TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[remote-tracking branches \(https://www.vogella.com/remote-tracking-branches/\)](https://www.vogella.com/remote-tracking-branches/) or all your remote repositories you can

use the following command

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

```
# simplification of the fetch command
git fetch --prune --tags --depth 100
# fetches only git objects for every remote repository
git remote update

# the same but remove all stale branches which
# are not in the remote anymore
git remote update --prune
```

CONSOLE

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

### 34.3. Compare remote-tracking branch with local branch

The following code shows a few options how you can compare your branches.

```
# show the log entries between the last local commit and the
# remote branch
git log HEAD..origin/master

# show the diff for each patch
git log -p HEAD..origin/master

# show a single diff
git diff HEAD...origin/master

# instead of using HEAD you can also
# specify the branches directly
git diff master origin/master
```

CONSOLE

The above commands show the changes introduced in HEAD compared to origin. If you want to see the changes in origin compared to HEAD, you can switch the arguments or use the `-R` parameter.

### 34.4. Rebase your local branch onto the remote-tracking branch

You can rebase your current local branch onto a remote-tracking branch. The following commands demonstrate that.

```
# assume you want to rebase master based on the latest fetch
# therefore check it out
git checkout master

# update your remote-tracking branch
git fetch

# rebase your master onto origin/master
git rebase origin/master
```

CONSOLE



More information on the rebase command can be found in [Rebasing branches](#).

#### VOGELLA COMMERCIAL OFFERINGS

- [Read Pre-Recorded Content .. \(https://leaver.me\)](#)
- [Book Online Trainings \(https://www.vogella.com/training/\)](#)
- [Consulting \(https://www.vogella.com/consulting/\)](#)

#### TRAINING EVENTS

- [Eclipse R&D Schulung Hamburg \(https://www.vogella.com/training/eclipse-rd-schulung-hamburg/\)](#)



Tutorials (<https://www.vogella.com/tutorials/>) **Training** (<https://www.vogella.com/training/>) Search  
(<https://www.vogella.com/>)

**Consulting** (<https://www.vogella.com/consulting/>) **Company** (<https://www.vogella.com/company/>)

**Contact us** (<https://www.vogella.com/contact.html>)

## 34.5. Fetch compared with pull

The `git pull` command performs a `git fetch` and `git merge` (or `git rebase` based on your Git settings). The `git fetch` does not perform any operations on your local branches. You can always run the `fetch` command and review the incoming changes.

## 35. Merging


Git allows you to combine the changes which were created on two different branches. One way to achieve this is *merging*, which is described in this chapter. You can merge based on branches, tags or commits. Other ways are using `rebase` or `cherry-pick`.

This part explains how to merge changes between two different branches under the assumption that no merging conflicts happen. Solving conflicts is covered in [What is a conflict during a merge operation?](#).

### 35.1. Fast-forward merge

If the commits which are merged are direct successors of the *HEAD* pointer of the current branch, Git performs a so-called *fast forward merge*. This *fast forward merge* only moves the *HEAD* pointer of the current branch to the tip of the branch which is being merged.

This process is depicted in the following diagram. The first picture assumes that `master` is checked out and that you want to merge the changes of the branch labeled "branch 1" into your "master" branch. Each commit points to its predecessor (parent).

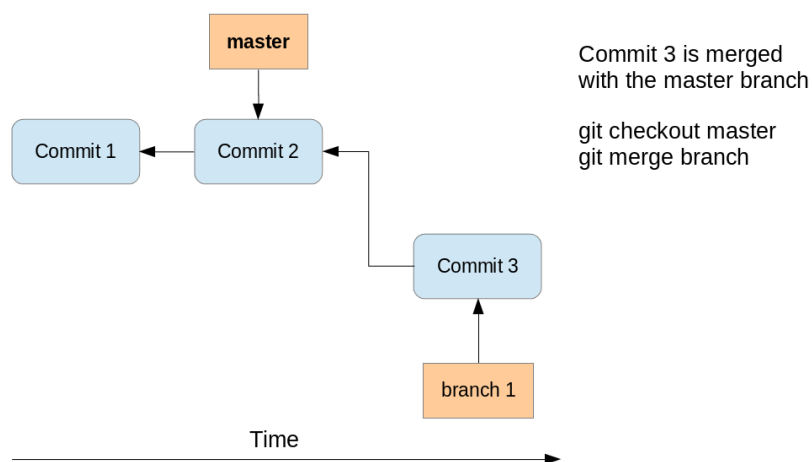

After the fast-forward merge the *HEAD* points to the master branch pointing to "Commit 3". The "branch 1" branch points to the same commit.

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(<https://lea>)
- [Book On](#)  
(<https://wv>)
- [Consultin](#)  
(<https://wv>)

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(<https://wv>)




Tutorials (<https://www.vogella.com/tutorials/>)  
(<https://www.vogella.com/>)

[Tutorials](https://www.vogella.com/tutorials/) (<https://www.vogella.com/tutorials/>) [Training](https://www.vogella.com/training/) (<https://www.vogella.com/training/>) [Search](https://www.vogella.com/search/) (<https://www.vogella.com/search/>)


[Consulting](https://www.vogella.com/consulting/) (<https://www.vogella.com/consulting/>) [Company](https://www.vogella.com/company/) (<https://www.vogella.com/company/>)

[Contact us](https://www.vogella.com/contact.html) (<https://www.vogella.com/contact.html>)

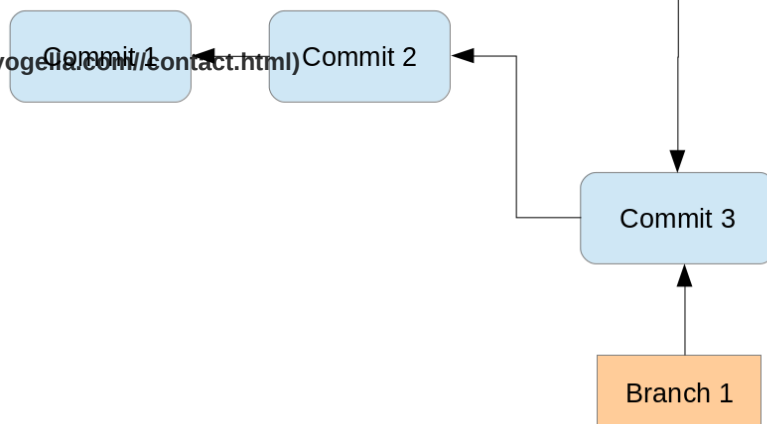

## 35.2. Merge commit

If commits are merged which are not direct predecessors of the current branch, Git performs a so-called *three-way-merge* between the latest commits of the two branches, based on the most recent common predecessor of both.

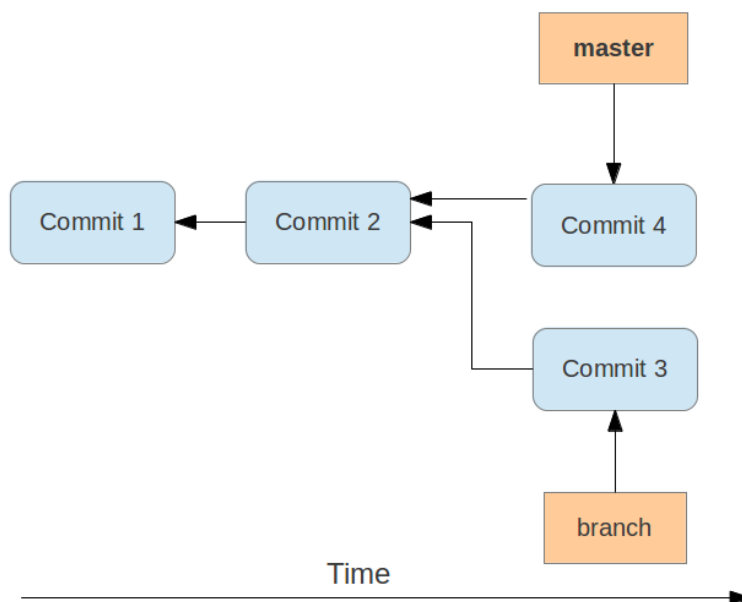

As a result a so-called *merge commit* is created on the current branch. It combines the respective changes from the two branches being merged. This commit points to both of its predecessors.

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(<https://lea>)
- [Book Ons](#)  
(<https://wv>)
- [Consultin](#)  
(<https://wv>)

TRAINING EV


- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(<https://wv>)



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search](https://www.vogella.com/search/)  
(<https://www.vogella.com/>)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

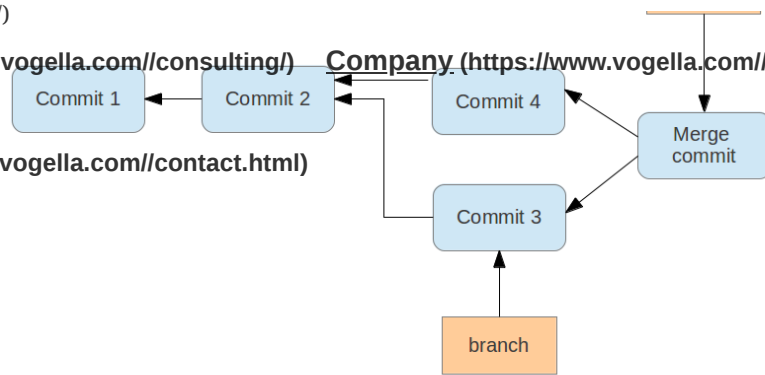

If multiple common predecessors exist, Git uses recursion to create a virtual common predecessor. For this Git creates a merged tree of the common ancestors and uses that as the reference for the 3-way merge. This is called the *recursive merge* strategy and is the default merge strategy.

### 35.3. Merge strategies - Octopus, Subtree, Ours

If a fast-forward merge is not possible, Git uses a merge strategy. The default strategy called *recursive merge* strategy was described in Merge commit.

The Git command line tooling also supports the *octopus merge* strategy for merges of multiple references. With this operation it can merge multiple branches at once.

The *subtree* option is useful when you want to merge in another project into a sub-directory of your current project. It is rarely used and you should prefer the usage of Git submodules. See [Git Submodules \(https://www.vogella.com/tutorials/GitSubmodules/article.html\)](https://www.vogella.com/tutorials/GitSubmodules/article.html) for more information.

The *ours* strategy merges a branch without looking at the changes introduced in this branch. This keeps the history of the merged branch but ignores the changes introduced in this branch.

You can use the *ours* merge strategy to document that you have integrated a branch and decided to ignore all changes from this branch.

### 35.4. Using the git merge command

The `git merge` command performs a merge. You can merge changes from one branch to the current active one via the following command.

```
# syntax: git merge <branch-name>
# merges into your currently checked out branch
git merge testing
```

CONSOLE

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(<https://lea>)
- [Book Ons](#)  
(<https://wv>)
- [Consultin](#)  
(<https://wv>)

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(<https://wv>)



Tutorials (<https://www.vogella.com/tutorials/>) **Training** (<https://www.vogella.com/training/>) Search  
(<https://www.vogella.com/>)

**35.5. Specifying merge strategies**  
**Consulting** (<https://www.vogella.com/consulting/>) **Company** (<https://www.vogella.com/company/>)

The `-s` parameter allows you to specify other merge strategies. This is demonstrated with the following command.

**Contact us** (<https://www.vogella.com/contact.html>)

For example, you can specify the *ours* strategy in which the result of the merge is always that of the current branch head, effectively ignoring all changes from all other branches. This is demonstrated with the following command.

```
# merge branch "obsolete" ignoring all
# changes in the branch
git merge -s ours obsolete
```

CONSOLE



Be careful if you use the *ours* merge strategy, it ignores everything from the branch which is merged.

The usage of the octopus merge strategy is triggered if you specify more than one reference to merge.

```
# merge the branch1 and the branch2 using
# changes in the branch
git merge branch1 branch2`
```

CONSOLE

## 35.6. Specifying parameters for the default merge strategy

The recursive merge strategy (default) allows you to specify flags with the `-X` parameter. For example you can specify here the *ours* option. This option forces conflicting changes to be auto-resolved by favoring the local version. Changes from the other branch that do not conflict with our local version are reflected to the merge result. For a binary file, the entire contents are taken from the local version.



The *ours* option for the *recursive* merge strategy should not be confused with the *ours* merge strategy.

A similar option to *ours* is the *theirs* option. This option prefers the version from the branch which is merged.

Both options are demonstrated in the following example code.

```
# merge changes preferring our version
git merge -s recursive -X ours [branch_to_merge]

# merge changes preferring the version from
# the branch to merge
git merge -s recursive -X theirs [branch_to_merge]
```

CONSOLE

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Preparing Content..](#)  
(<https://leavenet.org/>)
- [Book Online](#)  
(<https://www.vogella.com/>)
- [Consulting](#)  
(<https://www.vogella.com/consulting/>)

TRAINING EVENTS

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(<https://www.vogella.com/training/>)



Tutorials (<https://www.vogella.com/tutorials/>) **Training** (<https://www.vogella.com/training/>) Search

(<https://www.vogella.com/>)

**Consulting** (<https://www.vogella.com/consulting/>) **Company** (<https://www.vogella.com/company/>)

For more information about the merge strategies and options see [Git merge manpage](https://www.kernel.org/pub/software/scm/git/docs/git-merge.html)

(<https://www.kernel.org/pub/software/scm/git/docs/git-merge.html>).

**Contact us** (<https://www.vogella.com/contact.html>)

## 35.7. Enforcing the creation of a merge commit

If you prefer to have merge commits even for situations in which Git could perform a fast-forward merge you can use the `git merge --no-ff` command.

The `--no-ff` parameter can make sense if you want to record in the history at which time you merged from a maintenance branch to the master branch.


When pulling from a remote repository, prefer doing a rebase to a merge. This will help to keep the history easier to read. A merge commit can be helpful to document that functionality was developed in parallel.

## 36. Rebasing branches

### 36.1. Rebasing branches

You can use Git to rebase one branch on another one. As described, the `merge` command combines the changes of two branches. If you rebase a branch called A onto another, the `git` command takes the changes introduced by the commits of branch A and applies them based on the HEAD of the other branch. After this operation the changes in the other branch are also available in branch A.

The process is displayed in the following picture. We want to rebase the branch called `branch_1` onto master.

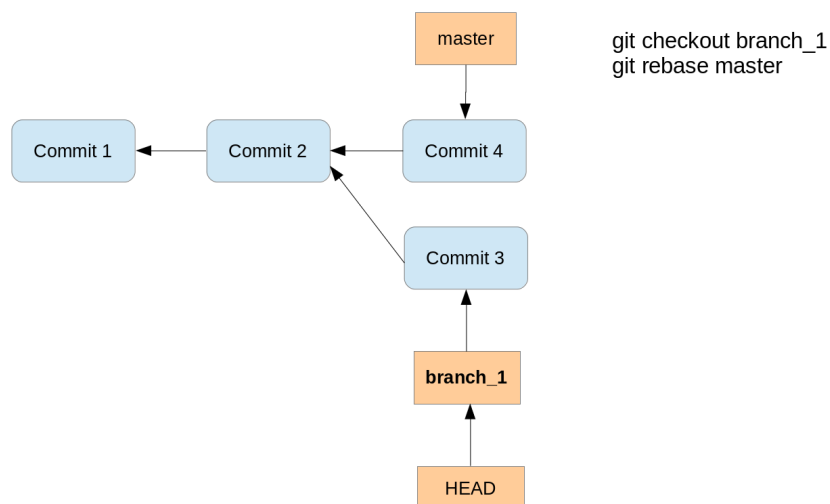

Running the rebase command creates a new commit with the changes of the branch on top of the master branch.

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(<https://lea>)
- [Book Ons](#)  
(<https://wv>)
- [Consultin](#)  
(<https://wv>)

TRAINING EV


- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(<https://wv>)



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search](https://www.vogella.com/search/)  
(<https://www.vogella.com/>)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

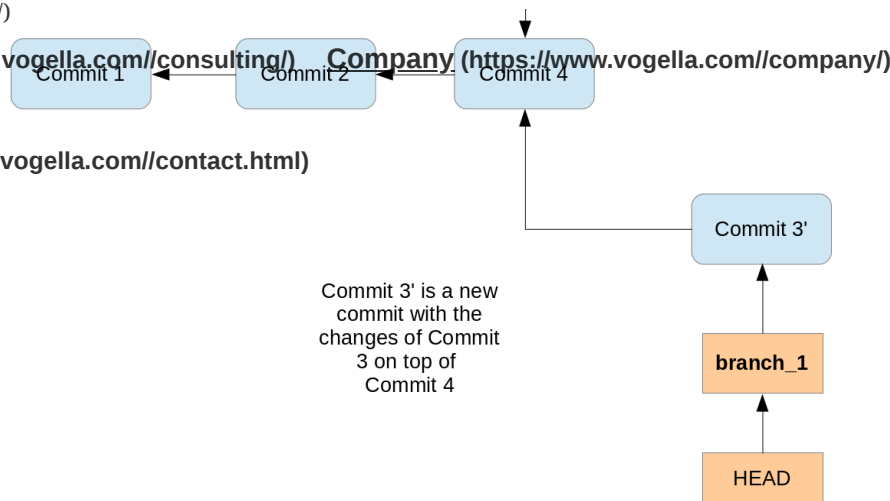

Performing a rebase does not create a merge commit. The final result for the source code is the same as with merge but the commit history is cleaner; the history appears to be linear.

Rebase can be used to forward-port a feature branch in the local Git repository onto the changes of the master branch. This ensures that your feature is close to the tip of the upstream branch until it is finally published.

If you rewrite more than one commit by rebasing, you may have to solve conflicts per commit. In this case the merge operations might be simpler to be performed because you only have to solve merge conflicts once.

Also, if your policy requires that all commits result in correct software you have to test all the rewritten commits since they are "rewritten" by the rebase algorithm. Since merge/rebase/cherry-pick are purely text-based and do not understand the semantics of these texts they can end up with logically incorrect results. Hence, it might be more efficient to merge a long feature branch into upstream instead of rebasing it since you only have to review and test the merge commit.



You can use the rebase command to change your Git repository history commits. This is called *interactive rebase*, see ? for information about this feature.

## 36.2. Good practice for rebase

You should avoid using the Git rebase operation for changes which have been published in other Git repositories. The Git rebase operation creates new commit objects, this may confuse other developers using the existing commit objects.

## VOGELLA COMMERCIAL OFFERINGS

- [Read Pre-Content ..](#)  
(<https://leavogella.com/>)
- [Book Online](#)  
(<https://www.vogella.com/training/>)
- [Consulting](#)  
(<https://www.vogella.com/consulting/>)

## TRAINING EVENTS

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(<https://www.vogella.com/training/>)





[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search](#)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

And therefore pushing is not possible. Now it is good practice to fetch the latest state of the branch from the remote repository. Afterwards you rebase the local feature branch onto the remote tracking branch.

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

This avoids an unnecessary merge commit. This rebasing of a local feature branch is also useful to incorporate the latest changes from remote into the local development, even if the user does not want to push right away.



Rebasing and amending commits is safe as long as you do not push any of the changes involved in the rebase. For example, when you cloned a repository and worked in this local repository. Rebasing is a great way to keep the history clean before contributing back your modifications.



In case you want to rewrite history for changes you have shared with others you need to use the `-f` parameter in your `git push` command and subsequently your colleagues have to use `fetch -f` to fetch the rewritten commits.

```
# using forced push
git push -f
```

CONSOLE

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(https://lea
- [Book Ons](#)  
(https://wv
- [Consultin](#)  
(https://wv

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv

### 36.3. Example for a rebase

The following demonstrates how to perform a rebase operation.

```
# create new branch
git checkout -b rebasetest

# create a new file and put it under revision control
touch rebase1.txt
git add . && git commit -m "work in branch"

# do changes in master
git checkout master

# make some changes and commit into testing
echo "rebase this to rebasetest later" > rebasefile.txt
git add rebasefile.txt
git commit -m "create new file"

# rebase the rebasetest onto master
git checkout rebasetest
git rebase master

# now you can fast forward your branch onto master
git checkout master
git merge rebasetest
```

CONSOLE



## 37. Editing history with the interactive rebase

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

Git allows you to edit your commit history with a functionality called interactive rebase. For example, you can combine several commits into one commit, reorder or skip commits and edit the commit message.

This is useful as it allows the user to rewrite some commit history (cleaning it up) before pushing the changes to a remote repository.

Interactive rebase allows you to quickly edit a series of commits using the following actions:

*Table 3. Interactive rebase actions*

Action	Description
pick	includes the selected commit, moving pick entries enables reordering of commits
skip	removes a commit
edit	amends the commit
squash	combines the changes of the commit with the previous commit and combines their commit messages
fixup	squashes the changes of a commit into the previous commit discarding the squashed commit's message
reword	similar to pick but allows modifying the commit message

The setup for the rebase is called the *rebase plan*. Based on this plan, the actual interactive rebase can be executed.



It is safe to use interactive rebase as long as the commits have not been pushed to another repository. As the interactive rebase creates new commit objects, other developers might be confused if you rebase already published changes.

### 37.1. Example: Interactive rebase

The following commands create several commits which will be used for the interactive rebase.

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre-Release Content ..](#)  
(https://le...
- [Book Online](#)  
(https://wv...
- [Consulting](#)  
(https://wv...

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv...



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/) [\(https://www.vogella.com/\)](https://www.vogella.com/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

```
git add . && git commit -m "add rebase.txt to staging area"
```

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

```
# do some silly changes and commit
echo "content" >> rebase.txt
git add . && git commit -m "add content"
echo " more content" >> rebase.txt
git add . && git commit -m "just testing"
echo " more content" >> rebase.txt
git add . && git commit -m "woops"
echo " more content" >> rebase.txt
git add . && git commit -m "yes"
echo " more content" >> rebase.txt
git add . && git commit -m "add more content"
echo " more content" >> rebase.txt
git add . && git commit -m "creation of important configuration
file"

# check the git log message
git log
```

We want to combine the last seven commits. You can do this interactively via the following command.

```
git rebase -i HEAD~7
```

CONSOLE

This command opens your editor of choice and lets you configure the rebase operation by defining which commits to *pick*, *squash* or *fixup*.

The following listing shows an example of the selection. We pick the last commit, squash 5 commits and fix the sixth commit. The listing uses the long format of the commands (for example `fixup` instead of the short form `f`) for better readability.

## VOGELLA COMMERCIAL OFFERINGS

- [Read Pre-Recorded Content ..](#)  
(https://le...
- [Book Online Courses](#)  
(https://wv...
- [Consulting Services](#)  
(https://wv...

## TRAINING EVENTS

- [Eclipse RCP Development Schulung Hamburg](#)  
(https://wv...


[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/)
[Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/)
[Search](#)
[\(https://www.vogella.com/\)](https://www.vogella.com/)

```
fixup 701cbb5 ups
```

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/)
[Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

```
fixup 31d447d added more content
```

```
squash e08d5c3 creation of important configuration file
```

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

```
# Rebase 06e7464..e08d5c3 onto 06e7464
```

```
#
```

```
# Commands:
```

```
# p, pick = use commit
```

```
# r, reword = use commit, but edit the commit message
```

```
# e, edit = use commit, but stop for amending
```

```
# s, squash = use commit, but meld into previous commit
```

```
# f, fixup = like "squash", but discard this commit's log message
```

```
# x, exec = run command (the rest of the line) using shell
```

```
#
```

```
# These lines can be re-ordered; they are executed from top to bottom.
```

```
#
```

```
# If you remove a line here THAT COMMIT WILL BE LOST.
```

```
# However, if you remove everything, the rebase will be aborted.
```

## 38. Using the Git cherry-pick command

### 38.1. Applying a single commit with cherry-pick

The git cherry-pick command allows you to select the patch which was introduced with an individual commit and apply this patch on another branch. The patch is captured as a new commit on the other branch.

This way you can select individual changes from one branch and transfer them to another branch.



The new commit does not point back to its original commit so do not use cherry-pick blindly since you may end up with several copies of the same change. Most often cherry-pick is either used locally (to emulate an interactive rebase) or to port individual bug fixes done on a development branch into maintenance branches.

### 38.2. Example: Using cherry-pick

In the following example you create a new branch and commit two changes.

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(https://lea
- [Book Ons](#)  
(https://wv
- [Consultin](#)  
(https://wv

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[\(https://www.vogella.com/\)](https://www.vogella.com/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

```
# create some data and commit
git add pickfile.txt
git commit -m "adds new file"

# create second commit
echo "changes to file" > pickfile.txt
git commit -a -m "changes in file"
```

You can check the commit history, for example, with the `git log --oneline` command.

```
# see change commit history

git log --oneline

# results in the following output

2fc2e55 changes in file
ebb46b7 adds new file
[MORE COMMITS]
330b6a3 initial commit
```

CONSOLE

The following command selects the first commit based on the commit ID and applies its changes to the master branch. This creates a new commit on the master branch.

```
git checkout master
git cherry-pick ebb46b7
```

CONSOLE

The `cherry-pick` command can be used to change the order of commits. `git cherry-pick` also accepts commit ranges for example in the following command.

```
git checkout master
# pick the last two commits
git cherry-pick picktest~1..picktest~2
```

CONSOLE

See Commit ranges with the double dot operator for more information about commit ranges.

If things go wrong or you change your mind, you can always reset to the previous state using the following command.

```
git cherry-pick --abort
```

CONSOLE

## 39. Solving merge conflicts

### 39.1. What is a conflict during a merge operation?

#### VOGELLA COMMERCIAL OFFERINGS

- [Read Preparing Content ..](#)  
(https://le...
- [Book Online](#)  
(https://wv...
- [Consulting](#)  
(https://wv...

#### TRAINING EVENTS

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv...



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/) [Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/) [Contact us \(https://www.vogella.com/contact-us/\)](https://www.vogella.com/contact-us/)

This happens for example if the same line in a file has been replaced

[Contact us \(https://www.vogella.com/tutorials/Git/article.html\)](https://www.vogella.com/tutorials/Git/article.html)

If a conflict occurs, Git marks the conflict in the file and the programmer has to resolve the conflict manually.

After resolving it, he adds the file to the staging area and commits the change. These steps are required to finish the merge operation.

## 40. Keep a version of a file during a merge conflict

Merge conflict LARSSECONDARY"theirs  
parameter"LARSSECONDARY Merge conflict

LARSSECONDARY"ours parameter"LARSSECONDARY Sometimes if a conflict occurs the developer does not want to solve the conflict. He decides that he wants to keep the original version or the new version of the file.

For this, there is the `--theirs` and the `--ours` options on the `git checkout` command. The first option keeps the version of the file that you merged in, and the second option keeps the version before the merge operation was started.

```
git checkout --ours foo/bar.java
git add foo/bar.java
```

CONSOLE

```
git checkout --theirs foo/bar.java
git add foo/bar.java
```

CONSOLE

## 41. Example: Solving a conflict during a merge operation

### 41.1. Create a conflict

In the following example you create a conflict during a merge operation.

The following steps create a merge conflict. It assumes that *repo1* and *repo2* have the same *origin* repository defined.

```
# switch to the first directory
cd ~/repo01
# make changes
echo "Change in the first repository" > mergeconflict.txt
# stage and commit
git add . && git commit -a -m "Will create conflict 1"
```

CONSOLE

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Preparing for Production](#) (https://le...
- [Book Online](#) (https://wv...
- [Consulting](#) (https://wv...

TRAINING EV

- [Eclipse R](#)
- [Schulung](#)
- [Hamburg](#) (https://wv...



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search](https://www.vogella.com/search/)

[\(https://www.vogella.com/\)](https://www.vogella.com/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

```
touch mergeconflict.txt
# stage and commit
git add . && git commit -a -m "Will create conflict 2"
# push to the master repository
git push

CONSOLE

# switch to the first directory
cd ~/repo01

# now try to push from the first directory
# try to push --> assuming that the same remote repository is
used,
# you get an error message
git push
```

As this push would not result in a non-fast-format merge, you receive an error message similar to the following listing.

```
! [rejected]        master -> master (fetch first)
error: failed to push some refs to '../remote-repository.git/'
hint: Updates were rejected because the remote contains work
that you do
hint: not have locally. This is usually caused by another
repository pushing
hint: to the same ref. You may want to first integrate the
remote changes
hint: (e.g., 'git pull ...') before pushing again.
hint: See the 'Note about fast-forwards' in 'git push --help'
for details.

CONSOLE
```

To solve this, you need to integrate the remote changes into your local repository. In the following listing the `git fetch` command gets the changes from the remote repository. The `git merge` command tries to integrate it into your local repository.

```
# get the changes via a fetch
git fetch origin

# now merge origin/master into the local master
# this creates a merge conflict in your
# local repository
git merge origin/master

CONSOLE
```

This creates the conflict and a message similar to the following.

```
Auto-merging mergeconflict.txt
CONFLICT (add/add): Merge conflict in mergeconflict.txt
Automatic merge failed; fix conflicts and then commit the
result.

CONSOLE
```

The resulting conflict is displayed in ? and solved in ?

## VOGELLA COMMERCIAL OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(https://lea
- [Book Ons](#)  
(https://wv
- [Consultin](#)  
(https://wv

## TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[\(https://www.vogella.com/\)](https://www.vogella.com/)



[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

command together in one step. Whether merge or rebase is used depends on your Git configuration for the branch. See ? for the global configuration.

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

## 41.2. Review the conflict in the file

Git marks the conflicts in the affected files. In the example from ? one file has a conflict and the file looks like the following listing.

```
<<<<<< HEAD
Change in the first repository
=====
Change in the second repository
>>>>>> b29196692f5ebfd10d8a9ca1911c8b08127c85f8
```

CONSOLE

The text above the ===== signs is the conflicting change from your current branch and the text below is the conflicting change from the branch that you are merging in.

## 41.3. Solve a conflict in a file

In this example you resolve the conflict which was created in ? and apply the change to the Git repository.

To solve the merge conflict you edit the file manually. The following listing shows a possible result.

```
Change in the first and second repository
```

CONSOLE

Afterwards add the affected file to the staging area and commit the result. This creates the merge commit. You can also push the integrated changes now to the remote repository.

```
# add the modified file
git add .

# creates the merge commit
git commit -m "Merge changes"

# push the changes to the remote repository
git push
```

CONSOLE

Instead of using the -m option in the above example you can also use the git commit command without this option. In this case the command opens your default editor with the default commit message about the merged conflicts. It is good practice to use this message.

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Preparing for the Eclipse IDE](#) (https://le...
- [Book Online](#) (https://wv...
- [Consulting](#) (https://wv...

TRAINING EVENTS

- [Eclipse R](#)
- [Schulung](#)
- [Hamburg](#) (https://wv...




[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/)
[Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/)
[Search](#)
[\(https://www.vogella.com/\)](https://www.vogella.com/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/)
[Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)
[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

merge tool that displays the changes in a split screen. Some operating systems may come with a suitable merge tool already installed or configured for Git.

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(https://lea
- [Book On](#)  
(https://wv
- [Consultin](#)  
(https://wv

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv

## 42. Solving rebase conflicts

### 42.1. What is a conflict during a rebase operation?

Rebase conflict During a rebase operation, several commits are applied onto a certain commit. If you rebase a branch onto another branch, this commit is the last common ancestor of the two branches.

For each commit which is applied it is possible that a conflict occurs.

## 43. Handling a conflict during a rebase operation

If a conflict occurs during a rebase operation, the rebase operation stops and the developer needs to resolve the conflict. After he has solved the conflicts, the developer instructs Git to continue with the rebase operation.

A conflict during a rebase operation is solved similarly to the way a conflict during a merge operation is solved. The developer edits the conflicts and adds the files to the Git index. Afterwards he continues the rebase operation with the following command.

```
# rebase conflict is fixed, continue with the rebase operation
git rebase --continue
```

CONSOLE

To see the files which have a rebase conflict use the following command.

```
# lists the files which have a conflict
git diff --name-only --diff-filter=U
```

CONSOLE

You solve such a conflict the same way as you would solve a merge conflict.

You can also skip the commit which creates the conflict.

```
# skip commit which creates the conflict
git rebase --skip
```

CONSOLE

## 44. Aborting a rebase operation

You can also abort a rebase operation with the following command.



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)  
[\(https://www.vogella.com/\)](https://www.vogella.com/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

## 45. Picking theirs or ours for conflicting file

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

If a file is in conflict, you can instruct Git to take the version from the new commit of the version of commit onto which the new changes are applied. This is sometimes easier than to solve all conflicts manually. For this you can use the `git checkout` with the `--theirs` or `--ours` flag. During the conflict `--ours` points to the file in the commit onto which the new commit is placed, i.g., using this skips the new changes for this file.

Therefore to ignore the changes in a commit for a file use the following command.

```
git checkout --ours foo/bar.java
git add foo/bar.java
```

CONSOLE

To take the version of the new commit use the following command.

```
git checkout --theirs foo/bar.java
git add foo/bar.java
```

CONSOLE

## 46. Define alias

### 46.1. Using an alias

An *alias* in Git allows you to create a short form of one or several existing Git commands. For example, you can define an alias which is a short form of your own favorite commands or you can combine several commands with an alias.

### 46.2. Alias examples

The following defines an *alias* to see the staged changes with the new `git staged` command.

```
git config --global alias.staged 'diff --cached'
```

CONSOLE

Or you can define an *alias* for a detailed `git log` command. The following command defines the `git ll` *alias*.

```
git config --global alias.ll 'log --graph --oneline --decorate --all'
```

CONSOLE

You can also run external commands. In this case you start the *alias* definition with a `!` character. For example, the following defines the `git ac` command which combines `git add . -A` and `git commit` commands.

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(https://lea
- [Book Ons](#)  
(https://wv
- [Consultin](#)  
(https://wv

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv



## 47. Error search with git bisect

### 47.1. Using git bisect

The `git bisect` command allows you to run a binary search through the commit history to identify the commit which introduced an issue. You specify a range of commits and a script that the `bisect` command uses to identify whether a commit is good or bad.

This script must return 0 if the condition is fulfilled and non-zero if the condition is not fulfilled.

### 47.2. git bisect example

Create a new Git repository, create the `test1.txt` file and commit it to the repository. Do a few more changes, remove the file and again do a few more changes.

We use a simple shell script which checks the existence of a file. Ensure that this file is executable.

```
#!/bin/bash
FILE=$1

if [ -f $FILE ];
then
    exit 0;
else
    exit 1;
fi
```

CONSOLE

Afterwards use the `git bisect` command to find the bad commit. First you use the `git bisect start` command to define a commit known to be bad (showing the problem) and a commit known to be good (not showing the problem).

```
# define that bisect should check
# the last 5 commits
git bisect start HEAD HEAD~5
```

CONSOLE

Afterwards run the bisect command using the shell script.

```
# assumes that the check script
# is a directory above the current
git bisect run ../check.sh test1.txt
```

CONSOLE

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(https://lea
- [Book Ons](#)  
(https://wv
- [Consultin](#)  
(https://wv

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv


[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/)
[Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/)
[Search](#)
[\(https://www.vogella.com/\)](https://www.vogella.com/)

[git bisect command: git bisect run test -f](#)
[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/)
[test.txt](#)
[Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)
[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

## 48. Rewriting commit history with git filter-branch

### 48.1. Using the git filter branch command (filter-branch)

The `git filter-branch` command allows you to rewrite the Git commit history. This can be done for selected branches and you can apply custom filters on each revision. This creates different hashes for all modified commits. This implies that you get new IDs for all commits based on any rewritten commit.

The command allows you to filter for several values, e.g., the author, the message, etc. For details please see the [git-filter-branch manual page](http://www.kernel.org/pub/software/scm/git/docs/git-filter-branch.html) (<http://www.kernel.org/pub/software/scm/git/docs/git-filter-branch.html>)



Using the `filter-branch` command is dangerous as it changes the Git repository. It changes the commit IDs and reacting on such a change requires explicit action from the developer, e.g., trying to rebase the stale local branch onto the corresponding rewritten remote-tracking branch.

For example, you can use `git filter-branch` if you want to remove a file which contains a password from the Git history. Or you want to remove huge binary files from the history. To completely remove such files, you need to run the `filter-branch` command on all branches.

### 48.2. filter-branch examples

The following command extracts a directory from a Git repository and retains all commits for this subfolder.

```
git filter-branch --prune-empty --subdirectory-filter FOLDER-  
NAME BRANCH-NAME
```

CONSOLE

The following command replaces the email address of one author from all commits.

```
git filter-branch -f \  
--env-filter 'if [ "$GIT_AUTHOR_NAME" = "Lars Vogel" ]; then \  
GIT_AUTHOR_EMAIL="lars.vogel@gmail.com"; fi' HEAD)
```

CONSOLE

## 49. Working with patch files

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(<https://lea>)
- [Book On](#)  
(<https://wv>)
- [Consultin](#)  
(<https://wv>)

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(<https://wv>)



[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search \(https://www.vogella.com/search/\)](https://www.vogella.com/search/)

[\(https://www.vogella.com/\)](https://www.vogella.com/)

## 49.1. What is a patch file?

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

A *patch* is a text file that contains changes to other text files in a standardized format. A patch created with the `git format-patch` command includes meta-information about the commit (committer, date, commit message, etc) and also contains the changes introduced in binary data in the commit.

This file can be sent to someone else and the receiver can use it to apply the changes to his local repository. The metadata is preserved.

Alternatively you could create a diff file with the `git diff` command, but this diff file does not contain the metadata information.

## 49.2. Create and apply patches

The following example creates a branch, changes several files and creates a commit recording these changes.

```
# create a new branch
git branch mybranch
# use this new branch
git checkout mybranch
# make some changes
touch test05
# change some content in an existing file
echo "new content for test01" >test01
# commit this to the branch
git add .
git commit -m "first commit in the branch"
```

CONSOLE

The next example creates a patch for these changes.

```
# creates a patch --> git format-patch master
git format-patch origin/master

# this creates the file:
# patch 0001-First-commit-in-the-branch.patch
```

CONSOLE

To apply this patch to your master branch in a different clone of the repository, switch to it and use the `git apply` command.

```
# switch to the master branch
git checkout master

# apply the patch
git apply 0001-First-commit-in-the-branch.patch
```

CONSOLE

Afterwards you can commit the changes introduced by the patches and delete the patch file.

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Preparing Content..](#)  
(https://lea)
- [Book Online](#)  
(https://wv)
- [Consulting](#)  
(https://wv)

TRAINING EVENTS

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv)


[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/)
[Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/)
[Search](#)
[\(https://www.vogella.com/\)](https://www.vogella.com/)

```
git commit -m "apply patch"
```

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/)
[Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)

```
# delete the patch file
```

```
rm 0001-First-commit-in-the-branch.patch
```

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)


Use the `git am` command to apply and commit the changes in a single step. To apply and commit all patch files in the directory use, for example, the `git am *.patch` command. You specify the order in which the patches are applied by specifying them on the command line.

### 49.3. Create a patch for a selected commit

You can specify the commit ID and the number of patches which should be created. For example, to create a patch for selected commits based on the HEAD pointer you can use the following commands.

```
# create patch for the last commit based on HEAD
git format-patch -1 HEAD
```

CONSOLE

```
# create a patch series for the last three commits
# based on head
git format-patch -3 HEAD
```

## 50. Git commit and other hooks

### 50.1. Usage of Git hooks

Git provides commit hooks, e.g., programs which can be executed at a pre-defined point during the work with the repository. For example, you can ensure that the commit message has a certain format or trigger an action after a push to the server.

These programs are usually scripts and can be written in any language, e.g., as shell scripts or in Perl, Python etc. You can also implement a hook, for example, in C and use the resulting executables. Git calls the scripts based on a naming convention.

### 50.2. Client and server side commit hooks

Git provides hooks for the client and for the server side. On the server side you can use the `pre-receive` and `post-receive` script to check the input or to trigger actions after the commit. The usage of a server commit hook requires that you have access to the server. Hosting providers like GitHub or Bitbucket do not offer this access.

If you create a new Git repository, Git creates example scripts in the `.git/hooks` directory. The example scripts end with `.sample`. To activate them make them executable and remove the `.sample` from

VOGELLA  
COMMERCIAL  
OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(https://lea
- [Book Ons](#)  
(https://wv
- [Consultin](#)  
(https://wv

TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv


[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/)
[Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/)
[Search](#)
[\(https://www.vogella.com/\)](https://www.vogella.com/)
[manual page](#)
[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/)
[Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)
[\(https://www.kernel.org/pub/software/scm/git/docs/githooks.html\).](https://www.kernel.org/pub/software/scm/git/docs/githooks.html) 
[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

## 50.3. Restrictions

Not all Git server implementations support server side commit hooks. For example Gerrit (a Git server which also provides the ability to do code review) does not support hooks in this form. Also Github and Bitbucket do not support server hooks at the time of this writing.

Local hooks in the local repository can be removed by the developer.

## 51. Handling line endings on different platforms

### 51.1. Line endings of the different platforms

Every time a developer presses return on the keyboard an invisible character called a line ending is inserted. Unfortunately, different operating systems handle line endings differently.

Linux and Mac use different line endings than Windows. Windows uses a carriage-return and a linefeed character (CRLF), while Linux and Mac only uses a linefeed character (LF). This becomes a problem if developers use different operating system to commit changes to a Git repository.

To avoid commits because of line ending differences in your Git repository you should configure all clients to write the same line ending to the Git repository.

### 51.2. Configuring line ending settings as developer

On Windows systems you can tell Git to convert line endings during a checkout to CRLF and to convert them back to LF during commit. Use the following setting for this.

```
# configure Git on Windows to properly handle line endings
git config --global core.autocrlf true
```

CONSOLE

On Linux and Mac you can tell Git to convert CRLF to LF with the following setting.

```
# configure Git on Linux and Mac to properly handle line endings
git config --global core.autocrlf input
```

CONSOLE

### 51.3. Configuring line ending settings per repository

## VOGELLA COMMERCIAL OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(https://lea
- [Book Ons](#)  
(https://wv
- [Consultin](#)  
(https://wv

## TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(https://wv



**Tutorials** (<https://www.vogella.com/tutorials/>) **Training** (<https://www.vogella.com/training/>) **Search** (<https://www.vogella.com/search/>) **Repository** (<https://www.vogella.com/repository/>) **Consulting** (<https://www.vogella.com/consulting/>) **Company** (<https://www.vogella.com/company/>)

In this file you can configure Git to auto detect the line endings.

**Contact us** (<https://www.vogella.com/contact.html>)



Not all graphical Git tools support the `.gitattributes` file, for example the Eclipse IDE does currently not support it. See [Eclipse Bug report](https://bugs.eclipse.org/bugs/show_bug.cgi?id=342372) ([https://bugs.eclipse.org/bugs/show\\_bug.cgi?id=342372](https://bugs.eclipse.org/bugs/show_bug.cgi?id=342372)).

## 52. Migrating from SVN

To convert Subversion projects to Git you can use a RubyGem called `svn2git`. This tool relies on `git svn` internally and handles most of the trouble.

To install it (on Ubuntu) simply type:

```
sudo apt-get install git-svn ruby rubygems
sudo gem install svn2git
```

CONSOLE

Let's say you have a repository called

```
http://svn.example.com/repo
```

with the default layout (trunk, branches, tags) and already prepared a local git repository where you want to put everything. Then navigate to your git directory and use the following commands:

```
svn2git http://svn.example.com/repo --verbose
svn2git --rebase
```

CONSOLE

The parameter `--verbose` adds detailed output to the commandline so you can see what is going on including potential errors. The second `svn2git --rebase` command aligns your new git repository with the svn import. You are now ready to push to the web and get forked! If your svn layout deviates from the standard or other problems occur, seek `svn2git --help` for documentation on additional parameters.

## 53. Frequently asked questions

### 53.1. Can Git handle symlinks?

The usage of symlinks requires that the operating system used by the developers supports them.

## VOGELLA COMMERCIAL OFFERINGS

- [Read Pre-Release Content ..](#) (<https://www.vogella.com/pre-release-content/>)
- [Book Online Training](#) (<https://www.vogella.com/book-online-training/>)
- [Consulting](#) (<https://www.vogella.com/consulting/>)

## TRAINING EVENTS

- [Eclipse RCP Schulung Hamburg](#) (<https://www.vogella.com/eclipse-rcp-schulung-hamburg/>)





[Tutorials \(https://www.vogella.com/tutorials/\)](https://www.vogella.com/tutorials/) [Training \(https://www.vogella.com/training/\)](https://www.vogella.com/training/) [Search](https://www.vogella.com/search/)

[\(https://www.vogella.com/\)](https://www.vogella.com/)

[Consulting \(https://www.vogella.com/consulting/\)](https://www.vogella.com/consulting/) [Company \(https://www.vogella.com/company/\)](https://www.vogella.com/company/)  
is symlinking to, and the file type. This is similar to a symlink to a directory; Git does not store the contents under the symlinked directory.

[Contact us \(https://www.vogella.com/contact.html\)](https://www.vogella.com/contact.html)

## 54. Futher reading on Git

This tutorial is part of a series about the Git version control system. See the other tutorials for more information.

- [Introduction to Git \(https://www.vogella.com/tutorials/Git/article.html\)](https://www.vogella.com/tutorials/Git/article.html)
- [Using Github \(https://www.vogella.com/tutorials/GitHub/article.html\)](https://www.vogella.com/tutorials/GitHub/article.html)
- [Hosting Git repositories at Bitbucket or on your own server \(https://www.vogella.com/tutorials/GitHosting/article.html\)](https://www.vogella.com/tutorials/GitHosting/article.html)
- [Typical workflows with Git \(https://www.vogella.com/tutorials/GitWorkflows/article.html\)](https://www.vogella.com/tutorials/GitWorkflows/article.html)
- [EGit - Teamprovider for Eclipse \(https://www.vogella.com/tutorials/EclipseGit/article.html\)](https://www.vogella.com/tutorials/EclipseGit/article.html)

## 55. Get this tutorial as book

This tutorial is part of a book available as [paper print \(https://www.vogella.com/books/git.html\)](https://www.vogella.com/books/git.html) and electronic form for your [Kindle \(https://www.vogella.com/books/git.html\)](https://www.vogella.com/books/git.html).

## 56. Links and Literature

[Git homepage \(http://git-scm.com/\)](http://git-scm.com/)

[Blog post about Git 2.4 news](https://github.com/blog/1994-git-2-4-atomic-pushes-push-to-deploy-and-more)

(<https://github.com/blog/1994-git-2-4-atomic-pushes-push-to-deploy-and-more>)

[Blog post about Git 2.5 news](https://github.com/blog/2042-git-2-5-including-multiple-worktrees-and-triangular-workflows)

(<https://github.com/blog/2042-git-2-5-including-multiple-worktrees-and-triangular-workflows>)

[Blog post about Git 2.6 news](https://github.com/blog/2066-git-2-6-including-flexible-fsck-and-improved-status)

(<https://github.com/blog/2066-git-2-6-including-flexible-fsck-and-improved-status>)

[Video with Linus Torvalds on Git](http://www.youtube.com/watch?v=4XpnKHJAok8)

(<http://www.youtube.com/watch?v=4XpnKHJAok8>)

[Git on Windows \(https://git-for-windows.github.io/\)](https://git-for-windows.github.io/)

## 57. vogella training and consulting support

### VOGELLA COMMERCIAL OFFERINGS

- [Read Preparing to Leave Content.. \(https://www.vogella.com/leaving\)](https://www.vogella.com/leaving)
- [Book On Demand \(https://www.vogella.com/book-on-demand\)](https://www.vogella.com/book-on-demand)
- [Consulting \(https://www.vogella.com/consulting\)](https://www.vogella.com/consulting)

### TRAINING EVENTS

- [Eclipse Rschulung Hamburg \(https://www.vogella.com/eclipse-rschulung-hamburg\)](https://www.vogella.com/eclipse-rschulung-hamburg)



**Tutorials** (<https://www.vogella.com/tutorials/>) **Training** (<https://www.vogella.com/training/>) **Search**

(<https://www.vogella.com/>)

**Consulting** (<https://www.vogella.com/consulting/>)

**Online Training**

**Company** (<https://www.vogella.com/company/>)

(<https://learn.vogella.com/>)

(<https://www.vogella.com/training/>)

**Contact us** (<https://www.vogella.com/contact.html>)



**Consulting**

(<https://www.vogella.com/consulting/>)

## Appendix A: Copyright, License and Source code

Copyright © 2012-2019 vogella GmbH. Free use of the software examples is granted under the terms of the [Eclipse Public License 2.0](https://www.eclipse.org/legal/epl-2.0) (<https://www.eclipse.org/legal/epl-2.0>). This tutorial is published under the [Creative Commons Attribution-NonCommercial-ShareAlike 3.0 Germany](http://creativecommons.org/licenses/by-nc-sa/3.0/de/deed.en) (<http://creativecommons.org/licenses/by-nc-sa/3.0/de/deed.en>) license.

[Licence](https://www.vogella.com/license.html) (<https://www.vogella.com/license.html>)

[Source code](https://www.vogella.com/code/index.html) (<https://www.vogella.com/code/index.html>)

[Support free tutorials](https://www.vogella.com/support.html) (<https://www.vogella.com/support.html>)

### VOGELLA COMMERCIAL OFFERINGS

- [Read Pre](#)  
[Content ..](#)  
(<https://lea>)
- [Book Ons](#)  
(<https://wv>)
- [Consultin](#)  
(<https://wv>)

### TRAINING EV

- [Eclipse R](#)  
[Schulung](#)  
[Hamburg](#)  
(<https://wv>)

Version unspecified

Last updated 2019-05-21 15:07:00 +0200