







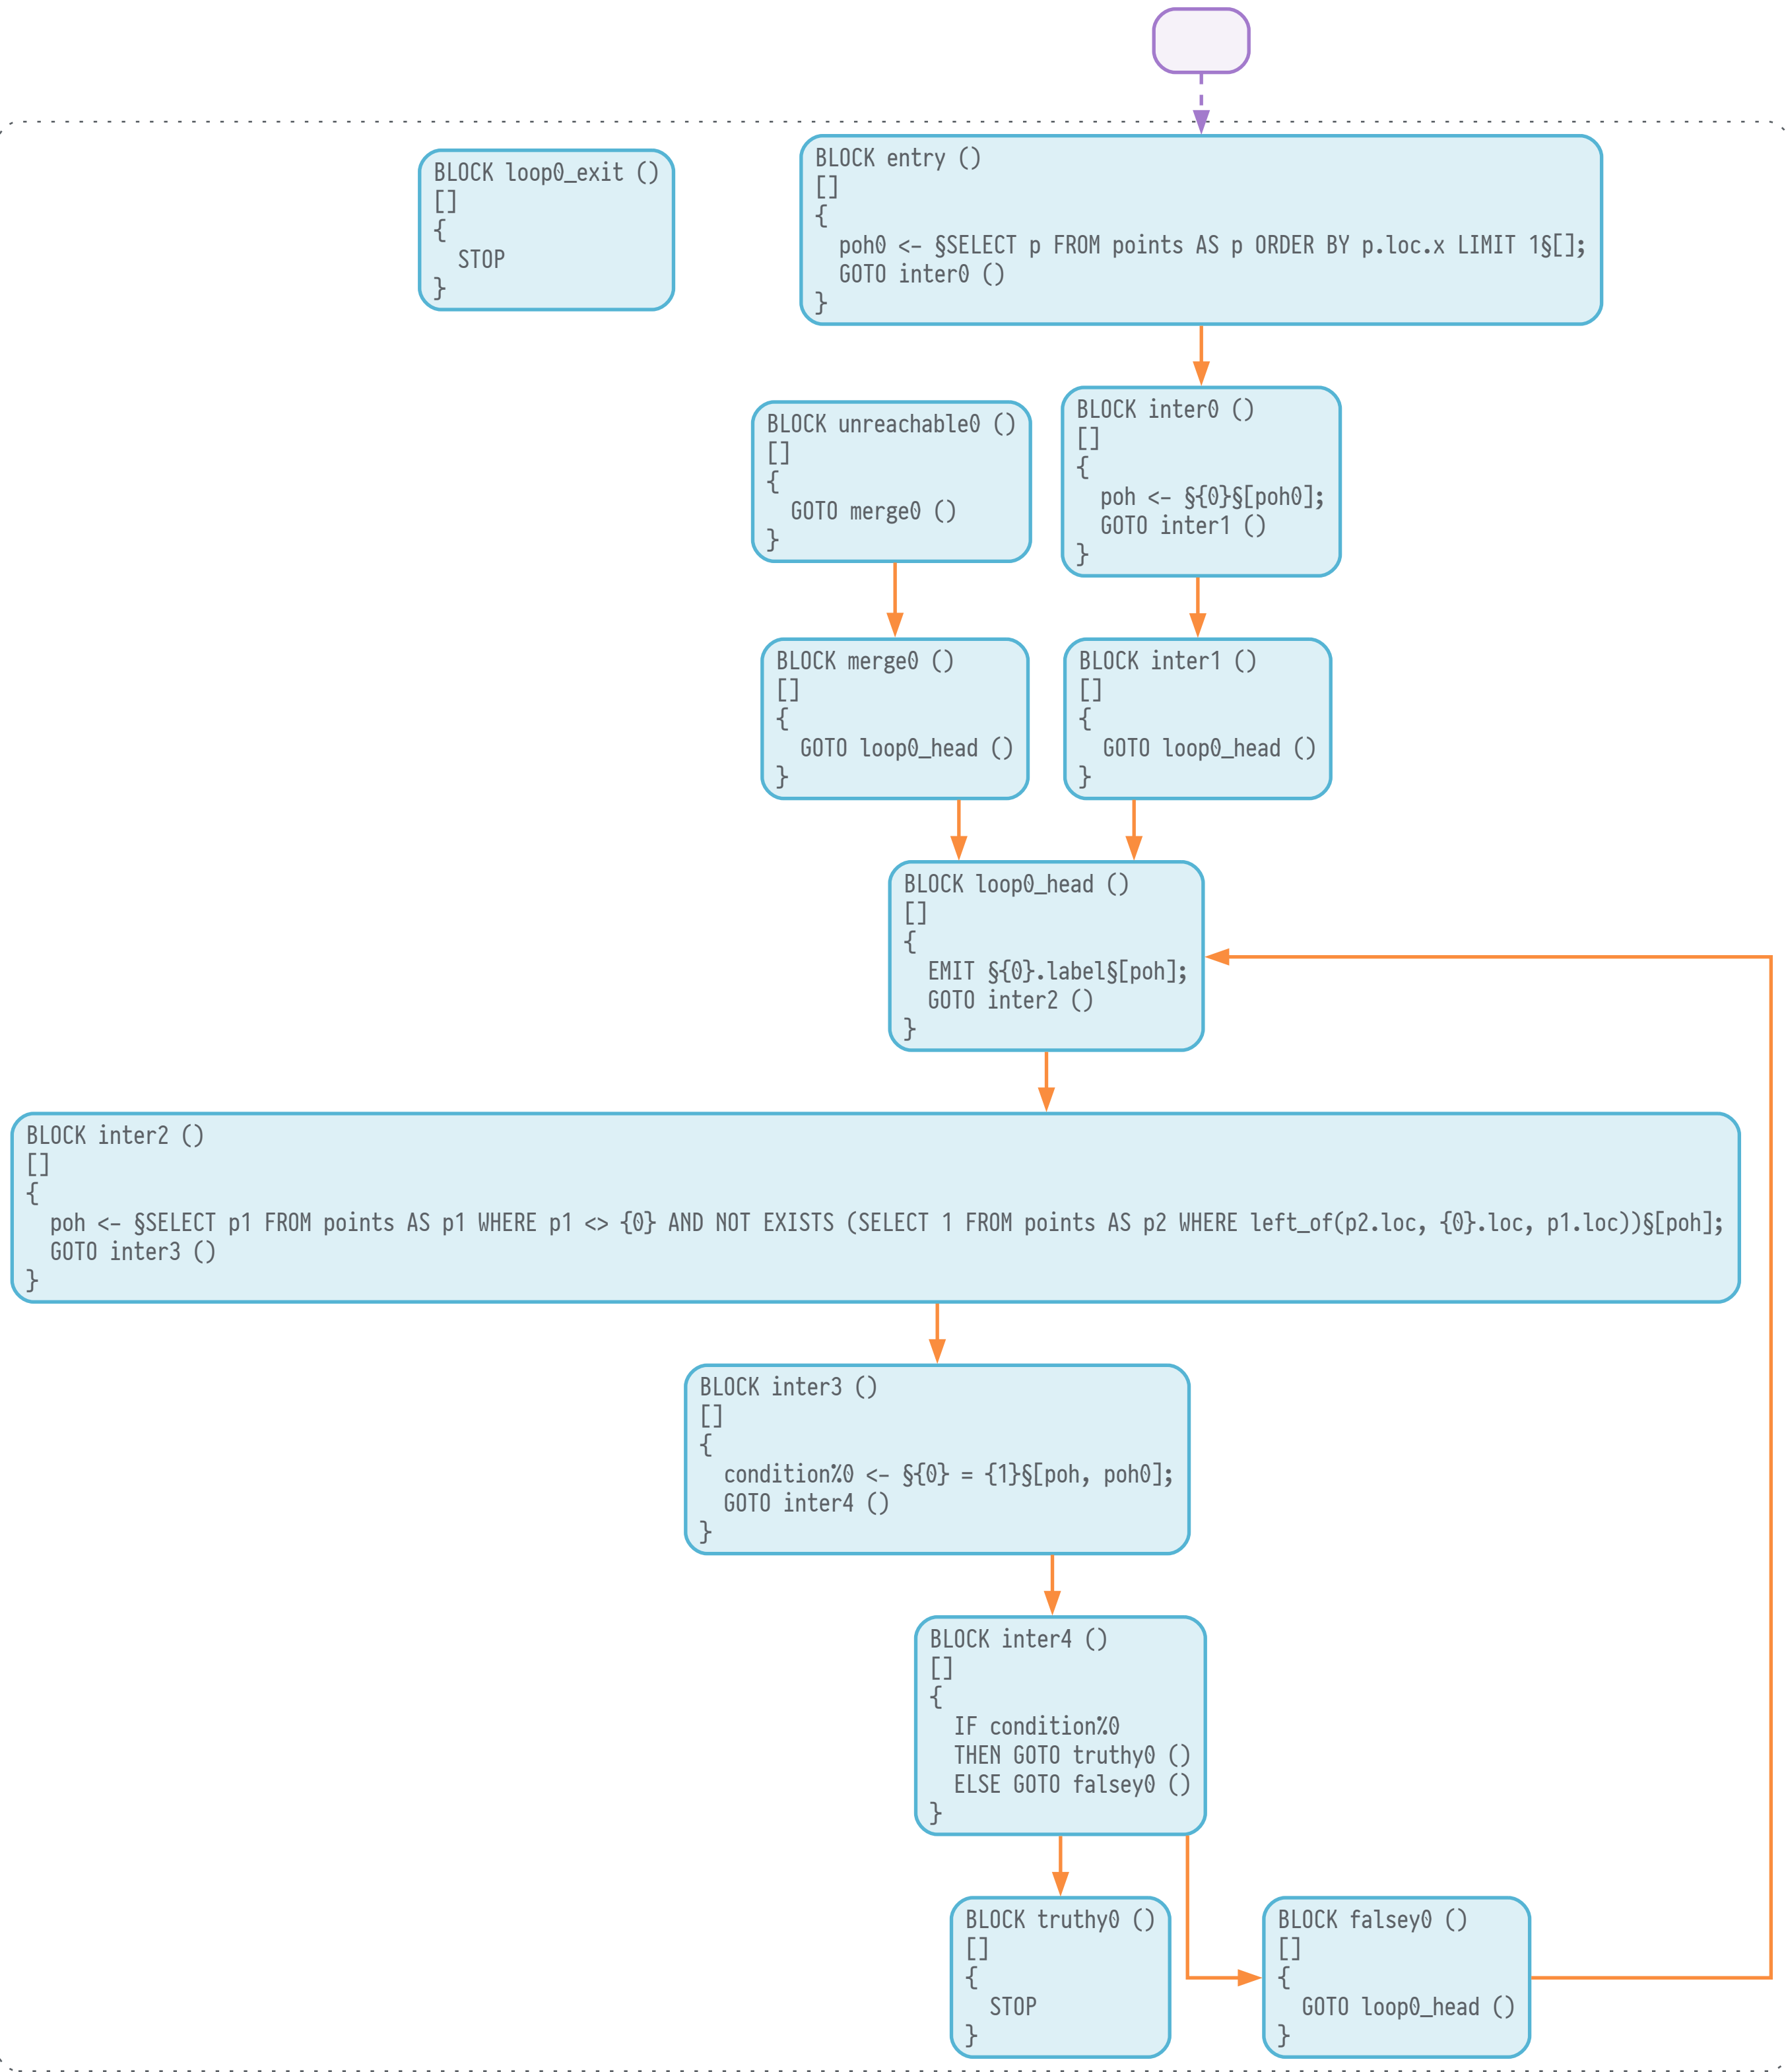

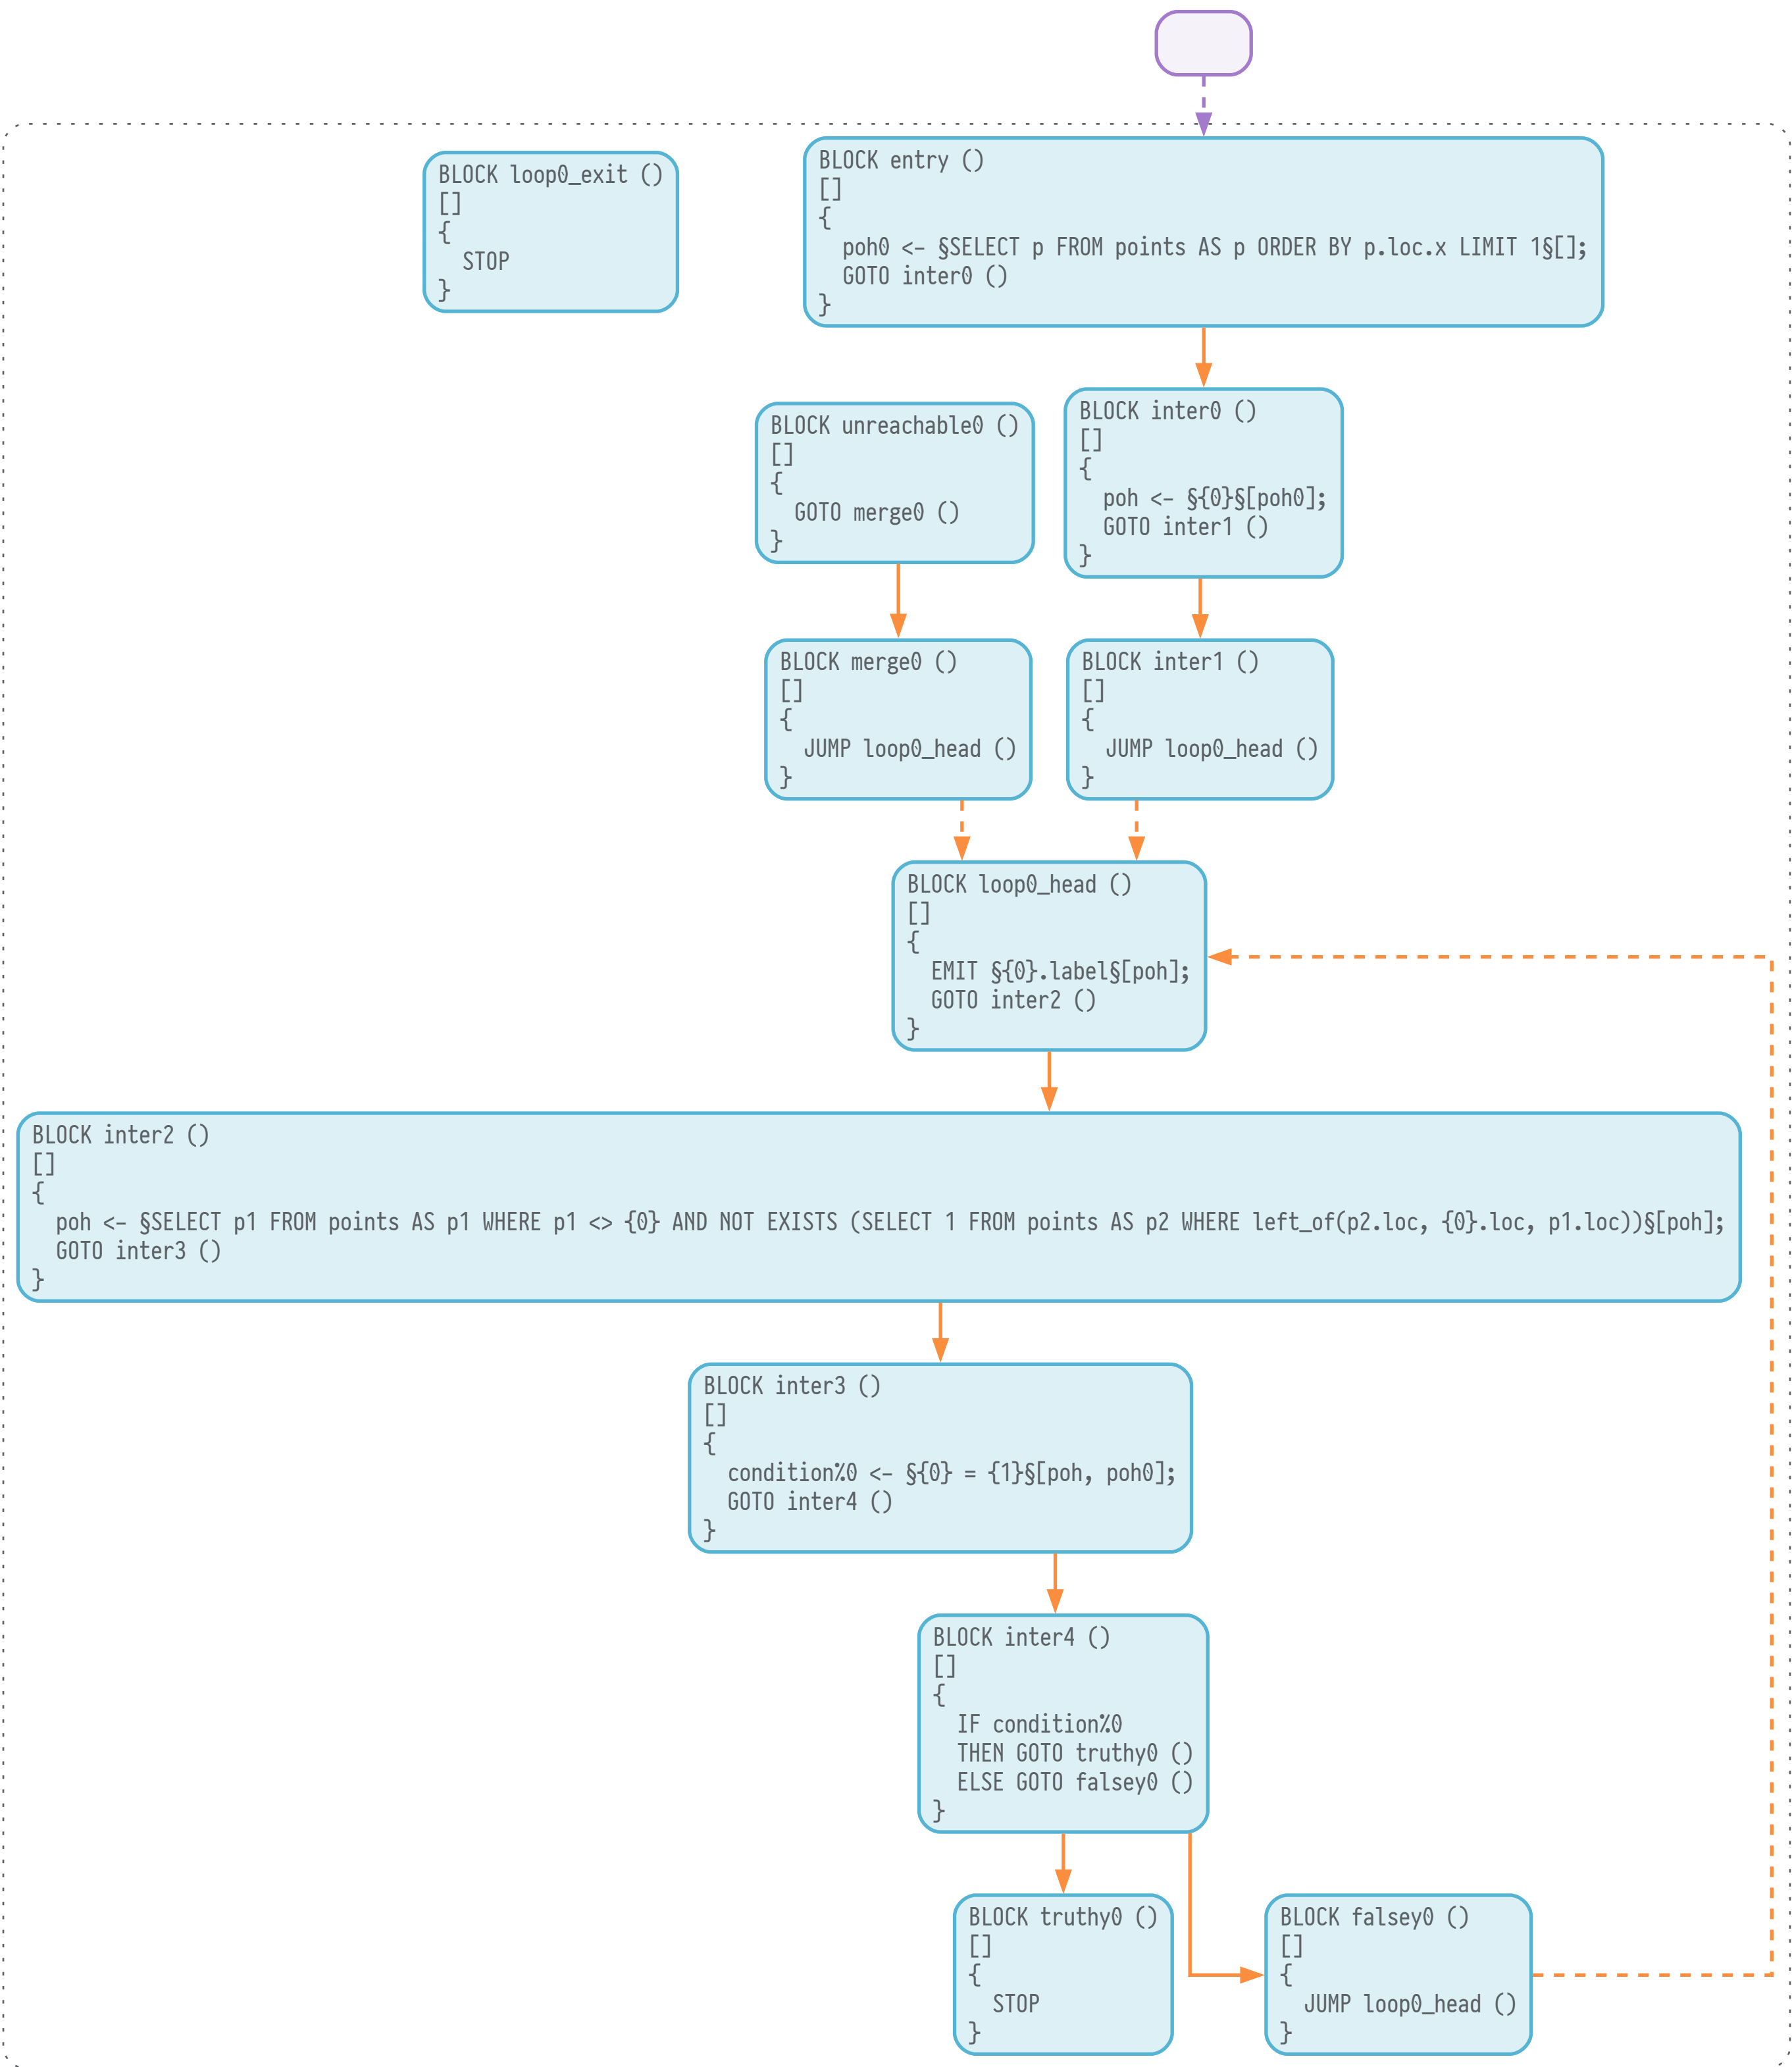

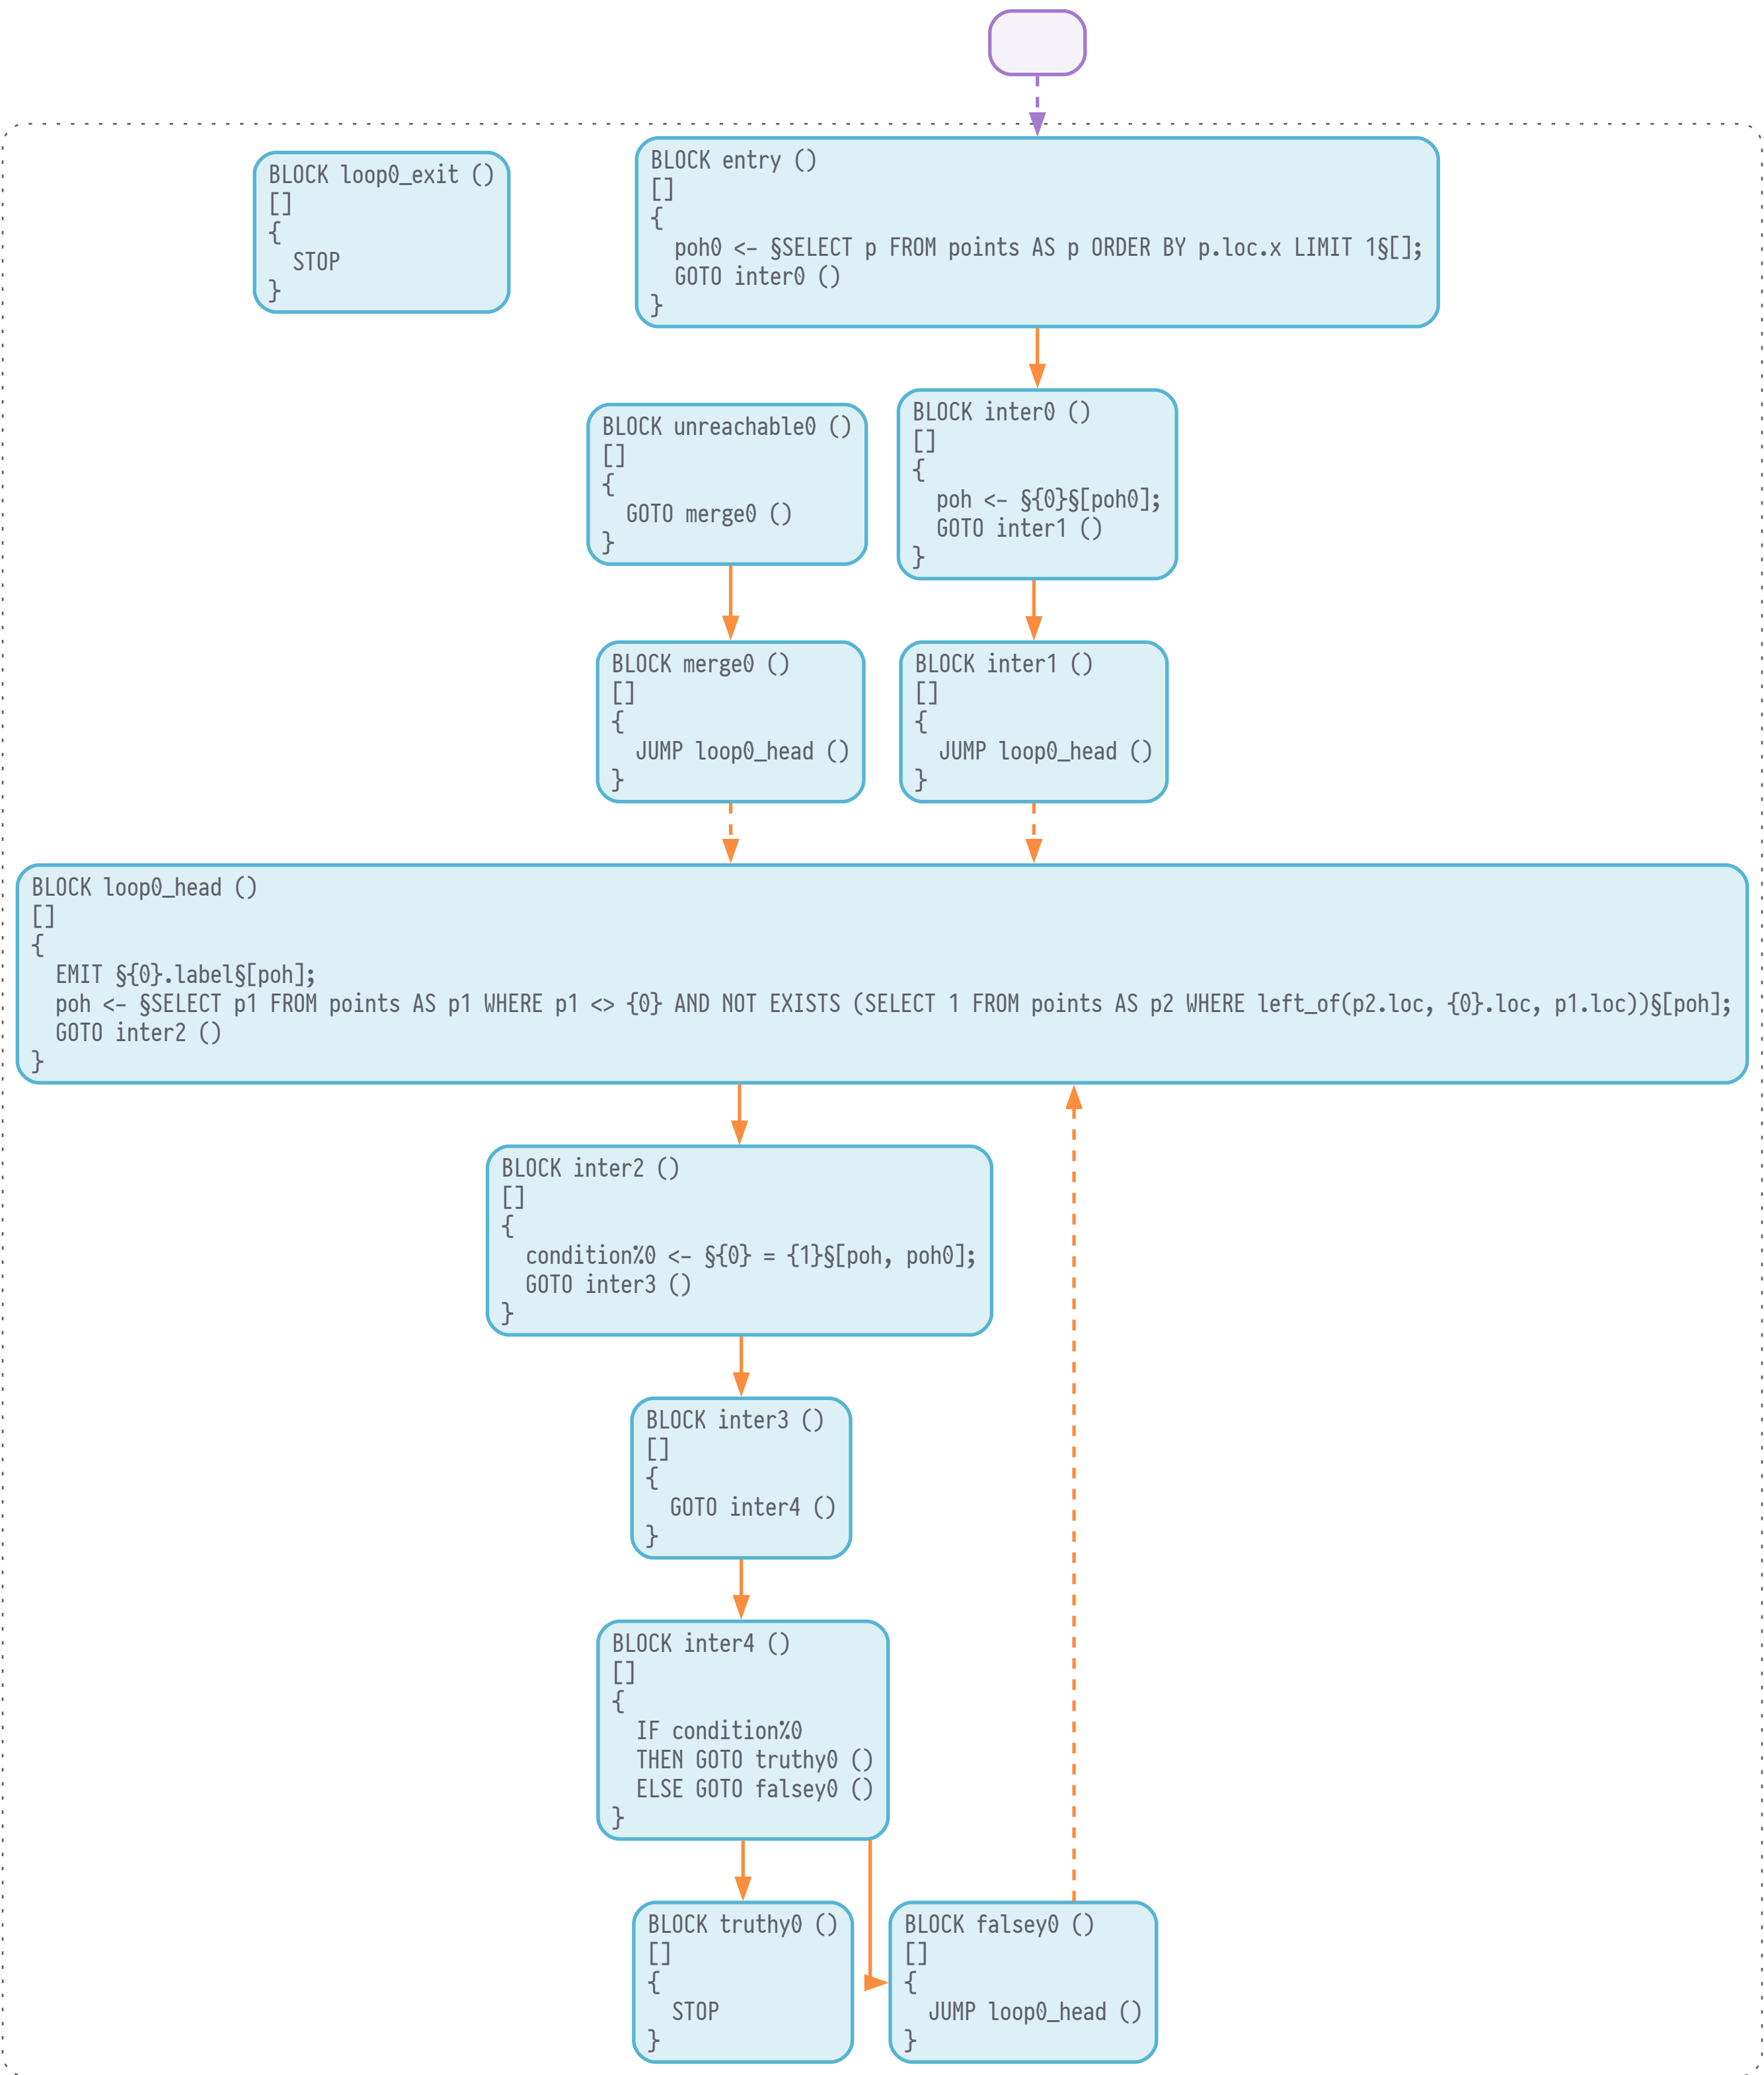

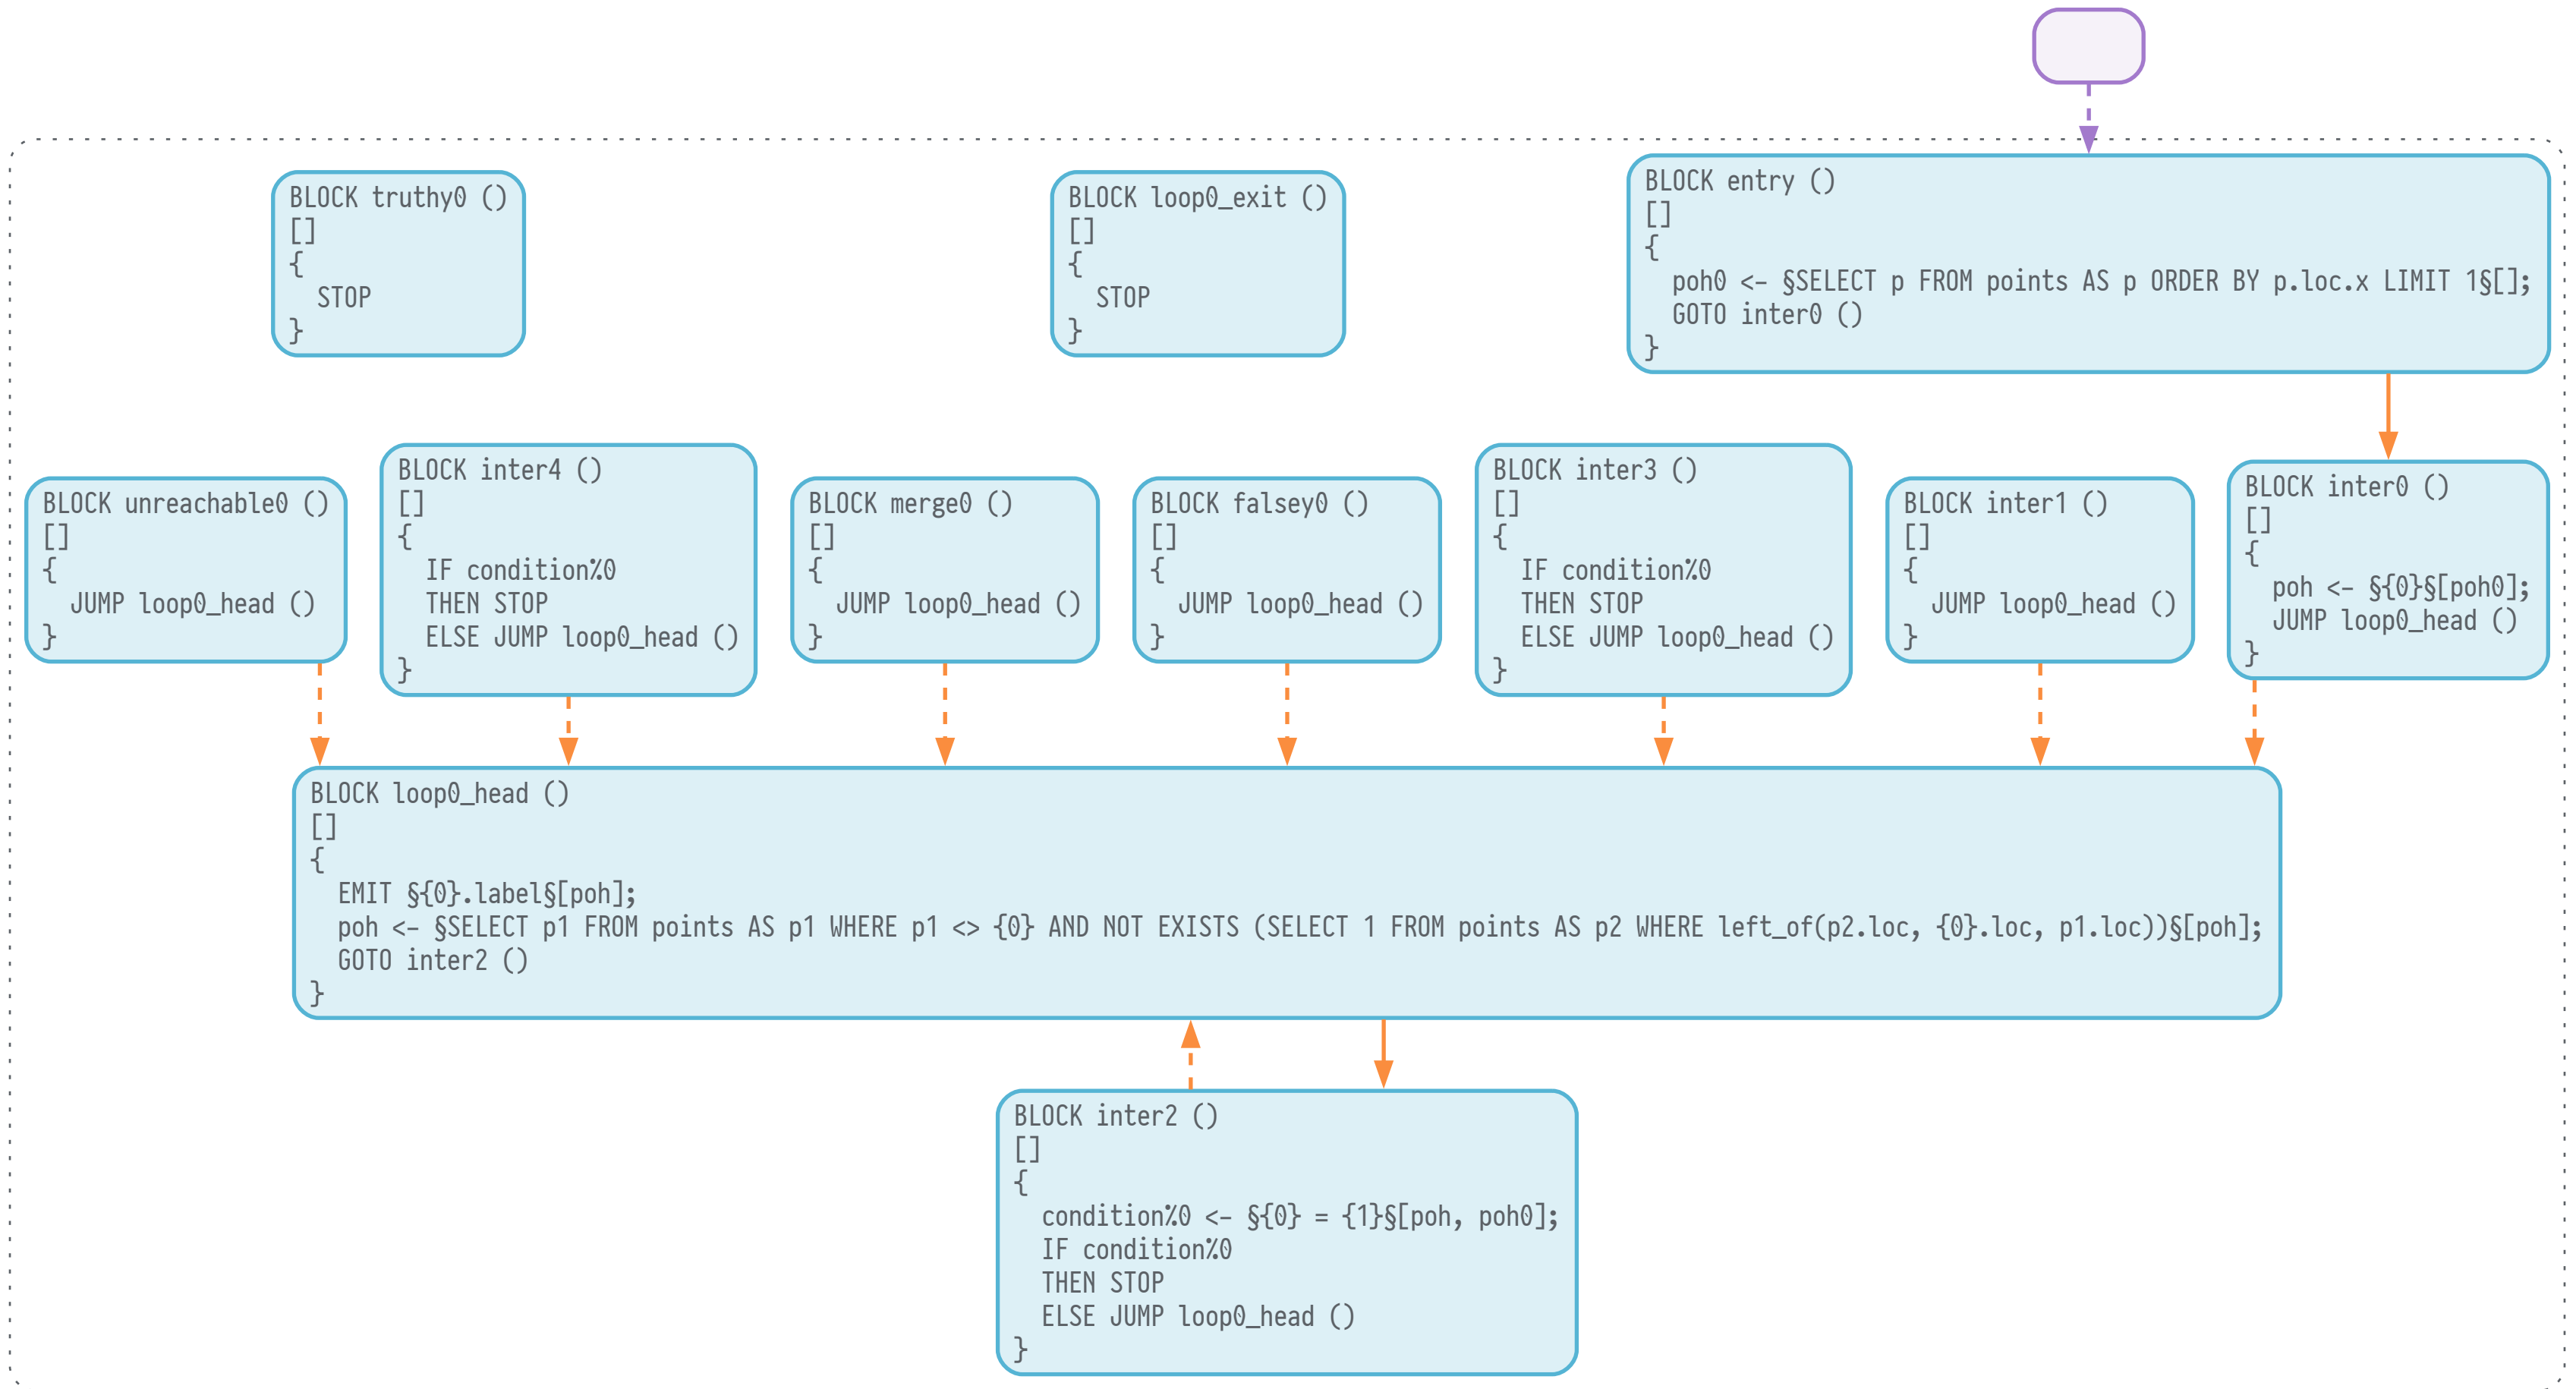

```
BLOCK entry ()  
[]  
{  
  poh0 <- $SELECT p FROM points AS p ORDER BY p.loc.x LIMIT 1$[];  
  GOTO inter0 ()  
}
```



```
BLOCK inter0 ()  
[]  
{  
  poh <- ${0}$[poh0];  
  JUMP loop0_head ()  
}
```



```
BLOCK loop0_head ()  
[]  
{  
  EMIT ${0}.label$[poh];  
  poh <- $SELECT p1 FROM points AS p1 WHERE p1 <> {0} AND NOT EXISTS (SELECT 1 FROM points AS p2 WHERE left_of(p2.loc, {0}.loc, p1.loc))$[poh];  
  GOTO inter2 ()  
}
```



```
BLOCK inter2 ()  
[]  
{  
  condition%0 <- ${0} = {1}$[poh, poh0];  
  IF condition%0  
  THEN STOP  
  ELSE JUMP loop0_head ()  
}
```





```
BLOCK entry (poh0, poh)
[]
{
  poh0 <- §SELECT p FROM points AS p ORDER BY p.loc.x LIMIT 1§[];
  GOTO inter0 (poh0)
}
```



```
BLOCK inter0 (poh0)
[]
{
  poh <- §{0}§[poh0];
  JUMP loop0_head (poh0, poh)
}
```



```
BLOCK loop0_head (poh0, poh)
[]
{
  EMIT §{0}.label§[poh];
  poh <- §SELECT p1 FROM points AS p1 WHERE p1 <> {0} AND NOT EXISTS (SELECT 1 FROM points AS p2 WHERE left_of(p2.loc, {0}.loc, p1.loc))§[poh];
  GOTO inter2 (poh0, poh)
}
```



```
BLOCK inter2 (poh0, poh)
[]
{
  condition%0 <- §{0} = {1}§[poh, poh0];
  IF condition%0
  THEN STOP
  ELSE JUMP loop0_head (poh0, poh)
}
```



```
poh0 <- $NULL$[]  
poh <- $NULL$[]
```

```
BLOCK entry (poh0, poh)  
[]  
{  
  poh0 <- $SELECT p FROM points AS p ORDER BY p.loc.x LIMIT 1$[];  
  GOTO inter0 (poh0)  
}
```

```
BLOCK inter0 (poh0)  
[]  
{  
  poh <- ${0}$[poh0];  
  JUMP loop0_head (poh0, poh)  
}
```

```
BLOCK loop0_head (poh0, poh)  
[]  
{  
  EMIT ${0}.label$[poh];  
  poh <- $SELECT p1 FROM points AS p1 WHERE p1 <> {0} AND NOT EXISTS (SELECT 1 FROM points AS p2 WHERE left_of(p2.loc, {0}.loc, p1.loc))$[poh];  
  GOTO inter2 (poh0, poh)  
}
```

```
BLOCK inter2 (poh0, poh)  
[]  
{  
  condition%0 <- ${0} = {1}$[poh, poh0];  
  IF condition%0  
  THEN STOP  
  ELSE JUMP loop0_head (poh0, poh)  
}
```

```
poh0 <- $NULL$[]  
poh <- $NULL$[]
```

```
BLOCK entry (poh0, poh)  
[  
  FROM LOOP AS entry  
]  
{  
  poh0 <- $SELECT p FROM points AS p ORDER BY p.loc.x LIMIT 1$[];  
  GOTO inter0 (poh0)  
}
```

```
BLOCK inter0 (poh0)  
[  
  FROM entry  
  WITH (poh0)  
  WHERE TRUE  
]  
{  
  poh <- ${0}$[poh0];  
  JUMP loop0_head (poh0, poh)  
}
```

```
BLOCK loop0_head (poh0, poh)  
[  
  FROM LOOP AS loop0_head  
]  
{  
  EMIT ${0}.label$[poh];  
  poh <- $SELECT p1 FROM points AS p1 WHERE p1 <> {0} AND NOT EXISTS (SELECT 1 FROM points AS p2 WHERE left_of(p2.loc, {0}.loc, p1.loc))$[poh];  
  GOTO inter2 (poh0, poh)  
}
```

```
BLOCK inter2 (poh0, poh)  
[  
  FROM loop0_head  
  WITH (poh0, poh)  
  WHERE TRUE  
]  
{  
  condition%0 <- ${0} = {1}$[poh, poh0];  
  IF condition%0  
  THEN STOP  
  ELSE JUMP loop0_head (poh0, poh)  
}
```