

```
149.28.236.173 - PuTTY
login as: root
root@149.28.236.173's password:
Linux 4.19.0-6-amd64 #1 SMP Debian 4.19.67-2+deb10u2 (2019-11-11) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/*copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
root@1:~#
```


用 Putty 登录服务器

<https://www.v2ray.com>

访问这个网址



点击这里

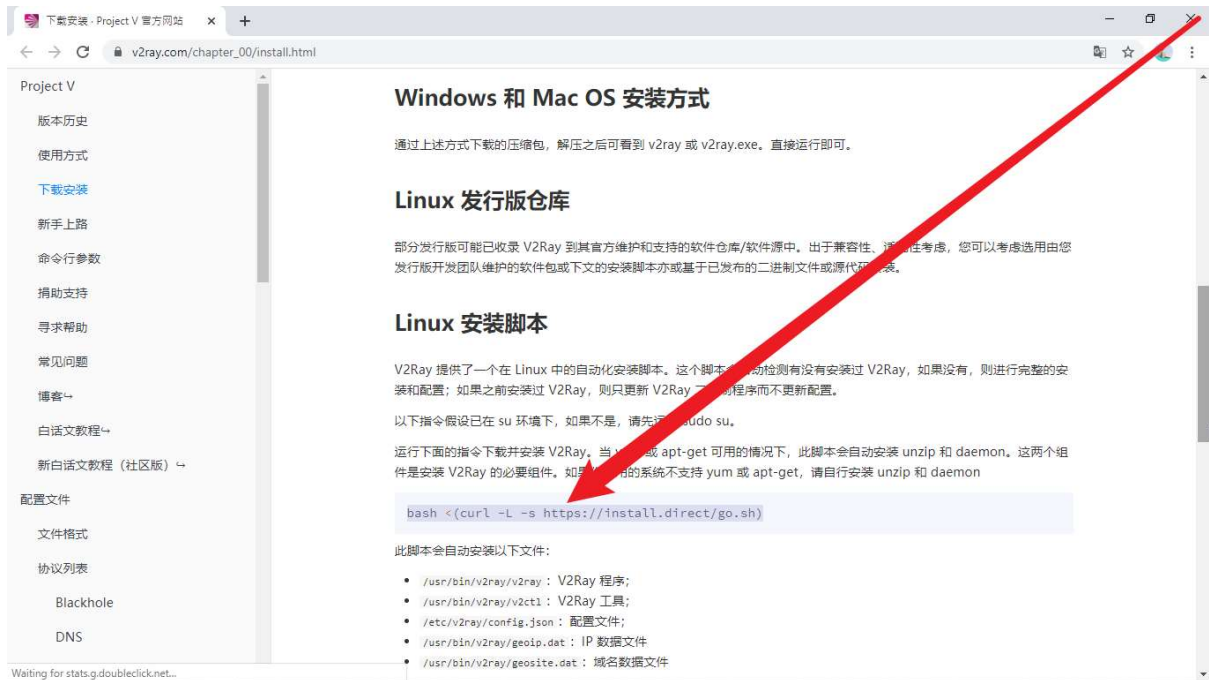

复制这一句命令。最好上这个网站亲自复制，如果无法访问这个网站，就复制下面这一行：
bash <(curl -L -s https://install.direct/go.sh)



粘贴到 Putty 里，敲回车。这是用 V2ray 官方脚本安装 V2ray 服务器端。

```
149.28.236.173 - PuTTY
login as: root
root@149.28.236.173's password:
Linux 4.19.0-6-amd64 #1 SMP Debian 4.19.67-2+deb10u2 (2019-11-11) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/*copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
root@1:~# bash <(curl -L -s https://install.direct/go.sh)
Installing V2Ray v4.22.1 on x86_64
Downloading V2Ray: https://github.com/v2ray/v2ray-core/releases/download/v4.22.1/v2ray-linux-64.zip
  % Total    % Received % Xferd Average Speed   Time    Time     Time  Current
                                 Dload  Upload   Total   Spent    Left   Speed
100 608 100 608 0 0 15589 0 --:--:-- --:--:-- --:--:-- 15589
100 11.6M 100 11.6M 0 0 21.9M 0 --:--:-- --:--:-- --:--:-- 59.5M
awk: /dev/fd/63: line 144: unzip: command not found
not an option: -e
Updating software repo
Installing unzip
Selecting previously unselected package unzip.
(Reading database ... 31466 files and directories currently installed.)
Preparing to unpack .../unzip_6.0-23+deb10u1_amd64.deb ...
Unpacking unzip (6.0-23+deb10u1) ...
Setting up unzip (6.0-23+deb10u1) ...
Processing triggers for mime-support (3.62) ...
Processing triggers for man-db (2.8.5-2) ...
Archive: /tmp/v2ray/v2ray.zip
  inflating: /usr/bin/v2ray/geosite.dat
  inflating: /usr/bin/v2ray/geosite.dat
  inflating: /usr/bin/v2ray/v2ctl
  inflating: /usr/bin/v2ray/v2ray
PORT:36185
UUID:b6392c13-8f31-43d3-9559-1d3c4776d377
Archive: /tmp/v2ray/v2ray.zip
  inflating: /etc/systemd/system/v2ray.service
Created symlink /etc/systemd/system/multi-user.target.wants/v2ray.service -> /etc/systemd/system/v2ray.service.
V2Ray v4.22.1 is installed.
root@1:~#
```


这是端口号

```
149.28.236.173 - PuTTY
login as: root
root@149.28.236.173's password:
Linux 4.19.0-6-amd64 #1 SMP Debian 4.19.67-2+deb10u2 (2019-11-11) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/*copyright.


Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
root@1:~# bash <(curl -L -s https://install.direct/go.sh)
Installing V2Ray v4.22.1 on x86_64
Downloading V2Ray: https://github.com/v2ray/v2ray-core/releases/download/v4.22.1/v2ray-linux-64.zip
  % Total    % Received % Xferd Average Speed   Time    Time     Time  Current
                                 Dload  Upload   Total   Spent    Left   Speed
100 608 100 608 0 0 15589 0 --:--:-- --:--:-- --:--:-- 15589
100 11.6M 100 11.6M 0 0 21.9M 0 --:--:-- --:--:-- --:--:-- 59.5M
awk: /dev/fd/63: line 144: unzip: command not found
not an option: -e
Updating software repo
Installing unzip
Selecting previously unselected package unzip.
(Reading database ... 31466 files and directories currently installed.)
Preparing to unpack .../unzip_6.0-23+deb10u1_amd64.deb ...
Unpacking unzip (6.0-23+deb10u1) ...
Setting up unzip (6.0-23+deb10u1) ...
Processing triggers for mime-support (3.62) ...
Processing triggers for man-db (2.8.5-2) ...
Archive: /tmp/v2ray/v2ray.zip
  inflating: /usr/bin/v2ray/geosite.dat
  inflating: /usr/bin/v2ray/geosite.dat
  inflating: /usr/bin/v2ray/v2ctl
  inflating: /usr/bin/v2ray/v2ray
PORT:36185
UUID:b6392c13-8f31-43d3-9559-1d3c4776d377
Archive: /tmp/v2ray/v2ray.zip
  inflating: /etc/systemd/system/v2ray.service
Created symlink /etc/systemd/system/multi-user.target.wants/v2ray.service -> /etc/systemd/system/v2ray.service.
V2Ray v4.22.1 is installed.
root@1:~#
```

这是 UUID

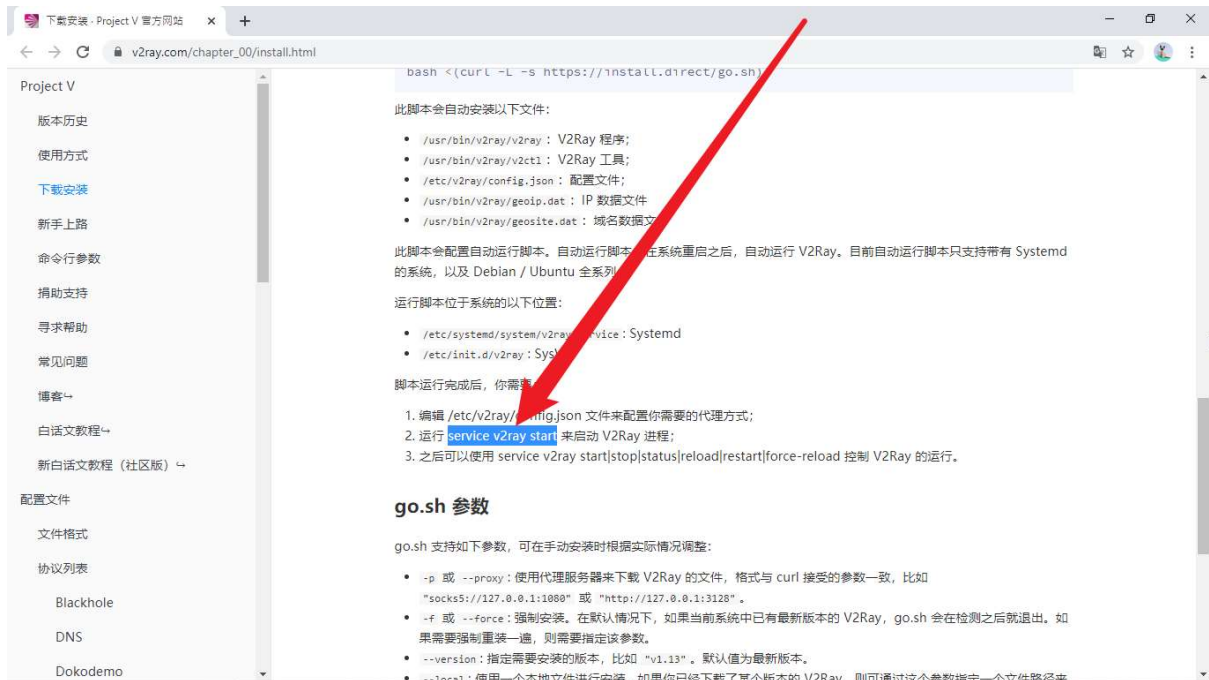


复制这一句命令。最好上这个网站亲自复制, 如果无法访问这个网站, 就复制下面这一行:


`service v2ray start`

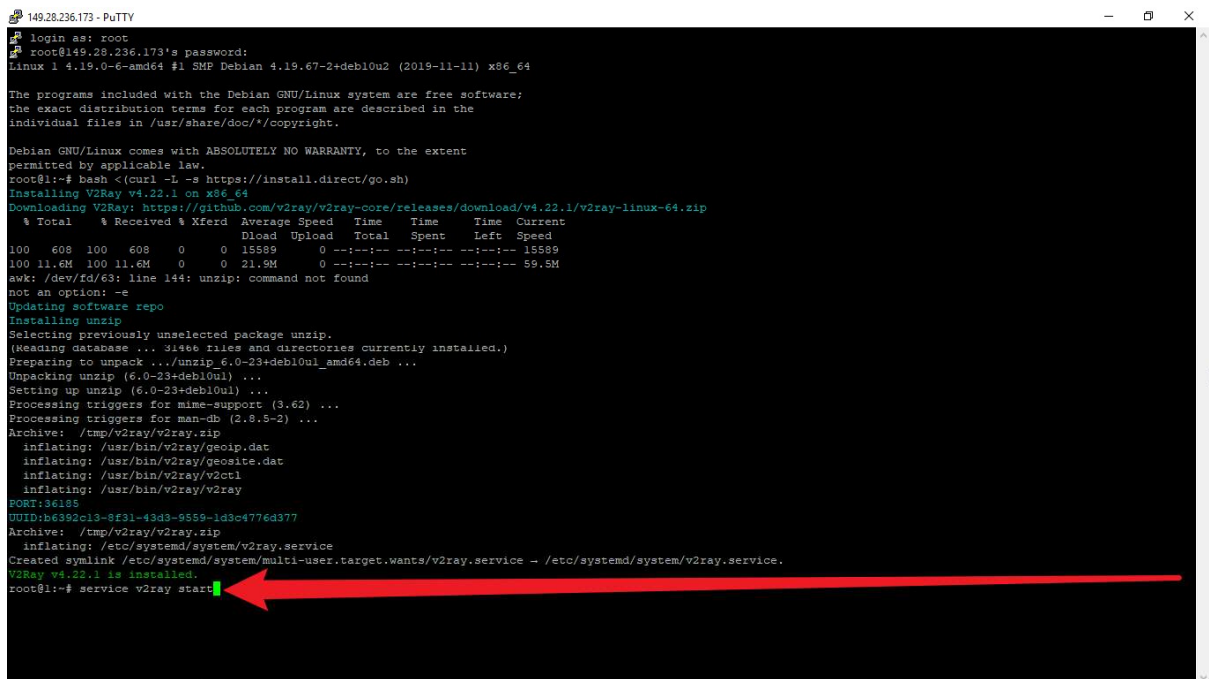

粘贴到 Putty 里, 敲回车。这是启动 V2ray。

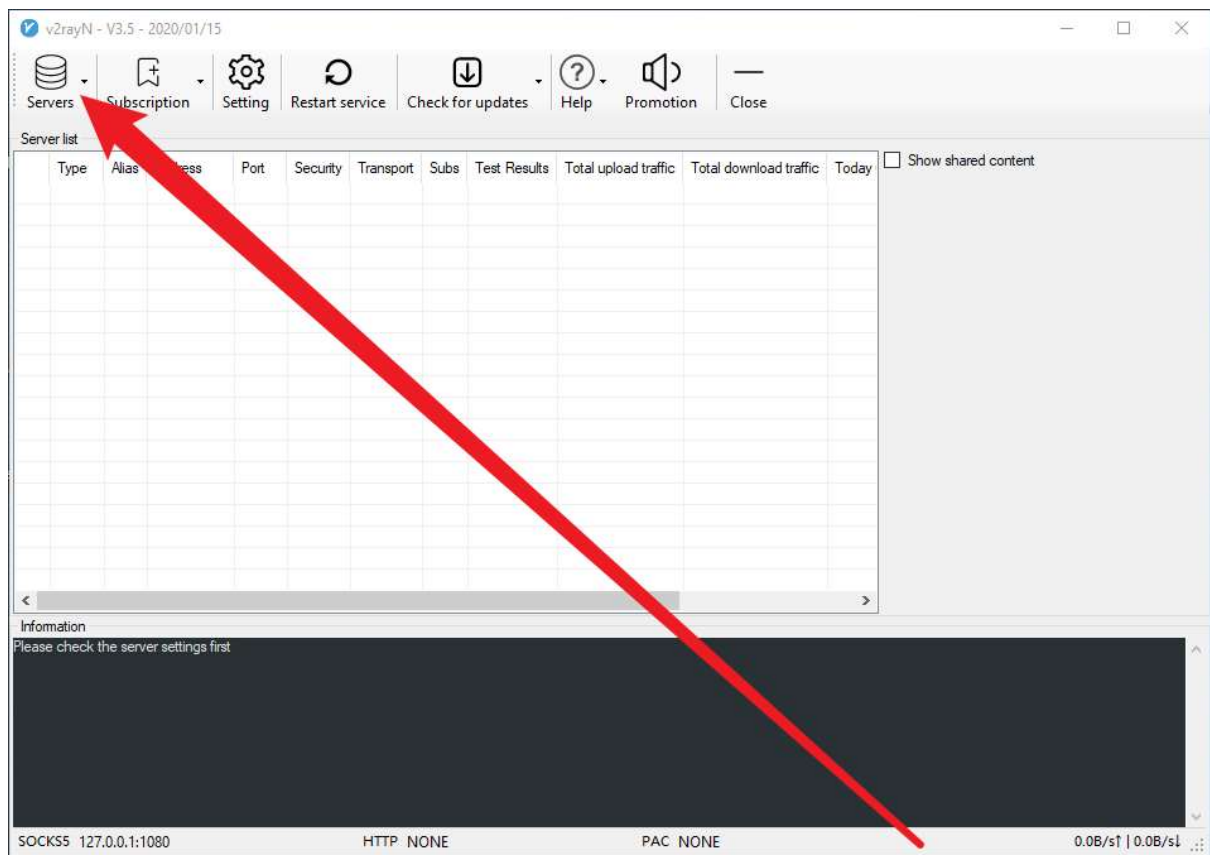

点击这里

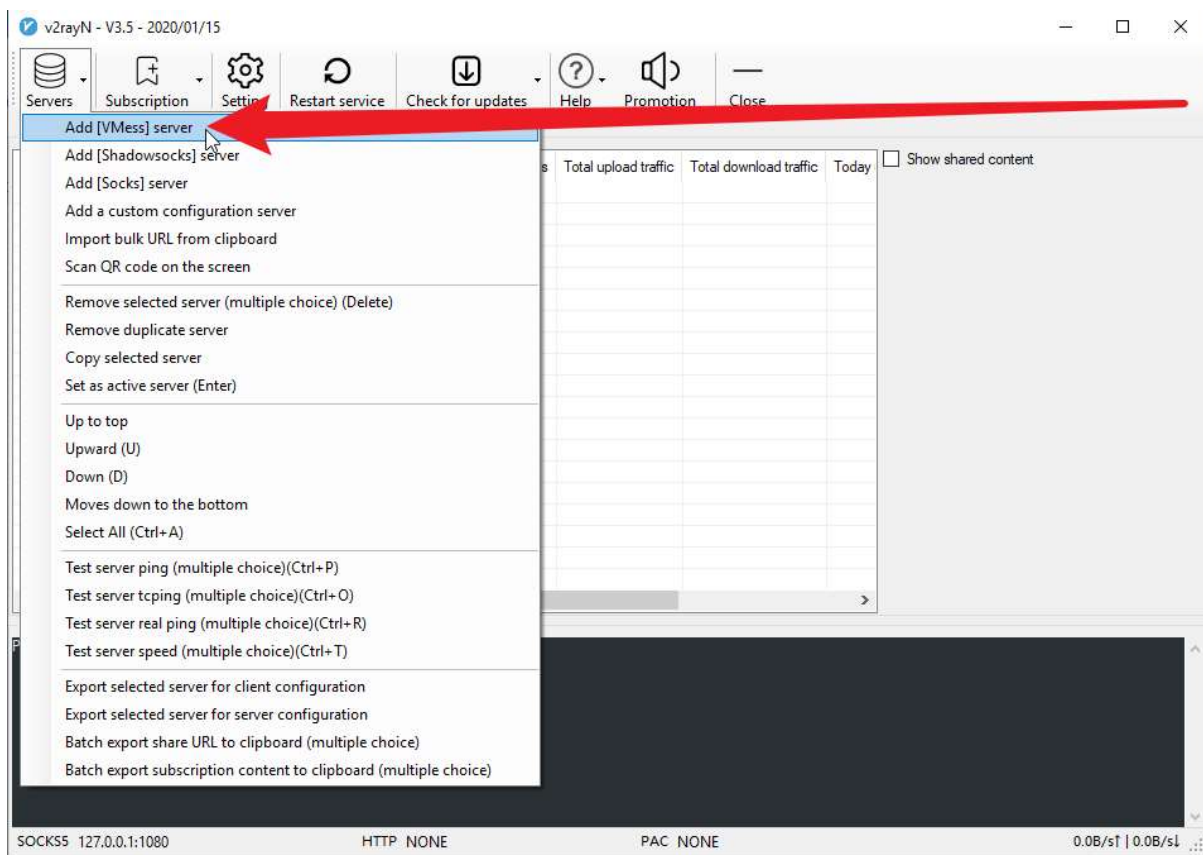

点击这里。这是添加一个 Vmess 服务器配置。

✓ Edit or add a [VMess] server

Import configuration file

Server

Address

Port

UUID(id)

AlterId

Encryption method (security) *Recommended (auto)

Transport protocol(network) *Default value tcp

Alias (remarks) * Fill in manually

Keep the default value if it is not clear

Camouflage type *tcp or kcp or QUIC camouflage type, default none

Camouflage domain(host)

Path

TLS

1)http host Separated by commas (,)
2)ws host
3)h2 host Separated by commas (,)
4)QUIC security

1)ws path
2)h2 path
3)QUIC key

填入服务器的 IP

✓

Edit or add a [VMess] server

✕

Import configuration file

Server

Address

23.14.215.259

Port

34693

UUID(id)

Generate

AlterId

0

Encryption method (security)

auto

*Recommended (auto)

Transport protocol(network)

tcp

*Default value tcp

Alias (remarks)

* Fill in manually

Keep the default value if it is not clear

Camouflage type

none

*tcp or kcp or QUIC camouflage type, default none

Camouflage domain(host)

1)http host Separated by commas (,)
2)ws host
3)h2 host Separated by commas (,)
4)QUIC security

Path

1)ws path
2)h2 path
3)QUIC key

TLS

OK

Cancel

填入端口号


✓ Edit or add a [VMess] server ✕

Import configuration file

Server

Address

Port

UUID(id) 

AlterId

Encryption method (security) *Recommended (auto)

Transport protocol(network) *Default value tcp

Alias (remarks) * Fill in manually

Keep the default value if it is not clear

Camouflage type *tcp or kcp or QUIC camouflage type, default none

Camouflage domain(host)
1)http host Separated by commas (,)
2)ws host
3)h2 host Separated by commas (,)
4)QUIC security

Path
1)ws path
2)h2 path
3)QUIC key

TLS

填入 UUID。UUID 可以认为就是密码。

✓ Edit or add a [VMess] server

Import configuration file

Server

Address

Port

UUID(id)

AlterId

Encryption method (security) *Recommended (auto)

Transport protocol(network) *Default value tcp

Alias (remarks) * Fill in manually

Keep the default value if it is not clear

Camouflage type *tcp or kcp or QUIC camouflage type, default none

Camouflage domain(host)

Path

TLS

1)http host Separated by commas (,)
2)ws host
3)h2 host Separated by commas (,)
4)QUIC security

1)ws path
2)h2 path
3)QUIC key

这里改成数字 0。AlterID 设置成 0 以防大于服务器端 AlterID。

✓ Edit or add a [VMess] server

Import configuration file

Server

Address

Port

UUID(id)

AlterId

Encryption method (security) *Recommended (auto)

Transport protocol(network) *Default value tcp

Alias (remarks) * Fill in manually

Keep the default value if it is not clear


Camouflage type *tcp or kcp or QUIC camouflage type, default none

Camouflage domain(host) 1)http host Separated by commas (,)
2)ws host
3)h2 host Separated by commas (,)
4)QUIC security

Path 1)ws path
2)h2 path
3)QUIC key

TLS

点击这里。这个 Vmess 配置就添加了。

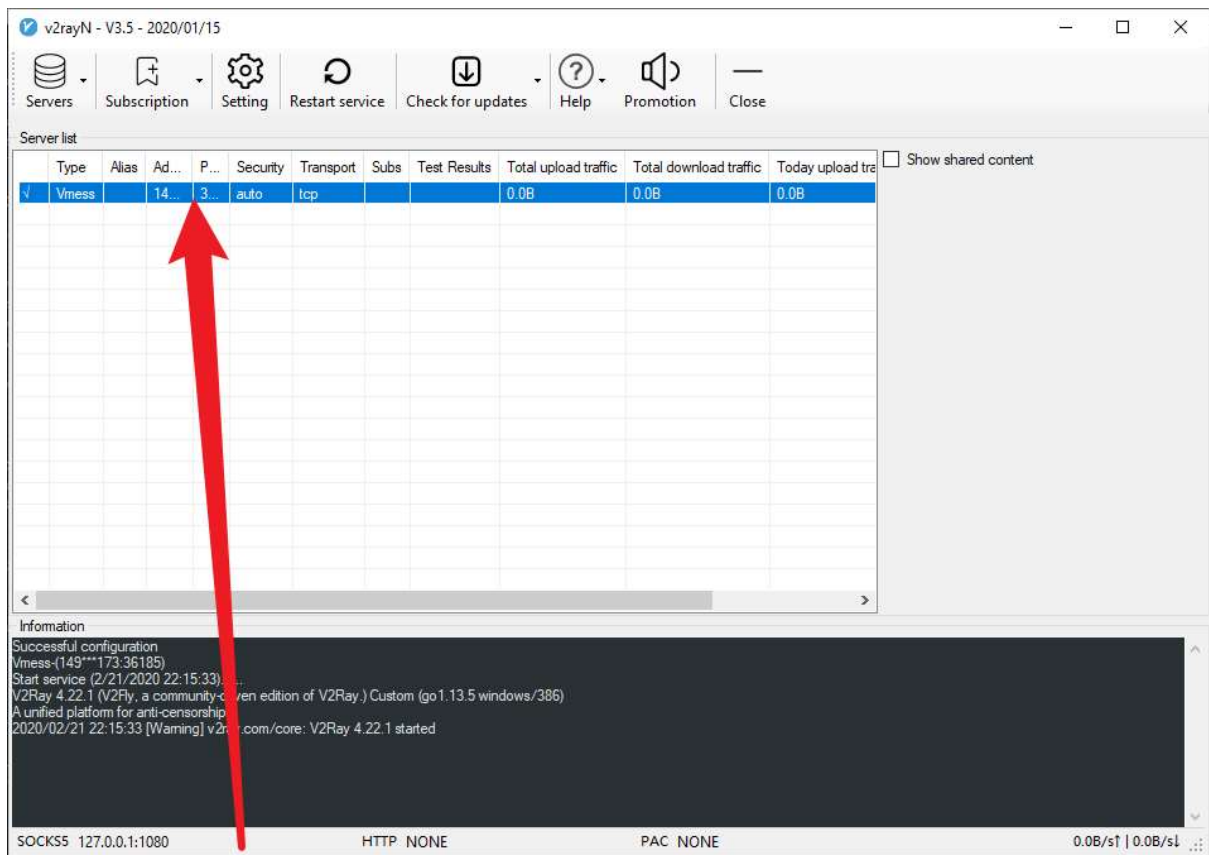

点击新添加的配置并敲回车这个配置就开始工作了

在任何地方提任何问题之前首先要确保自己已经仔细研读过下面这篇文章至少三遍：

https://github.com/ryanhanwu/How-To-Ask-Questions-The-Smart-Way/blob/master/README-zh_CN.md