
## Blockchain

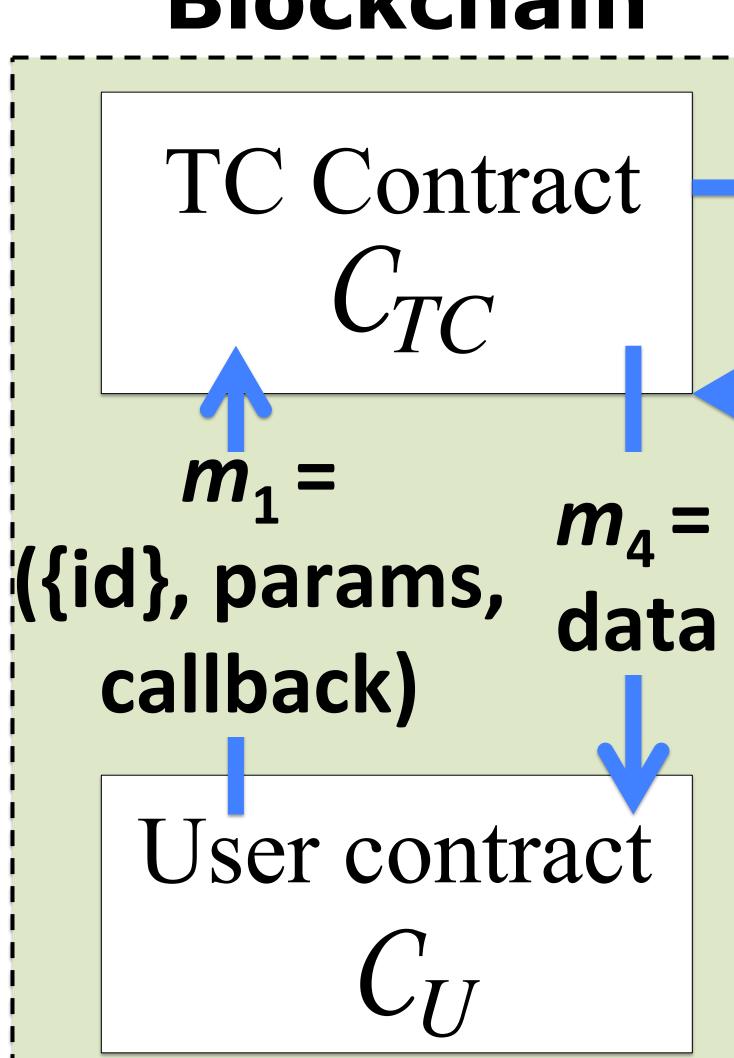

TC server

 $m_2$  = (id, params)

 $m_3 =$ 

(id, params, data)

Enclave

(obtains data from data source)