

Visualizations

```
## -- Attaching packages ----- tidyverse 1.3.1 --
## v ggplot2 3.3.5      v dplyr  1.0.7
## v tibble  3.1.4      v stringr 1.4.0
## v tidyr   1.1.3      v forcats 0.5.1
## v purrr   0.3.4

## -- Conflicts ----- tidyverse_conflicts() --
## x dplyr::filter() masks stats::filter()
## x dplyr::lag()     masks stats::lag()

##
## Attaching package: 'kableExtra'

## The following object is masked from 'package:dplyr':
##
##   group_rows

## Linking to GEOS 3.8.0, GDAL 3.0.4, PROJ 6.3.1

## Installing package into '/cloud/lib/x86_64-pc-linux-gnu-library/4.1'
## (as 'lib' is unspecified)

## Skipping install of 'leaflet.providers' from a github remote, the SHA1 (86765f12) has not changed since last
##   Use `force = TRUE` to force installation

## Rows: 22 Columns: 16

## -- Column specification -----
## Delimiter: ","
## chr (8): District_Name, Latino%, White%, Black%, Native_American%, Asian%, O...
## dbl (2): District_No, Native_American

##
## i Use `spec()` to retrieve the full column specification for this data.
## i Specify the column types or set `show_col_types = FALSE` to quiet this message.

## Rows: 13530 Columns: 11

## -- Column specification -----
## Delimiter: ","
## chr (9): LAST_NME, FIRST_NME, EMPLOYEE_POSITION, CPD_UNIT_ASSIGNED_NO, UNITA...
## dbl (2): AGE, STAR_NO

##
## i Use `spec()` to retrieve the full column specification for this data.
## i Specify the column types or set `show_col_types = FALSE` to quiet this message.

## Warning: One or more parsing issues, see `problems()` for details

## Rows: 125581 Columns: 22

## -- Column specification -----
## Delimiter: ","
## chr (12): gender, race, current_rank, complaint_category, recommended_findi...
```

```

## dbl (7): row_id, cr_id, birth_year, current_unit, current_star, recommende...
## lgl (2): middle_initial, middle_initial2
## date (1): appointed_date

##
## i Use `spec()` to retrieve the full column specification for this data.
## i Specify the column types or set `show_col_types = FALSE` to quiet this message.
## Rows: 48214 Columns: 4

## -- Column specification -----
## Delimiter: ","
## chr (2): gender, race
## dbl (2): cr_id, age

##
## i Use `spec()` to retrieve the full column specification for this data.
## i Specify the column types or set `show_col_types = FALSE` to quiet this message.
## Rows: 131142 Columns: 12

## -- Column specification -----
## Delimiter: ","
## chr (6): beat, location_code, address_number, street, apartment_number, cit...
## dbl (2): row_id, cr_id
## date (3): incident_date, complaint_date, closed_date
## time (1): incident_time


##
## i Use `spec()` to retrieve the full column specification for this data.
## i Specify the column types or set `show_col_types = FALSE` to quiet this message.
district_complaints <- complaints_accused %>%
  filter(current_unit %in% 1:25) %>%
  group_by(current_unit) %>%
  summarise(n = n()) %>%
  arrange(desc(n))

total_district_complaints <- full_join(district_complaints,
                                       district_demographics,
                                       by = c("current_unit" = "District_No")) %>%
  mutate(complaints_per_capita = n/Population)

total_district_complaints %>%
  filter(is.na(District_Name) == FALSE) %>%
  ggplot(mapping = aes(
    x = fct_reorder(District_Name, complaints_per_capita),
    y = complaints_per_capita,
    color = Majority)) +
  geom_point() +
  geom_segment(aes(x = fct_reorder(District_Name, complaints_per_capita),
                             xend = fct_reorder(District_Name, complaints_per_capita),
                             y = 0, yend = complaints_per_capita)) +
  coord_flip() +
  labs(title = "Complaints per Capita by District Name",
       subtitle = "Colored by Racial Majority",
       x = "District Name",
       y = "Complaints Per Capita")

```

Complaints per Capita by District Name
Colored by Racial Majority

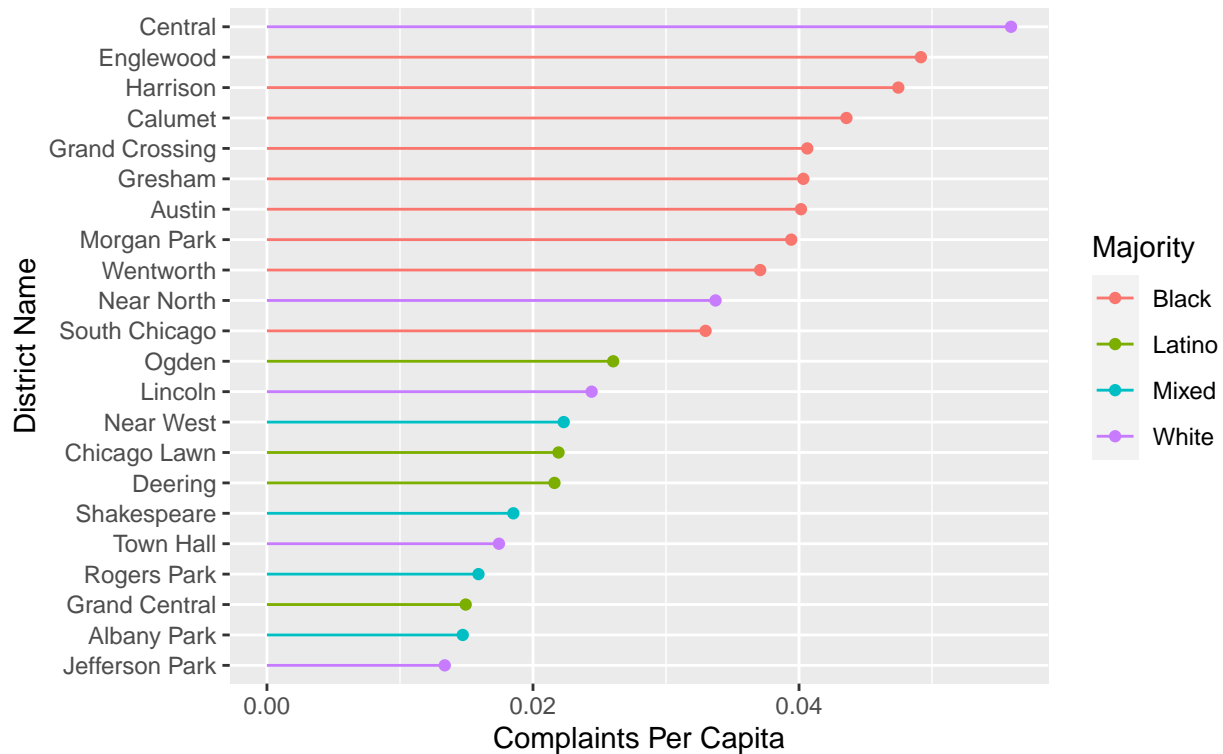

```
district_complaints_1 <- complaints_accused %>%
  filter(current_unit %in% 1:25) %>%
  group_by(current_unit)
```

```
total_district_complaints_findings <- full_join(district_complaints_1,
  district_demographics,
  by = c("current_unit" = "District_No"))
```

```
#stat = "identity"
```

```
data1 <- total_district_complaints_findings %>%
  mutate(final_decision = as.factor(case_when(
    final_finding %in% "SU" ~ "Sustained",
    final_finding %in% "DIS" ~ "Sustained",
    is.na(final_finding) == TRUE ~ "Missing",
    final_finding %in% "NAF" ~ "No Affidavit or Cooperation",
    final_finding %in% "NC" ~ "No Affidavit or Cooperation",
    final_finding %in% "NS" ~ "Not Sustained",
    final_finding %in% "EX" ~ "Not Sustained",
    final_finding %in% "UN" ~ "Not Sustained"
  ))) %>%
  group_by(final_decision, District_Name) %>%
  summarize(n = n())
```

`summarise()` has grouped output by 'final_decision'. You can override using the `.groups` argument.

```
#data1 %>%
# group_by(final_decision) %>%
```

```

#summarize(n = n())
#reorder so that missing is at the end and change colors, take out the NA
#ggplot(data = data1, aes(fill = factor(final_decision, levels = c("Not Sustained", "No Affidavit or
#      x = fct_relevel(District_Name), district_levels),
#      y = n)) +
#geom_bar(position = "fill", stat = "identity") +
#theme_minimal() +
#scale_fill_viridis_d() +
#coord_flip() +
# labs(title = "Proportion of Final Findings",
#       subtitle = "By Neighborhood",
#       x = "Proportion of Complaints",
#       y = "District Name",
#       fill = "Final Decision"
# )

```

```

sustained_data <- total_district_complaints_findings %>%
  group_by(final_finding, District_Name, Majority, Population) %>%
  filter(final_finding == "SU" | final_finding == "DIS") %>%
  summarize(n = n()) %>%
  mutate(complaints_per_capita = n/Population)

```


`summarise()` has grouped output by 'final_finding', 'District_Name', 'Majority'. You can override using `ungroup()` or `distinct()`.

```

ggplot(data = sustained_data,
       mapping = aes(
         x = fct_reorder(District_Name, n),
         y = n,
         color = Majority)) +
  geom_point() +
  coord_flip() +
  labs(title = " Sustained Complaints per Capita by District Name",
       subtitle = "Colored by Racial Majority",
       x = "District Name",
       y = " Sustained Complaints Per Capita")

```

Sustained Complaints per Capita by District Name
Colored by Racial Majority

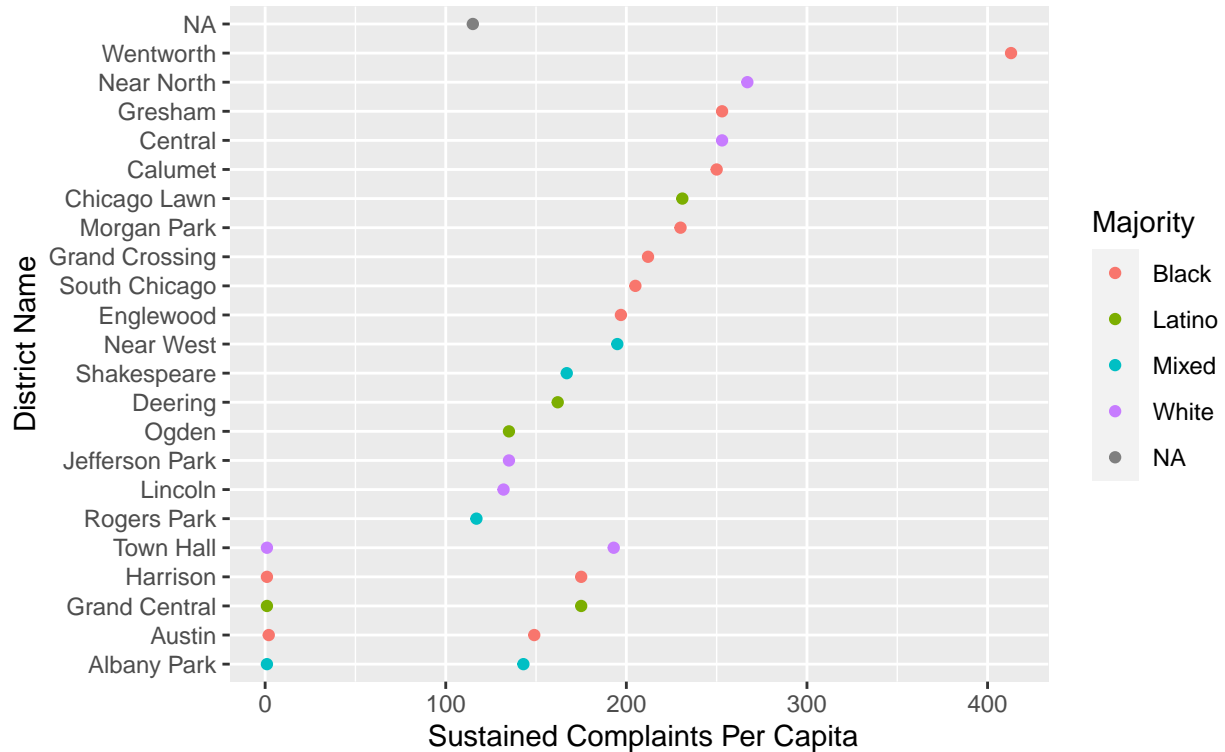


```
unsustained_data <- total_district_complaints_findings %>%
  group_by(final_finding, District_Name, Majority, Population) %>%
  filter(!final_finding == "SU" & !final_finding == "DIS") %>%
  summarize(n = n()) %>%
  mutate(complaints_per_capita = n/Population)
```

`summarise()` has grouped output by 'final_finding', 'District_Name', 'Majority'. You can override u

```
ggplot(data = unsustained_data,
       mapping = aes(
         x = fct_reorder(District_Name, n),
         y = n,
         color = Majority)) +
  geom_point() +
  coord_flip() +
  labs(title = "Unsustained Complaints per Capita by District Name",
       subtitle = "Colored by Racial Majority",
       x = "District Name",
       y = "Unsustained Complaints Per Capita")
```

Unsustained Complaints per Capita by District Name
Colored by Racial Majority

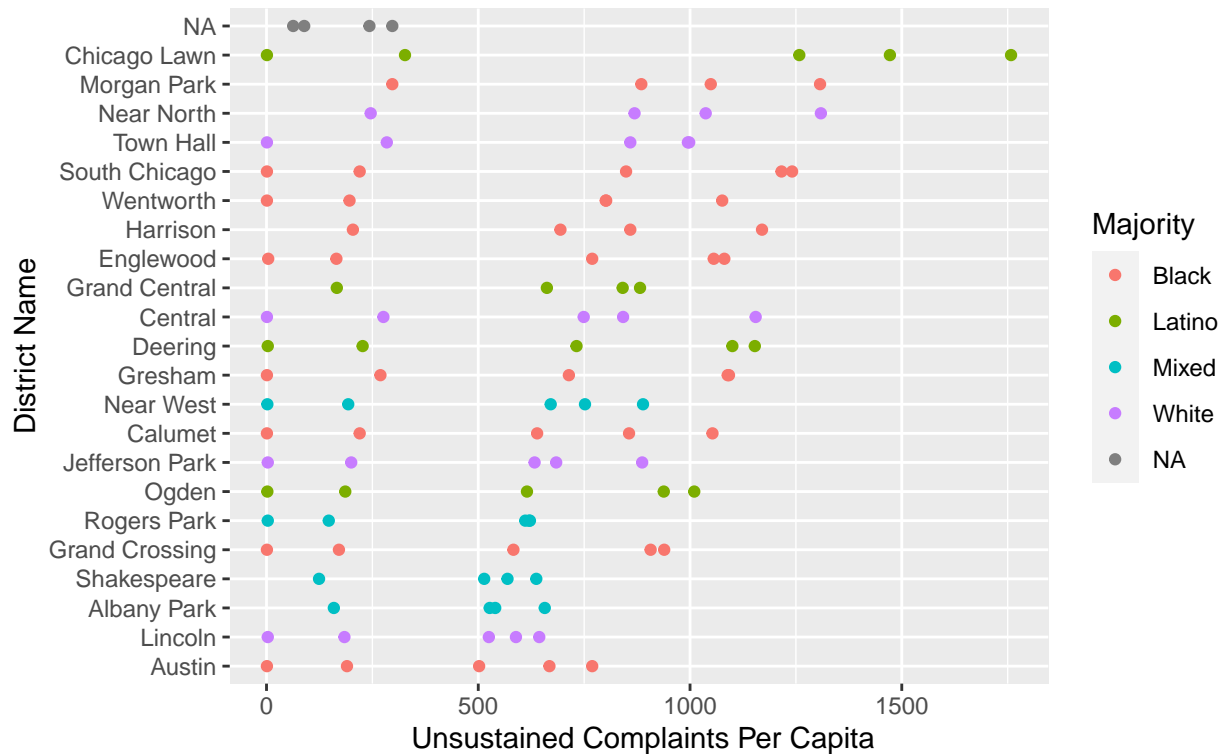


```
missing_data <- total_district_complaints_findings %>%
  group_by(final_finding, District_Name, Majority, Population) %>%
  filter(is.na(final_finding)) %>%
  summarize(n = n()) %>%
  mutate(complaints_per_capita = n/Population)
```

`summarise()` has grouped output by 'final_finding', 'District_Name', 'Majority'. You can override u

```
ggplot(data = missing_data,
       mapping = aes(
         x = fct_reorder(District_Name, n),
         y = n,
         color = Majority)) +
  geom_point() +
  coord_flip() +
  labs(title = "Missing Complaints per Capita by District Name",
       subtitle = "Colored by Racial Majority",
       x = "District Name",
       y = "Missing Complaints Per Capita")
```

Missing Complaints per Capita by District Name
Colored by Racial Majority

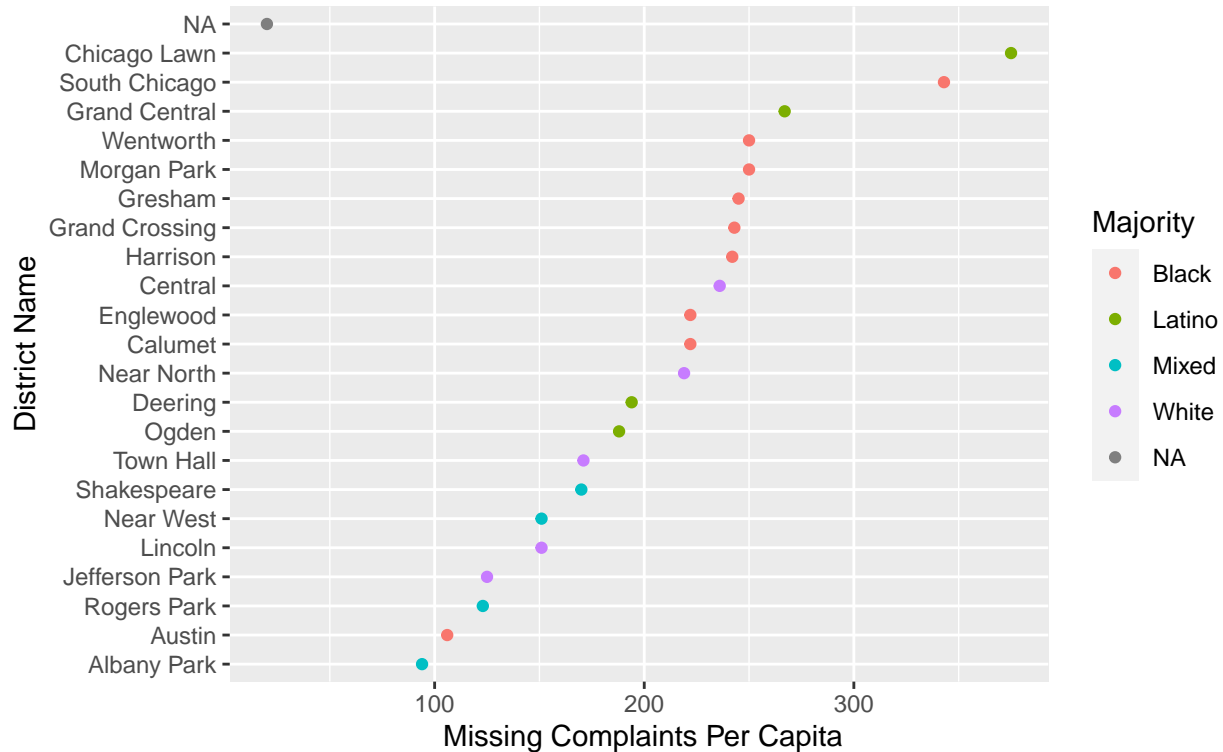

#no 21 or 23 district but 31st district included?

```
chicago_police_district_spatial <- st_read(dsn = "/cloud/project/data/geo_export_2efb16ec-aa66-49b0-92a0-2d6f5e0f81d9")
```

```
## Reading layer `geo_export_2efb16ec-aa66-49b0-92a0-2d6f5e0f81d9' from data source `/cloud/project/data/geo_export_2efb16ec-aa66-49b0-92a0-2d6f5e0f81d9'
```

```
## using driver `ESRI Shapefile'
```

```
## Simple feature collection with 25 features and 2 fields
```

```
## Geometry type: POLYGON
```

```
## Dimension: XY
```

```
## Bounding box: xmin: -87.94011 ymin: 41.64455 xmax: -87.52414 ymax: 42.02303
```

```
## Geodetic CRS: WGS84(DD)
```

```
total_district_complaints_spatial <- total_district_complaints %>%
```

```
  mutate(`Latino` = str_remove(`Latino`, "%"),
         `White` = str_remove(`White`, "%"),
         `Black` = str_remove(`Black`, "%"),
         `Asian` = str_remove(`Asian`, "%"),
         `Native_American` = str_remove(`Native_American`, "%"),
         `Other` = str_remove(`Other`, "%"),
         `Latino` = as.numeric(`Latino`),
         `White` = as.numeric(`White`),
         `Black` = as.numeric(`Black`),
         `Asian` = as.numeric(`Asian`),
         `Native_American` = as.numeric(`Native_American`),
         `Other` = as.numeric(`Other`)) %>%
```

```
  mutate(current_unit = as.character(current_unit)) %>%
```

```
  left_join(chicago_police_district_spatial,
            by = c("current_unit" = "dist_num")) %>%
```

```

st_as_sf() %>%
st_transform("+init=epsg:4326")

## Warning in CPL_crs_from_input(x): GDAL Message 1: +init=epsg:XXXX syntax is
## deprecated. It might return a CRS with a non-EPSG compliant axis order.

bins <- seq(from = 0, to = 100, by = 12.5)
pal_perc <- colorBin("OrRd", domain = total_district_complaints_spatial , bins = bins)
#https://laurielbaker.github.io/DSCA\_leaflet\_mapping\_in\_r/slides/leaflet\_slides3.html#58

m <- leaflet(total_district_complaints_spatial) %>%
# Now add tiles to it
addTiles() %>%
# Setting the middle of where the map should be and the zoom level
setView(-87.633506, 41.876067, zoom = 9.5) %>%
addProviderTiles(providers$CartoDB.Positron)

Black_perc_m <- m %>%
  addPolygons(
    fillOpacity = 1,
    color = "black",
    opacity = 0.7,
    weight = 1,
    fillColor = ~pal_perc(total_district_complaints_spatial$`Black%`)

Black_perc_m <- Black_perc_m %>%
  addLegend(
    position = "topright",
    pal = pal_perc,
    values = ~total_district_complaints_spatial$`Black%`,
    title = "Percent Black residents",
    opacity = 1)

Black_perc_m

## QStandardPaths: XDG_RUNTIME_DIR not set, defaulting to '/tmp/runtime-rstudio-user'
## TypeError: Attempting to change the setter of an unconfigurable property.
## TypeError: Attempting to change the setter of an unconfigurable property.

```



```

White_perc_m <- m %>%
  addPolygons(
    fillOpacity = 1,
    color = "black",
    opacity = 0.7,
    weight = 1,
    fillColor = ~pal_perc(total_district_complaints_spatial$`White%`)

```

```

White_perc_m <- White_perc_m %>%
  addLegend(
    position = "topright",
    pal = pal_perc,
    values = ~total_district_complaints_spatial$`White%`,
    title = "Percent White residents",
    opacity = 1)

```

```

White_perc_m

```

```

## QStandardPaths: XDG_RUNTIME_DIR not set, defaulting to '/tmp/runtime-rstudio-user'
## TypeError: Attempting to change the setter of an unconfigurable property.
## TypeError: Attempting to change the setter of an unconfigurable property.

```

```

Latino_perc_m <- m %>%
  addPolygons(
    fillOpacity = 1,
    color = "black",
    opacity = 0.7,
    weight = 1,
    fillColor = ~pal_perc(total_district_complaints_spatial$`Latino%`)

Latino_perc_m <- Latino_perc_m %>%
  addLegend(
    position = "topright",
    pal = pal_perc,
    values = ~total_district_complaints_spatial$`Latino%`,
    title = "Percent Latino residents",
    opacity = 1)

Latino_perc_m

```

```

## QStandardPaths: XDG_RUNTIME_DIR not set, defaulting to '/tmp/runtime-rstudio-user'
## TypeError: Attempting to change the setter of an unconfigurable property.
## TypeError: Attempting to change the setter of an unconfigurable property.

```

```
# creating map showing neighborhoods with most missing data ie when the final finding is either NA (mis
```