
Failure Recovery And Cleanup

Applies to ADOR 0.5.1.

Use this when a run is parked, failed, no longer wanted, or has left resources behind after a crash, close, merge, or interrupted host session.

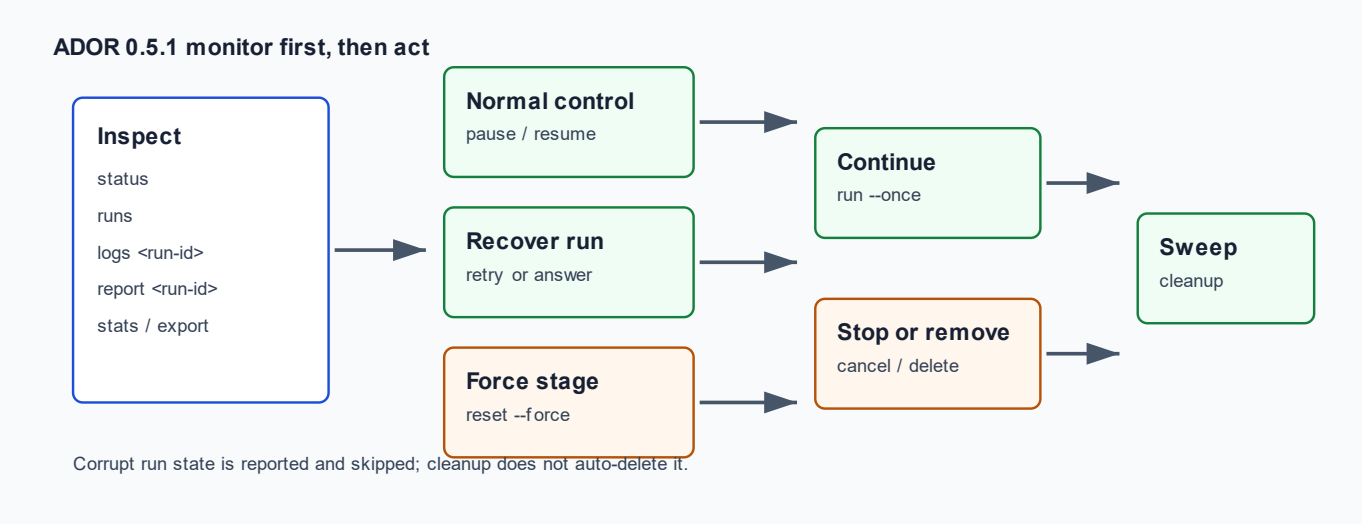

First Triage

Start with read-only state:

```
.\.venv\Scripts\ador.exe --profile <profile-name> status
.\.venv\Scripts\ador.exe --profile <profile-name> runs
.\.venv\Scripts\ador.exe --profile <profile-name> logs <run-id>
```

```
./.venv/bin/ador --profile <profile-name> status
./.venv/bin/ador --profile <profile-name> runs
./.venv/bin/ador --profile <profile-name> logs <run-id>
```

Then choose the smallest action that matches the state.

Clarification Park

When ADOR needs human input, it parks the run and writes a question to the ticket. The worktree and state remain available for resume.

To resume:

1. Answer in a normal human comment.
2. Add `agent-answered` if the project uses label signaling.
3. Run one supervised poll.

```
.\.venv\Scripts\ador.exe --profile <profile-name> run --once
```

```
./.venv/bin/ador --profile <profile-name> run --once
```

If no answer arrives before the configured timeout, ADOR escalates the run to the configured terminal state, normally `failed`.

Recovery Commands

Situation	Command	Effect
Failed run should continue from stored stage.	`ador retry <run-id>`	Re-arms retry flow without repeating completed gates.
Run should stop gracefully.	`ador cancel <run-id>`	Cancels the run and updates state.
Run must restart from a specific gate.	`ador reset <run-id> --to <stage> --force`	Moves the stage pointer, then requires `retry`.
Run state is no longer needed.	`ador delete <run-id> --force`	Irrecoverably removes run state.
Stale locks, containers, or worktrees may remain.	`ador cleanup`	Sweeps resources that no active valid run owns.

Windows examples:

```
.\.venv\Scripts\ador.exe --profile <profile-name> retry <run-id>
.\.venv\Scripts\ador.exe --profile <profile-name> reset <run-id> --to verify --force
.\.venv\Scripts\ador.exe --profile <profile-name> cleanup
```

Linux examples:

```
./.venv/bin/ador --profile <profile-name> retry <run-id>
./.venv/bin/ador --profile <profile-name> reset <run-id> --to verify --force
./.venv/bin/ador --profile <profile-name> cleanup
```

Reset Guardrail

`reset` is intentionally force-gated because it can re-run work, spend model budget, and churn ticket comments. After reset, ADOR tells you to run:

```
ador retry <run-id>
```

Use reset only when the stored stage is wrong or the operator deliberately wants to re-run a gate.

Cleanup Safety

`ador cleanup` removes stale locks and orphaned containers or worktrees that are terminal or unknown. It reports corrupt run state but does not auto-delete it.

If cleanup reports corrupt runs:

1. Inspect the run folder and journal manually.
2. Confirm no active process owns it.
3. Use `ador delete <run-id> --force` only when removal is intentional.

Human Merge Boundary

ADOR may open a draft MR/PR, but it must not merge. After human review:

- If changes are needed, apply the configured revise trigger, normally `agent-revise`.
- If the MR/PR is accepted, the human merges it.
- After merge or close, run `ador cleanup` to verify no resources remain.