
Setup And First Run

Applies to ADOR 0.5.1.

Use this when you are preparing a host, creating a runtime-project profile, or validating the first safe ADOR poll against a project.

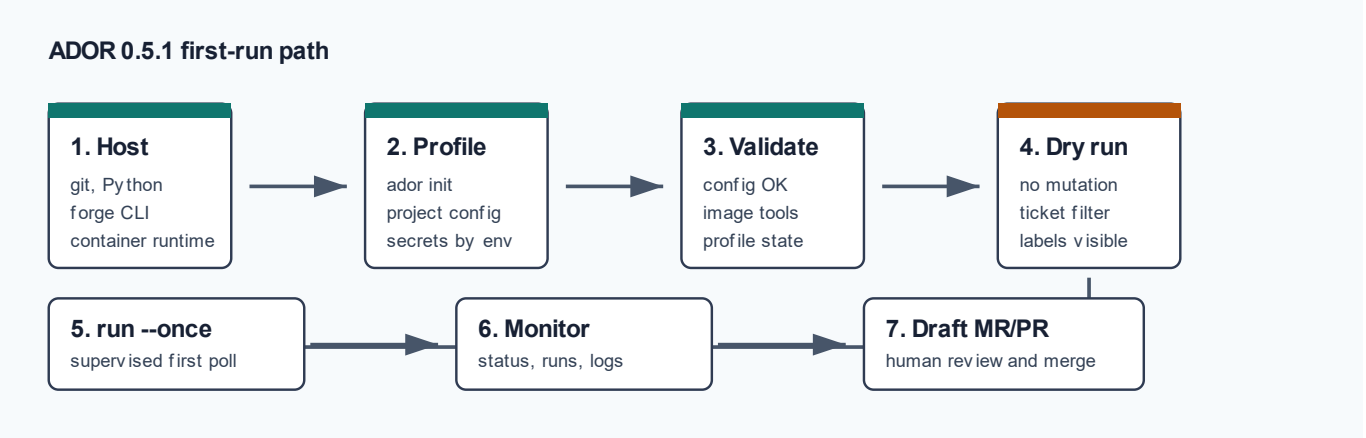

Operator Goal

End this flow with one validated profile, one dry run, and one supervised poll. Do not install a background runner until those three checks are clean.

Before ADOR

Confirm these are available to the same user account that will run ADOR:

- Git.
- Python 3.11 or newer.
- `uv`.
- A container runtime: Docker or Podman.
- A forge CLI: `glab` for GitLab or `gh` for GitHub.
- A local clone of the runtime project.
- Executor credentials supplied through environment variables or `.env`.
- A project image with the runtime project's tools.

Quick checks:

```
git --version
python --version
glab auth status
docker version
```

```
git --version
python3 --version
```

```
gh auth status
docker version
```

First Setup Pass

Create or refresh the locked Python environment from the unpacked ADOR runtime:

```
uv sync --frozen
.\.venv\Scripts\ador.exe --version
```

```
uv sync --frozen
./.venv/bin/ador --version
```

Expected version:

```
ador 0.5.1
```

Create The Profile

The wizard writes a runtime-project profile under the ADOR config home. It does not store secret values, only the names of environment variables that ADOR may inject into executor containers.

```
.\.venv\Scripts\ador.exe init <profile-name>
```

```
./.venv/bin/ador init <profile-name>
```

Choose:

Wizard area	Recommended first-run answer
Profile identity	Short lowercase project name.
Forge	Match the authenticated CLI, GitLab or GitHub.
Runtime project	Local clone path plus repo name.
State location	Profile-owned state.
Container runtime	Docker or Podman command that works from this host.
Container image	Runtime-project image, not only the generic base image.

Wizard area	Recommended first-run answer
Executor	`opencode` unless the project has chosen another implemented executor.
Run mode	`once` for validation.

Validate Before Pickup

```
.\.venv\Scripts\ador.exe --profile <profile-name> config validate
.\.venv\Scripts\ador.exe profile show <profile-name>
```

```
./.venv/bin/ador --profile <profile-name> config validate
./.venv/bin/ador profile show <profile-name>
```

Do not continue until validation prints `OK`.

Dry Run

Dry run checks ticket visibility and selection without starting delivery work.

```
.\.venv\Scripts\ador.exe --profile <profile-name> run --dry-run
```

```
./.venv/bin/ador --profile <profile-name> run --dry-run
```

Look for:

- ADOR can load the profile.
- ADOR can read tickets.
- Control labels such as `agent-hold` and `no-agent` are respected.
- Readiness filters explain why a ticket is or is not eligible.

Supervised First Poll

Run exactly one real poll while watching the terminal and ticket:

```
.\.venv\Scripts\ador.exe --profile <profile-name> run --once
```

```
./.venv/bin/ador --profile <profile-name> run --once
```

Then monitor:

```
.\.venv\Scripts\ador.exe --profile <profile-name> status
.\.venv\Scripts\ador.exe --profile <profile-name> runs
```

```
./.venv/bin/ador --profile <profile-name> status
./.venv/bin/ador --profile <profile-name> runs
```

Safe Completion

After ADOR opens a draft MR/PR:

- Review the draft like any human-authored change.
- Request revisions with the configured revise label, normally `agent-revise`.
- Merge manually only when the human review decision is complete.
- Run `ador cleanup` after closed or merged work if you want a resource sweep.