
Tickets, Readiness, And Labels

Applies to ADOR 0.5.1.

Use this when you want ADOR to pick up a ticket, skip a ticket, resume a parked ticket, or route a ticket to a specific executor.

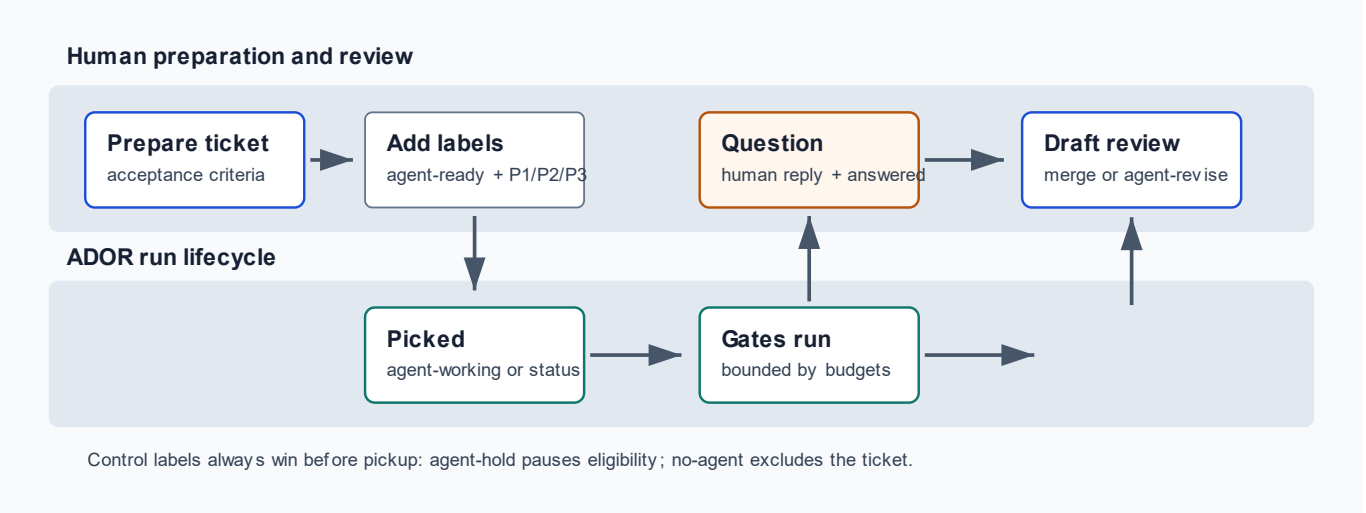

Ticket Pickup Checklist

A good ADOR ticket has:

- One clear goal.
- Acceptance criteria.
- A small enough scope for the configured `[readiness] max_scope_hint`.
- A known component or folder path when the project requires it.
- One priority label.
- The configured ready label.

Minimal ticket body:

```
## Goal
Describe the change ADOR should make.

## Acceptance Criteria
- The public behavior changes in this exact way.
- Existing behavior remains unchanged for this case.
- Tests or validation prove the result.

## Scope
Small. Touch only <component/path>.

## Notes
Any constraints, examples, or links the executor must respect.
```

Human-Managed Labels

Defaults can be renamed in `config.toml`, but the roles stay the same.

Role	Default label	Who applies it	Effect
Ready	`agent-ready`	Human	Ticket is eligible for pickup.
Answered	`agent-answered`	Human	Parked run may resume after a clarification answer.
Hold	`agent-hold`	Human	ADOR does not pick or continues according to reconcile config.
Exclude	`no-agent`	Human	Ticket is human-only.
Priority high	`P1`	Human	Picked before medium and low.
Priority medium	`P2`	Human	Normal priority.
Priority low	`P3`	Human	Lower priority.
Feature	`feature`	Human	Type hint.
Bug	`bug`	Human	Type hint.
Executor pin	`agent-exec:<name>`	Human	Forces a configured executor for this ticket.
Revise	`agent-revise`	Reviewer	Requests a post-MR revision cycle.

ADOR-Managed Lifecycle Labels

These labels are only applied when `[state] channel` is `labels` or `both`.

Default label	Meaning
`agent-working`	ADOR claimed the ticket and is running a gate.
`agent-clarify`	ADOR parked the run and is waiting for a human answer.
`agent-mr`	ADOR opened a draft MR/PR and is waiting for review.
`agent-failed`	ADOR stopped after a failure, budget, or timeout.
`agent-done`	Optional final label after a human merge.

In comment mode, the authoritative state still lives locally and ADOR mirrors status through ticket comments instead of lifecycle labels.

Readiness Rules

The default readiness gate rejects tickets that are missing:

- acceptance criteria;
- a priority label;
- a known component;
- a scope no larger than the configured maximum.

Check the active configuration:

```
.\.venv\Scripts\ador.exe --profile <profile-name> config show
```

```
./.venv/bin/ador --profile <profile-name> config show
```

Common Moves

What you want	Do this
Let ADOR pick up a ticket.	Add `agent-ready` plus `P1`, `P2`, or `P3`.
Stop pickup temporarily.	Add `agent-hold`.
Make the ticket human-only.	Add `no-agent`.
Answer a clarification.	Reply in a normal human comment, then add `agent-answered` if labels are used.
Request a revision after draft MR/PR review.	Add `agent-revise` to the MR/PR, then run another poll.
Force opencode for one ticket.	Add `agent-exec:opencode`.

Do not remove or edit the hidden ADOR marker lines in status comments.