
## TT191005 - OPENweb - Controller Preset with Selection


Note	This Support Knowledge Base article KB is the result of a support request.
	It is not part of the official documentation of DEOS AG and does not claim to be complete.
	The article is intended to support the solution of a similar problem.
	If you have any questions, comments or additions, please contact DEOS AG Support.
Title	OPENweb - Controller Preset with Selection (TT191005)
Object	OPENweb
Reference version	8
Date	10.2019
Author	EK
Goal	Use OPENweb to preset selective HTML pages in controller

## **Content:**

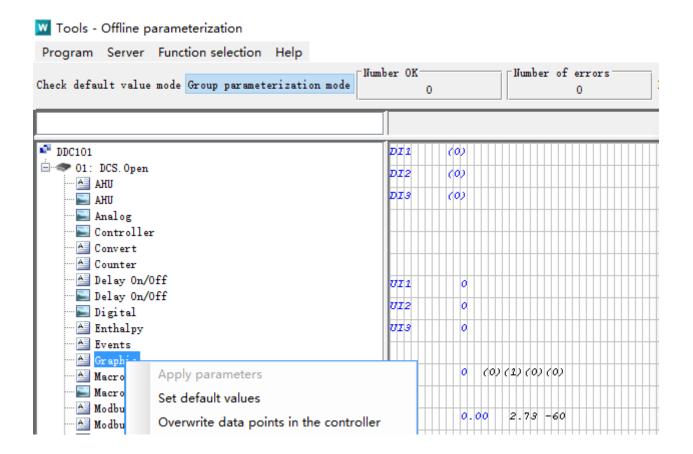


## TT191005 - OPENweb - Controller Preset with Selection


- 1. If you want to set all the "Input" to the default values assigned in FUP, the easiest way is to do a "Preset" in the controller via browser access. But sometimes you may only want to set a few pages to default values, then you can do it in OPENweb
- 2. Please refer to TT180808 to setup OPENweb and controller. Start OPENweb control panel, click on "Extras", "Tools"

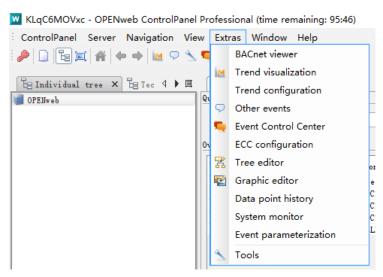


3. In "OPENweb Tools", click on "Program", "Offline parameteration"

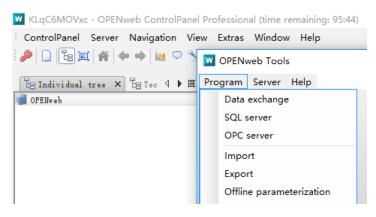


4. Click on "Function selection", "Editing a controller group"




5. Select the controller and click "OK"




6. Click on "Group parameterization mode"




7. Select the HTML page that you want to set default value

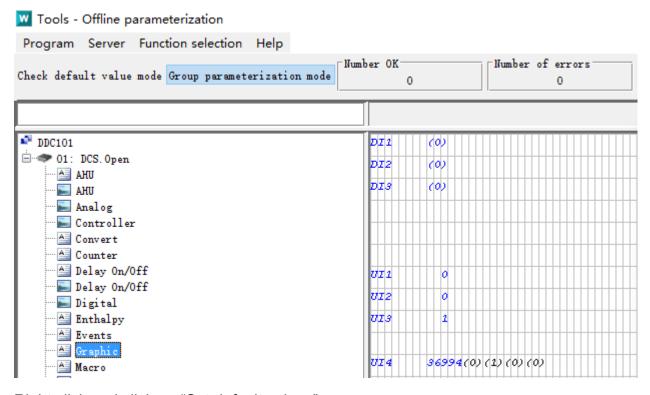


8. Right click and click on "Set default values"




9. Right click on the page again and select "Apply parameters"

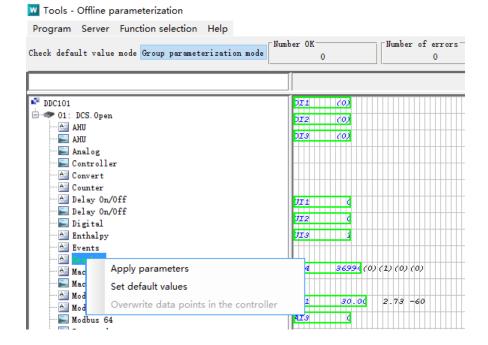

10. Now you can see all the "Input" are set to default values. Right click on the page again and select "Overwrite data points in the controller"

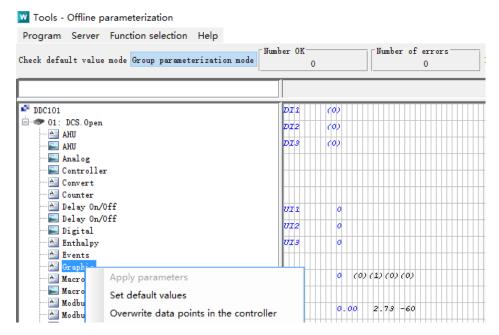

11. Click "Yes" to update the controller. Done!



12. You can do a lot more functions using "Offline parameterization", please refer to the OPENweb manual for details