

TT191006 – OPENweb - Change HTTP Port

Note

This Support Knowledge Base article KB is the result of a support request.

It is not part of the official documentation of DEOS AG and does not claim to be complete.

The article is intended to support the solution of a similar problem.

If you have any questions, comments or additions, please contact DEOS AG Support.

Title

OPENweb - Change HTTP Port (TT191006)

Object

OPENweb

Reference version

8

Date

10.2019


Author

EK

Goal

To change the OPENweb HTTP port to other port number

Content:

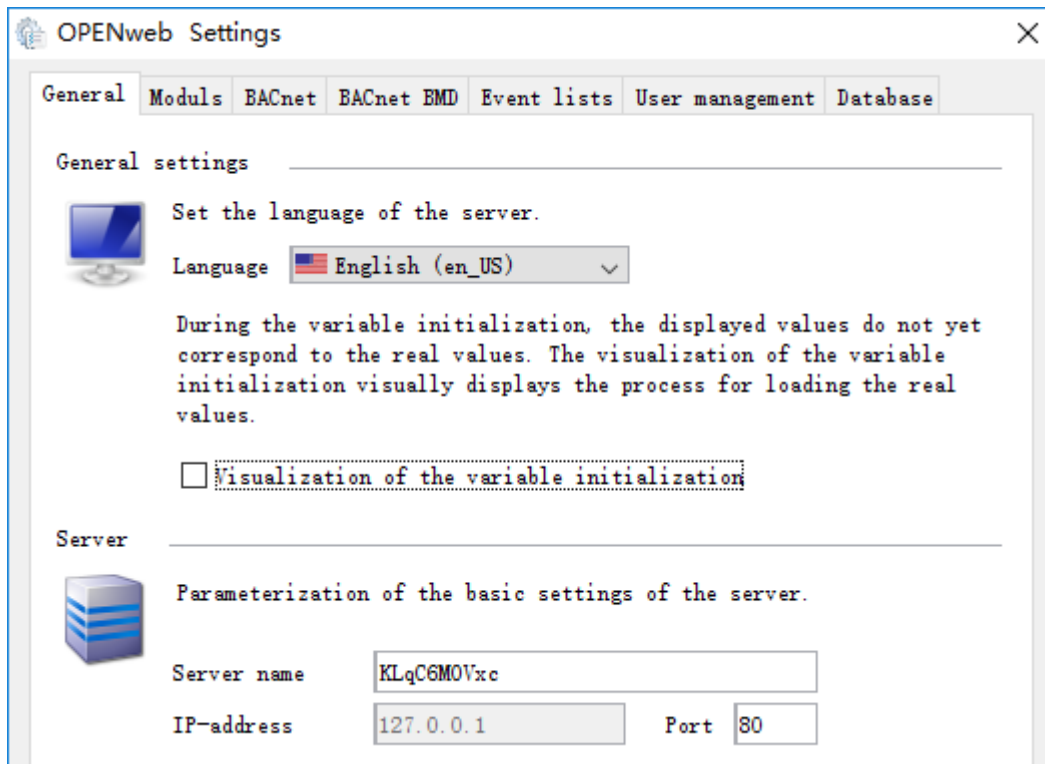


The screenshot shows the 'OPENweb Settings' window with the 'General' tab selected. The window has a title bar with a close button. Below the title bar is a tabbed interface with tabs for 'General', 'Moduls', 'BACnet', 'BACnet BMD', 'Event lists', 'User management', and 'Database'. The 'General' tab is active, showing 'General settings' and 'Server' sections. In the 'General settings' section, there is a description of the language setting, a dropdown menu for 'Language' set to 'English (en_US)', and a checkbox for 'Visualization of the variable initialization' which is currently unchecked. In the 'Server' section, there is a description of the parameterization, and input fields for 'Server name' (containing 'KLqC6MOVxc'), 'IP-address' (containing '127.0.0.1'), and 'Port' (containing '80').

OPENweb Settings

General Moduls BACnet BACnet BMD Event lists User management Database

General settings

Set the language of the server.

Language  English (en_US) ▼

During the variable initialization, the displayed values do not yet correspond to the real values. The visualization of the variable initialization visually displays the process for loading the real values.

☐ Visualization of the variable initialization

Server


Parameterization of the basic settings of the server.

Server name


IP-address Port

TT191006 – OPENweb - Change HTTP Port


1. OPENweb use TCP port 80 for HTTP connection with OPENweb Control Panel as default. But sometimes port 80 is used by other application in your PC (e.g. Microsoft IIS), so you have to use other port for OPENweb (e.g. port 85)
2. To change the port in OPENweb server, start “OPENweb Settings”

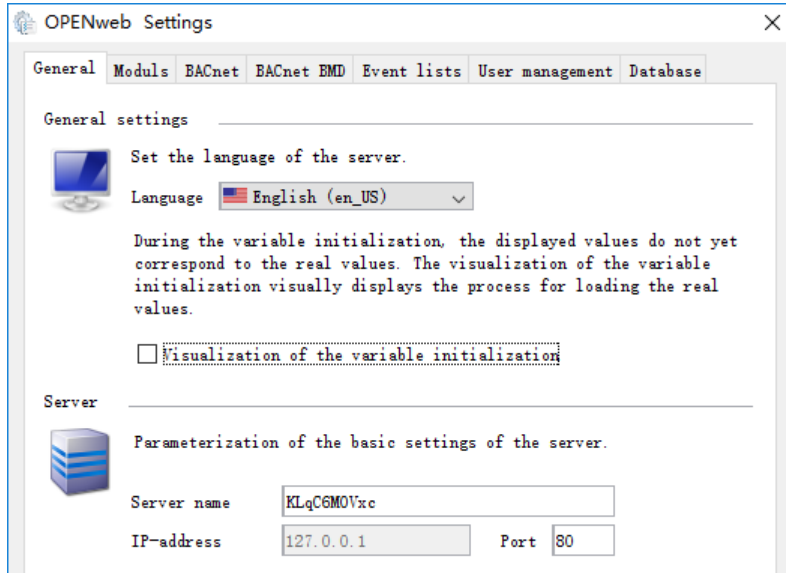


3. Change the port to 85, and click OK

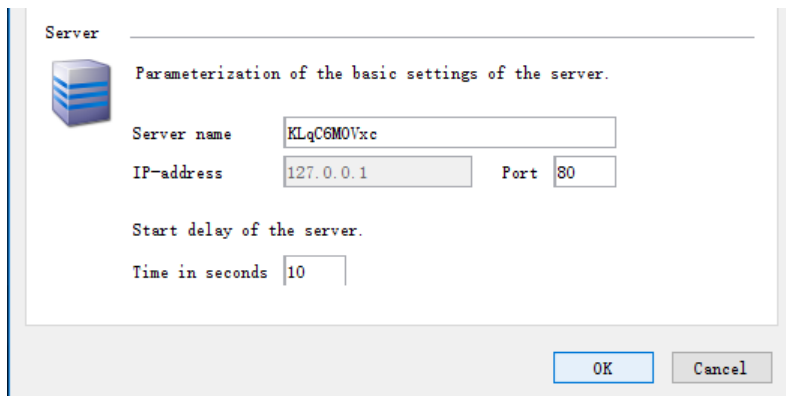


4. Click “Y” to restart server, and wait for it to finish

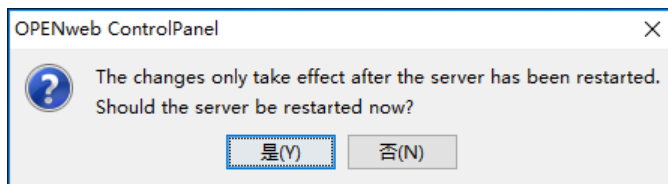


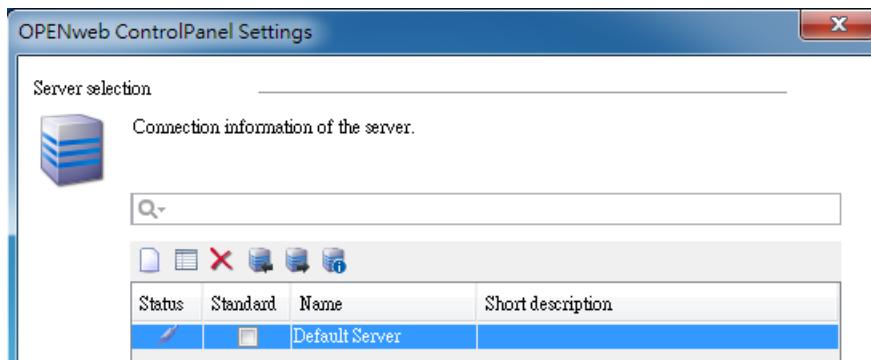
5. Start OPENweb Control Panel. Select the connection and click the  button

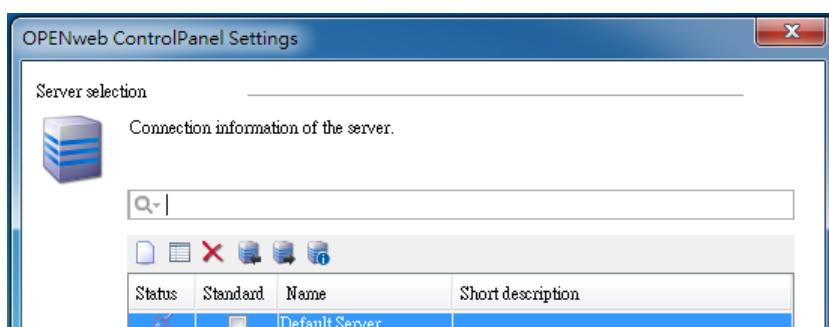

6. Change the port to 85 and click “OK”

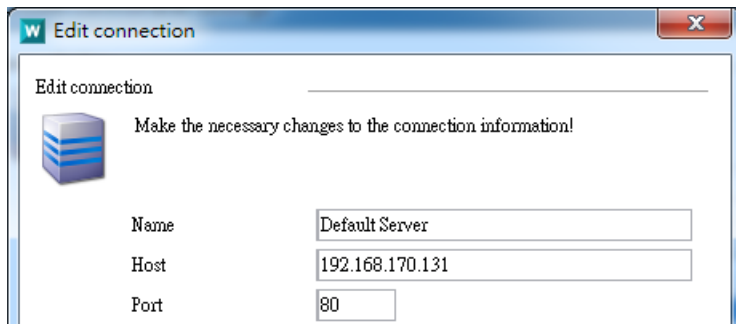

7. If the settings and connections are OK, then you should see the status icon change to . Click “OK” to start the program



8. Now you can operate OPENweb on the workstation PC

