


Customer Container Setup

Short frontend user story and approved guided journey

FRONTEND USER STORY - V1.1 - 23 JUL 2026

USER STORY


As an Admin, I want to create a customer and optionally configure its container store and allowed containers in one guided flow, **so that** the customer is ready for container transactions without navigating between separate pages.

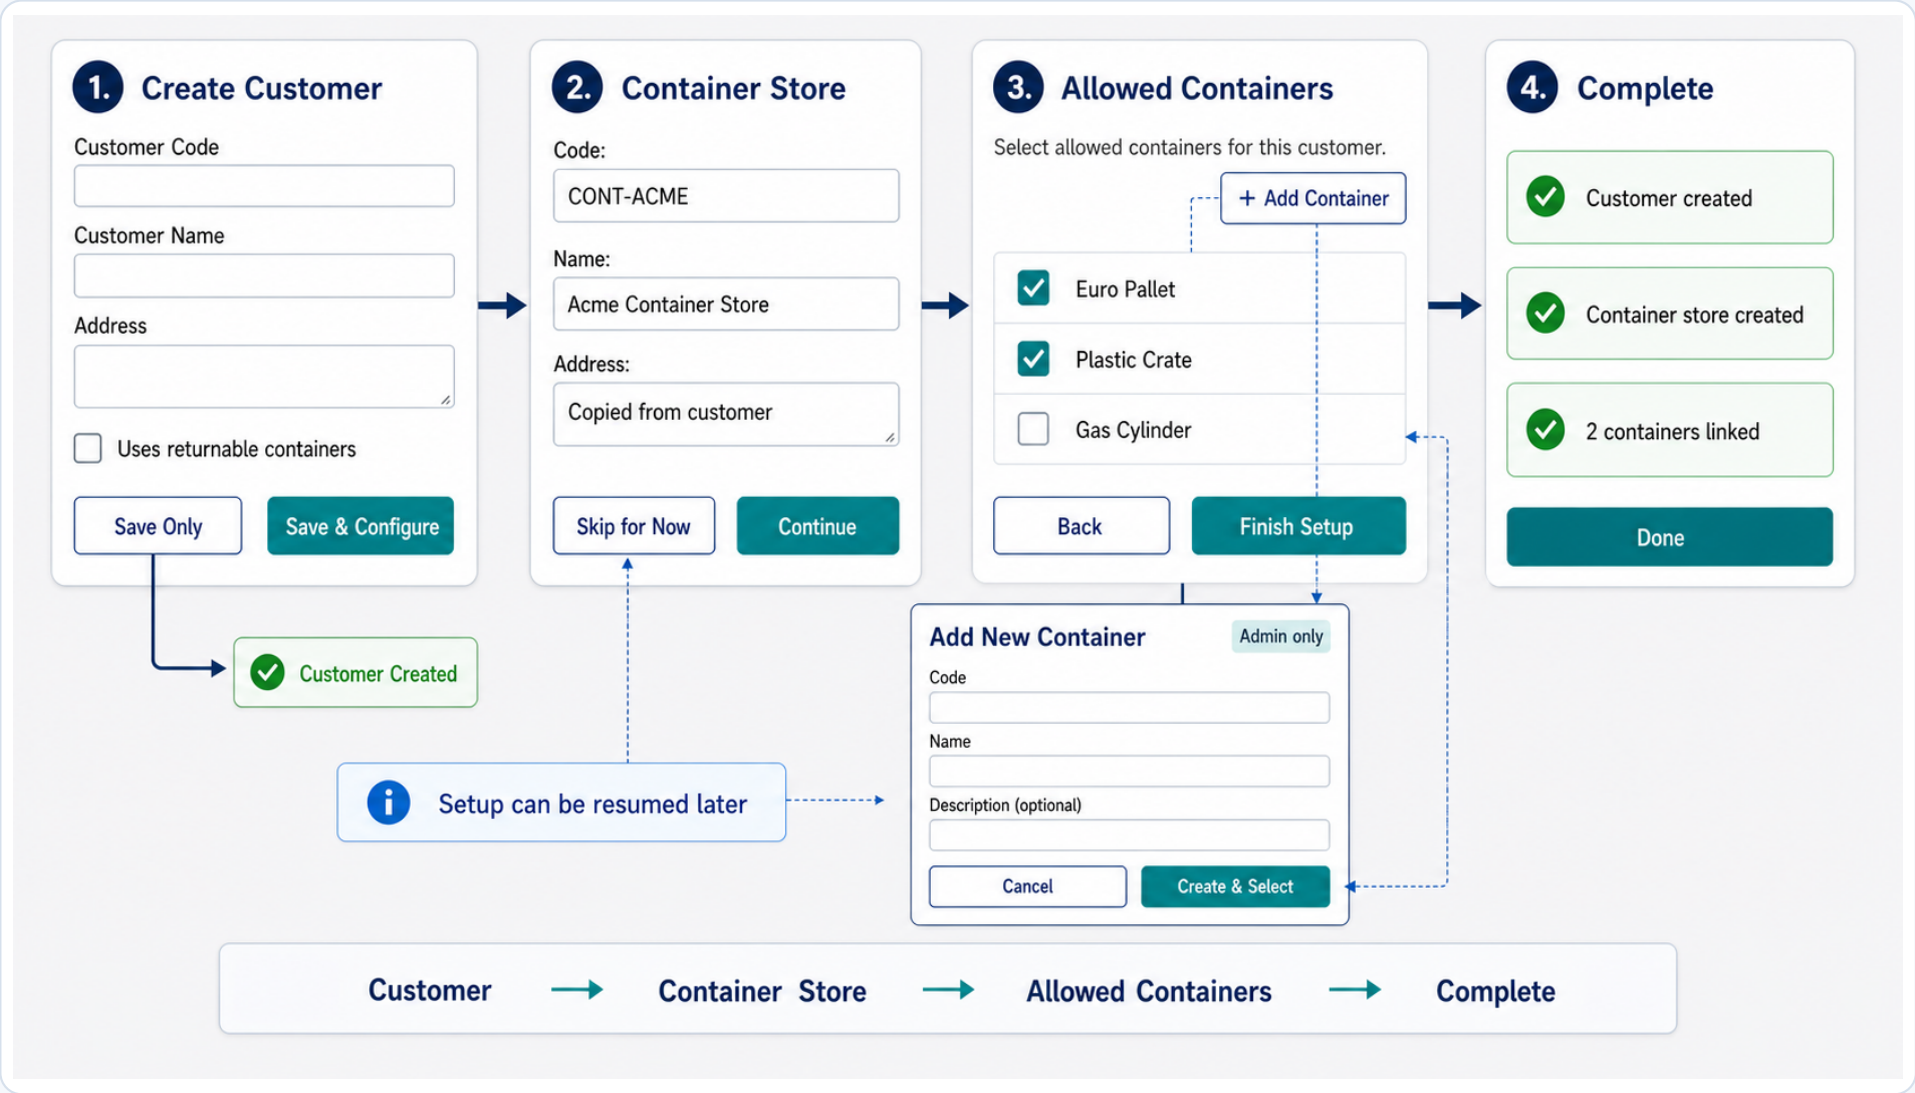

Frontend Interaction Cycle

Use one guided journey and one atomic assignment save

ATOMIC UPSERT CONTRACT - V1.1

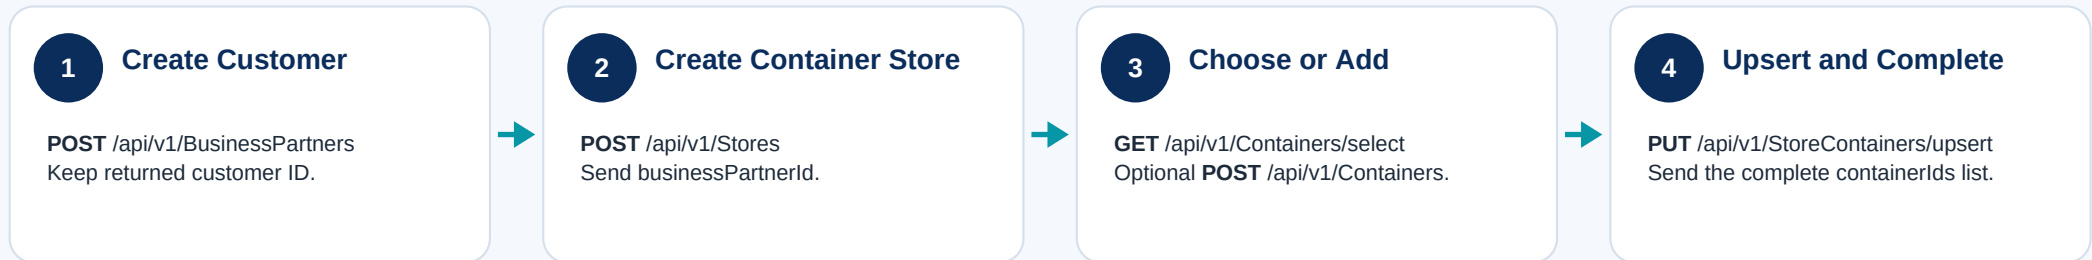

INLINE ADD CONTAINER

Create -> refresh /api/v1/Containers/select -> auto-select the returned ID -> preserve Store and all prior selections.

Behavior and Recovery

- **Optional:** unchecked uses **Save Only**; checked continues to Store setup.
- **Permissions:** mutation controls and inline Container creation are Admin-only.
- **Complete set:** send every selected Container ID; omitted assignments are soft-deleted.
- **Clear all:** send containerIds: [] to remove every current assignment for the Store.
- **Atomic and idempotent:** one serializable transaction; saving the same list creates no duplicates.
- **Errors:** keep selections for errors.ContainerIds; after an uncertain 500, reload before retry.
- **History:** removed links remain historical and still protect Store and Container deletion.
- **Company isolation:** reload Store, Container, and assignment data after company switching.

Acceptance Criteria

- ☐ Admin can save a Customer without starting container setup.
- ☐ Selecting the container option opens the prefilled, editable Store step.
- ☐ Active Containers load in a multi-select without leaving the wizard.
- ☐ Admin can add a Container inline and it becomes selected after creation.
- ☐ Finish sends exactly one PUT with the Store ID and complete selected ID list.
- ☐ Unselecting a Container removes its current link; an empty selection clears all.
- ☐ Repeated Save returns the same final list without duplicate assignments.
- ☐ Validation, missing, inactive, and permission errors preserve the current selections.
- ☐ Non-Admin users cannot see or invoke Upsert or inline Container creation.

UPSERT RULE

containerIds is the complete final set, not a delta. Never auto-retry an uncertain 500; reload current assignments first.