
```
db.com
                                                              H Save
                                                                                    *
DB beta
igger for c/c++
                           public void series(int n1,int n2,int n){
ebug. share.
                                for(int i=n1;i<=n2;i++){
                                    if(n==0){
                                         if(i%2==0){
                                             System.out.println(i+" ");
ming
                                    else{
                                         if(i%2!=0){
estions
                   11
                                             System.out.println(i+" ");
                   12
                   13
                  15
                       }
                  17
                  18 class B extends Thread{
with
                           public void run(){
                                A = new A();
                  21
                                a.series(1,50,0);
                  25 class C extends Thread{
                           public void run(){
                               A a =new A();
                               a.series(1,50,1);
                 v . .
                                                                                               input
                17
                19
                21
                23
                25
                27
                29
31
e - Contact Us - GDB
                33
B Online
                                            Q Search
```

```
Run O Debug
                                             H Save
                                                    {} Beautify
                                                                 *
  15
      }
  17
  18 class B extends Thread{
           public void run(){
  19 -
  20
               A a =new A();
  21
               a.series(1,50,0);
  22
  23
      }
  24
  25 class C extends Thread{
  26 -
           public void run(){
  27
               A a =new A();
  28
               a.series(1,50,1);
  29
  30
      }
      public class Main
  32 - {
           public static void main(String[] args) {
  33 -
               B b = new B();
  34
               C c = new C();
  35
               b.start();
  36
  37
               c.start();
 v / 4
                                                                          input
17
19
21
23
25
27
29
31
33
                           Q Search
```

pile X + db.com 土 M Save 30 DB beta ugger for c/c++ static String acc ="0827CI221067"; lebug. share. static int am = 300000; public static void withdraw(String s ,int n){ if(acc!=s){ ts /stem.out.println("Account do not match"); else{ mming if(am==0){ ystem.out.println("Account Empty"); uestions 11 else{ 12 -13 am-=n; System.out.println("Amount"+am); 15 public static void deposite(String s ,int n){ on with if(acc!=s){ oud System.out.println("Account do not match"); 21 am+=n; System.out.println("Amount"+am); } 28 input Withdrawing : Depositing : Amount310000 Amount290000 of Use • Contact Us • GDB ...Program finished with exit code 0
Press ENTER to exit console. dits • Privacy GDB Online Q Search

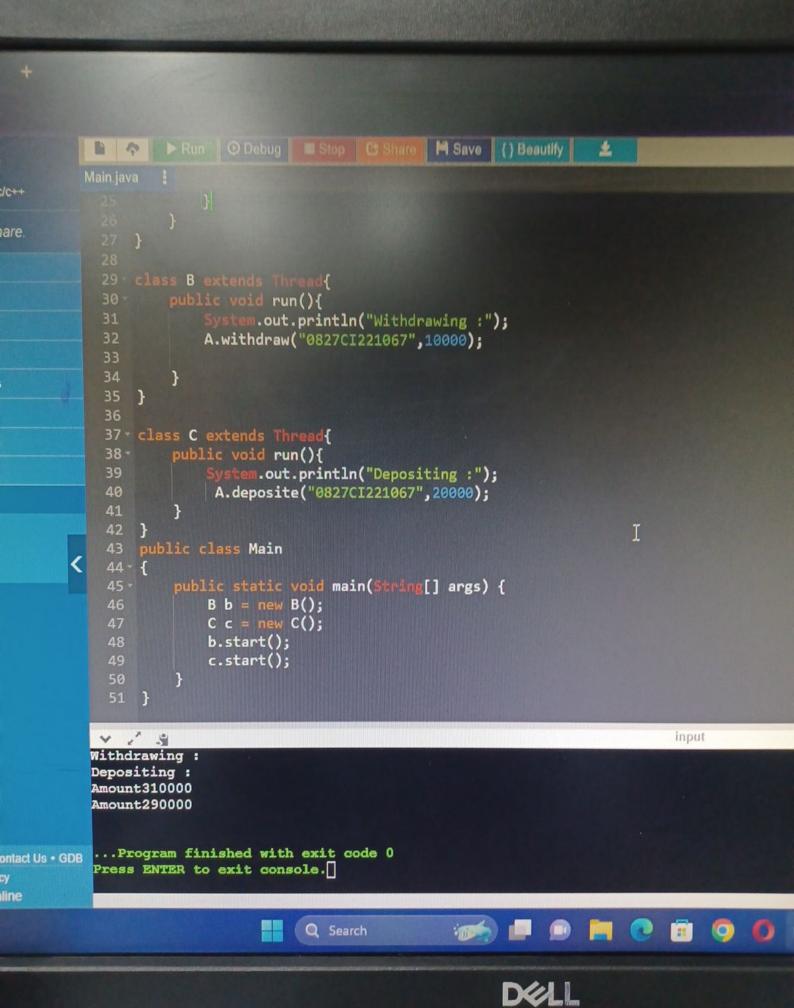

```
empile X
egdb.com/#
                                                                                        土
                                                                         {} Beautify
                                                                M Save
                             ▶ Run Debug
                   GDB beta
                  Ex3.java
bugger for c/c++
                     1 class A{
                             static int bjp=0;
debug, share.
                             static int congress=0;
                             public void vote(String s){
                                  if(s=="bjp"){
ects
                                      bjp++;
New
                                  else if(s=="cong"){
ramming
                                       congress++;
                     10
Questions
                     11
                     12 .
                              void show(){
                                   ivstem.out.println("bjp vote "+bjp);
                     13
Up
                                   System.out.println("congress vote "+congress);
                     14
in
                     15
                         class B implements Runnable{
                     17
                              A a=new A();
hon with
                              public void run(){
Kloud
                      20
                                   a.vote("bjp");
                      21
                      22
                     23 class C implements Runnable{
                      24
                              A a=new A();
                              public void run(){
                                   a.vote("cong");
                      27
                      28 }
                                                                                                   input
                    bjp vote 9999
                    congress vote 100
                    ...Program finished with exit code 0
                    Press ENTER to exit console.
ns of Use . Contact Us . GDB
redits • Privacy
23 GDB Online
                                                Q Search
```

```
±
                                                               H Save
                                                                        {} Beautify
                            Run Debug
                                              DB beta
                 Ex3.java
ugger for c/c++
                   17 class B implements Runnable{
                            A a=new A();
debug, share
                   19
                            public void run(){
                                a.vote("bjp");
                   20
                   21
                   22
                   23 class C implements Runnable{
                    24
                            A a=new A();
                    25
                            public void run(){
                                a.vote("cong");
                    26
Questions
                    27
                    28
                    29
                        class Ex3
þ
                    30 - {
                    31 .
                            public static void main(String[] args) {
                    32
                                 A a=new A();
                    33 -
                                 for(int i=0;i<10000;i++){
                                 Thread t1=new Thread(new B());
                    34
on with
                    35
                                 t1.start();
loud
                                 for(int i=0;i<100;i++){
                    37
                                 Thread t2=new Thread(new C());
                                 t2.start();
                                 B
                                 a.show();
                    42
                            }
                    43
                        1
                          3
                                                                                              inpu
                  bjp vote 9999
                  congress vote 100
                  ...Program finished with exit code 0
                  Press ENTER to exit console.
s of Use . Contact Us . GDB
edits • Privacy
3 GDB Online
```