

Schema documentation for DR-GW-Recording.xsd

july 28, 2026

Table of Contents

Namespace: "DR-GW-Interface/DR-GW-Recording"	2
Schema(s)	2
Main schema DR-GW-Recording.xsd	2
Element(s)	2
Element Record_Group	2
Element typeRecordRequest / sel	2
Element Record_Individual	3
Complex Type(s)	3
Complex Type typeRecordRequest	3
Namespace: "DR-GW-Interface/CommonTypes"	4
Schema(s)	4
Imported schema CommonTypes.xsd	4
Element(s)	4
Element ct:typeRequest / ct:requestId	4
Element ct:typeAddress / ct:subscriber	4
Element ct:typeSubscriberAddress / ct:ssi	5
Element ct:typeSubscriberAddress / ct:tsi	5
Element ct:typeTSI / ct:mnc	5
Element ct:typeTSI / ct:mcc	6
Element ct:typeTSI / ct:ssi	6
Element ct:typeAddress / ct:alias	6
Element ct:typeAddress / ct:msisdn	6
Element ct:typeAddress / ct:fssn	6
Element ct:typeAddress / ct:external	7
Element ct:typeExternal / ct:gatewayNumber	7
Element ct:typeExternal / ct:number	7
Element ct:typeAddress / ct:opta	8
Element ct:typeAddress / ct:cell	8
Element ct:typeResult / ct:responseCode	8
Element ct:typeResult / ct:sourceSystem	8
Element ct:typeResult / ct:result	9
Element ct:typeResponse / ct:requestId	9
Element ct:typeResponse / ct:result	9
Element ct:typeEvent / ct:requestId	10
Element ct:typeEvent / ct:result	10
Complex Type(s)	10
Complex Type ct:typeRequest	10
Complex Type ct:typeAddress	10
Complex Type ct:typeSubscriberAddress	11
Complex Type ct:typeTSI	11
Complex Type ct:typeExternal	12
Complex Type ct:typeResult	12
Complex Type ct:typeResponse	13
Complex Type ct:typeEvent	13
Complex Type ct:typeEmpty	13
Simple Type(s)	14
Simple Type ct:typeDialString	14
Simple Type ct:typeOPTA	14
Simple Type ct:typeResponseCode	14
Simple Type ct:typeSourceSystem	15
Simple Type ct:typeAddressingStyle	15
Namespace: "DR-GW-Interface/DR-GW-Recording.CommonTypes"	16
Schema(s)	16
Imported schema DR-GW-Recording.CommonTypes.xsd	16
Element(s)	16
Element typeRecordingTarget / level	16
Element typeRecordingTarget / target	16
Complex Type(s)	17
Complex Type typeRecordingTarget	17
Simple Type(s)	17

Simple Type typeRecordingLevel 17

Namespace: "DR-GW-Interface/DR-GW-Recording"

Schema(s)

Main schema DR-GW-Recording.xsd

Namespace	DR-GW-Interface/DR-GW-Recording
Annotations	Version 1.2 DR-GW-Recording. Use for Archive recording applications.
Properties	attribute form default: unqualified element form default: qualified

Element(s)

Element Record_Group

Namespace	DR-GW-Interface/DR-GW-Recording
Annotations	The method is used to place group under either statistical(signaling and data) or active(audio and data) recording.
Diagram	
Type	typeRecordRequest
Type hierarchy	- ct:typeRequest - typeRecordRequest
Properties	content: complex
Model	ct:requestId , sel
Children	ct:requestId, sel
Instance	<pre><Record_Group xmlns="DR-GW-Interface/DR-GW-Recording" xmlns:ct="DR-GW-Interface/CommonTypes"> <ct:requestId>{1,1}</ct:requestId> <sel>{1,1}</sel> </Record_Group></pre>
Source	<pre><xs:element name="Record_Group" type="typeRecordRequest"> <xs:annotation> <xs:documentation>The method is used to place group under either statistical(signaling and data) or active(audio and data) recording.</xs:documentation> </xs:annotation> </xs:element></pre>

Element typeRecordRequest / sel

Namespace	DR-GW-Interface/DR-GW-Recording
-----------	---------------------------------

Diagram	
Type	typeRecordingTarget
Properties	content: complex
Model	level , target
Children	level, target
Instance	<pre><sel xmlns="DR-GW-Interface/DR-GW-Recording" xmlns:ctR="DR-GW-Interface/DR-GW-Recording.CommonTypes"> <ctR:level>{1,1}</ctR:level> <ctR:target>{1,1}</ctR:target> </sel></pre>
Source	<pre><xs:element name="sel" type="ctR:typeRecordingTarget"/></pre>

Element Record_Individual

Namespace	DR-GW-Interface/DR-GW-Recording
Annotations	The method is used to place individual subscriber(radio or client application) under either statistical(signaling and data) or active(audio and data) recording.
Diagram	
Type	typeRecordRequest
Type hierarchy	- ct:typeRequest - typeRecordRequest
Properties	content: complex
Model	ct:requestId , sel
Children	ct:requestId, sel
Instance	<pre><Record_Individual xmlns="DR-GW-Interface/DR-GW-Recording" xmlns:ct="DR-GW-Interface/CommonTypes"> <ct:requestId>{1,1}</ct:requestId> <sel>{1,1}</sel> </Record_Individual></pre>
Source	<pre><xs:element name="Record_Individual" type="typeRecordRequest"> <xs:annotation> <xs:documentation>The method is used to place individual subscriber(radio or client application) under either statistical(signaling and data) or active(audio and data) recording.</ xs:documentation> </xs:annotation> </xs:element></pre>

Complex Type(s)

Complex Type typeRecordRequest

Namespace	DR-GW-Interface/DR-GW-Recording
-----------	---------------------------------

Diagram	
Type	extension of ct:typeRequest
Type hierarchy	- ct:typeRequest - typeRecordRequest
Used by	Elements Record_Group, Record_Individual
Model	ct:requestId, sel
Children	ct:requestId, sel
Source	<pre> <xs:complexType name="typeRecordRequest"> <xs:complexContent> <xs:extension base="ct:typeRequest"> <xs:sequence> <xs:element name="requestId" type="ctR:typeRecordingTarget"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>

Namespace: "DR-GW-Interface/CommonTypes"

Schema(s)

Imported schema CommonTypes.xsd

Namespace	DR-GW-Interface/CommonTypes
Annotations	Version 1.2
Properties	attribute form default: unqualified element form default: qualified

Element(s)

Element ct:typeRequest / ct:requestId

Namespace	DR-GW-Interface/CommonTypes
Diagram	
Type	xs:unsignedLong
Properties	content: simple
Source	<pre> <xs:element name="requestId" type="xs:unsignedLong"/> </pre>

Element ct:typeAddress / ct:subscriber

Namespace	DR-GW-Interface/CommonTypes
Diagram	

Type	ct:typeSubscriberAddress
Properties	content: complex
	minOccurs: 0
Model	ct:ssi ct:tsi
Children	ct:ssi, ct:tsi
Instance	<pre><ct:subscriber xmlns:ct="DR-GW-Interface/CommonTypes"> <ct:ssi>{1,1}</ct:ssi> <ct:tsi>{1,1}</ct:tsi> </ct:subscriber></pre>
Source	<pre><xs:element name="subscriber" type="ct:typeSubscriberAddress" minOccurs="0"/></pre>

Element ct:typeSubscriberAddress / ct:ssi

Namespace	DR-GW-Interface/CommonTypes
Diagram	
Type	xs:unsignedLong
Properties	content: simple
Source	<pre><xs:element name="ssi" type="xs:unsignedLong"/></pre>

Element ct:typeSubscriberAddress / ct:tsi

Namespace	DR-GW-Interface/CommonTypes
Diagram	
Type	ct:typeTSI
Properties	content: complex
Model	ct:mnc , ct:mcc , ct:ssi
Children	ct:mcc, ct:mnc, ct:ssi
Instance	<pre><ct:tsi xmlns:ct="DR-GW-Interface/CommonTypes"> <ct:mnc>{1,1}</ct:mnc> <ct:mcc>{1,1}</ct:mcc> <ct:ssi>{1,1}</ct:ssi> </ct:tsi></pre>
Source	<pre><xs:element name="tsi" type="ct:typeTSI"/></pre>

Element ct:typeTSI / ct:mnc

Namespace	DR-GW-Interface/CommonTypes
Diagram	
Type	xs:unsignedShort

Properties	content: simple
Source	<code><xs:element name="mnc" type="xs:unsignedShort"/></code>

Element `ct:typeTSI` / `ct:mcc`

Namespace	DR-GW-Interface/CommonTypes
Diagram	
Type	xs:unsignedShort
Properties	content: simple
Source	<code><xs:element name="mcc" type="xs:unsignedShort"/></code>

Element `ct:typeTSI` / `ct:ssi`

Namespace	DR-GW-Interface/CommonTypes
Diagram	
Type	xs:unsignedLong
Properties	content: simple
Source	<code><xs:element name="ssi" type="xs:unsignedLong"/></code>

Element `ct:typeAddress` / `ct:alias`

Namespace	DR-GW-Interface/CommonTypes
Diagram	
Type	xs:normalizedString
Properties	content: simple minOccurs: 0
Source	<code><xs:element name="alias" type="xs:normalizedString" minOccurs="0"/></code>

Element `ct:typeAddress` / `ct:msisdn`

Namespace	DR-GW-Interface/CommonTypes
Diagram	
Type	ct:typeDialString
Properties	content: simple minOccurs: 0
Facets	maxLength 24
Source	<code><xs:element name="msisdn" type="ct:typeDialString" minOccurs="0"/></code>

Element `ct:typeAddress` / `ct:fssn`

Namespace	DR-GW-Interface/CommonTypes
-----------	-----------------------------

Annotations	Fleet specific short number
Diagram	
Type	xs:unsignedLong
Properties	content: simple minOccurs: 0
Source	<pre><xs:element name="fssn" type="xs:unsignedLong" minOccurs="0"> <xs:annotation> <xs:documentation>Fleet specific short number</xs:documentation> </xs:annotation> </xs:element></pre>

Element ct:typeAddress / ct:external

Namespace	DR-GW-Interface/CommonTypes
Diagram	
Type	ct:typeExternal
Properties	content: complex minOccurs: 0
Model	ct:gatewayNumber , ct:number
Children	ct:gatewayNumber, ct:number
Instance	<pre><ct:external xmlns:ct="DR-GW-Interface/CommonTypes"> <ct:gatewayNumber>{1,1}</ct:gatewayNumber> <ct:number>{1,1}</ct:number> </ct:external></pre>
Source	<pre><xs:element name="external" type="ct:typeExternal" minOccurs="0"/></pre>

Element ct:typeExternal / ct:gatewayNumber


Namespace	DR-GW-Interface/CommonTypes
Diagram	
Type	xs:unsignedLong
Properties	content: simple
Source	<pre><xs:element name="gatewayNumber" type="xs:unsignedLong"/></pre>

Element ct:typeExternal / ct:number

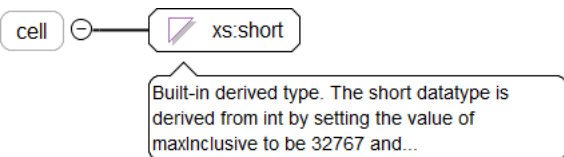
Namespace	DR-GW-Interface/CommonTypes
Diagram	
Type	ct:typeDialString

Properties	content:	simple
Facets	maxLength	24
Source	<xs:element name="number" type="ct:typeDialString"/>	

Element ct:typeAddress / ct:opta

Namespace	DR-GW-Interface/CommonTypes	
Diagram		
Type	ct:typeOPTA	
Properties	content:	simple
	minOccurs:	0
Facets	maxLength	24
Source	<xs:element name="opta" type="ct:typeOPTA" minOccurs="0"/>	

Element ct:typeAddress / ct:cell

Namespace	DR-GW-Interface/CommonTypes	
Diagram		
Type	xs:short	
Properties	content:	simple
	minOccurs:	0
Source	<xs:element name="cell" type="xs:short" minOccurs="0"/>	

Element ct:typeResult / ct:responseCode

Namespace	DR-GW-Interface/CommonTypes	
Diagram		
Type	ct:typeResponseCode	
Properties	content:	simple
Facets	enumeration	success
	enumeration	final_response_pending
	enumeration	error
	enumeration	not_authorized_error
	enumeration	temporary_failure
	enumeration	subscription_failed
Source	<xs:element name="responseCode" type="ct:typeResponseCode"/>	

Element ct:typeResult / ct:sourceSystem

Namespace	DR-GW-Interface/CommonTypes	
Diagram		
Type	ct:typeSourceSystem	
Properties	content:	simple
	minOccurs:	0

Facets	enumeration	DR - GW
	enumeration	TCS - API
	enumeration	TETRA
	enumeration	TACTILON - API
Source	<xs:element name="sourceSystem" type="ct:typeSourceSystem" minOccurs="0"/>	

Element ct:typeResult / ct:result

Namespace	DR-GW-Interface/CommonTypes	
Diagram		
Type	xs:unsignedLong	
Properties	content:	simple
	minOccurs:	0
Source	<xs:element name="result" type="xs:unsignedLong" minOccurs="0"/>	

Element ct:typeResponse / ct:requestId

Namespace	DR-GW-Interface/CommonTypes	
Diagram		
Type	xs:unsignedLong	
Properties	content:	simple
Source	<xs:element name="requestId" type="xs:unsignedLong"/>	

Element ct:typeResponse / ct:result

Namespace	DR-GW-Interface/CommonTypes	
Diagram		
Type	ct:typeResult	
Properties	content:	complex
Model	ct:responseCode , ct:sourceSystem {0,1} , ct:result{0,1}	
Children	ct:responseCode, ct:result, ct:sourceSystem	
Instance	<pre><ct:result xmlns:ct="DR-GW-Interface/CommonTypes"> <ct:responseCode>{1,1}</ct:responseCode> <ct:sourceSystem>{0,1}</ct:sourceSystem> <ct:result>{0,1}</ct:result> </ct:result></pre>	
Source	<xs:element name="result" type="ct:typeResult"/>	

Element `ct:typeEvent / ct:requestId`

Namespace	DR-GW-Interface/CommonTypes				
Diagram					
Type	xs:unsignedLong				
Properties	<table> <tr> <td>content:</td><td>simple</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> </table>	content:	simple	minOccurs:	0
content:	simple				
minOccurs:	0				
Source	<code><xs:element name="requestId" type="xs:unsignedLong" minOccurs="0"/></code>				

Element `ct:typeEvent / ct:result`

Namespace	DR-GW-Interface/CommonTypes				
Diagram					
Type	ct:typeResult				
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> </table>	content:	complex	minOccurs:	0
content:	complex				
minOccurs:	0				
Model	ct:responseCode , ct:sourceSystem{0,1} , ct:result{0,1}				
Children	ct:responseCode, ct:result, ct:sourceSystem				
Instance	<pre><ct:result xmlns:ct="DR-GW-Interface/CommonTypes"> <ct:responseCode>{1,1}</ct:responseCode> <ct:sourceSystem>{0,1}</ct:sourceSystem> <ct:result>{0,1}</ct:result> </ct:result></pre>				
Source	<code><xs:element name="result" type="ct:typeResult" minOccurs="0"/></code>				

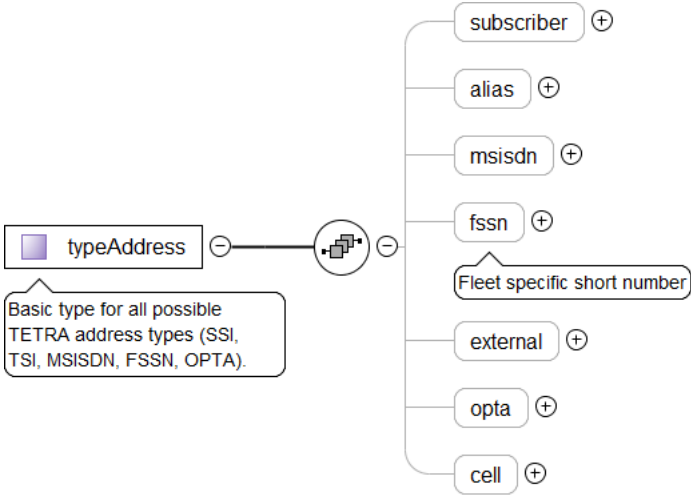
Complex Type(s)

Complex Type `ct:typeRequest`


Namespace	DR-GW-Interface/CommonTypes
Diagram	
Used by	Complex Type typeRecordRequest
Model	ct:requestId
Children	ct:requestId
Source	<pre><xs:complexType name="typeRequest"> <xs:sequence> <xs:element name="requestId" type="xs:unsignedLong"/> </xs:sequence> </xs:complexType></pre>

Complex Type `ct:typeAddress`

Namespace	DR-GW-Interface/CommonTypes
-----------	-----------------------------

Annotations	Basic type for all possible TETRA address types (SSI, TSI, MSISDN, FSSN, OPTA).
Diagram	
Used by	Element typeRecordingTarget/target
Model	ct:subscriber{0,1} , ct:alias{0,1} , ct:msisdn{0,1} , ct:fssn{0,1} , ct:external{0,1} , ct:opta{0,1} , ct:cell{0,1}
Children	ct:alias, ct:cell, ct:external, ct:fssn, ct:msisdn, ct:opta, ct:subscriber
Source	<pre> <xs:complexType name="typeAddress"> <xs:annotation> <xs:documentation>Basic type for all possible TETRA address types (SSI, TSI, MSISDN, FSSN, OPTA).</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="subscriber" type="ct:typeSubscriberAddress" minOccurs="0"/> <xs:element name="alias" type="xs:normalizedString" minOccurs="0"/> <xs:element name="msisdn" type="ct:typeDialString" minOccurs="0"/> <xs:element name="fssn" type="xs:unsignedLong" minOccurs="0"> <xs:annotation> <xs:documentation>Fleet specific short number</xs:documentation> </xs:annotation> </xs:element> <xs:element name="external" type="ct:typeExternal" minOccurs="0"/> <xs:element name="opta" type="ct:typeOPTA" minOccurs="0"/> <xs:element name="cell" type="xs:short" minOccurs="0"/> </xs:sequence> </xs:complexType> </pre>

Complex Type ct:typeSubscriberAddress

Namespace	DR-GW-Interface/CommonTypes
Annotations	
Diagram	
Used by	Element ct:typeAddress/ct:subscriber
Model	ct:ssi ct:tsi
Children	ct:ssi, ct:tsi
Source	<pre> <xs:complexType name="typeSubscriberAddress"> <xs:annotation> <xs:documentation/> </xs:annotation> <xs:choice> <xs:element name="ssi" type="xs:unsignedLong"/> <xs:element name="tsi" type="ct:typeTSI"/> </xs:choice> </xs:complexType> </pre>

Complex Type ct:typeTSI

Namespace	DR-GW-Interface/CommonTypes
-----------	-----------------------------

Annotations	Basic type for TETRA subscriber identity containing Network code(MNC) and Country code(MCC).
Diagram	<pre> graph LR typeTSI[Basic type for TETRA subscriber identity containing Network code(MNC) and Country code(MCC).] --- mnc[mnc] typeTSI --- mcc[mcc] typeTSI --- ssi[ssi] </pre>
Used by	Element ct:typeSubscriberAddress/ct:tsi
Model	ct:mnc , ct:mcc , ct:ssi
Children	ct:mcc, ct:mnc, ct:ssi
Source	<pre> <xs:complexType name="typeTSI"> <xs:annotation> <xs:documentation>Basic type for TETRA subscriber identity containing Network code(MNC) and Country code(MCC).</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="mnc" type="xs:unsignedShort"/> <xs:element name="mcc" type="xs:unsignedShort"/> <xs:element name="ssi" type="xs:unsignedLong"/> </xs:sequence> </xs:complexType> </pre>

Complex Type ct:typeExternal

Namespace	DR-GW-Interface/CommonTypes
Annotations	External number consisting of Gateway number + DialString
Diagram	<pre> graph LR typeExternal[External number consisting of Gateway number + DialString] --- gatewayNumber[gatewayNumber] typeExternal --- number[number] </pre>
Used by	Element ct:typeAddress/ct:external
Model	ct:gatewayNumber , ct:number
Children	ct:gatewayNumber, ct:number
Source	<pre> <xs:complexType name="typeExternal"> <xs:annotation> <xs:documentation>External number consisting of Gateway number + DialString</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="gatewayNumber" type="xs:unsignedLong"/> <xs:element name="number" type="ct:typeDialString"/> </xs:sequence> </xs:complexType> </pre>

Complex Type ct:typeResult

Namespace	DR-GW-Interface/CommonTypes
Annotations	Common result values used in every response and optional specific subsystem result codes.
Diagram	<pre> graph LR typeResult[Common result values used in every response and optional specific subsystem result codes.] --- responseCode[responseCode] typeResult --- sourceSystem[sourceSystem] typeResult --- result[result] </pre>

Used by	Elements ct:typeEvent/ct:result, ct:typeResponse/ct:result
Model	ct:responseCode , ct:sourceSystem{0,1} , ct:result{0,1}
Children	ct:responseCode, ct:result, ct:sourceSystem
Source	<pre> <xs:complexType name="typeResult"> <xs:annotation> <xs:documentation>Common result values used in every response and optional specific subsystem result codes.</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="responseCode" type="ct:typeResponseCode"/> <xs:element name="sourceSystem" type="ct:typeSourceSystem" minOccurs="0"/> <xs:element name="result" type="xs:unsignedLong" minOccurs="0"/> </xs:sequence> </xs:complexType> </pre>

Complex Type ct : typeResponse

Namespace	DR-GW-Interface/CommonTypes
Annotations	Response contains result of execution of any method.
Diagram	
Model	ct:requestId , ct:result
Children	ct:requestId, ct:result
Source	<pre> <xs:complexType name="typeResponse"> <xs:annotation> <xs:documentation>Response contains result of execution of any method.</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="requestId" type="xs:unsignedLong"/> <xs:element name="result" type="ct:typeResult"/> </xs:sequence> </xs:complexType> </pre>

Complex Type ct : typeEvent

Namespace	DR-GW-Interface/CommonTypes
Diagram	
Model	ct:requestId{0,1} , ct:result{0,1}
Children	ct:requestId, ct:result
Source	<pre> <xs:complexType name="typeEvent"> <xs:sequence> <xs:element name="requestId" type="xs:unsignedLong" minOccurs="0"/> <xs:element name="result" type="ct:typeResult" minOccurs="0"/> </xs:sequence> </xs:complexType> </pre>

Complex Type ct : typeEmpty

Namespace	DR-GW-Interface/CommonTypes
Annotations	Explicit type specification for elements that shall be empty.
Diagram	
Source	<pre> <xs:complexType name="typeEmpty"> <xs:annotation> </pre>

```
<xs:documentation>Explicit type specification for elements that shall be empty.</xs:documentation>
</xs:annotation>
</xs:complexType>
```

Simple Type(s)

Simple Type ct:typeDialString

Namespace	DR-GW-Interface/CommonTypes
Annotations	Allowed characters are digits 0 - 9, *, #, A, B, C and D. Maximum length is 24 characters.
Diagram	
Type	restriction of xs:normalizedString
Facets	maxLength 24
Used by	Elements ct:typeAddress/ct:msisdn, ct:typeExternal/ct:number
Source	<pre><xs:simpleType name="typeDialString"> <xs:annotation> <xs:documentation>Allowed characters are digits 0 - 9, *, #, A, B, C and D. Maximum length is 24 characters.</xs:documentation> </xs:annotation> <xs:restriction base="xs:normalizedString"> <xs:maxLength value="24"/> </xs:restriction> </xs:simpleType></pre>

Simple Type ct:typeOPTA

Namespace	DR-GW-Interface/CommonTypes
Annotations	OPTA string. Maximum length is 24 characters.
Diagram	
Type	restriction of xs:normalizedString
Facets	maxLength 24
Used by	Element ct:typeAddress/ct:opta
Source	<pre><xs:simpleType name="typeOPTA"> <xs:annotation> <xs:documentation>OPTA string. Maximum length is 24 characters.</xs:documentation> </xs:annotation> <xs:restriction base="xs:normalizedString"> <xs:maxLength value="24"/> </xs:restriction> </xs:simpleType></pre>

Simple Type ct:typeResponseCode

Namespace	DR-GW-Interface/CommonTypes
Diagram	
Type	restriction of xs:normalizedString

Facets	enumeration	success
	enumeration	final_response_pending
	enumeration	error
	enumeration	not_authorized_error
	enumeration	temporary_failure
	enumeration	subscription_failed
Used by	Element	ct:typeResult/ct:responseCode
Source	<pre> <xs:simpleType name="typeResponseCode"> <xs:restriction base="xs:normalizedString"> <xs:enumeration value="success"/> <xs:enumeration value="final_response_pending"/> <xs:enumeration value="error"/> <xs:enumeration value="not_authorized_error"/> <xs:enumeration value="temporary_failure"/> <xs:enumeration value="subscription_failed"/> </xs:restriction> </xs:simpleType> </pre>	

Simple Type ct:typeSourceSystem

Namespace	DR-GW-Interface/CommonTypes	
Diagram		
Type	restriction of xs:normalizedString	
Facets	enumeration	DR-GW
	enumeration	TCS-API
	enumeration	TETRA
	enumeration	TACTILON-API
Used by	Element	ct:typeResult/ct:sourceSystem
Source	<pre> <xs:simpleType name="typeSourceSystem"> <xs:restriction base="xs:normalizedString"> <xs:enumeration value="DR-GW"/> <xs:enumeration value="TCS-API"/> <xs:enumeration value="TETRA"/> <xs:enumeration value="TACTILON-API"/> </xs:restriction> </xs:simpleType> </pre>	

Simple Type ct:typeAddressingStyle

Namespace	DR-GW-Interface/CommonTypes	
Annotations	Describes the IP addressing style. Unicast or multicast.	
Diagram		
Type	restriction of xs:normalizedString	
Facets	enumeration	ucast
	enumeration	mcast
Source	<pre> <xs:simpleType name="typeAddressingStyle"> <xs:annotation> <xs:documentation>Describes the IP addressing style. Unicast or multicast.</xs:documentation> </xs:annotation> <xs:restriction base="xs:normalizedString"> <xs:enumeration value="ucast"/> <xs:enumeration value="mcast"/> </xs:restriction> </xs:simpleType> </pre>	

```
</xs:restriction>
</xs:simpleType>
```

Namespace: "DR-GW-Interface/DR-GW-Recording.CommonTypes"

Schema(s)

Imported schema DR-GW-Recording.CommonTypes.xsd

Namespace	DR-GW-Interface/DR-GW-Recording.CommonTypes
Properties	attribute form default: unqualified
	element form default: qualified

Element(s)

Element typeRecordingTarget / level

Namespace	DR-GW-Interface/DR-GW-Recording.CommonTypes		
Diagram			
Type	typeRecordingLevel		
Properties	content:	simple	
Facets	enumeration	no	No recording. Used to stop the recording.
	enumeration	active	AR active recording level.
	enumeration	statistical	AR statistical recording level.
Source	<xs:element name="level" type="typeRecordingLevel"/>		

Element typeRecordingTarget / target

Namespace	DR-GW-Interface/DR-GW-Recording.CommonTypes
Diagram	
Type	ct:typeAddress
Properties	content: complex
Model	ct:subscriber{0,1} , ct:alias{0,1} , ct:msisdn{0,1} , ct:fssn{0,1} , ct:external{0,1} , ct:opta{0,1} , ct:cell{0,1}

Children	ct:alias, ct:cell, ct:external, ct:fssn, ct:msisdn, ct:opta, ct:subscriber
Instance	<pre><target xmlns="DR-GW-Interface/DR-GW-Recording.CommonTypes" xmlns:ct="DR-GW-Interface/CommonTypes"> <ct:subscriber>{0,1}</ct:subscriber> <ct:alias>{0,1}</ct:alias> <ct:msisdn>{0,1}</ct:msisdn> <ct:fssn>{0,1}</ct:fssn> <ct:external>{0,1}</ct:external> <ct:opta>{0,1}</ct:opta> <ct:cell>{0,1}</ct:cell> </target></pre>
Source	<pre><xs:element name="target" type="ct:typeAddress"/></pre>

Complex Type(s)

Complex Type typeRecordingTarget

Namespace	DR-GW-Interface/DR-GW-Recording.CommonTypes
Annotations	
Diagram	
Used by	Element typeRecordRequest/sel
Model	level , target
Children	level, target
Source	<pre><xs:complexType name="typeRecordingTarget"> <xs:annotation> <xs:documentation/> </xs:annotation> <xs:sequence> <xs:element name="level" type="typeRecordingLevel"/> <xs:element name="target" type="ct:typeAddress"/> </xs:sequence> </xs:complexType></pre>

Simple Type(s)

Simple Type typeRecordingLevel

Namespace	DR-GW-Interface/DR-GW-Recording.CommonTypes		
Annotations	Defines if the target is statistically or actively monitored.		
Diagram			
Type	restriction of xs:normalizedString		
Facets	enumeration	no	No recording. Used to stop the recording.
	enumeration	active	AR active recording level.
	enumeration	statistical	AR statistical recording level.
Used by	Element	typeRecordingTarget/level	
Source	<pre><xs:simpleType name="typeRecordingLevel"> <xs:annotation> <xs:documentation>Defines if the target is statistically or actively monitored.</ xs:documentation> </xs:annotation> <xs:restriction base="xs:normalizedString"> <xs:enumeration value="no"> <xs:annotation> <xs:documentation>No recording. Used to stop the recording.</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="active"></pre>		

<pre><xs:annotation> <xs:documentation>AR active recording level.</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="statistical"> <xs:annotation> <xs:documentation>AR statistical recording level.</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType></pre>
