

# **Design**

**PSE of**

PSE Group

Fraunhofer Institute for Systems and Innovation Research ISI  
Advisor: M.Sc. Ankush Meshram

Version 1.0

Contents

1	Design	1
1.1	Front-End	1
1.1.1	UI Design Mockups	1
1.1.2	Class Diagrams	4
1.1.3	Sequence Diagram	8
1.1.4	Activity Diagram	12
1.2	Client-server protocol	15
1.2.1	Requests from client to server:	15
1.2.2	Messages from server to client:	15
1.3	Back-End	16
1.3.1	Class Diagram	16
1.3.2	Sequence Diagram	30
1.3.3	Activity Diagram	31

# 1 Design

## 1.1 Front-End

This subsection deals with the front-end of the ADIN INSPECTOR - the UI elements the GUI consists of, and how states are handled. A series of final UI design mockups are presented under UI Design Mockups subsection, whereas an overview of the GUI can be seen in Figure 4.

An interactive early stage demo is available at <https://adin-frontend.netlify.com>

### 1.1.1 UI Design Mockups

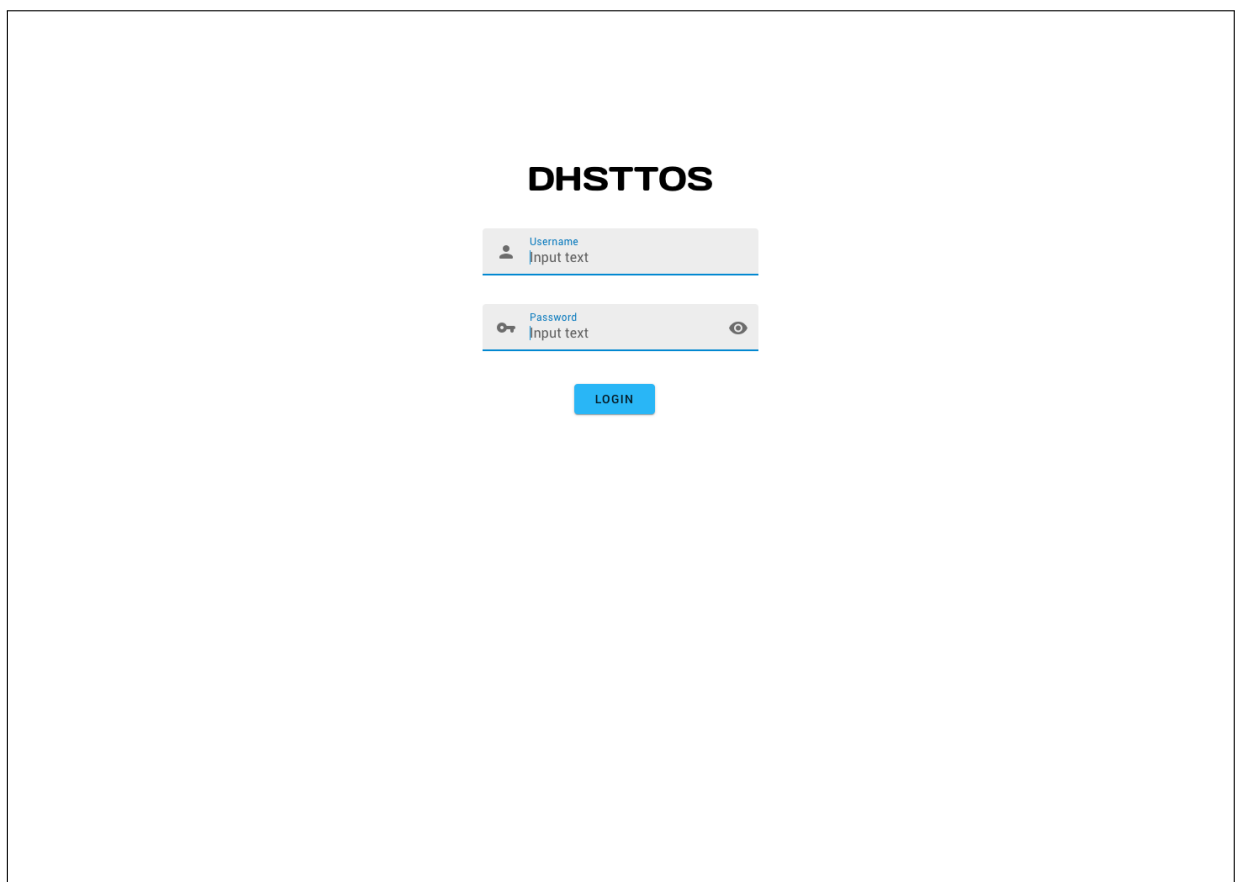


Figure 1: Login screen

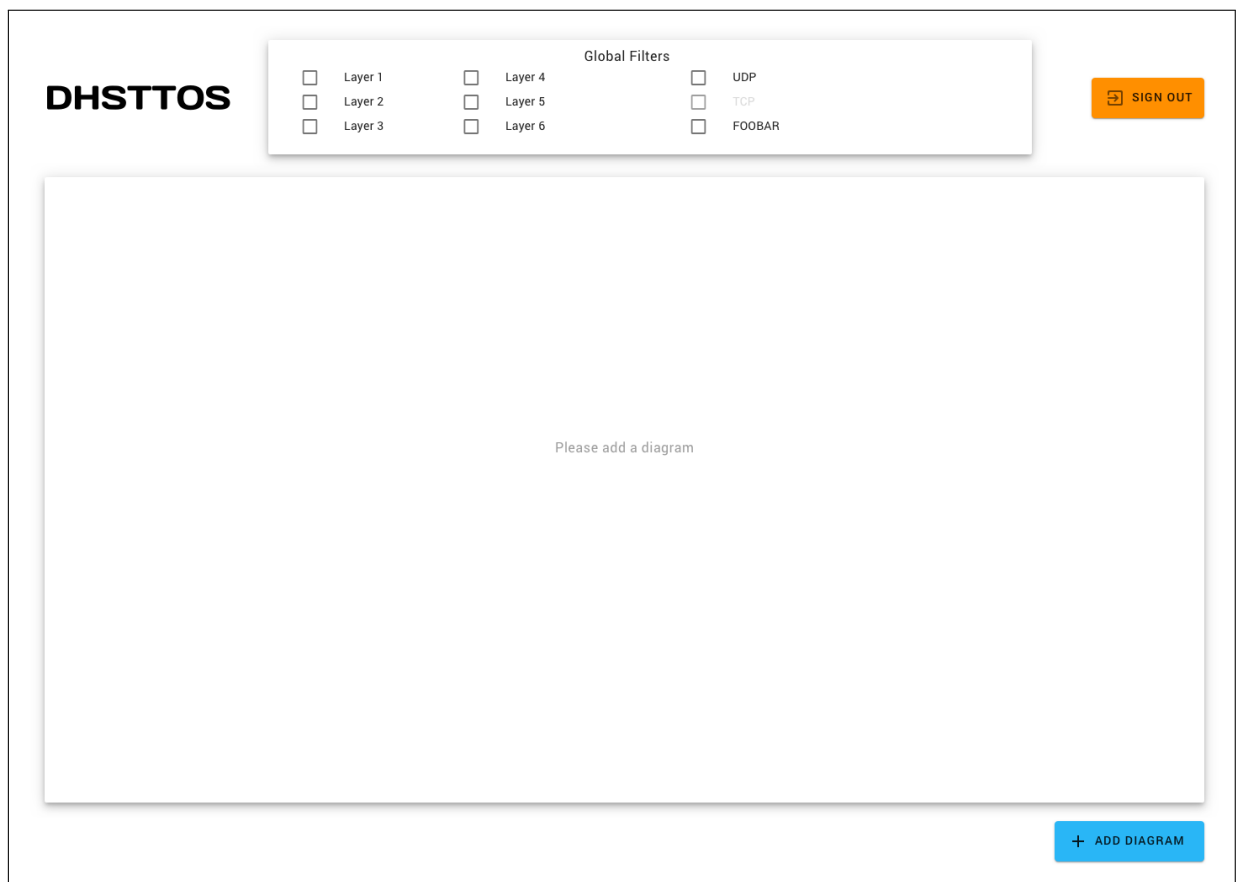


Figure 2: Initial empty screen

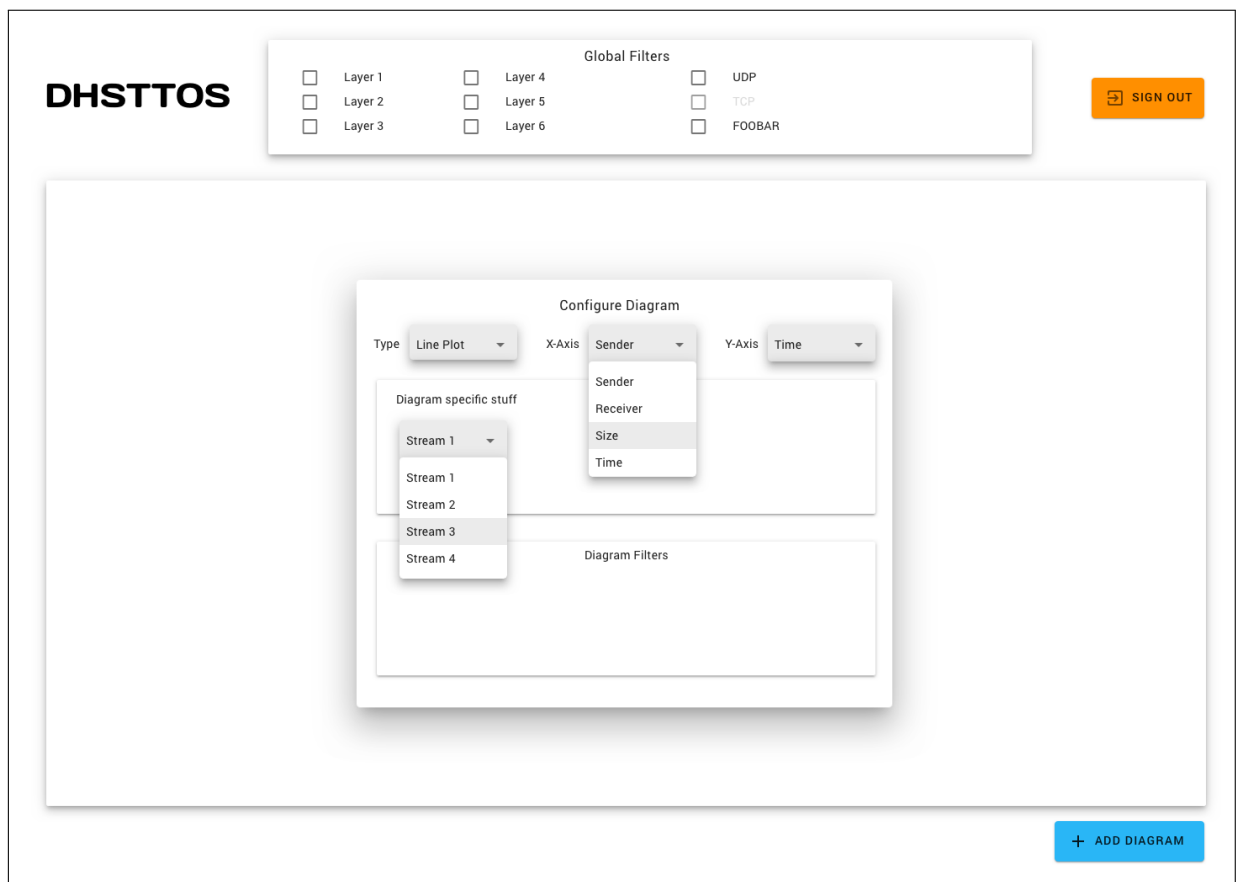


Figure 3: Add/configure diagram screen

### 1.1.2 Class Diagrams

Figure 4 illustrates the whole GUI structure of the application after the user has successfully logged in.

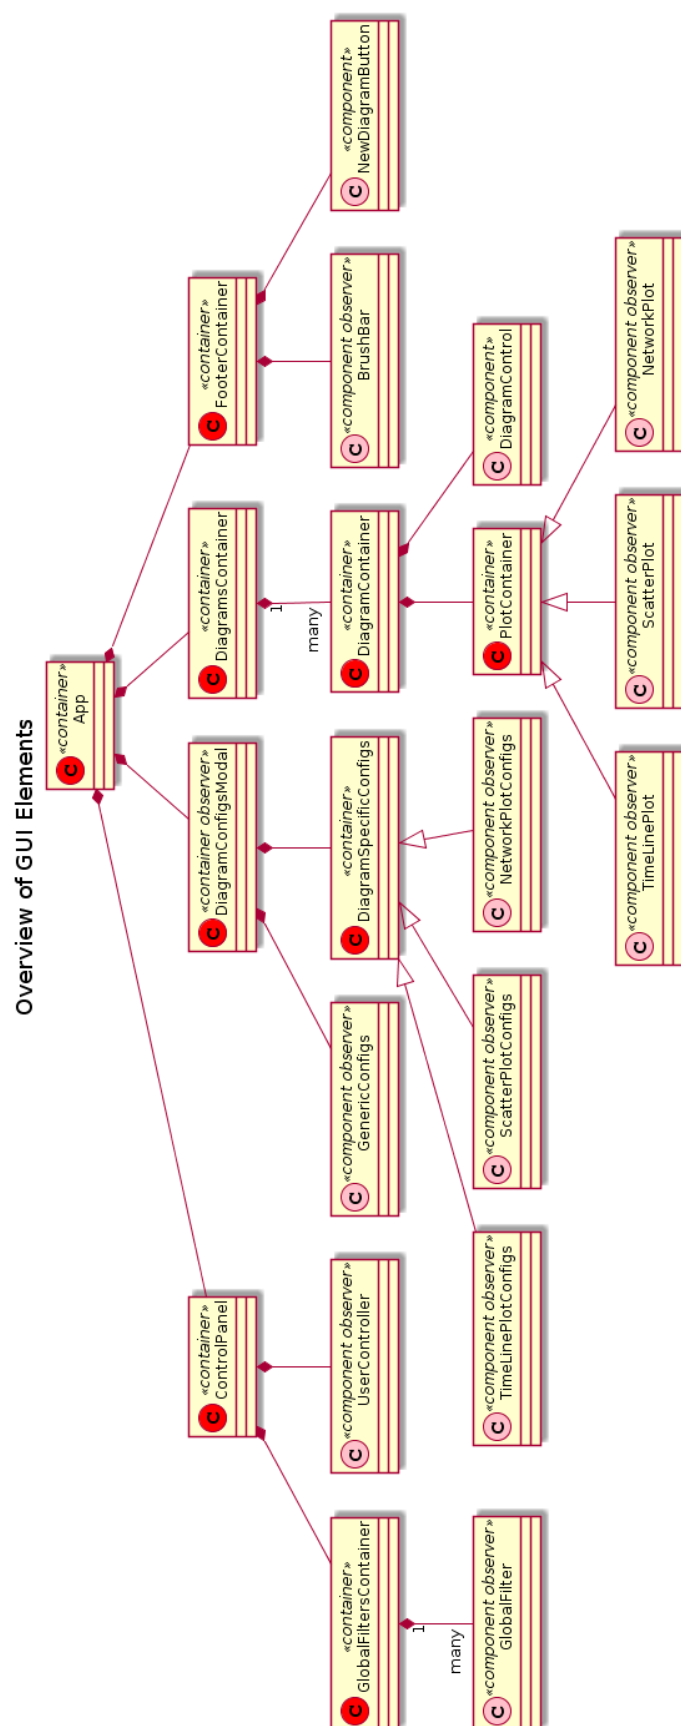


Figure 4: This diagram shows an overview of GUI elements and their relationships inside the main application, when the user has successfully logged in.

## Representational Element Definitions



Figure 5: This diagram shows the definitions of all representational elements.



## State Stores and Action Definitions




Figure 6: This diagram shows the design of the MobX state store objects and predefined actions to mutate the states.


## Type Definitions



Figure 7: This diagram shows the definitions of custom types that are used in the MobX state stores.


### 1.1.3 Sequence Diagram

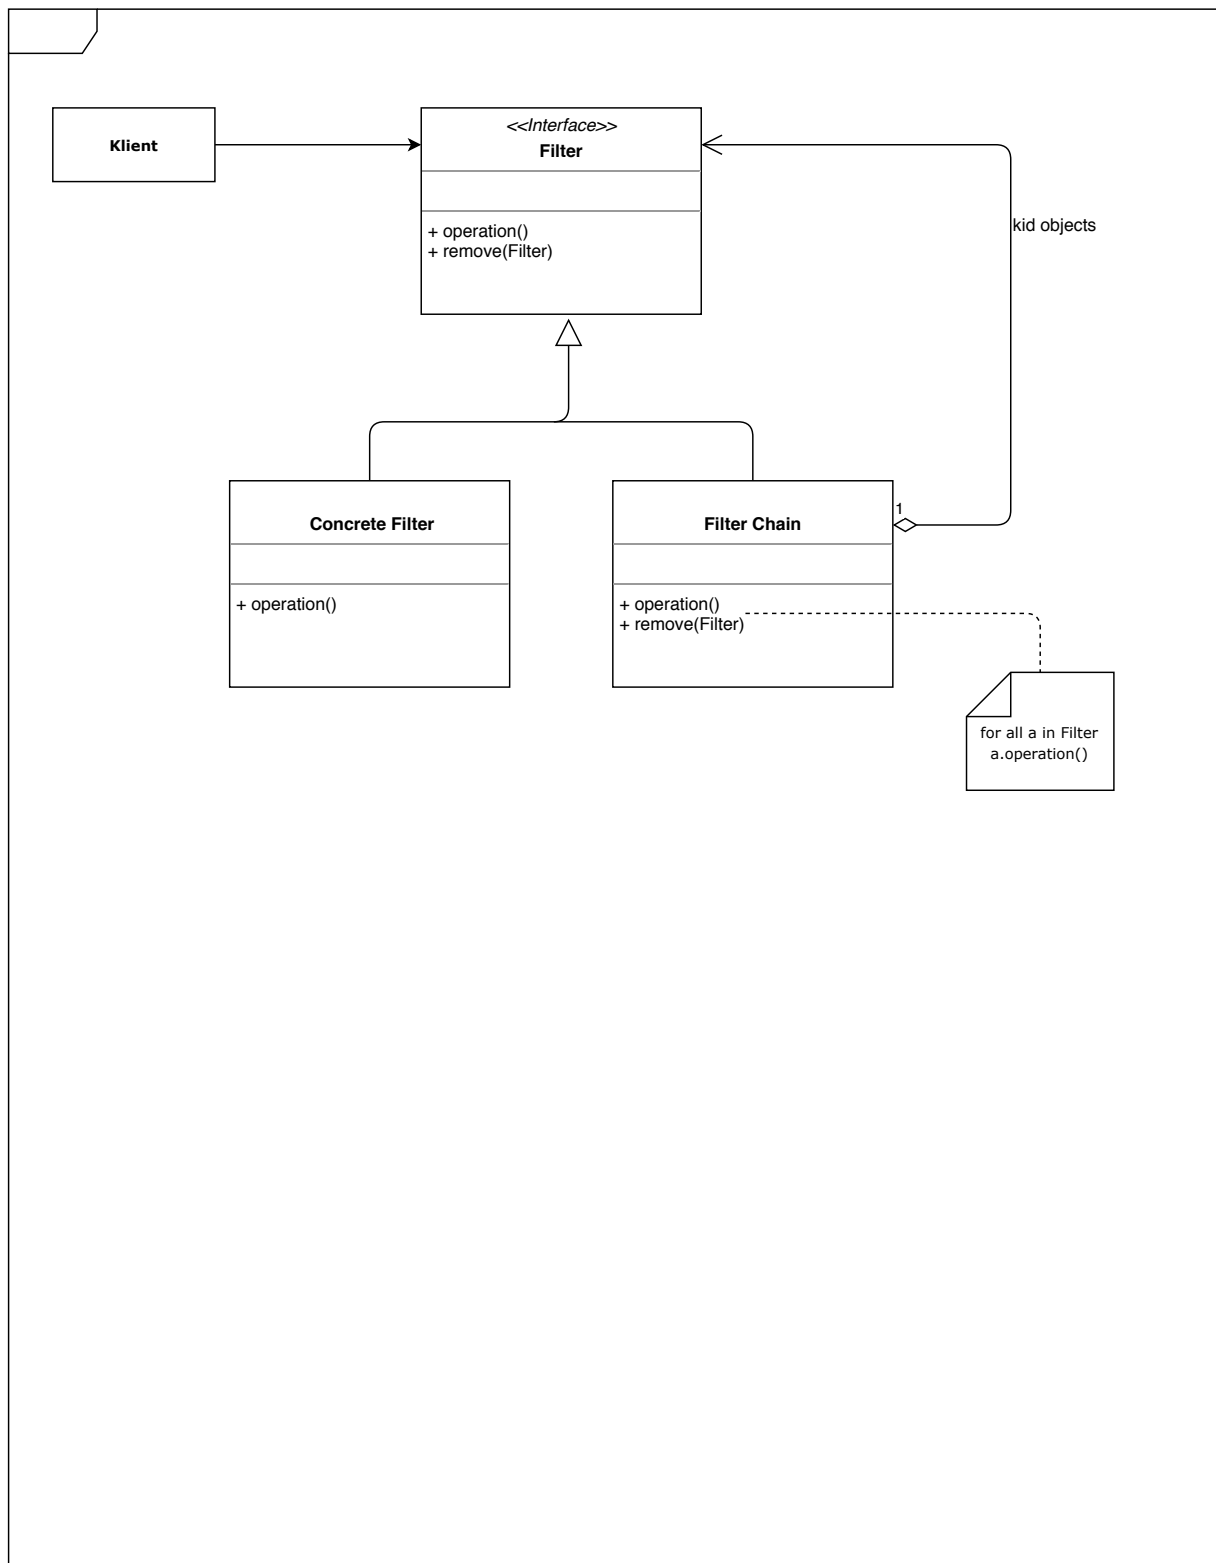


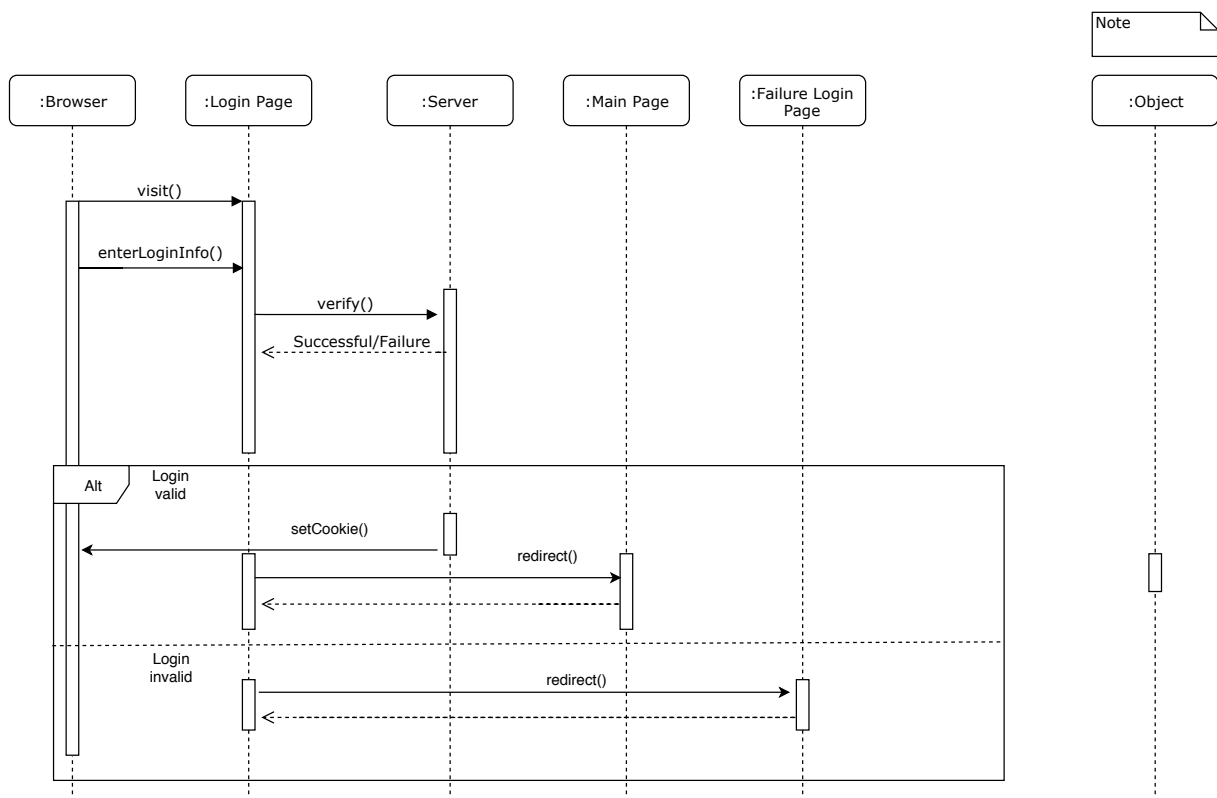

The following diagram shows an alternative view of the login sequence:


### ADIN Inspector Client-Server-Communication: login

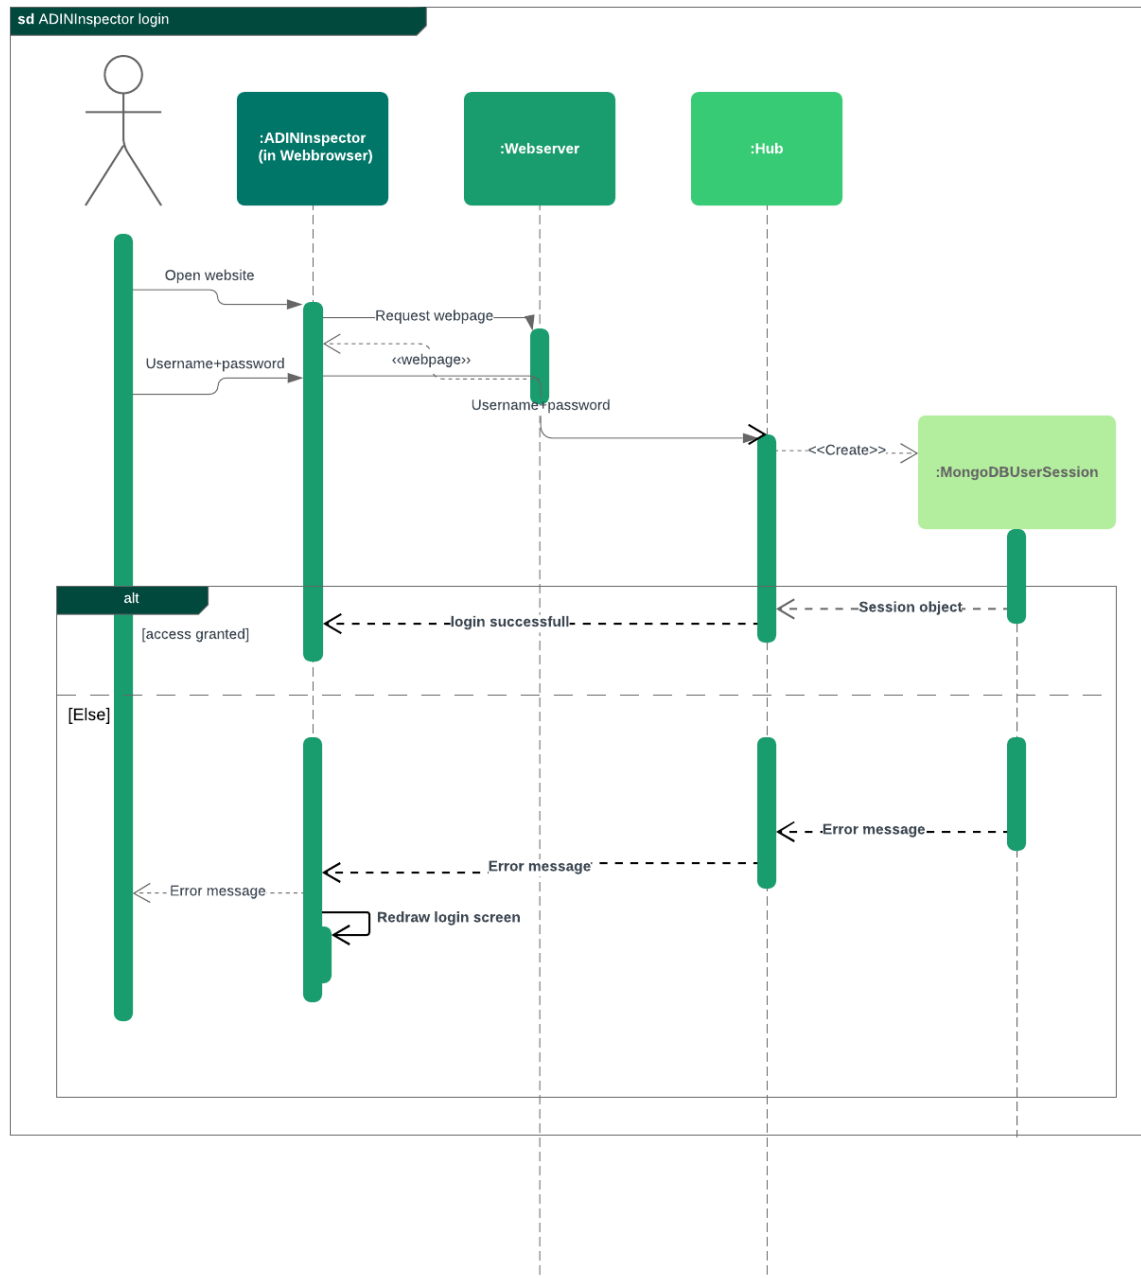


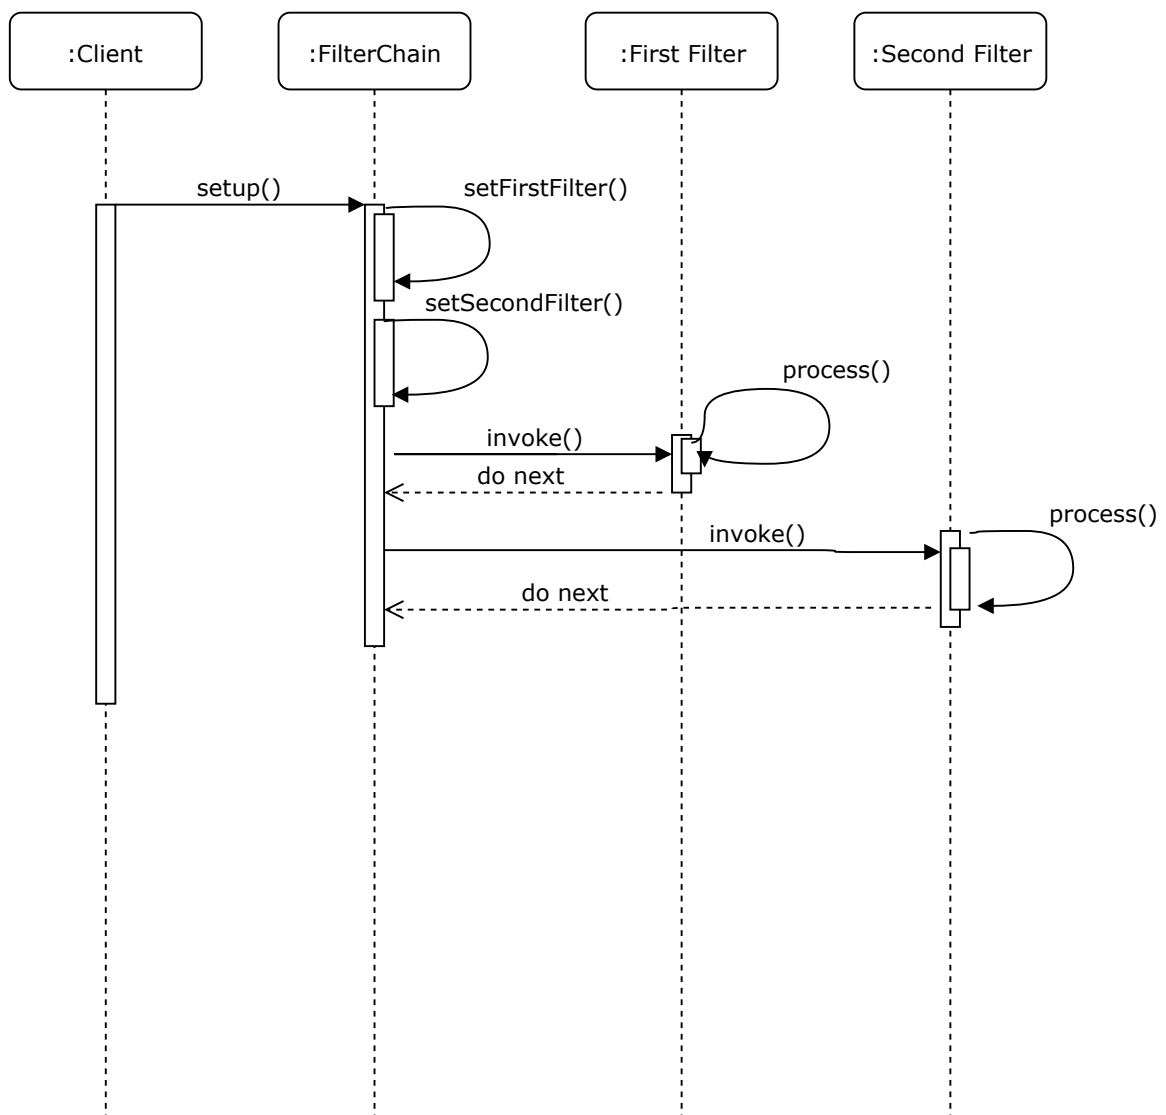

This diagram shows the control flow for handling a movement of the slider by the user.

#### 1.1.4 Activity Diagram

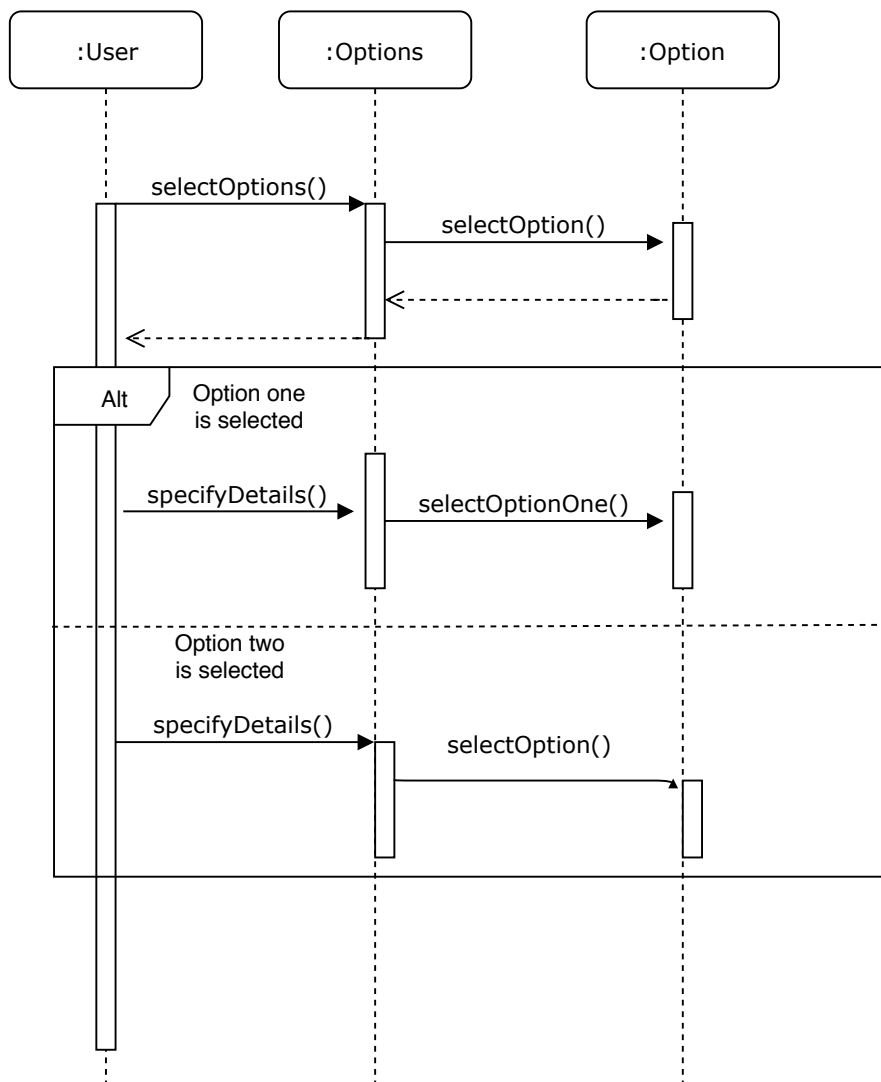

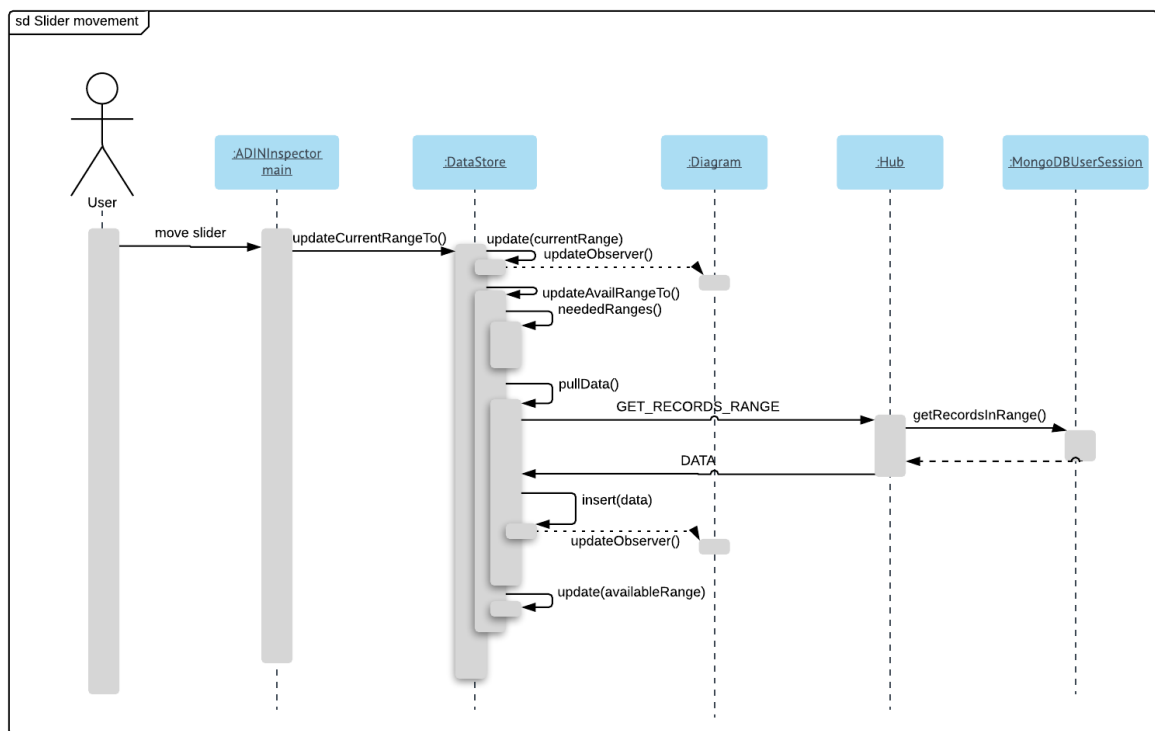

Note: the - - -> updateObserver() calls are performed by the MobX framework.

Figure 8: Sequence diagram for slider movement



## 1.2 Client-server protocol

Messages between client and server are exchanged as strings in JSON format. In the following list words in angle brackets ("**<>**") are placeholders.

### 1.2.1 Requests from client to server:

- `getAvailableCollections`  
syntax: {"cmd": "GET\_AV\_COLL"}  
expected response: list of collections
- `getCollectionSize(collection)`  
syntax: {"cmd": "GET\_COLL\_SIZE", "par": "<collection>"}  
where <collection> is the name of a collection  
expected response: collection size
- `getCollection(collection)`  
syntax: {"cmd": "GET\_COLL", "par": "<collection>"}  
expected response: data set
- `getRecordsInRange(collection, key, start, end)`  
syntax: {"cmd": "GET\_RECORDS\_RANGE", "par": "<collection>", "key": "<keyvalue>", "start": "<startvalue>", "end": "<endvalue>"}  
where <key> is the name of a key in the given collection and <startvalue> and <endvalue> are valid values for this key  
expected response: data set
- `getRecordsInRangeSize(collection, key, start, end)`  
syntax: {"cmd": "GET\_RECORDS\_RANGE\_SIZE", "par": "<collection>", "key": "<key-value>", "start": "<startvalue>", "end": "<endvalue>"}  
expected response: collection size

### 1.2.2 Messages from server to client:

- list of collections  
syntax: {"cmd": "LIST\_COL", "par": ["<collection>"]}  
where <collection> is the name of a collection
- collection size  
syntax: {"cmd": "COLL\_SIZE", "par": "<size>"}  
where <size> is the number of records in this collection
- data set  
syntax: {"cmd": "DATA", "par": [<record>]}  
where each record is a JSON object

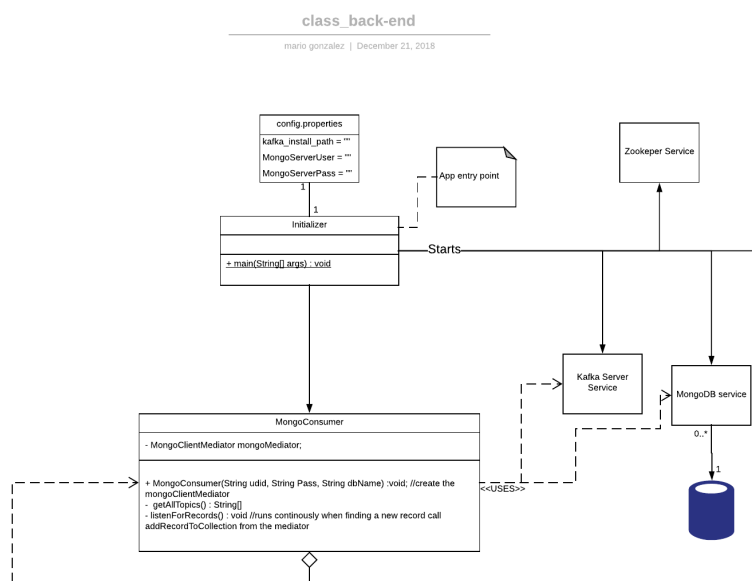


Figure 9: The classes involved in the initialization setup

### 1.3 Back-End

This subsection deals with the back-end of the ADIN INSPECTOR. How the system deals with client http calls, and how kafka interacts with the system. An overview of the system can be seen in Figure 12. Smaller subsections have been expanded in Figure ??, Figure ??, Figure ??.

The connection to the client is handled in the class Hub which contains handlers for the network interface. This class uses a separate class (ClientProtocolHandler) to parse and handle requests from the handler. This setup is according to the strategy design pattern and allows easily modifying or even replacing the client server-protocol. The Hub class and the ClientProtocolHandler access the database via an object that implements the IUserSession interface and encapsulates the database session. Currently there is only an implementation for MongoDB access (MongoDBUserSession), but the abstraction via the IUserSession interface allows to add classes that offer access to Kafka or other databases. Classes that implement IUserSession are instantiated with a factory Method (UserSession()) which guarantees that the returned object represents a successfully logged in database session.

#### 1.3.1 Class Diagram

The overview in Figure 12 shows a number of classes and it's interaction with eachother. What follows is a more in-depth view of what each component of this diagram does, what data it's stored and how it fits into the overarching architecture.

- Config properties file

The config file is stored alongside the built application .jar file and contains the path to the Kafka installation folder, the user name and password of a mongoDB account with the highest level of access and the name of the database.

- Initializer

Methods:

- main

parameters: String of arguments from the console

returns: void

App entry point.

We load the config.properties file and use the path provided to start the zookeeper, kafka and mongodb services

- MongoConsumer

The Mongo Consumer, as the name implies, consumes all messages from all topics in the Kafka messaging system. Once a message is found it is passed along to the Mongo Client for further processing.

Variables

- clientMediator

Type : MongoClientMediator

An instance of the Mongo Client Mediator, created with the credentials from the config file.

Methods

- MongoConsumer constructor

parameters: user name and password of a mongoDB account with the highest level of access.

Initializes the MongoClient variable and calls listenForRecords();

- getAllTopics

parameters: none

returns: an array of strings containing all the available kafka Topics.

Asks the kafka server service which topics exist.

- listenForRecords

parameters: none

returns: void

This Method first calls getAllTopics and uses the array of topics to poll the kafka server for new messages.

If new messages are found then the messages are passed to the Mongo Mediator for adding them to the Database.

If no new messages are found for a topic notify the Mongo Mediator that the collection tied to the topic is ready for pre-processing.

- MongoClientMediator This object serves as a nexus between the users who want to get data out of the database and the consumer and dataProcessor who want to add data into the database. This class encapsulates the mongo client from the mongo API.

Variables

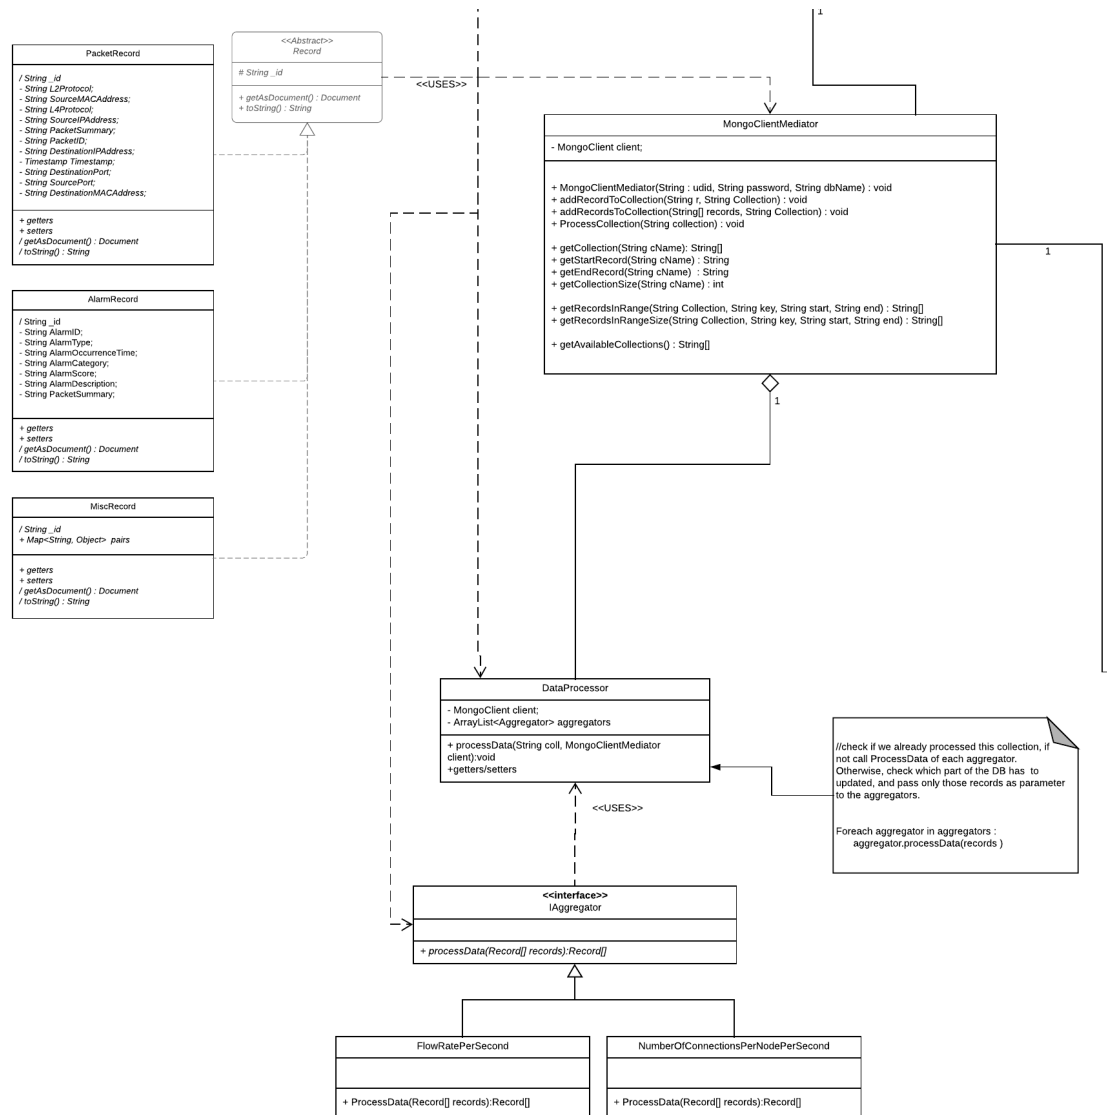


Figure 10: The classes involved in reading and writing data into the database

- client  
type: MongoClient  
An instance of the Mongo Client from the official java API.
- dataProc  
A reference to the data processor class for this client.

#### Methods

- MongoClientMediator constructor  
parameters: Username and password  
Initializes the client variable, throws an error if the user is not found.
- addRecordToCollection  
parameters: String representation of a record in json format  
String name of the collection it should be added to.  
returns: void  
Converts the json string into a java object, then to a bson document and uses the mongoAPI to insert it into the database.
- addRecordsToCollection  
parameters: String Array of records to be added to a collection  
String name of the collection it should be added to.  
returns: void  
for each one of the members of the array call addRecordToCollection
- ProcessCollection  
parameters: String, name of a collection  
returns: void  
signal the data processor to start the processing of a collection
- getCollection  
parameters: String, name of a collection  
returns: String array containing all entries of the collection
- getStartRecord  
parameters: String, name of a collection  
returns: the first entry of the collection as a String.
- getEndRecord  
parameters: String, name of a collection  
returns: the last entry of the collection as a String.
- getCollectionSize  
parameters: String, name of a collection  
returns: the number of entries in the collection as int
- getRecordsInRange  
parameters: String, name of the collection to query  
String, key of the parameter used for filtering  
String start and end ranges for the filtering  
returns: String array containing all entries of the collection within that range

this Method is very general to allow for flexibility. For example by letting the key be, SourceIPAddresses, or a timeStamp.

- getRecordsInRangeSize  
parameters: String, name of the collection to query  
String, key of the parameter used for filtering  
String start and end ranges for the filtering  
returns: number of elements matching the range as int

- Record

Every message that comes from kafka and needs to be added to the database has it's own Record class that inherit from this one.

Every single class that inherits needs to be able to, using reflection, convert itself into a Bson Document where every variable is a key Value pair of the name of the variable and it's associated value.

Variables

- id  
type: String

Methods

- getAsDocument()  
parameters: none  
returns: A Document, containing every variable of any class inheriting from this one.  
This function checks for every variable, gets it's name and value as a string and adds it to the document that it eventually returns.

- PacketRecord

Inheriting from Record, this class contains the variables that match the json string obtained from kafka.

Variables

- id  
type: String  
this id is used for determining the ordering when saving to mongoDB, it's the offset of the message in the kafka messaging queue. inherited from Record
- client  
type: String
- L2Protocol  
type: String
- SourceMACAddress  
type: String
- L4Protocol  
type: String

- SourceIPAddress  
type: String
- PacketSummary  
type: String
- DestinationIPAddress  
type: String
- Timestamp  
type: String
- DestinationPort  
type: String
- SourcePort  
type: String
- DestinationMACAddress  
type: String

#### Methods

- getters / setters  
parameters: variable  
returns: variable type  
Each variable has it's getters and setter methods.

- AlarmRecord

Inheriting from Record, this class contains the variables that match the json string obtained from kafka.

#### Variables

- id  
type: String
- AlarmID  
type: String
- AlarmType  
type: String
- AlarmOccurrenceTime  
type: String
- AlarmCategory  
type: String
- AlarmScore  
type: String
- AlarmDescription  
type: String
- PacketSummary  
type: String

### Methods

- getters / setters  
parameters: variable  
returns: variable type  
Each variable has it's getters and setter methods.

- MiscRecord

Inheriting from Record, this class is used by the data processor as an 'in-between' state before saving to the database. As well as an extension point for adding more types of records into the database programatically in the future.

Refer to the data processor class for further data on the key value pairs.

### Variables

- pairs  
A Map of strings to Objects to store any 1 to many relationships

### Methods

- getters / setters  
parameters: none  
returns: variable type  
Each variable has it's getters and setter methods.

- DataProcessor

This class is a mediator for each one of our data aggregators used for extraciton of features from the raw data stored in mongoDB.

We might want to hve multiple data processors for chaining different aggregators together or to split up the work into mutliple threads. This is dependant on further performance testing.

### Variables

- client  
an instance of the associated MongoClient that requested the data aggregation
- aggregators  
A ArrayList containing all the aggregators to be applied on a collection.

### Methods

- getters / setters
- processData  
parameters: variable  
returns: variable type

- IAggregator

This interface is the building block for every aggregator to be applied to data

### Variables Methods

- processData  
parameters: Records array of the records to be processed



- FlowRatePerSecond

Implements IAggregator. This calculates, per port, the outgoing and ingoing connections. A record processed by this aggregator is stored in a collection as follows:

Name of collection: collectionName\\_FlowratePerSec

structure of record as json:

```
{
  "date" : \{" date" " Unix_Timestamp  }
  rounded down to the second this record points to.
  Connections : [
    { Port: "portNumer", "InOut" : " In/Out ", count : "Number" }
    { Port: "portNumer", "InOut" : " In/Out ", count : "Number" }
    ...
  ]
}
```

] This array has an entry per port if the port communicated that second. Precomputing this allows us to stream whenever the client needs the information for a specific node.

}

#### Methods

- processData
  - parameters: Records array of the records to be processed
  - specific implementation left to the classes implementing this interface

- NumberOfConnectionsPerNodePerSecond

Implements IAggregator. This calculates the outgoing and ingoing connections. A record processed by this aggregator is stored in a collection as follows:

Name of collection: collectionName\\_FlowratePerSec

structure of record as json:

```
{
  "date" : \{" date" " Unix_Timestamp  }
  rounded down to the second this record points to.
  Connections : [
    { Port: "portNumer", count : "Number" }
    { Port: "portNumer", count : "Number" }
    ...
  ]
}
```

] This array has an entry per port if the port communicated that second. Precomputing this allows us to stream whenever the client needs the information for a specific node.

}

#### Methods

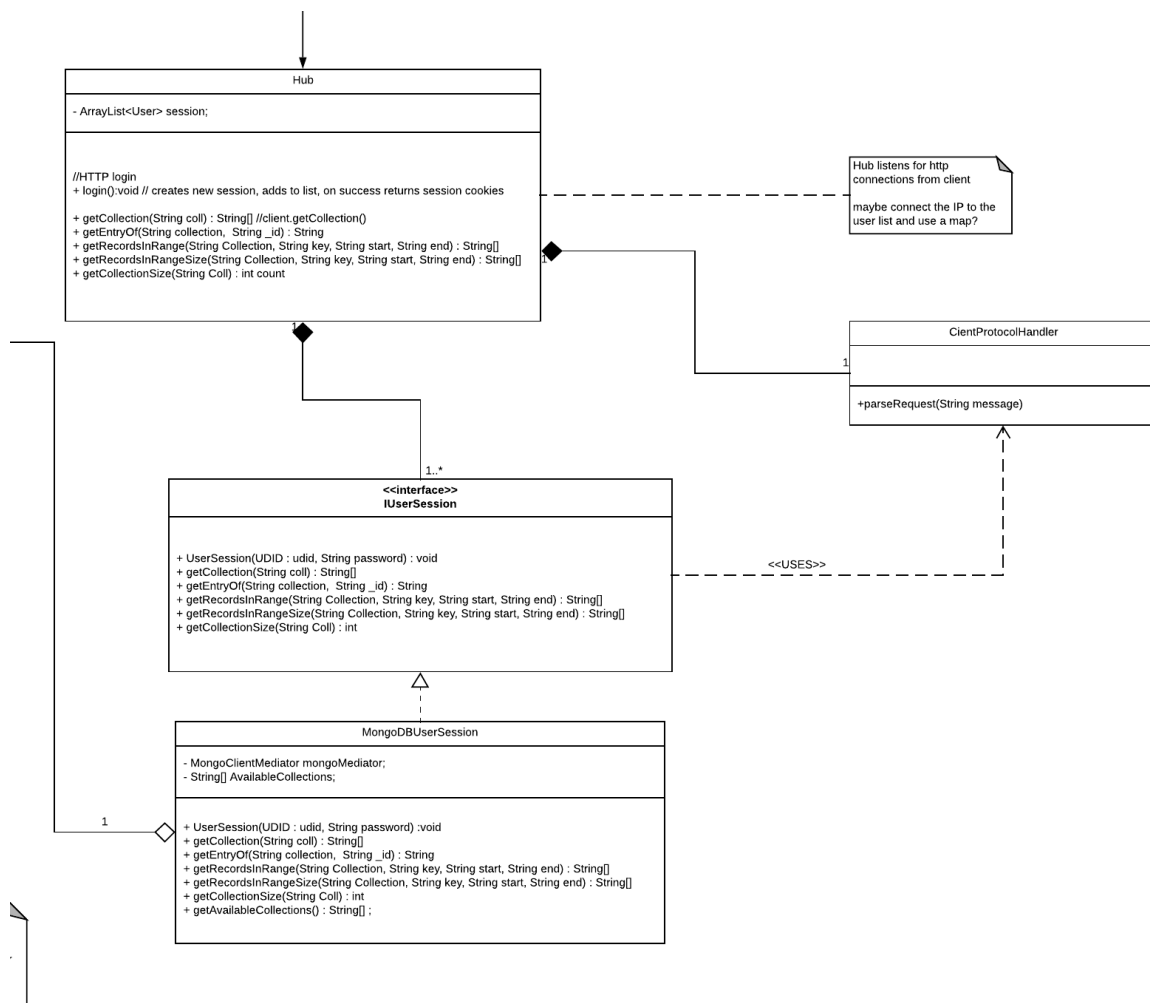


Figure 11: The classes involved in the communication between the server and the client

- processData  
parameters: Records array of the records to be processed

- Hub

This class implements the network handlers for the websocket connection to the client and access methods for a database connection.

Variables

- requestHandler  
Type : ClientProtocolHandler  
The strategy object we call for the actual parsing of the client requests.
- database  
Type : IUserSession  
The database we use during a user session.

Methods

- `handleOpen`  
parameters: Session session - the current session  
returns: void  
Event handler for the start of websocket connection.
  - `handleClose`  
parameters: Session session - the current session  
returns: void  
Event handler for closing a connection.
  - `handleMessage`  
parameters: String message - the message that we received from the client  
Session session - the current session  
returns: String - the response to be sent to the client  
Event handler for receiving a message. The message is passed to the ClientProtocol-Handler.
  - `handleError`  
parameters: Session session - the current session  
Throwable t - the exception that occurred  
returns: void  
Event handler for errors/exceptions during communication.
- **IUserSession**  
An IUserSession object encapsulates a data base session. On instantiation an IUserSession connects to a database using the given user id and password and uses this connection for all following data base access.  
Methods
    - `UserSession`  
parameters: String username - the user id to login with  
String password - the password  
returns: IUserSession  
Factory method to instantiate a new UserSession and log in into the database using the given credentials.
    - `getAvailableCollections`  
parameters: -  
returns: String array with collection names  
Returns an array with the names of the collections available to the current user.
    - `getCollectionSize`  
parameters: String collection - the collection to query  
returns: long - the number of records  
Returns the number of records in the specified collection.
    - `getCollection`  
parameters: String - name of a collection  
returns: String array containing all entries of the collection

- `getRecordsInRange`  
parameters: String - name of the collection to query  
String key - the parameter used for filtering  
String start and end - range for the filtering  
returns: String array containing all entries of the collection within the filter range  
Returns an array containing all records of this collection for which the value of the specified key is in the range [start, end). The records will be in the same order as they are in the collection.
- `getRecordsInRangeSize`  
parameters: String - name of the collection to query  
String key - the parameter used for filtering  
String start and end - range for the filtering  
returns: number of elements matching the range as int  
Returns the number of records in the specified collection for which the value of the specified key is within the range [start, end).
- `MongoDBUserSession`  
Encapsulates a user session for a connection to a MongoDB database.  
Methods
  - `MongoDBUserSession` constructor  
parameters: -  
Private constructor to create a new MongoDB session.
  - `UserSession`  
parameters: String username - the user id to login with  
String password - the password  
returns: a new `MongoDBUserSession` object  
Factory method to instantiate a new `MongoDBUserSession` and log in into the database using the given credentials.
  - `getAvailableCollections`  
parameters: -  
returns: String array with collection names  
Returns an array with the names of the collections available to the current user.
  - `getCollectionSize`  
parameters: String collection - the collection to query  
returns: long - the number of records  
Returns the number of records in the specified collection.
  - `getCollection`  
parameters: String - name of a collection  
returns: String array containing all entries of the collection
  - `getRecordsInRange`  
parameters: String - name of the collection to query  
String key - the parameter used for filtering  
String start and end - range for the filtering

returns: String array containing all entries of the collection within the filter range  
Returns an array containing all records of this collection for which the value of the specified key is in the range [start, end). The records will be in the same order as they are in the collection.

- getRecordsInRangeSize

parameters: String - name of the collection to query

String key - the parameter used for filtering

String start and end - range for the filtering

returns: number of elements matching the range as int

Returns the number of records in the specified collection for which the value of the specified key is within the range [start, end).

- ClientRequestHandler

This class handles client requests by parsing them, executing the requested action and producing responses. The requested actions are typically executed by calls to the database session object.

Methods

- handleRequest

parameters:

IUserSession dbSession - the current database session

Session session - the current client session

String message - the client request to process

returns: String - the response to be sent to the client

Parse the message from the client, execute the requested action (typically a database query) and construct the response message.

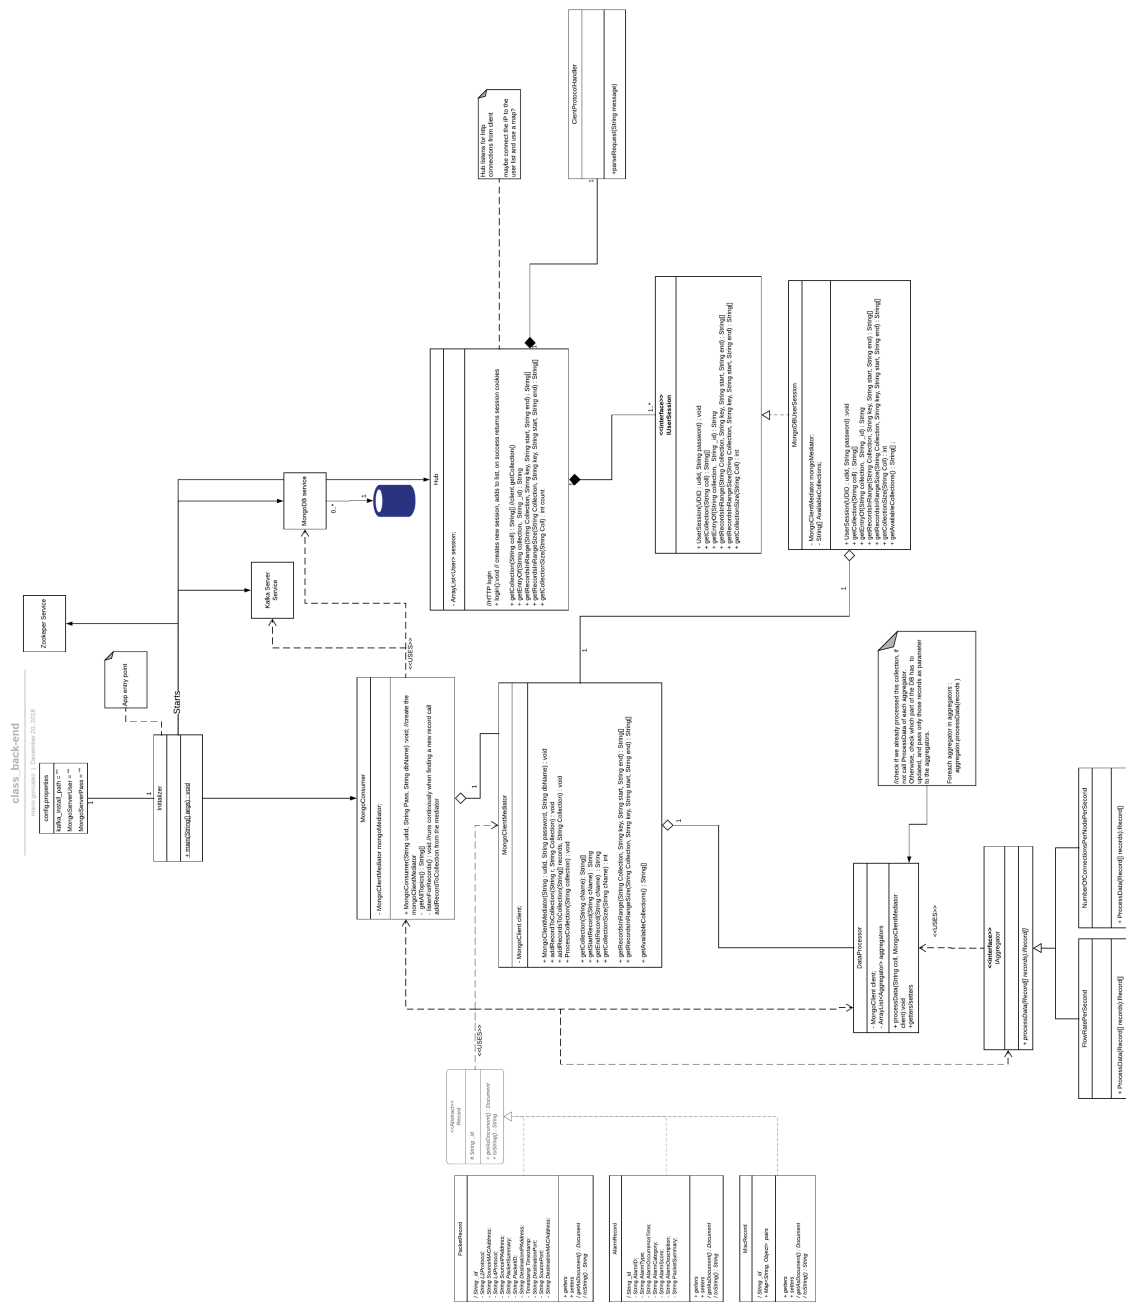


Figure 12: This is the class diagram for the whole back-end system

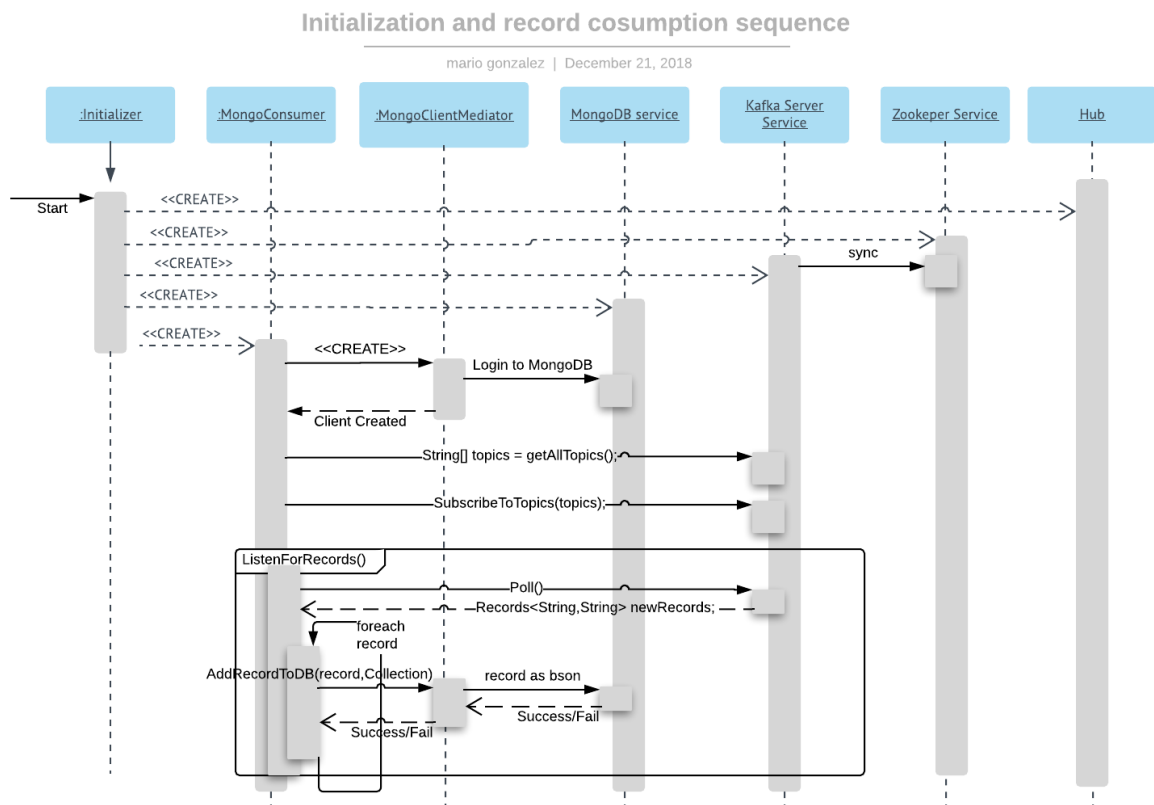


Figure 13: Initialization sequence and message consumption

### 1.3.2 Sequence Diagram

The following diagram shows the initialization sequence order, the corresponding class diagram is Figure ??, the program depends on a couple of services namely (in order), the zookeeper service, the kafka server service and the mongoDB service. Once all services are up and running the `MongoConsumer` is created and can start consuming messages and the `Hub` can start listening to client logins, requests, etc.



## Consuming messages

```

{{lastModifiedBy}} | {{lastModifiedTime:MMMM d,
yyyy}}

```

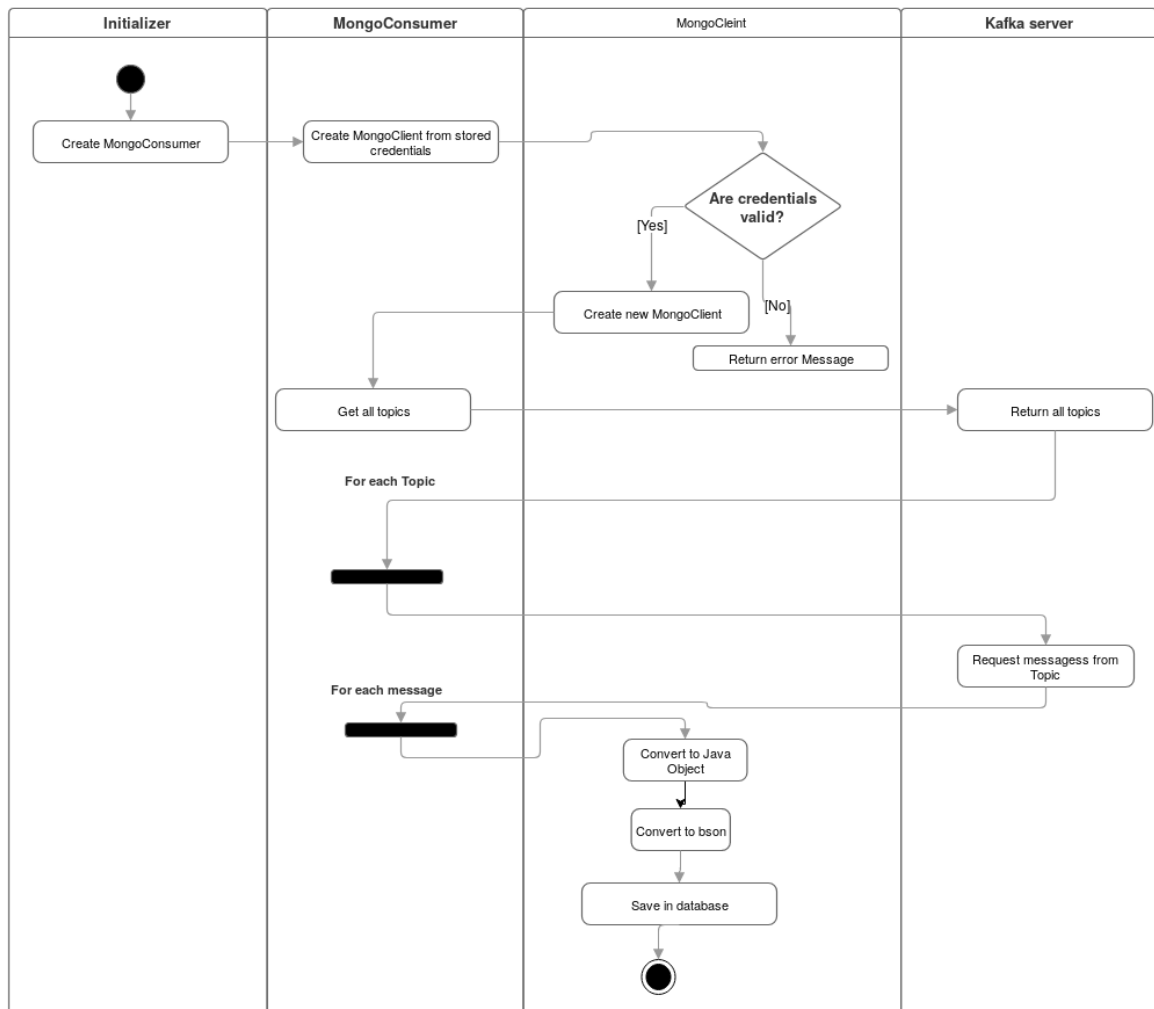


Figure 14: Message consumption workflow

## 1.3.3 Activity Diagram

For user access control the built-in UAC system in MongoDB is used, whereas every user can have roles assign to them.

A Role determines what can be done and seen within a database. For the purposes of the ADIN INSPECTOR there are three basic roles, Admin, Operator and Analyst. The admin role can create and destroy users as well as assign specific roles to them. An analyst can see all collectoins on the database and an Operator can only see part of them. The following Diagram workflow shows the user/role creation workflow an Administrator can use.

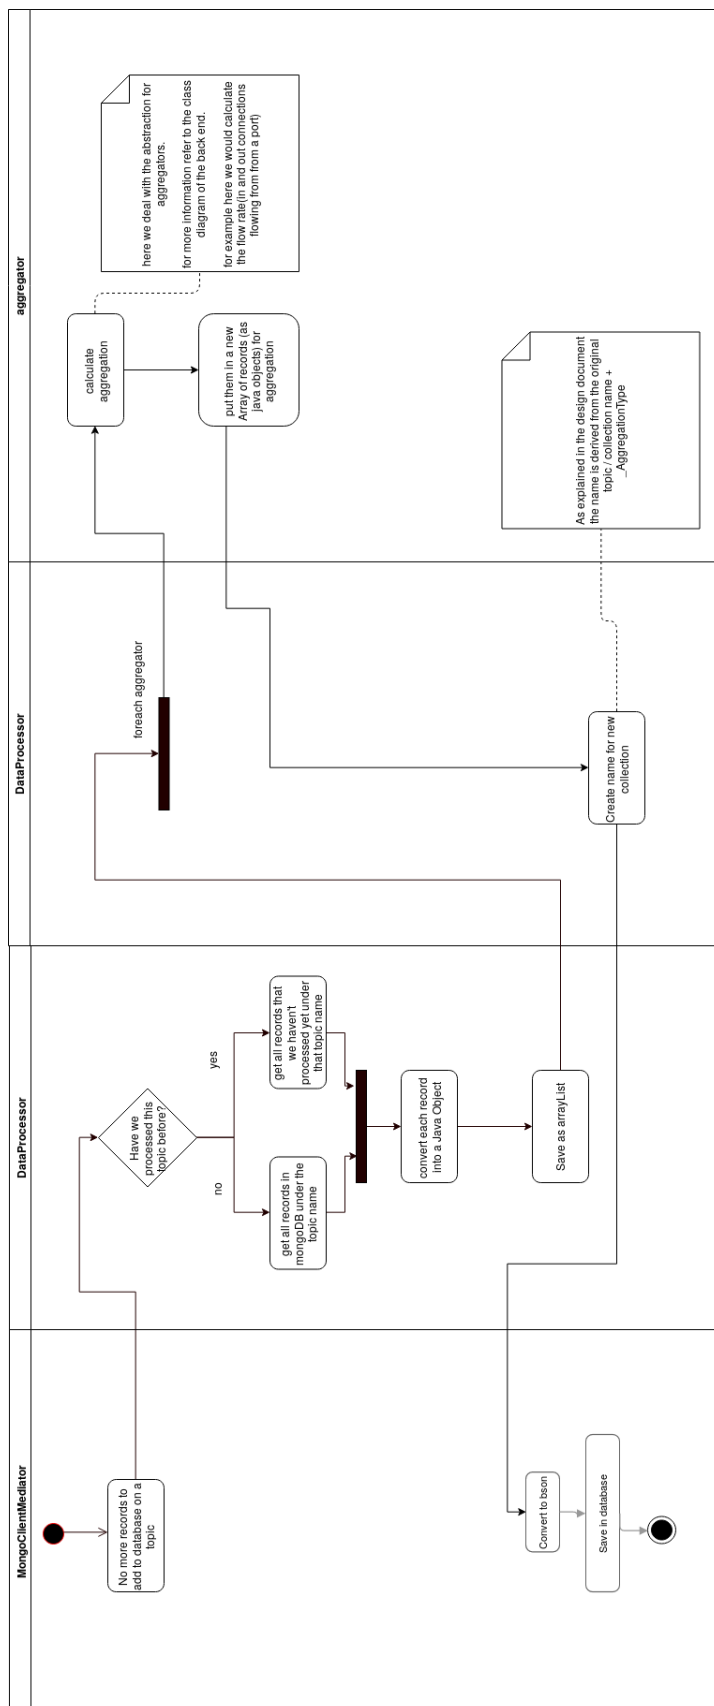


Figure 15: Processing Collection/Records workflow

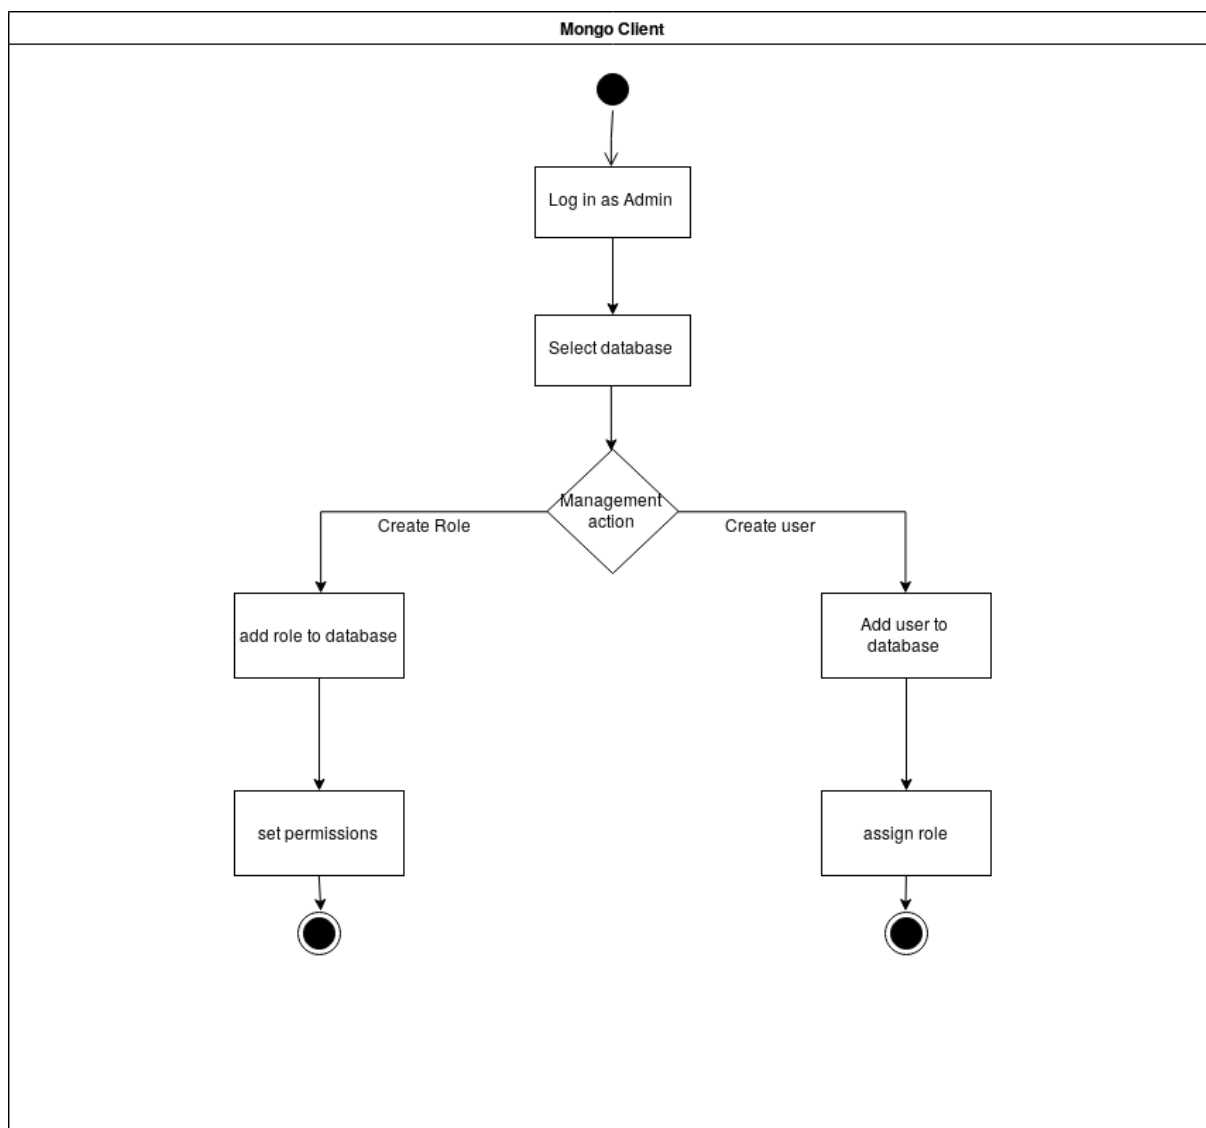


Figure 16: User Management workflow