

# **Real-time visualization of analyzed industrial communication network traffic**

## **Design**

PSE Group

Fraunhofer Institute of Optronics, System Technologies and Image Exploitation IOSB

Advisor: M.Sc. Ankush Meshram

Version 2.0.0

# Contents

<b>1</b>	<b>Design</b>	<b>1</b>
1.1	Front-End . . . . .	1
1.1.1	UI Design Mockups . . . . .	1
1.1.2	Class Diagrams . . . . .	5
1.1.3	Sequence Diagram . . . . .	9
1.2	Client-server protocol . . . . .	14
1.2.1	Requests from client to server: . . . . .	14
1.2.2	Responses from server to client: . . . . .	16
1.3	Back-End . . . . .	17
1.3.1	Class Diagram . . . . .	17
1.3.2	Sequence Diagrams . . . . .	38
1.3.3	Activity Diagram . . . . .	38
1.4	Changes . . . . .	42
1.4.1	Changes to the front-end . . . . .	42
1.4.2	Changes to the client-server protocol . . . . .	42
1.4.3	Changes to the back-end . . . . .	42

# 1 Design

## 1.1 Front-End

This subsection describes the front-end of the ADIN INSPECTOR - the UI elements the GUI consists of, and how states are handled. A series of final UI design mockups are presented under UI Design Mockups subsection, whereas an overview of the GUI classes can be seen in Figure 8.

The GUI elements are implemented in [React](#) and [Material UI](#), whereas the internal logic and application state management are written with [MobX](#).

### 1.1.1 UI Design Mockups

An early stage interactive demo is available at <https://adin-frontend.netlify.com>.



Figure 1: Login screen

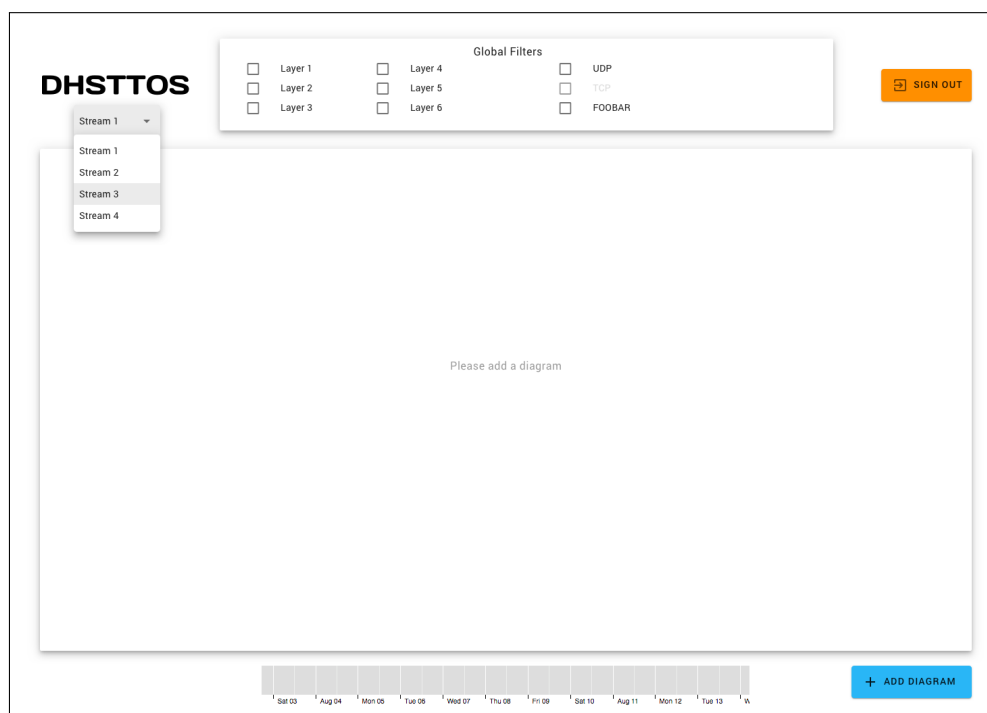


Figure 2: Initial empty screen

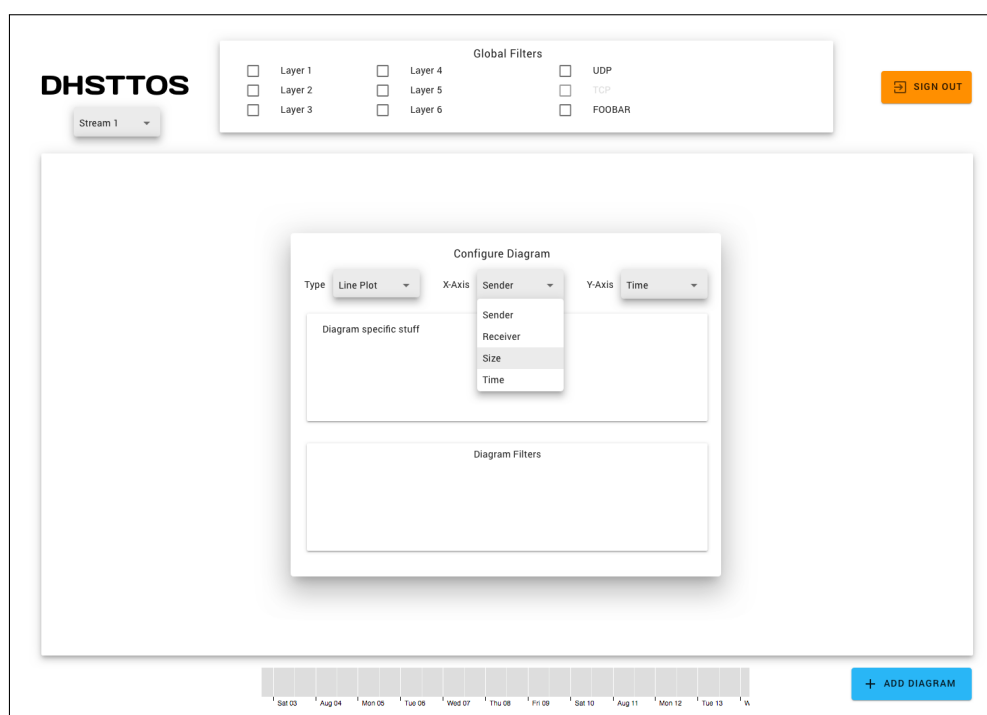


Figure 3: Adding first diagram

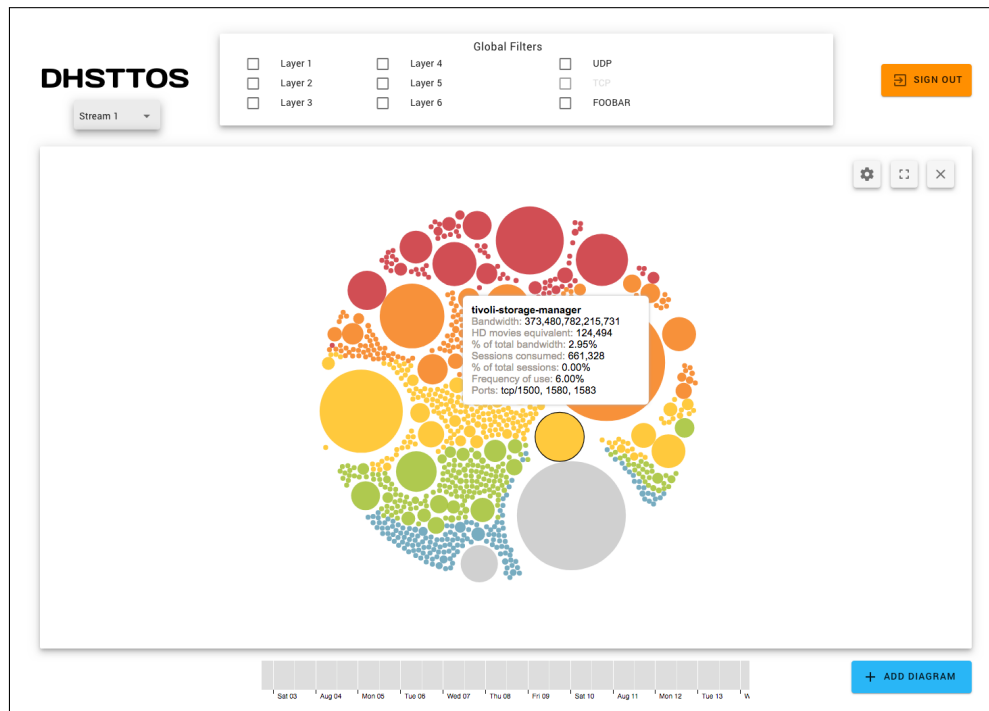


Figure 4: Displaying a single diagram

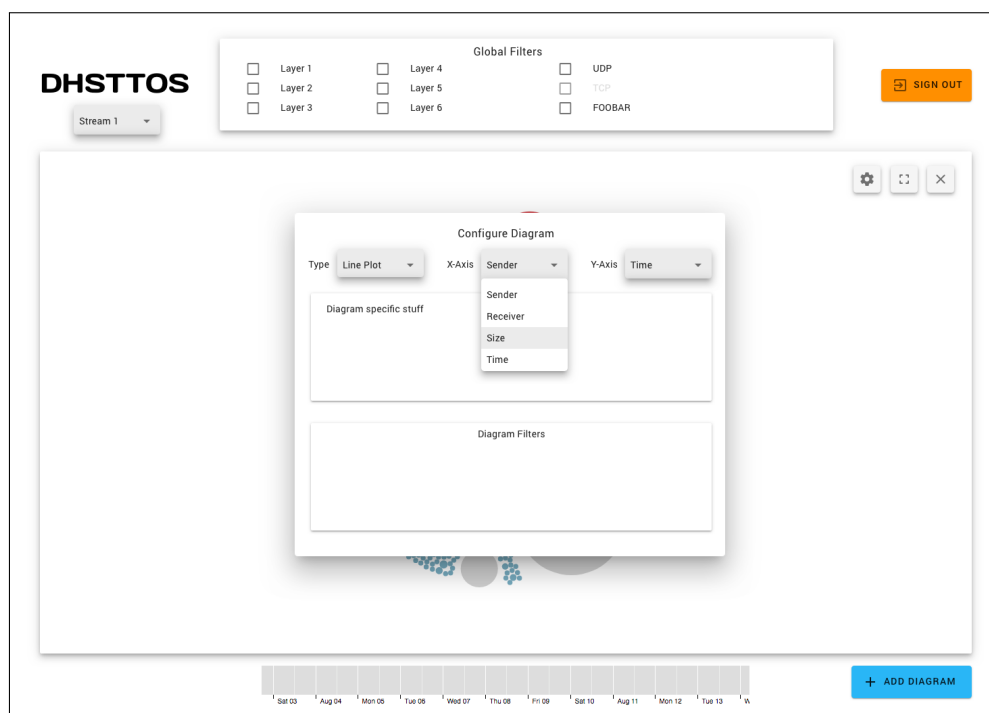


Figure 5: Adding new or configuring existing diagram

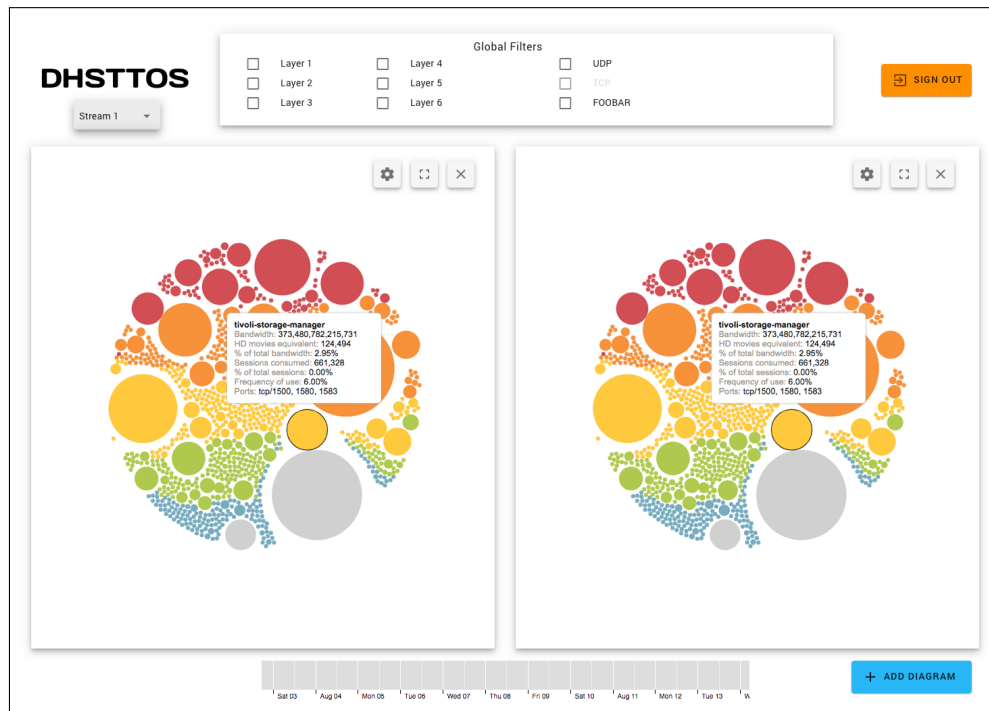


Figure 6: Displaying two diagrams

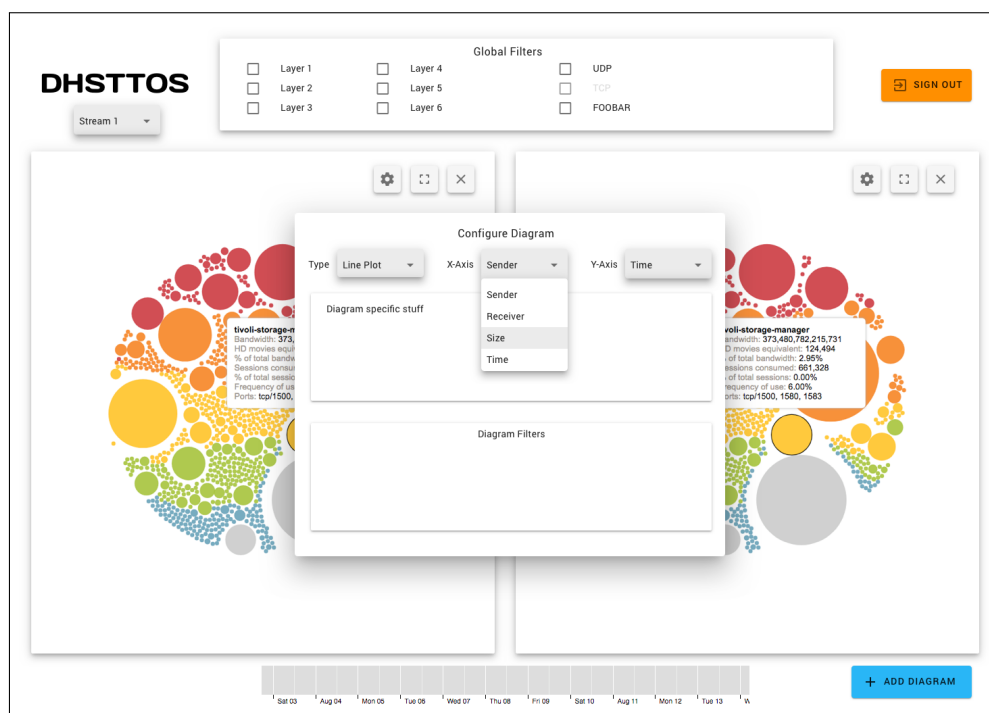


Figure 7: Adding additional or configuring existing diagram

## 1.1.2 Class Diagrams



Figure 8: This diagram shows an overview of GUI elements and their relationships inside the main application, when the user has successfully logged in.

## Representational Element Definitions



Figure 9: This diagram shows the definitions of all representational elements.



## State Stores and Action Definitions

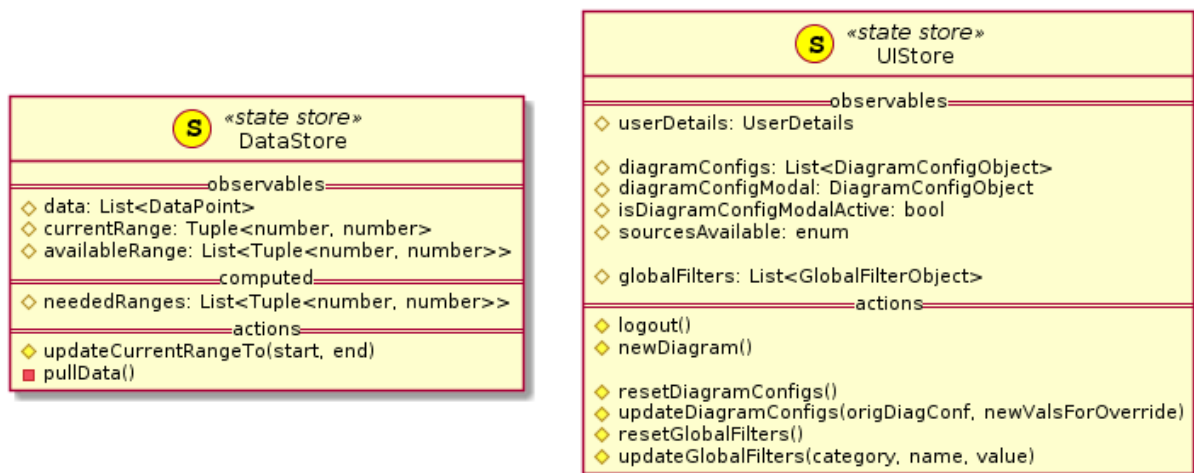


Figure 10: This diagram shows the design of the MobX state store objects and predefined actions to mutate the states.

## Type Definitions



Figure 11: This diagram shows the definitions of custom types that are used in the MobX state stores.

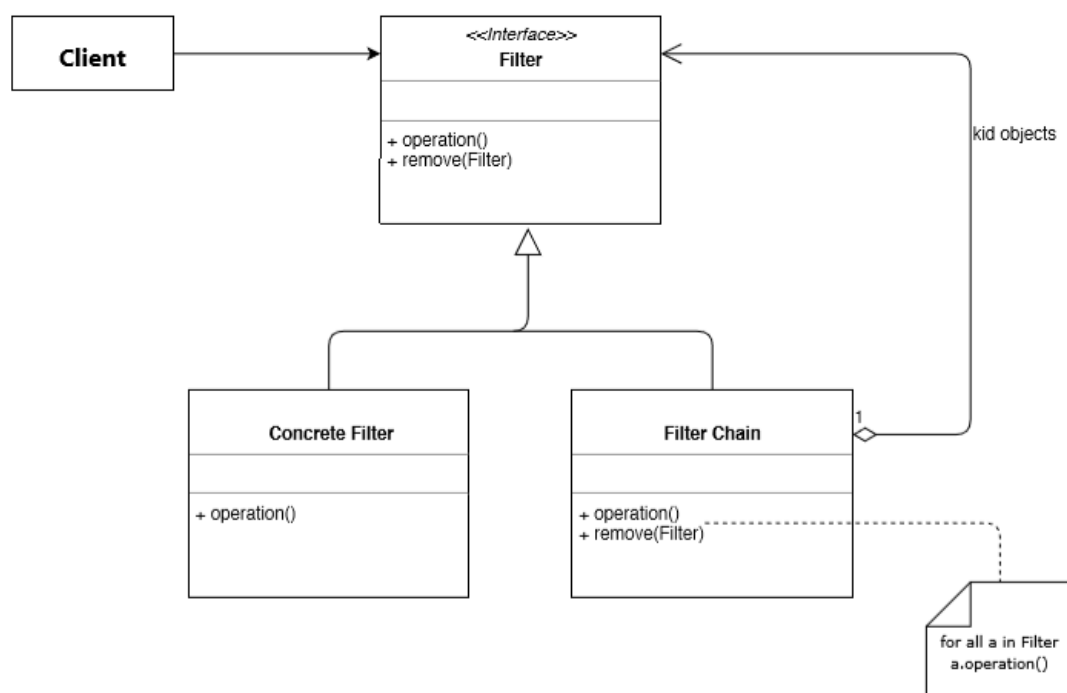


Figure 12: Class diagram representing the filtering chain.

## 1.1.3 Sequence Diagram

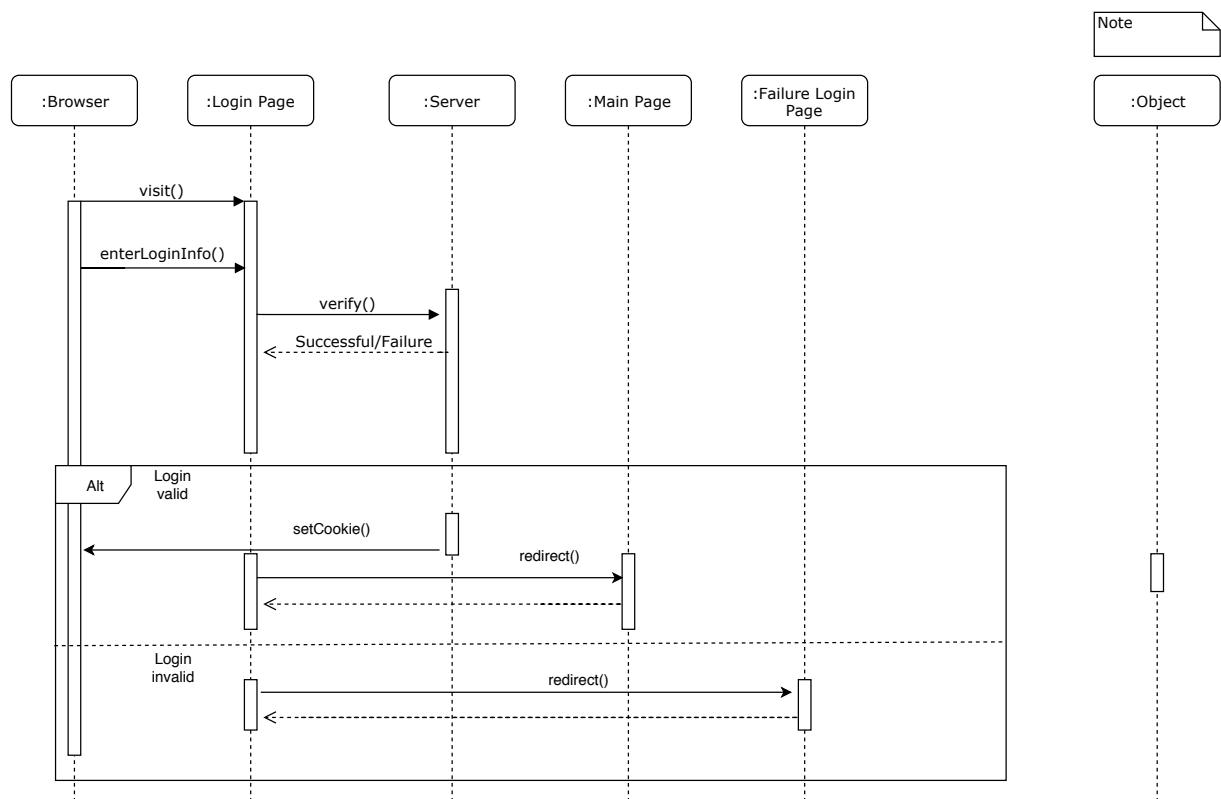


Figure 13: Sequence diagram of Login Authentication System. The user credentials are transmitted via https and the server returns a token to identify the following user session.

## ADIN Inspector Client-Server-Communication: login

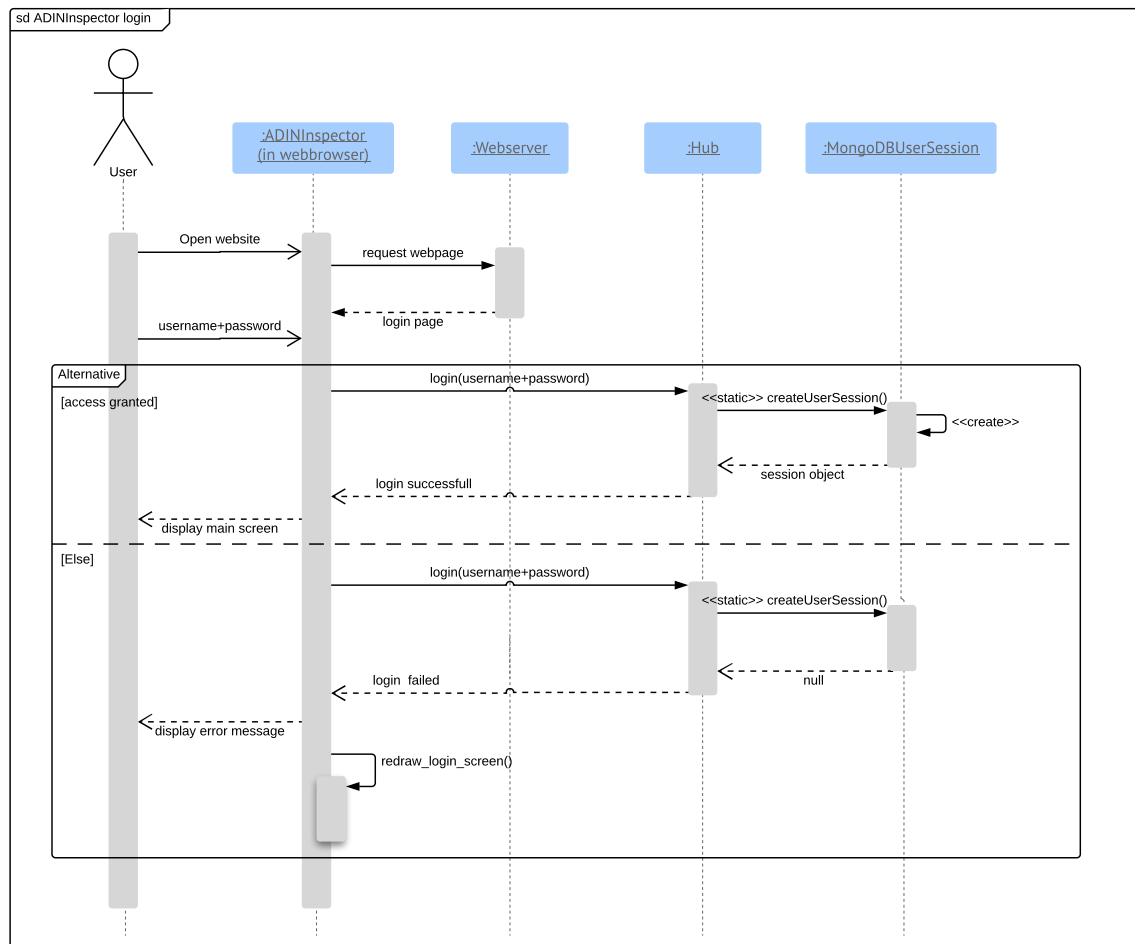


Figure 14: This diagram shows an alternative view of the login sequence where the user credentials are transmitted via the same encrypted WebSocket connections which is used for the following session.



Figure 15: Sequence diagram of chaining filters in a specific diagram.



Figure 16: Selecting a specific option from a drop-down menu.



Figure 17: Sequence diagram showing control flow for handling a movement of the slider by the user.

## 1.2 Client-server protocol

The client (web browser) and server communicate using the encrypted WebSocket protocol (wss://). Messages between client and server are exchanged as strings in JSON format. Communication is typically initiated by the client. Each request has a message id which is echoed back in the response to help the sender to link the response to the request. The ids can be random, they don't have to be in a specific order.

By default, all requests apart from login will be ignored. A communication session starts with a login request that is responded to with an "OK" session control message. Within a communication session, login is ignored and all other requests can occur in arbitrary order. On receiving a logout request, the server returns into the default state, i.e. logged out.

The user credentials that the user enters in the login web page can be transmitted in two different ways. In the first case they are sent via https with the POST method to the web server and the server returns a token which the client (the web browser) will save in a cookie and then transmit to the server in the WebSocket session with the LOGIN\_TOKEN message to authenticate the WebSocket session (see Figure 13). In the alternative case the client opens an encrypted WebSocket connection to the server and sends the user credentials with the LOGIN message; i.e. user authentication and data communication take place within the same WebSocket session (see Figure 14).

All communication, including the user authentication, uses https or wss, respectively, both of which use TLS/SSL encryption. The MongoDB data base doesn't store user passwords in plaintext but stores a hashed value derived from the password.

Responses carrying data, specifically "data set" and "collection size", will echo back any key-value pairs that are in addition to those specified in the protocol. This allows the client to add information that will help in processing the response, e.g. when requesting several "chunks" of data that will be concatenated.

In the following list words in angle brackets ("**<>**") are placeholders.

### 1.2.1 Requests from client to server:

- login  
syntax: {"cmd": "LOGIN", "user": "<username>", "pwd": "<password>", "id": "<id>"}  
expected response: session control with key "par" having the value "LOGIN"
- authentication via token  
syntax: {"cmd": "AUTH", "token": "<token>", "id": "<id>"}  
expected response: session control with "par": "AUTH"
- logout  
syntax: {"cmd": "LOGOUT", "id": "<id>"}  
expected response: session control with "par": "LOGOUT"
- getAvailableCollections  
syntax: {"cmd": "GET\_AV\_COLL", "id": "<id>"}  
expected response: list of collections



- `getCollectionSize(collection)`  
syntax: {"cmd": "GET\_COLL\_SIZE", "par": "<collection>", "id": "<id>"}  
where <collection> is the name of a collection  
expected response: collection size
- `getStartRecord(collection)`  
syntax: {"cmd": "GET\_START", "par": "<collection>", "id": "<id>"}  
expected response: single data point, with "idx": "start" and key "data" containing the first data point of the given collection
- `getEndRecord(collection)`  
syntax: {"cmd": "GET\_END", "par": "<collection>", "id": "<id>"}  
expected response: single data point, with "idx": "end" and key "data" containing the last data point of the given collection
- `getEndpoints(collection)`  
syntax: {"cmd": "GET\_ENDPOINTS", "par": "<collection>", "id": "<id>"}  
expected response: data endpoints, with the key "data" containing an array consisting of the first and the last data point of the given collection
- `getCollection(collection)`  
syntax: {"cmd": "GET\_COLL", "par": "<collection>", "id": "<id>"}  
expected response: data set
- `getRecordsInRange(collection, key, start, end)`  
syntax: {"cmd": "GET\_RECORDS\_RANGE", "par": "<collection>", "key": "<keyvalue>", "start": "<startvalue>", "end": "<endvalue>", "id": "<id>"}  
where <key> is the name of a key in the given collection and <startvalue> and <endvalue> are valid values for this key  
expected response: data set, where key "data" contains all data points (i.e. records) from the given collection for which the given key is in the interval [start, end).
- `getRecordsInRangeSize(collection, key, start, end)`  
syntax: {"cmd": "GET\_RECORDS\_RANGE\_SIZE", "par": "<collection>", "key": "<key-value>", "start": "<startvalue>", "end": "<endvalue>", "id": "<id>"}  
expected response: collection size, where the key "par" gives the number of data points that would be returned by a `getRecordsInRange()` request with the same arguments.

### 1.2.2 Responses from server to client:

- session control  
syntax: {"cmd": "SESSION", "par": "<specifier>", "status": "<status>", "msg": "<message>", "id": "<id>"}  
where <specifier> is one of "LOGIN", "AUTH", oder "LOGOUT", <status> is either "OK" or "FAIL" and <message> is a string, e.g. an error message  
"OK" as status for "LOGIN" and "AUTH" indicates a successful login, i.e. that the client session has started. "OK" as status for "LOGOUT" indicates that the server had ended the session and the user has been logged out.
- list of collections  
syntax: {"cmd": "LIST\_COLL", "par": ["<collection>"], "id": "<id>"}  
where <collection> is the name of a collection
- collection size  
syntax: {"cmd": "COLL\_SIZE", "name": "<name>", "key": "", "par": "<size>", "id": "<id>"}  
syntax: {"cmd": "COLL\_SIZE", "name": "<name>", "key": "<key>", "start": "<start>", "end": "<end>", "par": "<size>", "id": "<id>"}  
where <name> is the name of a data collection and <size> is the number of data points in this collection . If <key> is not an empty string, then <size> will be the number of data points from the given collection for which the key value is in the interval [<start>, <end>).
- single data point  
syntax: {"cmd": "DATASINGLE", "name": "<collection>", "idx": "<idx>", "data": "<data>", "id": "<id>"}  
where <collection> is the name of a collection, "idx" has either the value "start" or "end", and <data> is a string representing a single data point in JSON format.
- data endpoints  
syntax: {"cmd": "DATA\_ENDPOINTS", "name": "<collection>", "data": ["<start>", "<end>"], "id": "<id>"}  
where <collection> is the name of a collection and <start> and <end> are the first and last data point of this collection.
- data set  
syntax: {"cmd": "DATA", "name": "<name>", "key": "", "data": [<record>], "id": "<id>"}  
syntax: {"cmd": "DATA", "name": "<name>", "key": "<key>", "start": "<start>", "end": "<end>", "data": [<record>], "id": "<id>"}  
where <name> is the name of a data collection and each record is a JSON object describing a data point from this collection. If <key> is not an empty string, then the data array will contain those data points from the given collection for which the key value is in the interval [<start>, <end>).

## 1.3 Back-End

This subsection deals with the back-end of the ADIN INSPECTOR. How the system deals with client http calls, and how kafka interacts with the system. An overview of the system can be seen in Figure 21. Smaller subsections have been expanded in Figure 18, Figure 19, Figure 20.

The connection to the client is handled in the class Hub which contains handlers for the network interface. This class uses a separate class (ClientProtocolHandler) to parse and handle requests from the handler. This setup is according to the strategy design pattern and allows easily modifying or even replacing the client server-protocol. The Hub class and the ClientProtocolHandler access the database via an object that implements the IUserSession interface and encapsulates the database session. Currently there is only an implementation for MongoDB access (MongoDBUserSession), but the abstraction via the IUserSession interface allows to add classes that offer access to Kafka or other databases. Classes that implement IUserSession are instantiated with a factory Method (UserSession()) which guarantees that the returned object represents a successfully logged in database session.

### 1.3.1 Class Diagram

The overview in Figure 21 shows a number of classes and their interaction with each other. What follows is a more in-depth view of what each component of this diagram does, what data it stores and how it fits into the overarching architecture.

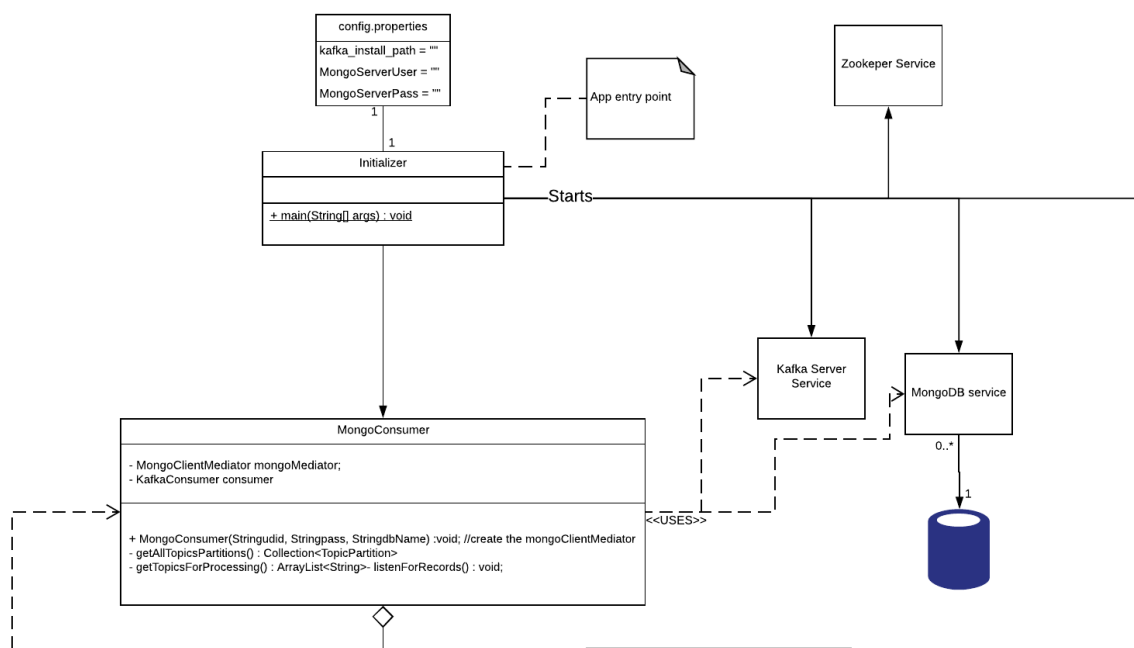


Figure 18: The classes involved in the initialization setup

- Config properties file

The config file is stored alongside the built application .jar file and contains the path to the Kafka installation folder, the user name and password of a mongoDB account with the highest level of access and the name of the database.

- Initializer

Methods:

- main

parameters: String of arguments from the console

returns: void

App entry point.

We load the config.properties file and use the path provided to start the zookeeper, kafka and mongodb services

- MongoConsumer

The Mongo Consumer, as the name implies, consumes all messages from all topics in the Kafka messaging system. Once a message is found it is passed along to the Mongo Client for further processing.

Attributes

- clientMediator

Type : MongoClientMediator

An instance of the Mongo Client Mediator, created with the credentials from the config file.

Methods

- MongoConsumer constructor  
parameters: user name and password of a mongoDB account with the highest level of access.  
Initializes the MongoClient variable and calls listenForRecords();
- getAllTopics  
parameters: none  
returns: an array of strings containing all the available kafka Topics.  
Asks the kafka server service which topics exists.
- listenForRecords  
parameters: none  
returns: void  
This Method first calls getAllTopics and uses the array of topics to poll the kafka server for new messages.  
If new messages are found then the messages are passed to the Mongo Mediator for adding them to the Database.  
If no new messages are found for a topic notify the Mongo Mediator that the collection tied to the topic is ready for pre-processing.
- getTopicsForProcessing  
parameters: none  
returns: ArrayList<String>  
This convenience method returns a list of all topics as strings.

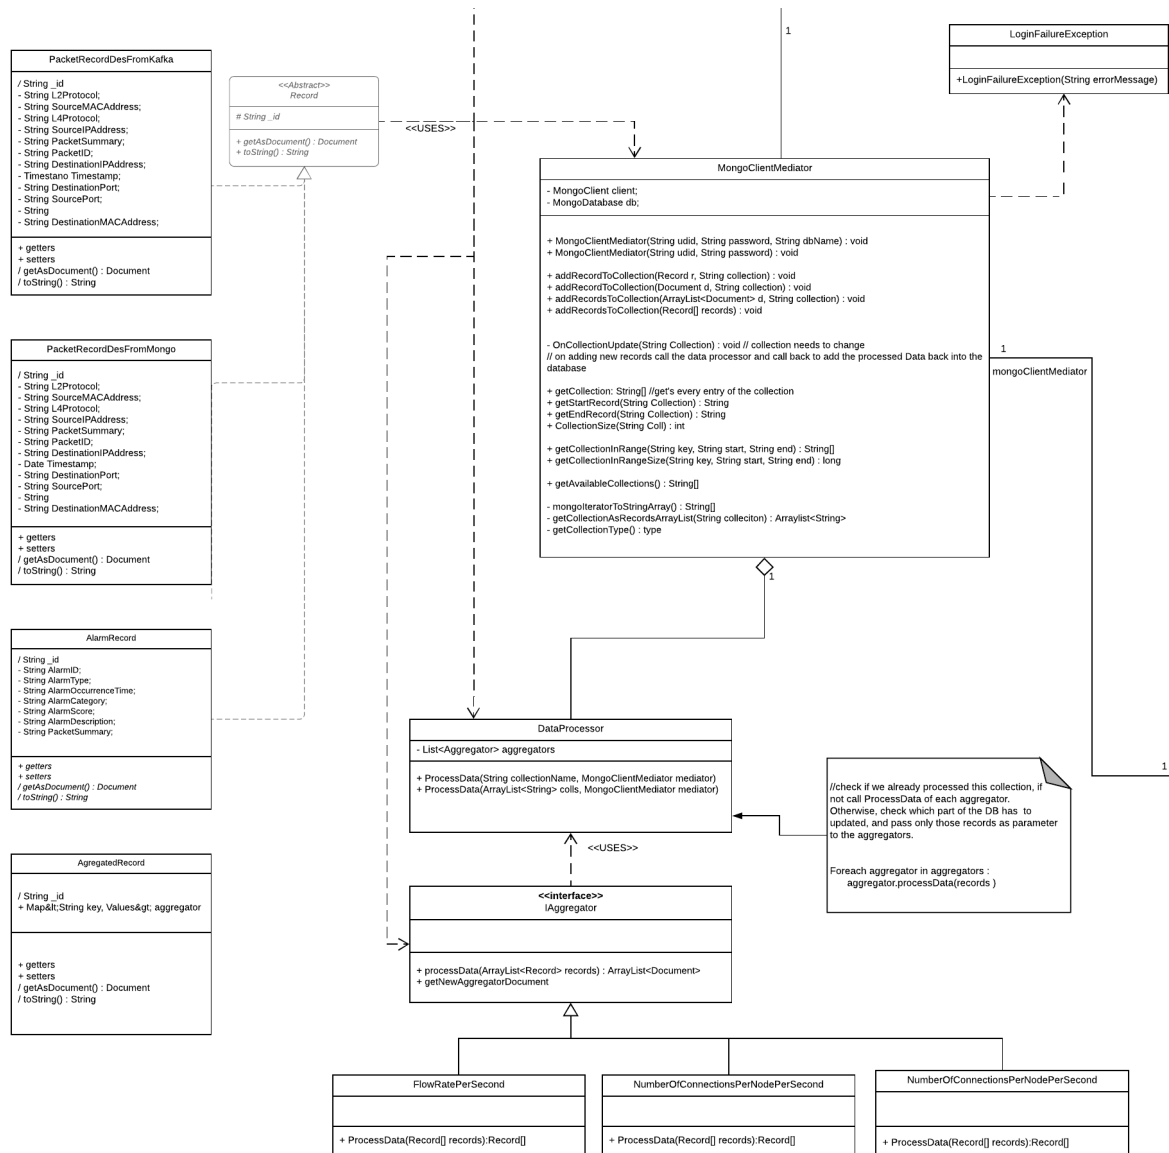


Figure 19: The classes involved in reading and writing data into the database

- **MongoClientMediator** This object serves as a nexus between the users who want to get data out of the database and the consumer and dataProcessor who want to add data into the database. This class encapsulates the mongo client from the mongo API. This means that any user wanting to sign in has to have valid credentials in the database, effectively relegating UAC to mongoDB.

#### Attributes

- client  
type: MongoClient  
An instance of the Mongo Client from the official java API.
- dataProc  
A reference to the data processor class for this client.

#### Methods

- MongoClientMediator constructor  
parameters: Username and password  
Initializes the client variable, throws an error if the user is not found.
- addRecordToCollection  
parameters: Record record - a record to add to the collection  
String collection - name of the collection it should be added to.  
returns: void  
Converts the record to a bson document and uses the mongoAPI to insert it into the database.
- addRecordToCollection  
parameters: Document record - a record to add to the collection  
String collection - name of the collection it should be added to.  
returns: void  
Takes a bson Document containing a record and uses the mongoAPI to insert it into the database.
- addRecordsToCollection  
parameters: Array of records - the records to be added to a collection  
String name of the collection it should be added to.  
returns: void  
for each one of the members of the array call addRecordToCollection
- addRecordsToCollection  
parameters: ArrayList of Documents - the records to be added to a collection  
String name of the collection it should be added to.  
returns: void  
for each one of the members of the array call addRecordToCollection
- ProcessCollection  
parameters: String, name of a collection  
returns: void  
signal the data processor to start the processing of a collection

- `getCollection`  
parameters: String, name of a collection  
returns: String array containing all entries of the collection
- `getStartRecord`  
parameters: String, name of a collection  
returns: the first entry of the collection as a String.
- `getEndRecord`  
parameters: String, name of a collection  
returns: the last entry of the collection as a String.
- `getCollectionSize`  
parameters: String, name of a collection  
returns: the number of entries in the collection as int
- `getRecordsInRange`  
parameters: String, name of the collection to query  
String, key of the parameter used for filtering  
String start and end ranges for the filtering  
returns: String array containing all entries of the collection within that range  
this Method is very general to allow for flexibility. For example by letting the key be, SourceIPAddresses, or a timeStamp.
- `getRecordsInRangeSize`  
parameters: String, name of the collection to query  
String, key of the parameter used for filtering  
String start and end ranges for the filtering  
returns: number of elements matching the range as int
- `getRecordsInRange`  
parameters: String, name of the collection to query  
Object, key of the parameter used for filtering  
Object start and end ranges for the filtering  
returns: String array containing all entries of the collection within that range  
this Method is very general to allow for flexibility. For example by letting the key be, SourceIPAddresses, or a timeStamp.
- `getRecordsInRangeSize`  
parameters: String, name of the collection to query  
Object, key of the parameter used for filtering  
Object start and end ranges for the filtering  
returns: number of elements matching the range as int
- `getAvailableCollections`  
parameters: -  
returns: String array with collection names  
Returns an array with the names of the collections available to the current user.



- Record

Every message that comes from kafka and needs to be added to the database has its own Record class that inherit from this one.

Every single class that inherits needs to be able to, using reflection, convert itself into a Bson Document where every variable is a key Value pair of the name of the variable and its associated value.

Attributes

- id  
type: String

Methods

- getAsDocument()  
parameters: none  
returns: A Document, containing every variable of any class inheriting from this one.  
This function checks for every variable, gets its name and value as a string and adds it to the document that it eventually returns.

- PacketRecordDesFromKafka

Inheriting from Record, this class contains the variables that match the json string obtained from kafka.

Attributes

- L2Protocol  
type: String
- SourceMACAddress  
type: String
- L3Protocol  
type: String
- L4Protocol  
type: String
- SourceIPAddress  
type: String
- PacketSummary  
type: String
- DestinationIPAddress  
type: String
- Timestamp  
type: Timestamp
- DestinationPort  
type: String
- SourcePort  
type: String

- DestinationMACAddress  
type: String

#### Methods

- constructor  
parameters: initializers for all attributes
- getters / setters  
parameters: variable  
returns: variable type  
Each variable has its getters and setter methods.

- PacketRecordDesFromMongo

Inheriting from Record, this class contains the variables that match the json string obtained from kafka.

#### Attributes

- L2Protocol  
type: String
- SourceMACAddress  
type: String
- L3Protocol  
type: String
- L4Protocol  
type: String
- SourceIPAddress  
type: String
- PacketSummary  
type: String
- DestinationIPAddress  
type: String
- Timestamp  
type: Date
- DestinationPort  
type: String
- SourcePort  
type: String
- DestinationMACAddress  
type: String

#### Methods

- constructor  
parameters: initializers for all attributes

- getters / setters  
parameters: variable  
returns: variable type  
Each variable has its getters and setter methods.

- AlarmRecord

Inheriting from Record, this class contains the variables that match the json string obtained from kafka.

Attributes

- id  
type: String
- AlarmID  
type: String
- AlarmType  
type: String
- AlarmOccurrenceTime  
type: String
- AlarmCategory  
type: String
- AlarmScore  
type: String
- AlarmDescription  
type: String
- PacketSummary  
type: String

Methods

- getters / setters  
parameters: variable  
returns: variable type  
Each variable has its getters and setter methods.

- MiscRecord

Inheriting from Record, this class is used by the data processor as an 'in-between' state before saving to the database. As well as an extension point for adding more types of records into the database programatically in the future.

Refer to the data processor class for further data on the key value pairs.

Attributes

- pairs  
A Map of strings to Objects to store any 1 to many relationships

Methods

- getters / setters  
parameters: none  
returns: variable type  
Each variable has its getters and setter methods.

- **DataProcessor**

This class is a mediator for each one of our data aggregators used for extraciton of features from the raw data stored in mongoDB.

We might want to hve multiple data processors for chaining different aggregators together or to split up the work into mutliple threads. This is dependant on further performance testing.

Attributes

- client  
an instance of the associated mongoClient that requested the data aggregation
- aggregators  
A Arraylist containing all the aggregators to be applied on a collection.

Methods

- getters / setters
- processData  
parameters: variable  
returns: variable type

- **IAggregator**

This interface is the building block for every aggregator to be applied to data

Attributes Methods

- processData  
parameters: Records array of the records to be processed

- **FlowRatePerSecond**

Implements IAggregator. This calculates, per port, the outgoing and incoming connections.

A record processed by this aggregator is stored in a collection as follows:

Name of collection: `collectionName\_FlowratePerSec`

structure of record as json:

```
{
  "date" : \{" date" " Unix_Timestamp  }
rounded down to the second this record points to.
Connections : [
{ Port: "portNumber", "InOut" : " In/Out ", count : "Number" }
{ Port: "portNumber", "InOut" : " In/Out ", count : "Number" }
...
]
```

] This array has an entry per port if the port communicated that second.

Precomputing this allows us to stream whenever the client needs the information

```

    for a specific node.
}

```

#### Methods

- processData  
parameters: Records array of the records to be processed  
specific implementation left to the classes implementing this interface

- NumberOfConnectionsPerNodePerSecond

Implements IAggregator. This calculates the outgoing and incoming connections. A record processed by this aggregator is stored in a collection as follows:

Name of collection: collectionName\\_FlowratePerSec  
structure of record as json:

```

{
  "date" : \{" date" " Unix_Timestamp  }
rounded down to the second this record points to.
Connections : [
{ Port: "portNumber", count : "Number" }
{ Port: "portNumber", count : "Number" }
...

```

] This array has an entry per port if the port communicated that second.  
Precomputing this allows us to stream whenever the client needs the information  
for a specific node.

```

}

```

#### Methods

- processData  
parameters: Records array of the records to be processed

- AddressesAndLinks

Implements IAggregator. This aggregator produces a list of network nodes that show up in the datastream and a list of connections between the nodes. Methods

- processData  
parameters: ArrayList records - the records to be processed  
returns: ArrayList<Document>

- LoginFailureException

Exceptions of this class are thrown by MongoClientMediator and MongoClientConsumer when login into the mongo database was not possible; usually due to invalid username or password. Methods

- constructor  
parameters: String errorMessage - the error message to be reported

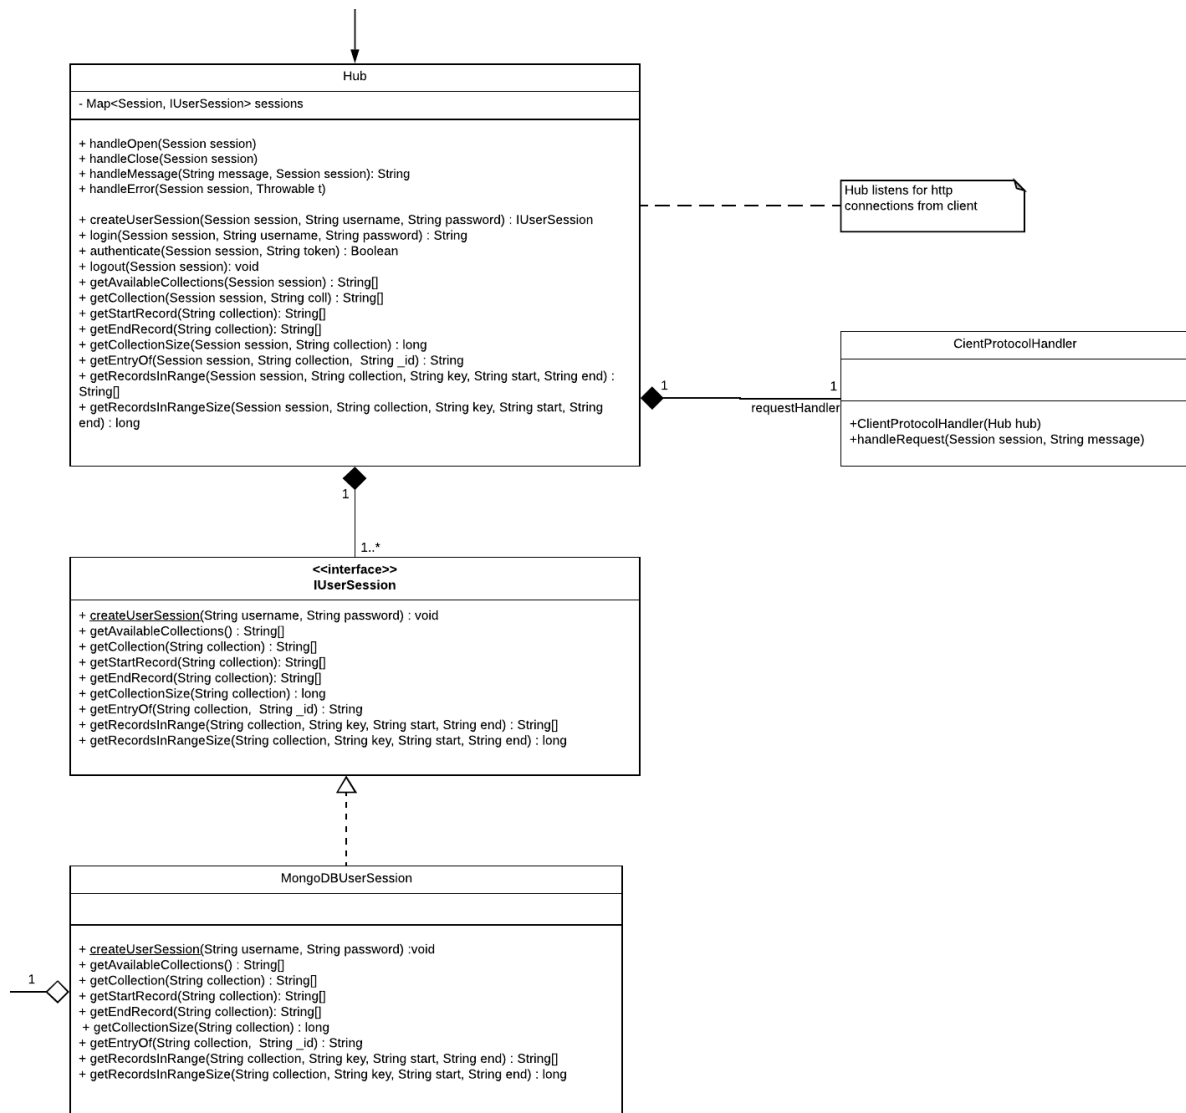


Figure 20: The classes involved in the communication between the server and the client

- Hub

This class implements the network handlers for the WebSocket connection to the client. It also has wrapper methods that delegate the database commands to the appropriate IUserSession object.

Attributes

- requestHandler

Type : ClientProtocolHandler

The strategy object we call for the actual parsing of the client requests.

- sessions

Type : map<Session, IUserSession>

A map that connects a client communication session to a database session. A non-null entry represents a successfully logged in user session.

Methods

- handleOpen

parameters: Session session - the current session

returns: void

Event handler for the start of WebSocket connection.

- handleClose

parameters: Session session - the current session

returns: void

Event handler for closing a connection.

- handleMessage

parameters: String message - the message that we received from the client

Session session - the current session

returns: String - the response to be sent to the client

Event handler for receiving a message. The message is passed to the ClientProtocolHandler.

- handleError

parameters: Session session - the current session

Throwable t - the exception that occurred

returns: void

Event handler for errors/exceptions during communication.

- createUserSession

parameters: Session session - the current session

String username - the user id to login with

String password - the password

returns: IUserSession

Delegate to the IUserSession method to instantiate a new UserSession and log in into the database using the given credentials.

- login

parameters: Session session - the current session

String username - the user to log in

String password - the user's password

returns: String

If the username and password are valid, create a new database user session with the user logged in and return a authentication token. If the login fails, return an empty string.

- authenticate

parameters: Session session - the current session

String token - the authentication token to use

returns: boolean

Return true if this token corresponds to a valid, currently logged in user session, otherwise return false.

- logout

parameters: Session session - the current session

returns: void

End the current session and log the user out.

- getAvailableCollections

parameters: Session session - the current session

returns: String array with collection names

Returns an array with the names of the collections available to the current user.

- getCollection

parameters: Session session - the current session

String collection - name of a collection

returns: String array containing all entries of the collection

- getStartRecord

parameters: String, name of a collection

returns: the first entry of the collection as a String.

- getEndRecord

parameters: String, name of a collection

returns: the last entry of the collection as a String.

- getCollectionSize

parameters: Session session - the current session

String collection - the collection to query

returns: long - the number of records

Returns the number of records in the specified collection.

- getRecordsInRange

parameters: Session session - the current session

String - name of the collection to query

String key - the parameter used for filtering

String start and end - range for the filtering

returns: String array containing all entries of the collection within the filter range

Returns an array containing all records of this collection for which the value of the



specified key is in the range [start, end). The records will be in the same order as they are in the collection.

- getRecordsInRangeSize

parameters: Session session - the current session

String - name of the collection to query

String key - the parameter used for filtering

String start and end - range for the filtering

returns: number of elements matching the range as int

Returns the number of records in the specified collection for which the value of the specified key is within the range [start, end).

- IUserSession

An IUserSession object encapsulates a data base session. On instantiation an IUserSession connects to a database using the given user id and password and uses this connection for all following data base access.

Methods

- createUserSession  
parameters: String username - the user id to login with  
String password - the password  
returns: IUserSession  
Factory method to instantiate a new UserSession and log in into the database using the given credentials.
- getAvailableCollections  
parameters: -  
returns: String array with collection names  
Returns an array with the names of the collections available to the current user.
- getCollection  
parameters: String - name of a collection  
returns: String array containing all entries of the collection
- getStartRecord  
parameters: String, name of a collection  
returns: the first entry of the collection as a String.
- getEndRecord  
parameters: String, name of a collection  
returns: the last entry of the collection as a String.
- getCollectionSize  
parameters: String collection - the collection to query  
returns: long - the number of records  
Returns the number of records in the specified collection.
- getRecordsInRange  
parameters: String - name of the collection to query  
String key - the parameter used for filtering  
String start and end - range for the filtering  
returns: String array containing all entries of the collection within the filter range  
Returns an array containing all records of this collection for which the value of the specified key is in the range [start, end). The records will be in the same order as they are in the collection.
- getRecordsInRangeSize  
parameters: String - name of the collection to query  
String key - the parameter used for filtering  
String start and end - range for the filtering  
returns: number of elements matching the range as int

Returns the number of records in the specified collection for which the value of the specified key is within the range [start, end).

- MongoDBUserSession

Encapsulates a user session for a connection to a MongoDB database.

Attributes

- mongoClientMediator  
Type : mongoClientMediator  
The mediator object used to access the database

Methods

- MongoDBUserSession constructor  
parameters: -  
Private constructor to create a new MongoDB session.
- createUserSession  
parameters: String username - the user id to login with  
String password - the password  
returns: a new MongoDBUserSession object  
Factory method to instantiate a new MongoDBUserSession and log in into the database using the given credentials.
- getAvailableCollections  
parameters: -  
returns: String array with collection names  
Returns an array with the names of the collections available to the current user.
- getCollection  
parameters: String - name of a collection  
returns: String array containing all entries of the collection
- getStartRecord  
parameters: String, name of a collection  
returns: the first entry of the collection as a String.
- getEndRecord  
parameters: String, name of a collection  
returns: the last entry of the collection as a String.
- getCollectionSize  
parameters: String collection - the collection to query  
returns: long - the number of records  
Returns the number of records in the specified collection.
- getRecordsInRange  
parameters: String - name of the collection to query  
String key - the parameter used for filtering  
String start and end - range for the filtering  
returns: String array containing all entries of the collection within the filter range  
Returns an array containing all records of this collection for which the value of the specified key is in the range [start, end). The records will be in the same order as they are in the collection.

- getRecordsInRangeSize  
parameters: String - name of the collection to query  
String key - the parameter used for filtering  
String start and end - range for the filtering  
returns: number of elements matching the range as int  
Returns the number of records in the specified collection for which the value of the specified key is within the range [start, end).

- ClientRequestHandler

This class handles client requests by parsing them, executing the requested action and producing responses. The requested actions are typically executed by calls to the appropriate methods in the Hub object. The relation between the Hub class and this class is basically the strategy design pattern with a single strategy.

Attributes

- hub  
Type : Hub  
The Hub object to work with

Methods

- ClientRequestHandler  
parameter: Hub hub - the Hub object to work with  
The constructor; sets the hub attribute.
- handleRequest  
parameters: Session session - the current client session  
String message - the client request to process  
returns: String - the response to be sent to the client  
Parse the message from the client, execute the requested action, and construct the response message.

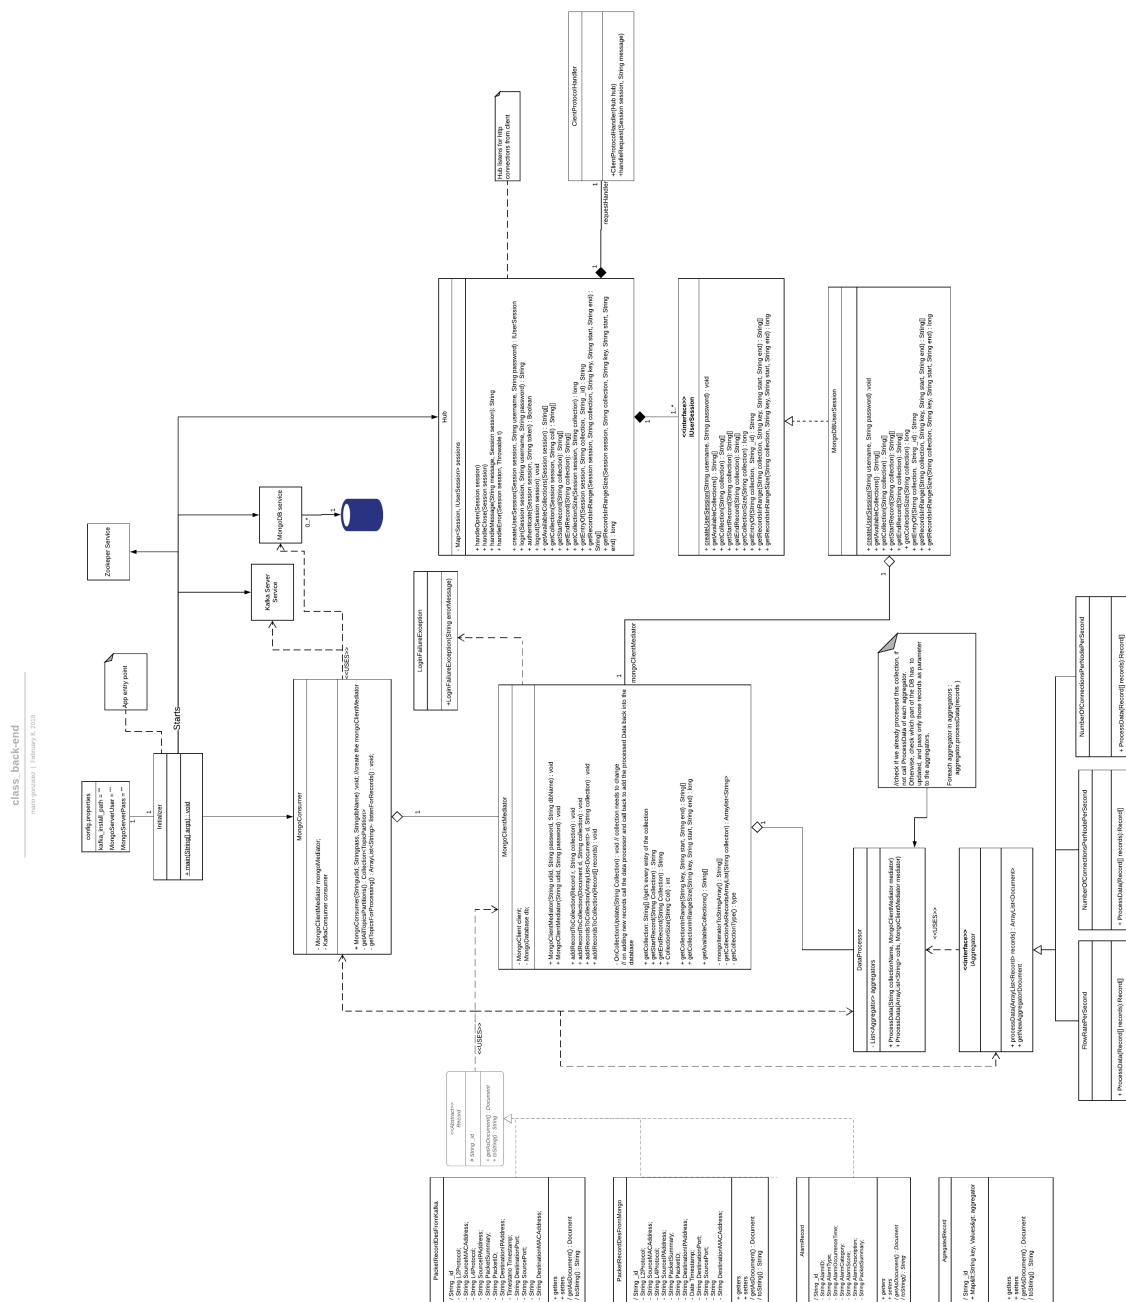


Figure 21: This is the class diagram for the whole back-end system.

### 1.3.2 Sequence Diagrams

Figure 22 shows the initialization sequence order, the corresponding class diagram is Figure 18, the program depends on a couple of services namely (in order), the zookeeper service, the kafka server service and the mongoDB service. Once all services are up and running the MongoConsumer is created and can start consuming messages and the Hub can start listening to client logins, requests, etc.

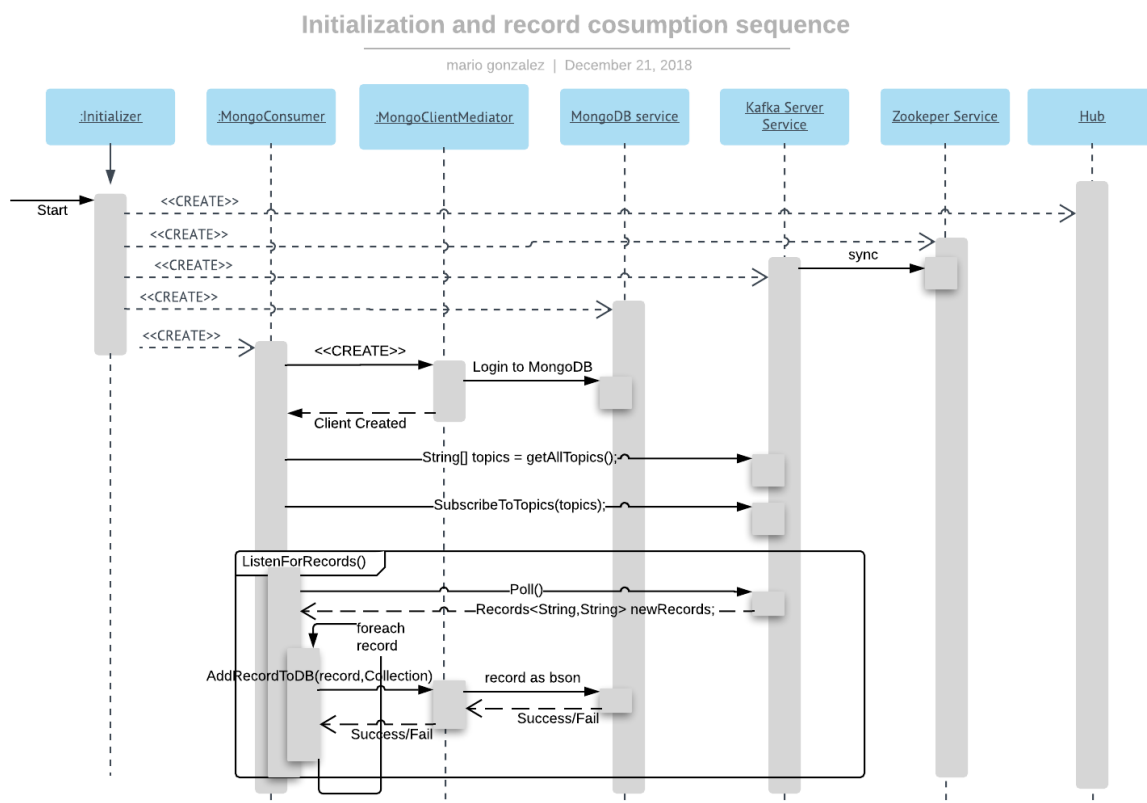


Figure 22: Initialization sequence and message consumption

### 1.3.3 Activity Diagram

As previously mentioned for UAC the built-in UAC in MongoDB is used.

Figure 25 shows the workflow on adding new roles and new user, who upon creation have a role assigned to them, to MongoDB.

A Role determines what can be done and seen within a database. For the purposes of the ADIN INSPECTOR there are three basic roles, Admin, Operator and Analyst. The admin role, created by default, can create and destroy users as well as assign specific roles to them. An analyst can see all collections on the database and an Operator can only see part of them.



## Consuming messages

```

{{lastModifiedBy}} | {{lastModifiedTime:MMMM d,
yyyy}}

```

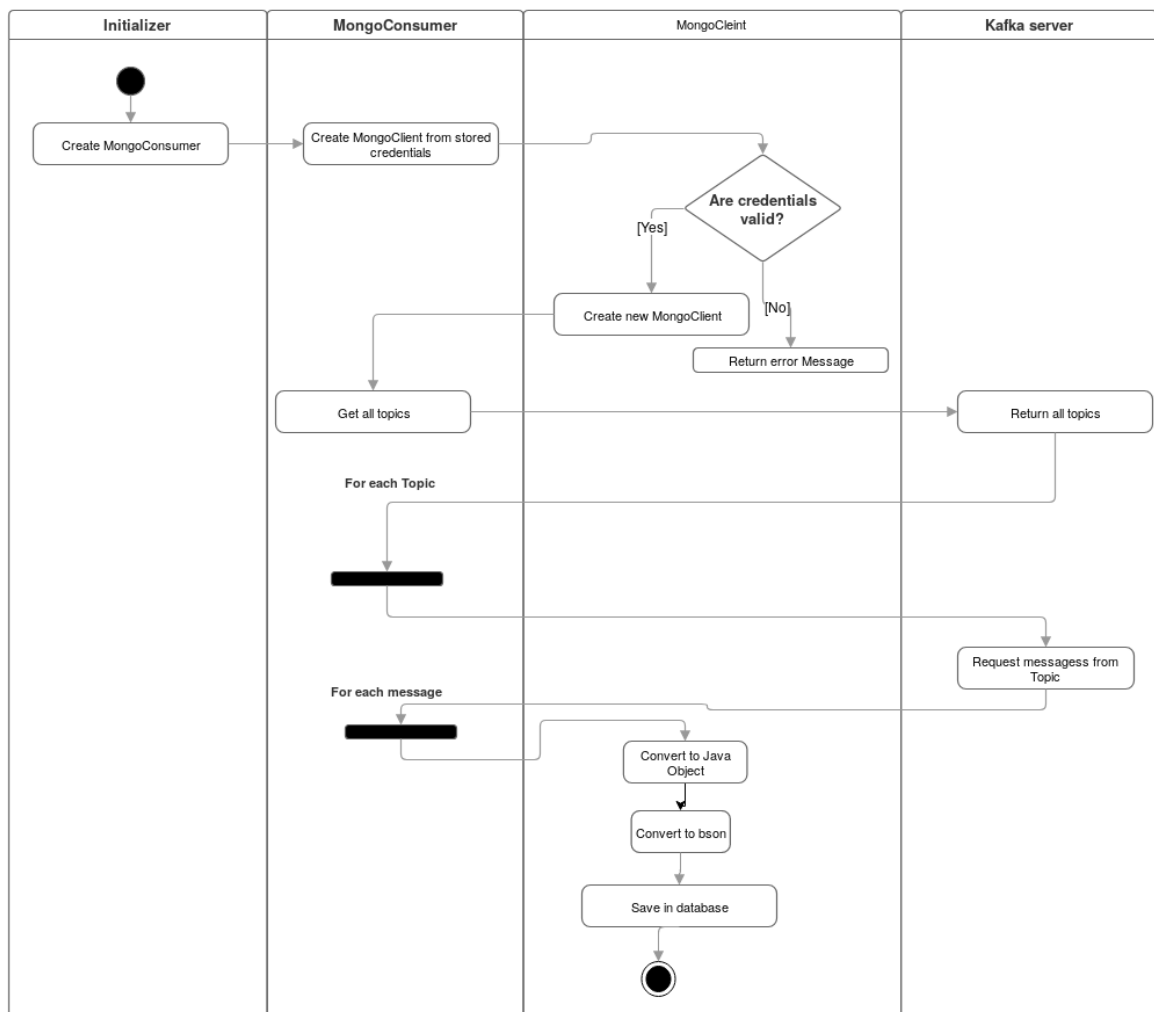


Figure 23: Initialization and message consumption workflow.

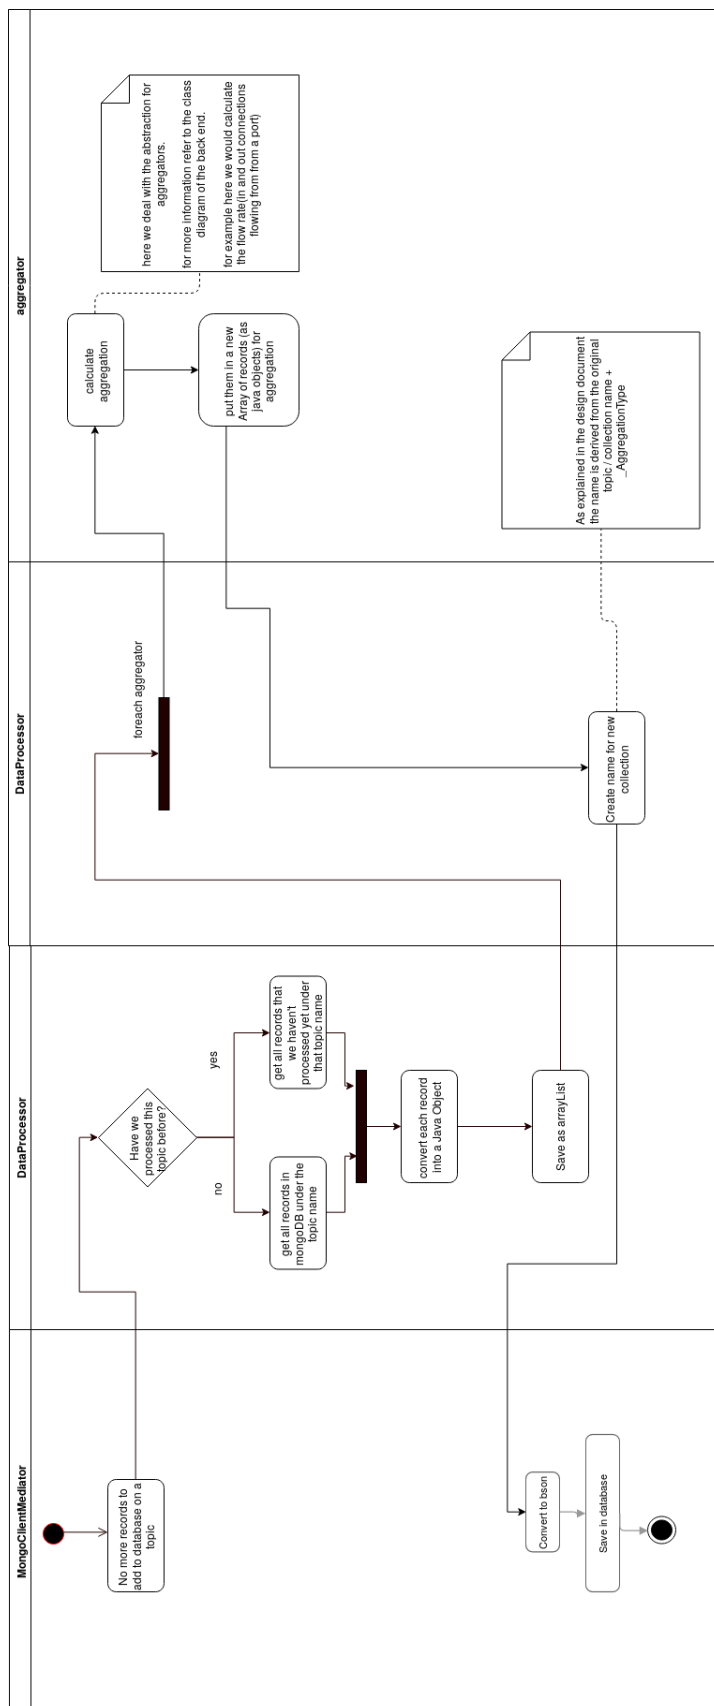


Figure 24: This diagram shows the processing of Collections and records as well as the addition of extracted data back into the database.

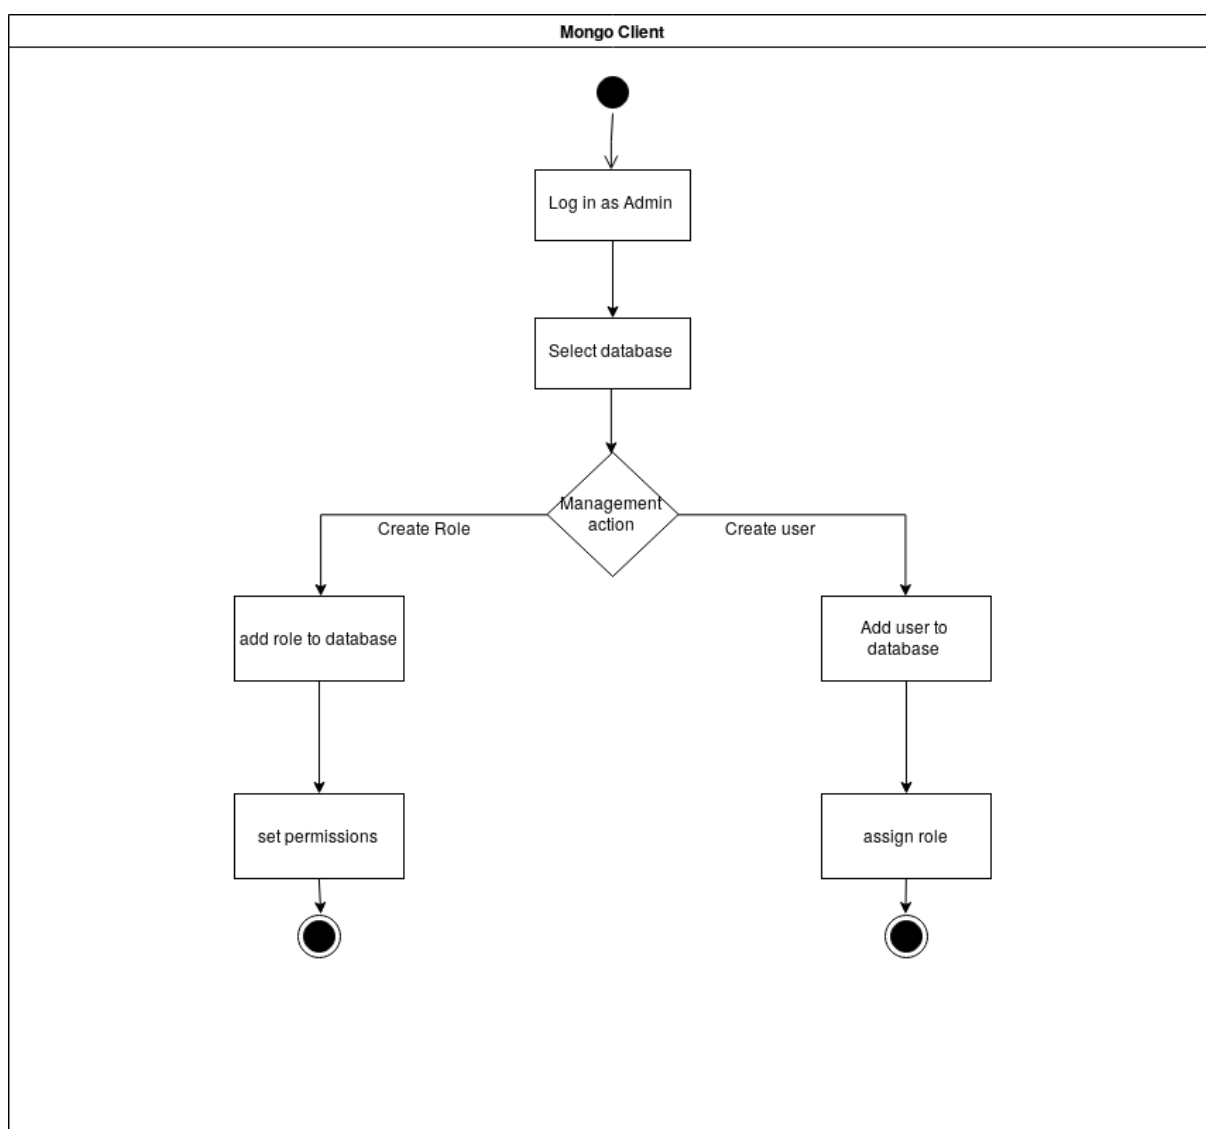


Figure 25: User Management workflow

## 1.4 Changes

Changes made between version 1.1.0 and version 2.0.0 of this document.

### 1.4.1 Changes to the front-end

- Update the login screen: add input field for server url.

### 1.4.2 Changes to the client-server protocol

The protocol responses have been made more expressive in general.

- Rename "LOGIN\_TOKEN" request to "AUTH".
- Rename "LIST\_COL" response to "LIST\_COLL".
- Expand "session" response with the specifier key "par"
- Expand "data set" and "collection size" responses with the key "key"
- Expand "data set" and "collection size" responses with the keys "start" and "end", if they were in the request
- "data set" and "collection size" responses will now echo back any key-value pairs not specified in the protocol
- getStartRecord, getEndRecord, and the "single data point" response were added. itemGetEndpoints and the "data endpoints" response were added.

### 1.4.3 Changes to the back-end

- Added new aggregator class AddressesAndLinks
- Added class LoginFailureException
- Rename class PacketRecord to PacketRecordDesFromKafka, changed the type of timestamp
- Added class PacketRecordDesFromMongo
- MongoClientMediator: added variants of methods addRecordToCollection() and addRecordsToCollection() to handle Records and bson Documents.
- MongoClientMediator: added new method getTopicsForProcessing().
- Hub: methods login(), authenticate() and logout() were added.