


# Passive Reinforcement Learning

- Simplified task: policy evaluation
  - Input: a fixed policy  $\pi(s)$
  - You don't know the transitions  $T(s,a,s')$
  - You don't know the rewards  $R(s,a,s')$
  - **Goal: learn the state values**

- In this case:

- Learner is “along for the ride”
- No choice about what actions to take
- Just execute the policy and learn from experience
- This is NOT offline planning! You actually take actions in the world.

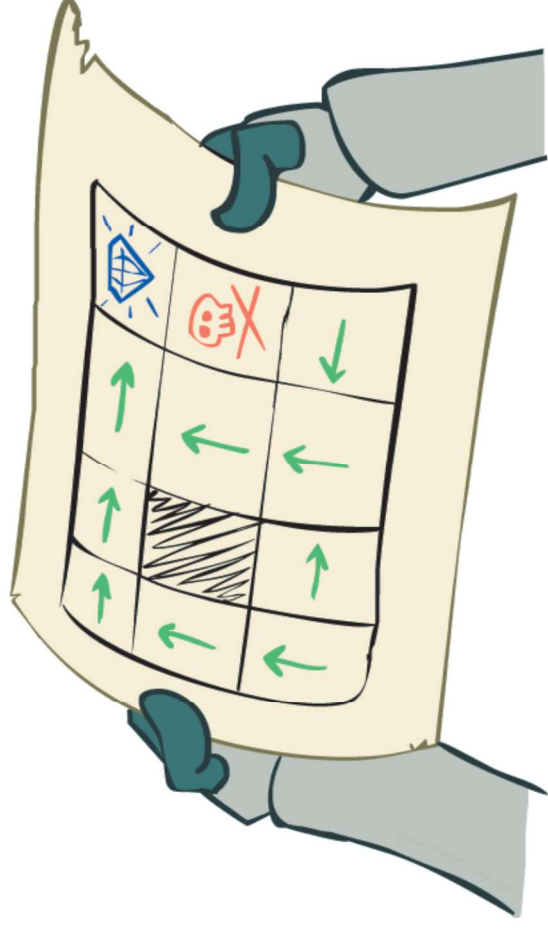

# Direct Evaluation

- Goal: Compute values for each state under  $\pi$
- Idea: Average together observed sample values
  - Act according to  $\pi$
  - Every time you visit a state, write down what the sum of discounted rewards turned out to be
  - Average those samples
- This is called direct evaluation



# Example: Direct Evaluation

Input Policy

$\pi$

	<div>A</div>	
<div>B</div>	<div>C</div>	
	<div>E</div>	

Assume:  $\gamma = 1$

Observed Episodes  
(Training)

Episode 1

B, east, C, -1  
C, east, D, -1  
D, exit, x, +10

Episode 2

B, east, C, -1  
C, east, D, -1  
D, exit, x, +10

Episode 3

E, north, C, -1  
C, east, D, -1  
D, exit, x, +10

Episode 4

E, north, C, -1  
C, east, A, -1  
A, exit, x, -10

Output Values

	<div>A</div>	
<div>B</div>	<div>C</div>	<div>D</div>
	<div>E</div>	



# Problems with Direct Evaluation

- What's good about direct evaluation?
  - It's easy to understand
  - It doesn't require any knowledge of T, R
  - It eventually computes the correct average values, using just sample transitions
- What bad about it?
  - It wastes information about state connections
  - Each state must be learned separately
  - So, it takes a long time to learn

## Output Values

	-10 A	
+8 B	+4 C	+10 D
	-2 E	

*If B and E both go to C under this policy, how can their values be different?*




# Why Not Use Policy Evaluation?

- Simplified Bellman updates calculate  $V$  for a fixed policy:
  - Each round, replace  $V$  with a one-step-look-ahead layer over  $V$

$$V_0^\pi(s) = 0$$

$$V_{k+1}^\pi(s) \leftarrow \sum_{s'} T(s, \pi(s), s') [R(s, \pi(s), s') + \gamma V_k^\pi(s')]$$

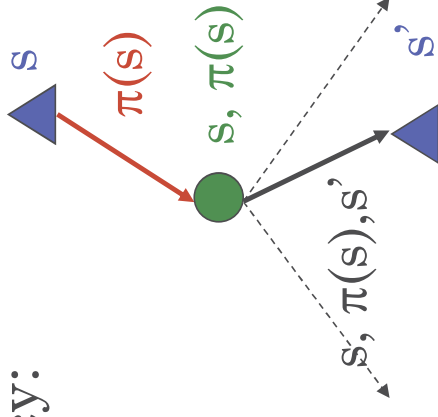

- This approach fully exploited the connections between the states
  - Unfortunately, we need  $T$  and  $R$  to do it!
- 
- Key question: how can we do this update to  $V$  without knowing  $T$  and  $R$ ?
    - In other words, how to we take a weighted average without knowing the weights?



# Sample-Based Policy Evaluation?

- We want to improve our estimate of  $V$  by computing these averages:

$$V_{k+1}^{\pi}(s) \leftarrow \sum_{s'} T(s, \pi(s), s') [R(s, \pi(s), s') + \gamma V_k^{\pi}(s')]$$

- Idea: Take samples of outcomes  $s'$  (by doing the action!) and average


$$sample_1 = R(s, \pi(s), s'_1) + \gamma V_k^{\pi}(s'_1)$$

$$sample_2 = R(s, \pi(s), s'_2) + \gamma V_k^{\pi}(s'_2)$$

...

$$sample_n = R(s, \pi(s), s'_n) + \gamma V_k^{\pi}(s'_n)$$

$$V_{k+1}^{\pi}(s) \leftarrow \frac{1}{n} \sum_i sample_i$$

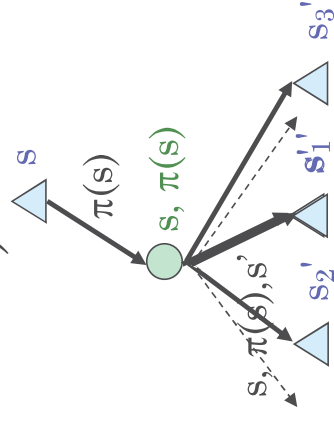

Almost! But we can't  
rewind time to get  
sample after sample  
from state  $s$ .

