



Harvey Miller <harvey@bsmmusic.com>

[OpenAI Developer Community] Summary

1 message

OpenAI Developer Community <notifications@openai1.discoursemail.com>
 Reply-To: OpenAI Developer Community <notifications@openai1.discoursemail.com>
 To: harvey@bsmmusic.com

Sun, Oct 19, 2025 at 11:43 PM

OpenAI Developer Community

Since your last visit

65
New Topics

1
Unread Notifications

4778
New Users

Popular Topics

Plugins / Actions builders October 17
When or how to enable the ChatGPT Developer Mode UI components for Apps SDK?



hammergept



When or how can enable the ChatGPT Developer Mode UI components for Apps SDK?

I thought Developer Mode already had the preview available, so I built an app specifically for that — but it can't render inside ChatGPT.



Read More

Bugs October 14
Asterisk / Realtime API with SPI : Getting a "BYE" after a few seconds



Communication
Communication_JobPho

Hello there!

I'm trying to set up OpenAI with the new SIP module from my own Asterisk server. My goal is to call the AI agent and put it on a conference using CONFBRIDGE.

[Read More](#)**GPT builders**

October 16

Is it possible to have the user interact with the agent?

Kim

Kim1

I'm playing around with the new agent builder.

Is there any way to make a user interact with parts of the flow? fx an agent needs to gather information from a user and once satisfied it needs to continue? I tried with a while loop and set the global state, but it never broke out of the loop.

[Read More](#)**API**

October 16

How to limit number of input images processed by image_generation tool via Responses API?

rus1243mor

Hi all,

I'm using the Responses API with the image_generation tool. My chat sometimes contains a lot of images *sent by users as input* (not the generated images), which makes the processing expensive. It looks like image_generation processes every image previously sent by the user every time I call it, increasing the cost.

[Read More](#)**API**

October 13

Access session user within the agent builder UI

awx

Hey. How can we access a current user (passed to the session when it was created from ChatKit) inside the agentic workflow? Right now, we have an option to pass a user to the ChatKit session

(<https://platform.openai.com/docs/api-reference/chatkit/sessions/create#chatkit-sessions-create-user>), but there is no way to get that value and use it inside the tool (or an MCP server). All existing templates (flows) in the agent builder cover simple use cases, but any suggestions on how to inject different users(can be userID or user token)?




13



3

[Read More](#)

Popular Posts

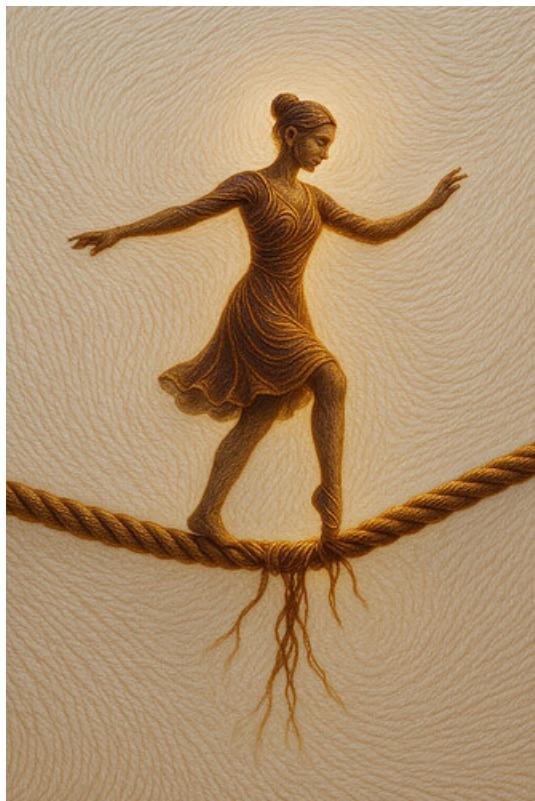

Windy Soliloquy
windysoliloquy

[The Official 4o and Dall-E image Megathread](#)

[Read More](#)

This is the Dev Forum... your philosophy better compile 😊 ... 💡💡💡



recursionrecursion1

[Ethics of AI - Put your ethical concerns here](#)

[Read More](#)

The health screenshots don't give me enough to conclude much more about volume other than this is likely a single-user scenario, with a period of no usage that would be atypical for having an established user base.



Jay
_j

[Is Anyone Getting Slow Response or Internal Server Error?](#)

[Read More](#)

Welcome to the developer community [@AngelCerveraClaudio](#)

How long ago was this? Also, did you use the same ID that was used for successful verification earlier?



Sukhman Preet Singh Jawa
sps

[Session Expired when try to Verify Organization](#)

[Read More](#)

Thank you for your quick response!



8coins

[Adding voice \(Whisper\) input support to ChatKit](#)

[Read More](#)

New for you

[Agent Builder - While Loop, Transform and Set State an example
Community](#)

5

0

[Multiple Assistant Messages in API Output
API](#)

2

0

How to become eligible for data residency endpoints?
API



OpenAI Apps, unsafe_url error
GPT builders



Adding voice (Whisper) input support to ChatKit
API



This summary is sent from [OpenAI Developer Community](#) when we haven't seen you in a while. Change [your email settings](#), or [click here](#) to unsubscribe.