


1 校验和

```
#include <reg51.h>


void main(){
    unsigned char A[15]={27,5,32,47,38,235,79,17,187,58,23,35,211,104,9};
    unsigned char data *pRam;
    int data *pSum;
    int i=0;
    int sum=0;
    pRam=0x30;
    pSum=0x3F;
    for (i=0;i<15;i++){
        *pRam=A[i];
        pRam++;
    }
    for (i=0;i<15;i++){
        sum+=A[i];
    }
    *pSum=sum;
    while(1);
}
```

由于int类型占两个字节，用int定义数组A会导致0x3F位置被占，故用unsigned char定义。如果用char会有一位变为符号位，使表达的整数值有变。

内存占用：从RAM的0x30——0x3E为数组内存。

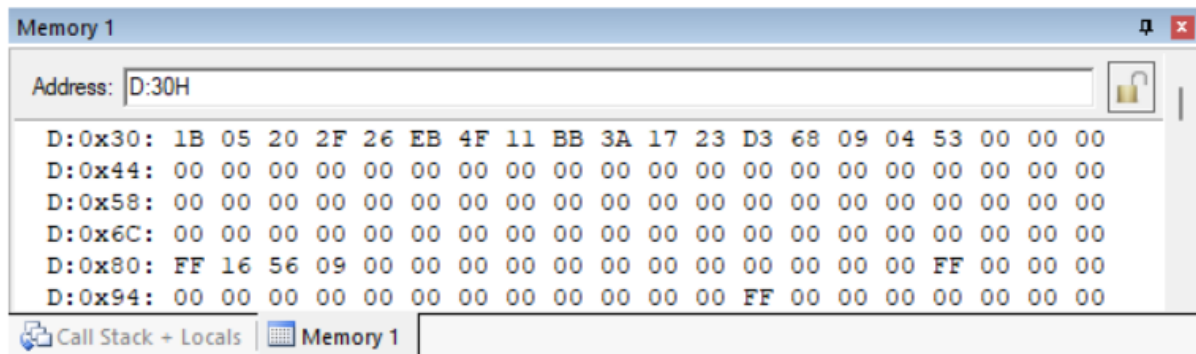

0x3F存有校验和的值，为0x0453，即1107

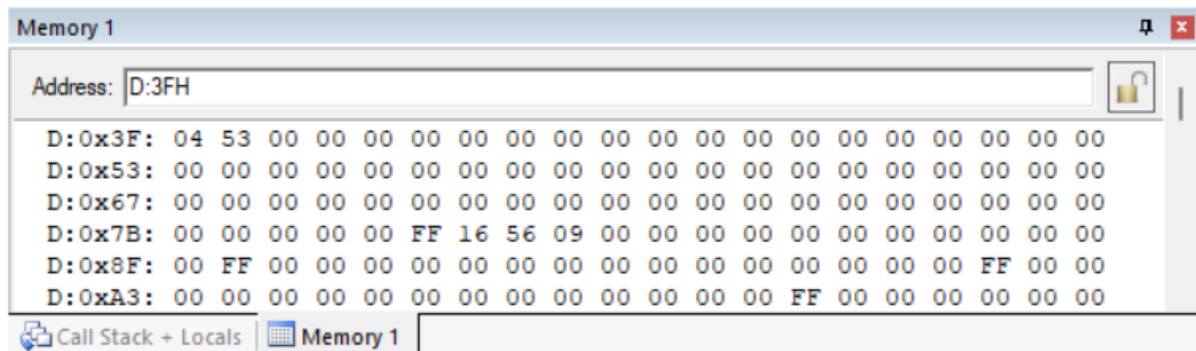

2 取最小值


```
#include <reg51.h>
```

```

void main(){
    unsigned char A[15]={27,5,32,47,38,235,79,17,187,58,23,35,211,104,9};
    unsigned char data *pRam;
    unsigned char data *pMin;
    int i=0;
    unsigned char t=A[0];
    pRam=0x30;
    pMin=0x3F;
    for(i=0;i<15;i++){
        *pRam=A[i];
        pRam++;
    }
    for(i=0;i<15;i++){
        if(A[i]<t) {t=A[i];}
    }
    *pMin=t;
    while(1);
}

```

内存占用：从RAM的0x30——0x3E为数组内存。

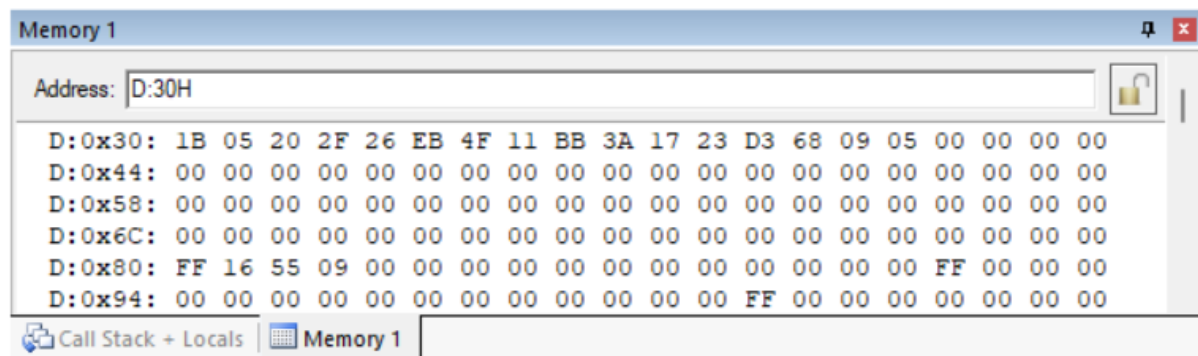

0x3F存有最小值，为05H

