



Technical Specification Document

Instant Payment Program (IPP)

Version 0.7

This page is intentionally left blank.

CONFIDENTIAL

Statement of Confidentiality and Disclaimer

The contents presented herein are strictly confidential and proprietary to National Payments Corporation of India (NPCI) and/or NPCI International Payments Ltd (NIPL). The document is intended solely for the limited purposes for the audiences/recipients that it is being presented/provided to. The documents and reports provided are for informational purposes and private circulation only and do not constitute any offer. They do not purport to be a complete description of the subject matter referred to in the document.

While utmost care has been taken in preparing the document, we claim no responsibility for the accuracy or completeness of information. Information contained in the document is provided “as is” without warranty of merchantability or fitness for a particular purpose or non-infringement. Unless specifically noted, National Payments Corporation of India and/or NPCI International Payments Ltd. is not responsible for the contents of these documents. We shall not be liable for any direct or indirect losses arising from the use thereof and the viewers are requested to use the information contained herein at their own discretion and risk.

No part of the document should be reproduced, re-circulated, published in any media/website or otherwise, shared or copied or re-represented in any form or manner without the explicit written permission of National Payments Corporation of India and/or NPCI International Payments Ltd. Any unauthorized use, disclosure or public dissemination of information contained herein is prohibited.

The information, contents shared in the document are subject to change without notice.

© NPCI/ NIPL 2024, All rights reserved.

Version History

Name	Version No.	Date	Description
BON Instant Payment Solution (IPS) TSD_v0.1	0.1	15-Nov-2024	Initial Draft.
BON Instant Payment Solution (IPS) TSD_v0.2	0.2	21-Nov-2024	Changes based on the input received from BON Tech team.
BON Instant Payment Solution (IPS) TSD_v0.3	0.3	06-Dec-2024	Additional Tag level updates included in all the APIs under Detail API Specifications for more clarity and readability.
BON Instant Payment Solution (IPS) TSD_v0.4	0.4	12-Dec-2024	Incorporated the feedback received from BON and Industry participants.
BON Instant Payment Solution (IPS) TSD_v0.5	0.5	13-Mar-2025	Incorporated the feedback received from BON Participants Additional Digital Signature Guidelines incorporated in Section Certificate Requirement Details with respect to ATM Cash withdrawal incorporated.
BON Instant Payment Solution (IPS) TSD_v0.6	0.6	07-July-2025	Incorporated the feedback received from BON Participants. Added flows for Registration and Alias Directory . Added the reference Request/Response for the API and Use cases.
BON Instant Payment Solution (IPS) TSD_v0.7	0.7	10-Nov-2025	Incorporated the feedback received from BON Participants. Added new field ClVersion for Common Library version capture. Section 3.8.5 Set Reset pin : National ID (updated the steps) Section 3.8.6 Set Reset pin : using Wallet (updated the steps & Diagram) 059_Detail.name Rule added for ReqRegMob API ReqRegMob Note section updated for FORMAT 1, FORMAT 6, FORMAT 7.

			Added Negative scenario logs and logs updated for 6.10.1.3, 6.21 4.4.1.2. RespPay section updated 030_Txn_SubType
--	--	--	--

CONFIDENTIAL

Glossary

Acronym	Description
2-FA	2-factor authentication.
Aadhaar	This refers to a National Identity for Namibia.
Alias directory	A digital registry that maps the full form alias version of the user with his/her mobile number, and a merchant with its unique number.
API	Application Programming Interface
AUA	Authentication User Agency
Customer	An individual person or an entity having an account and wishes to pay and/or receive money.
Enabler	A non-bank payment service provider that is not authorized to provide a store of value but is authorized to be an indirect participant on the instant payment switch. The enabler may also be contracted by an instant payment participant to onboard new instant payment user, or simply provide instant payment use case services on mobile application.
FRM	Fraudulent Risk Management
IPS	Instant Payment Solution
NIPL	NPCI International Payments Limited
Payment Account (or 'Account')	Any bank account or any other payment accounts (PPI, Wallets, Mobile Money etc.) offered by a regulated entity where money can be held, debited from, and credited to.
Payments Service Provider (PSP)	Bank, Payment Bank, PPI, or any other regulated entity that is allowed to acquire customers and provide payment (credit/debit) services to individuals and entities.
Receiver / Payee	Person/Entity who receives money. Payee's account is credited as part of payment transaction.
Reversal	Reversal is initiated when either a beneficiary store of value provider is not available, or a decline is received from the beneficiary store of value provider in an online message. It is a term that describes the transaction that is returned to a payer's store of value provider.
Sender / Payer	Person/Entity who pays money. Payer's account is debited as part of payment transaction.
Store of Value	Means a bank account or electronic wallet provided by a banking institution or a non-banking payment instrument issuer licensed by the Bank of Namibia in terms of the Payment System Management Act 14 of 2023.
UPI	Unified Payments Interface
USSD	Unstructured Supplementary Services Data

Table of Contents

Statement of Confidentiality and Disclaimer	3
Version History	4
Glossary	6
Table of Contents	7
1. Introduction.....	11
2. IPS Architecture	13
2.1. Overview	13
2.2. Core Features	13
2.3. Authorization	14
2.4. Architecture	14
2.5. Core Domain Entities.....	16
2.5.1. Alias	16
2.6. Authentication.....	17
2.7. Alias Directory	17
2.7.1. Checking availability of Alias Directory ID.....	18
2.7.2. Creation of IPS USER ID based on Merchant ID/Mobile No.	24
2.7.3. Porting of IPS USER ID -Mobile No.....	26
3. IPS Design	28
3.1. IPS Pay Flow.....	28
3.2. USSD Pay Flow.....	28
3.3. API's Briefly.....	29
3.4. Message Security, Trust and Authenticity.....	30
3.5. Certificate Requirement.....	32
3.6. Security Considerations.....	39
3.7. Identity & Account Validation.....	40
3.7.1. Protecting Account Details	40
3.7.2. Protecting Authentication Credentials.....	40
3.7.3. Protecting against Phishing	41
3.8. Registration Flow.....	41
3.8.1. Device Binding	41
3.8.2. Alias Creation at IPS Participant PSP.....	42
3.8.3. Listing Accounts	43
3.8.4. Set/Reset IPS PIN (Using Card- For Account).....	45
3.8.5. Set/Reset IPS PIN (Using National ID - For Account)	46
3.8.6. Set/Reset IPS PIN (Using WALLET PIN – For Wallet).....	48
3.8.7. Change IPS PIN	50
3.9. Direct Pay (Sender/Payer initiated).....	51
3.9.1. Person Initiated	51
3.9.2. System Initiated.....	51
3.9.3. Transaction Flow	51

3.9.3.1	Validate Payee VPA.....	51
3.9.3.2	Validate Payee Mobile Number.....	52
3.9.3.3	Validate Merchant ID (8-Digits).....	53
3.9.3.4	Payment flow:.....	54
3.10.	Failure Scenarios.....	55
3.10.1.	IPS Payer participant unable to notify the Payer:.....	55
3.10.2.	Response from IPS does not reach IPS Payee/Payer Participant:.....	55
3.10.3.	Response from Payee bank does not reach IPS:.....	56
3.10.4.	Declined Response from Payee bank to IPS:.....	56
3.10.5.	Payee bank is not available to IPS:.....	56
3.10.6.	Declined Response from Payer bank to IPS:.....	56
3.10.7.	Response from Payer bank does not reach IPS:.....	56
3.10.8.	Payer bank is not available to IPS:.....	56
3.10.9.	Declined Response from IPS Payee Participant to IPS:.....	56
3.10.10.	Response from IPS Payee Participant does not reach IPS:.....	56
3.10.11.	IPS Payee Participant is not available to IPS:.....	56
3.10.12.	IPS is not available to Payer IPS Participants:.....	56
4.	Detail API Specifications.....	57
4.1.	API Protocol.....	57
4.2.	Heartbeat API.....	61
4.2.1.	ReqHbt.....	61
4.2.2.	RespHbt.....	63
4.3.	Non-Financial APIs.....	65
4.3.1.	List PSP API.....	65
4.3.1.1.	ReqListPsp.....	65
4.3.1.2.	RespListPsp.....	66
4.3.2.	List Account Providers API.....	69
4.3.2.1.	ReqListAccPvd.....	69
4.3.2.2.	RespListAccPvd.....	71
4.3.3.	List Keys API.....	76
4.3.3.1.	ReqListKeys.....	76
4.3.3.2.	RespListKeys.....	79
4.3.4.	List Verified Address Entries API.....	82
4.3.4.1.	ReqListVae.....	82
4.3.4.2.	RespListVae.....	84
4.3.5.	List Account API.....	87
4.3.5.1.	ReqListAccount.....	87
4.3.5.2.	RespListAccount.....	91
4.3.6.	Manage Verified Address Entries API.....	96
4.3.6.1.	ReqManageVae.....	96
4.3.6.2.	RespManageVae.....	99

4.3.7.	Validate Address API.....	101
4.3.7.1.	ReqValAdd	101
4.3.7.2.	RespValAdd.....	105
4.3.8.	Set Credentials API.....	111
4.3.8.1.	ReqSetCre	111
4.3.8.2.	RespSetCre	116
4.3.9.	Mobile Banking Registration API	119
4.3.9.1.	ReqRegMob	119
4.3.9.2.	RespRegMob.....	126
4.3.10.	Check Transaction Status API	128
4.3.10.1.	ReqChkTxn.....	128
4.3.10.2.	RespChkTxn.....	130
4.3.11.	OTP API.....	136
4.3.11.1.	ReqOtp	136
4.3.11.2.	RespOtp	139
4.3.12.	Balance-Enquiry API.....	141
4.3.12.1.	ReqBalEnq	141
4.3.12.2.	RespBalEnq.....	147
4.3.13.	Transaction Confirmation API	151
4.3.13.1.	ReqTxnConfirmation	151
4.3.13.2.	RespTxnConfirmation	155
4.3.14.	RegMapper API	157
4.3.14.1.	ReqRegMapper	158
4.3.14.2.	RespRegMapper.....	163
4.3.15.	Get Address API.....	166
4.3.15.1.	ReqGetAdd	167
4.3.15.2.	RespGetAdd	171
4.3.16.	ReqMapperConfirmation API	175
4.3.16.1.	ReqMapperConfirmation	175
4.3.16.2.	RespMapperConfirmation	179
4.4.	Financial APIs	182
4.4.1.	Pay API	182
4.4.1.1.	ReqPay.....	182
4.4.1.2.	RespPay	203
4.4.2.	Authorization Details API.....	208
4.4.2.1.	ReqAuthDetails	208
4.4.2.2.	RespAuthDetails	219
5.	Appendix	234
6.	Reference Request/Response Logs	246
6.1.	HeartBeat	246
6.2.	List PSP.....	247

6.3.	List Account Providers	248
6.4.	List Keys	249
6.5.	List Verified Address Entries	252
6.6.	List Account API	253
6.7.	Manage Verified Address Entries API	256
6.8.	Validate Address.....	257
6.9.	Set Credential API	262
6.10.	Mobile Banking Registration API	266
6.10.1.1.	Registration through Debit card for Mobile APP	266
6.10.1.2.	Registration through Debit card for USSD	270
6.10.1.3.	Registration through Wallet PIN using APP	273
6.10.1.4.	Registration through National Id using APP	277
6.11.	Check Transaction	281
6.12.	OTP API.....	282
6.13.	Balance Enquiry	284
6.14.	Get Address API.....	288
6.15.	RegMapper API.....	293
6.16.	Mapper Confirmation.....	296
6.17.	Payment Request.....	297
6.18.	G2P Transaction	320
6.19.	Merchant Cash In – Pay by Alias.....	324
6.20.	Merchant Cash out – Pay by Alias.....	335
6.21.	ATM Cash Out.....	348
6.22.	Merchant Cash out – Pay by Merchant Id.....	359
6.23.	Payment Request – Pay by Mobile Number	373
6.24.	Sample Negative Scenario Logs :	386
6.24.1.1.	Multiple Error Code in Acknowledgement	386
6.24.1.2.	Duplicate Transaction Id	388

1. Introduction

The innovations in digital payment motivated the organizations to consolidate and integrate multiple systems with varying service levels, into a nation-wide, uniform, and standard business process for all retail payment systems.

The IPS intends to introduce fast payments, achieve e-money wallets interoperability with bank accounts, and introduce use cases and functionalities that will enhance financial inclusion, specifically in the rural areas and the informal sector of Namibia.

The solution being introduced is a payment and clearing switch that enables both banking institutions and non-banking financial institutions to provide instant payment services in a multidimensional payment ecosystem. The IPS supports both USSD and Mobile applications as channels that will enable participants to seamlessly enable multiple use-cases via Application Programming Interface (API). The IPS is compatible with both e-money wallets and bank accounts as SOVs for customers. IPS provides a solution that is easy to use, addresses financial literacy concerns, and is always available to offer a viable alternative to cash.

The consolidated system should facilitate an affordable payment mechanism to benefit the common men across the country and lower the cost of financial services for underserved consumers.

Bank of Namibia understood the importance of such payment product and introduced IPS as a highly innovative, flexible product, and can be integrated easily with any bank in a standardized way in minimal time.

The objective of IPS is to offer architecture and a set of standard APIs to facilitate the next generation online immediate payments, leveraging trends such as increased smartphone adoption and universal access to Internet and data.

This document provides details of payments 'architecture, which is directly connected to achieving the goals of universal electronic payments, a less cash society, and financial inclusion, using the latest technological trends.

The following are some of the key features of the IPS Instant Payment Solutions.

1. The IPS is expected to further propel easy instant payments via mobile, web, and other applications.
2. The payments can be either sender (payer) or receiver (payee) initiated and are carried out in a secure, convenient, and integrated fashion.
3. This design provides an ecosystem driven scalable architecture and a set of APIs taking full advantage of mass adoption of smartphones.
4. A system that is compatible with various devices, channels and platforms addressing

different needs of the consumer.

5. Capabilities include alias, 1-click 2-factor authentication, and use of payer's smartphone for secure credential capture.
6. It allows banks and other players to innovate and offer superior customer experience to make electronic payments convenient and secure.
7. Supports the growth of e-commerce, while simultaneously meeting the target of financial inclusion.

In this regards IPS has taken up new initiative of implementing “Instant Payment Switch” to simplify and provide a single interface across all systems.

1. **SIMPLICITY**- Paying and receiving payments should be as easy as making a call on a mobile phone. With the IPS system, anyone who has an account can send and/or receive money from their mobile phone with just an identifier unacquainted with bank/account details. The customer has to select "pay to" a “Alias” (such as National ID number, Mobile number, Alias, etc.) with a single click.
2. **INNOVATION**- System is simple and layered so that innovations on both payee and payer side can happen with no change to core interface. This unified layer allows application providers to take advantage of enhancements in mobile devices and payment channels, provide integrated payments on new consumer devices, provide innovative user interface features, take advantage of newer authentication services, etc.
3. **ADOPTION**– System is designed for scalability and mass adoption. This allows interoperability across payment channels, devices, and institutions for inclusive participation. Similarly, it allows full interoperability among multiple identifiers such as National ID number, mobile number, and alias.
4. **SECURITY**- System provides end to end resilient security and data protection. Considering self-service mobile applications, data capture is secured by encryption. Similarly, the system allows a mechanism to pay and collect using valid aliases without having to reveal any bank/account details. System provides convenience by offering 1-click 2-factor authentication, risk scoring, protection from phishing, etc.
5. **COST**- Considering the fact that about **** smartphone users exist today, and that number is expected to grow to **** in the next 5 years. The solution leverages the growing use of mobile phones as acquiring devices and uses alias instead of physical cards, thus reducing cost on both acquiring and issuing infrastructure.

**** BON needs to add details mentioned in COST point.

2. IPS Architecture

This section covers the core features, high level architecture, key concepts, overall value proposition, a list of possible use cases and real-world usage examples are provided to better understand the proposal. All technical details of the interface are covered in subsequent chapters.

2.1. Overview

A. INTEROPERABILITY

1. Interoperability across payment channels, devices, and institutions for inclusive participation.
2. Allows full interoperability between multiple identifiers such as mobile numbers and new aliases.
3. Allows money to be transferred instantly across bank accounts / wallets in entire system.

B. PUSH PAYMENTS

1. Payments can be initiated by either the sender (payer) or receiver (payee).
2. Pay request: The initiating customer pushes funds to the intended beneficiary.

C. SINGLE CLICK 2FA

1. IPS follows one click 2 factor authentication.
2. When a transfer is initiated using a smart phone, the device fingerprint (IMEI number for the device or any technical details unique to the device) is itself the first factor of authentication.
3. The second factor is a PIN number which must be keyed in.

D. IDENTIFIER

1. Ability to integrate accounts/wallets with different banks.
2. Enables users to carry out all the payment transactions across multiple accounts and thus provides a single interface for all payments.

2.2. Core Features

IPS provides the following core features via a set of APIs.


1. The ability to use personal mobile as the primary device for all payments, including person to person, person to entity, and entity to person.
2. Ability to use a personal mobile to "PAY" someone (push).
3. Ability to use mobile number, card number, and account number in a unified way. In addition, the ability to pay and collect using "Alias" that are "aliases" to.
4. Make payments by providing an alias without having to ever provide account details or credentials on 3rd party applications or websites.
5. Ability of all IPS Participants to use a standard set of APIs for any-to-any push.
6. The ability to use IPS Participants provides mobile applications, which allow payments from any account, using any number of aliases by providing credentials such as passwords and PINs.

7. Ability to use a fully interoperable system across all IPS Participants without having silos and closed systems.
8. Ability to make payments using 1-click 2-factor authentication just by using a personal phone and without any acquiring devices or physical tokens.


2.3. Authorization

Today, authentication and authorization are part of the same transaction flow and inline. Adopting 3rd. party authentication and cardless payment scheme allows banks to reduce the overall issuance cost while keeping authorization and account management within its control.

2.4. Architecture

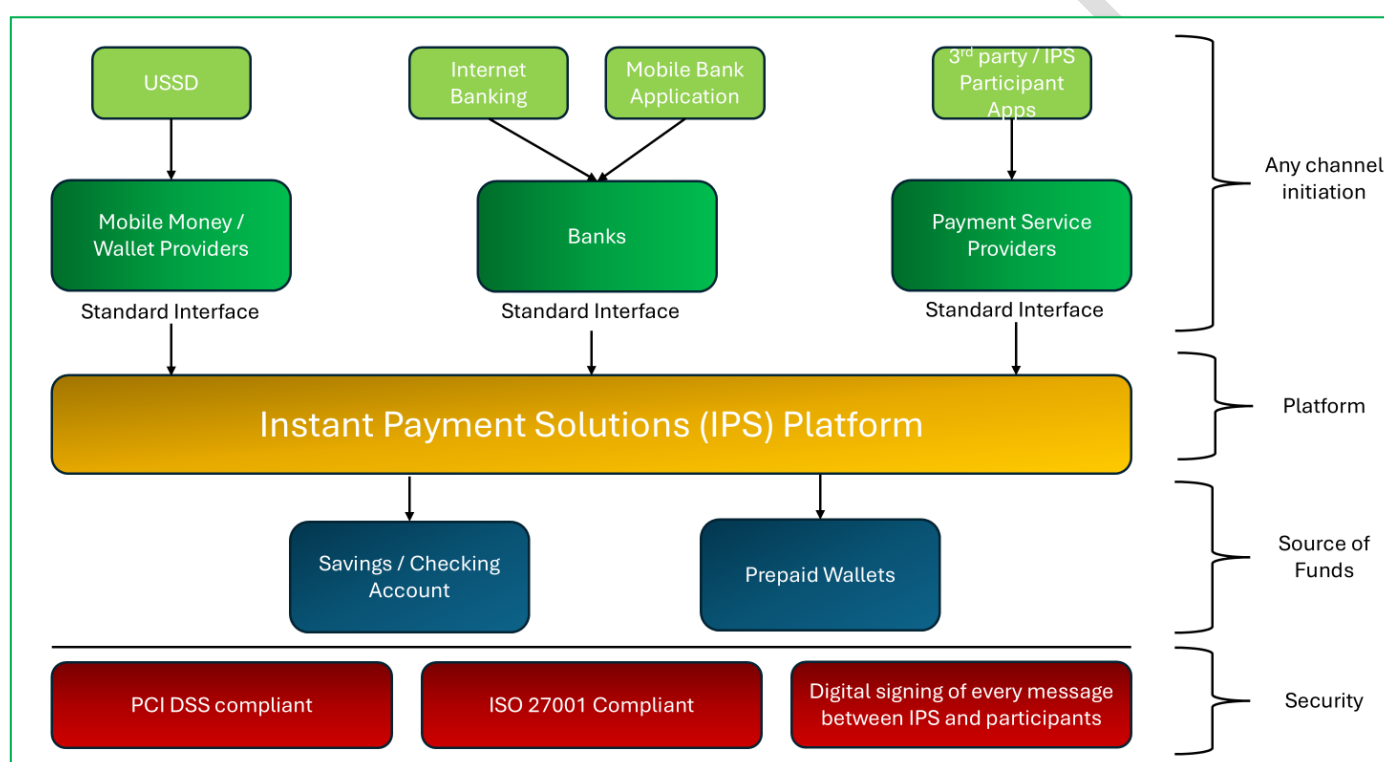

The diagram below shows the overall architecture of IPS allowing USSD, smartphone, Internet banking, and other channel integration onto a common layer at IPS. Using existing systems ensures reliability of payment transactions across various channels and takes full advantage of all the investments so far.

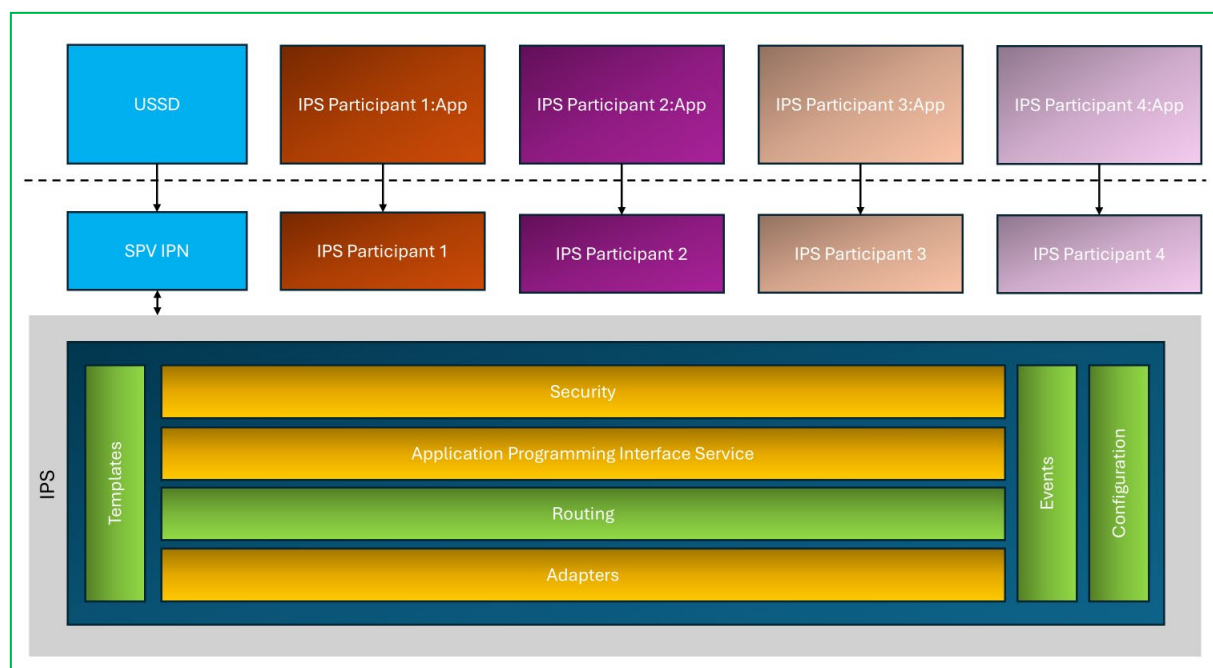

Facilitates online real-time payments through the three payment APIs and a set of supporting APIs. All APIs are asynchronous in nature, meaning once the request is sent and acknowledgement received, the processing of response can be sent back separately via corresponding response API.

The overall transaction processing is done through two external-facing interfaces, each of them having clearly defined responsibilities through application programming interface (API).

IPS - SOV Participant (PSP) Interfaces has a set of sub-interfaces which is used to communicate between IPS and IPS- SOV Participant.

Routing and Processing

Routes and processes payment request (ReqPay) and request persisted in cache and DB. This will act as an interface for all components of the system.

1. Resolver
Resolves the alias and sends the ReqAuthDetails message to, and receives RespAuthDetails from the corresponding IPS- SOV Participant
2. Debtor
Interacts with the IPS- SOV Participants through ReqPay / RespPay (Debit) messages for debit.
3. Creditor
Handles functionalities regarding Credit.
4. Internal System Interfaces
Provides interfaces to communicate directly with the underlying IPS systems such as FRM.

FRM:

It is used at network level. Designed and implemented as a Real-time Fraud Risk Monitoring and Management solution (FRM). This solution is envisaged as a value-added service offered by IPS to participating members as a real-time monitoring tool for fraud detection and prevention.

Across all application layers, REST API is used to design the integration interfaces making the system simple for a web-centric approach. This permits self-service for application developers and app users, provides API access to valuable enterprise resources, encourages collaboration among internal and external resources, and increases the value of current customers by offering existing services via new platforms and devices.

2.5. Core Domain Entities

Every payment request has the following core elements:

1. Payer SOV and Payee SOV account and institution details for routing and authorization
2. Authentication credentials (IPS-PIN, Debit Card PIN, OTP, CVV, etc. as required for debit)
3. Transaction amount
4. Transaction reference
5. Timestamp
6. Metadata attributes such as location, product code, mobile number, device details, etc. as required.

From the above list of core elements, items 1 and 2 are critical to be abstracted so that single architecture can handle current and futuristic scenarios of “any alias” using “any trusted authentication scheme”. The following sections describe these concepts in detail.

2.5.1. Alias

Every payment transaction must have source (Payer SOV) account details (for debit) and destination (Payee SOV) account details (for credit). At the end, before the transaction can be completed, these must be resolved to an actual account number/ID.

The IPS will follow a hybrid alias model. Alias constructs will consist of both centralized and decentralized models. The centralized model will consist of a mobile number that is linked to a full form alias. The short form alias “mobile number” is stored in the Operator’s Alias Directory at onboarding to enable the payer to only enter the payee’s mobile number when making a payment or sending money. A user can link and delink a full form to their mobile number at any time. The full form alias can be provided by the SOV provider or an Enabler. The decentralized model consists of the full form alias constructs. A user is allowed to have more than one full form construct with one SOV provider or more than one SOV provider.

Centralised Model	812345678	Linked to: John123@BankA John123@EnablerA John123@BankC
Decentralised Model	Bank A John123@BankA (Default) IDnumber@BankA Accountnumber@BankA	Bank B John123@EnablerA IDnumber@BankB Accountnumber@BankB

Alias is an abstract form to represent a handle that uniquely identifies account details in a “normalized” notation. In this architecture, all aliases are denoted as “account@provider” form. Alias translation may happen at provider/gateway level or at IPS level.

The alias should only contain a-z, A-Z, 0-9, . (dot), - (hyphen).

SOV provider is expected to map the alias to actual account details at an appropriate time. SOV provider who provides “Alias” should expose the alias translation API (see later sections for API details) for converting their alias to an address that can be used by IPS. Unlike current systems with fixed length account numbers and provider numbers (BIN, IFSC {bank code} etc.), aliases are strings of sufficient length to ensure they accommodate future possibilities.

IFSC (bank code) and account number combination resolved directly by IPS, is represented as account-no@ifsc-code.ifsc.npci (e.g. [123456789012@ABCD0123456.ifsc.npci](#)). This will be used for the Government to Person (G2P) payment. The SoV provider needs to pass these details in the <addr> field of the ReqPay request to IPS.

2.6. Authentication

Traditionally, SOV Provider themselves provide the authentication scheme. Account management (KYC, opening accounts, managing transactions, etc.) was tightly coupled with internal authentication schemes. Authentication schemes separately evolved, as new payment channels evolved. While numeric PIN/Passwords are the dominant authentication factor, different PINs were issued for different channels (Internet PIN, ATMPIN, Mobile PIN, etc.). In addition, OTP based authentication is used these days to offer 2-FA authentication schemes. Account management, including KYC, should be loosely coupled with authentication.

2.7. Alias Directory

Alias Directory (AD) will be maintained as a separate service in IPS. This will help to link the alias to a number, mobile number or any unique identifier. Post completing the new customer on-boarding process customer shall now be prompted for Numeric ID generation. For existing users this will be available as optional. In addition to the current alias and IFSC-Account as payment option, a simple Alias Identifier (Mobile Number and Merchant ID) can be used for transactions. Related IPS Participants will have to make the necessary changes required for the registration process and making payments using these new options. Alias directory maintains the mapping between short form of alias and full form of alias.

If Payer provides the full form alias of the Payee, then the IPS will send request to Payee IPS participant for retrieving necessary details of the beneficiary as mentioned in the specification. In such cases the request will not be routed to the Alias directory.

2.7.1. Checking availability of Alias Directory ID

This API is used during onboarding to check the availability of the selected IPS User Id.

GetAdd is mandatory for the following scenarios

1. Creation of short form of the alias (Mobile Number /Merchant ID)
2. Transfer of short form of the alias (Mobile Number) to different IPS Participant PSP.

Types of GetAdd API:

GetAdd API will have 3 types called “CHECK”, “FETCH” and “PORT”.

CHECK: Type “CHECK” is used to check the last updated status of the IPS USER ID

- Used to retrieve the status of the short form alias which is active with the IPS participants.
- If the short form alias is “Active” or “Inactive” with any other IPS Participant, then the status cannot be retrieved.
- If the requested short form alias is in “Active” or “Inactive” or “Block” or “Deregister” status, then the IPS Participant PSP should inform the user that the short form alias selected by the user is not available. Having said this, if the status of the short form alias is “New” then the IPS Participant PSP will allow to create the short form of alias as IPS User Id. In such cases the ‘addr’ tag of the API will not be populated.

FETCH: Type “FETCH” has subtype “ID|VPA” for retrieve functionality of short form of Alias.

- Subtype “VPA” – Retrieves all the mapped short form alias(IPS User Id’s) of the corresponding full form alias.
- Subtype “ID” - User will give both full form of alias and cmId (short form of alias), the system would provide the status if the combination present or not.
- The status of IPS User ID (short form of alias), of current initiated IPS Participants profile will be retrieved.
- For subType=” VPA”, RegIdDetails block not required.
- For subType=”ID”, Payer.addr + RegIdDetails.value field is mandatory. To fetch the linked full form of alias, user has to try the combination available full form of alias against the IPS User Id and GetAdd API will provide the status. The system will reject the invalid combination.


PORT: Type “PORT” is used while transferring mobile number from one IPS Participant to

Other IPS Participant

- Supports only “Mobile Number” as IPS User Id for this type.
- Users can check if the mobile number is already mapped and it’s in “Active” or “Inactive” status with other IPS Participant.
- The “addr” tag will give complete full form of alias without any masking.
- Alias directory will reject the request when type ” PORT” is used for creation of new IPS User Id (Mobile Number)

This API shall be used for checking the availability of an IPS User Id before creating a new record as well as for fetching status in case of timeout of CREATE/MODIFY/DELETE record.

2.7.1.1. Checking availability based on Merchant ID

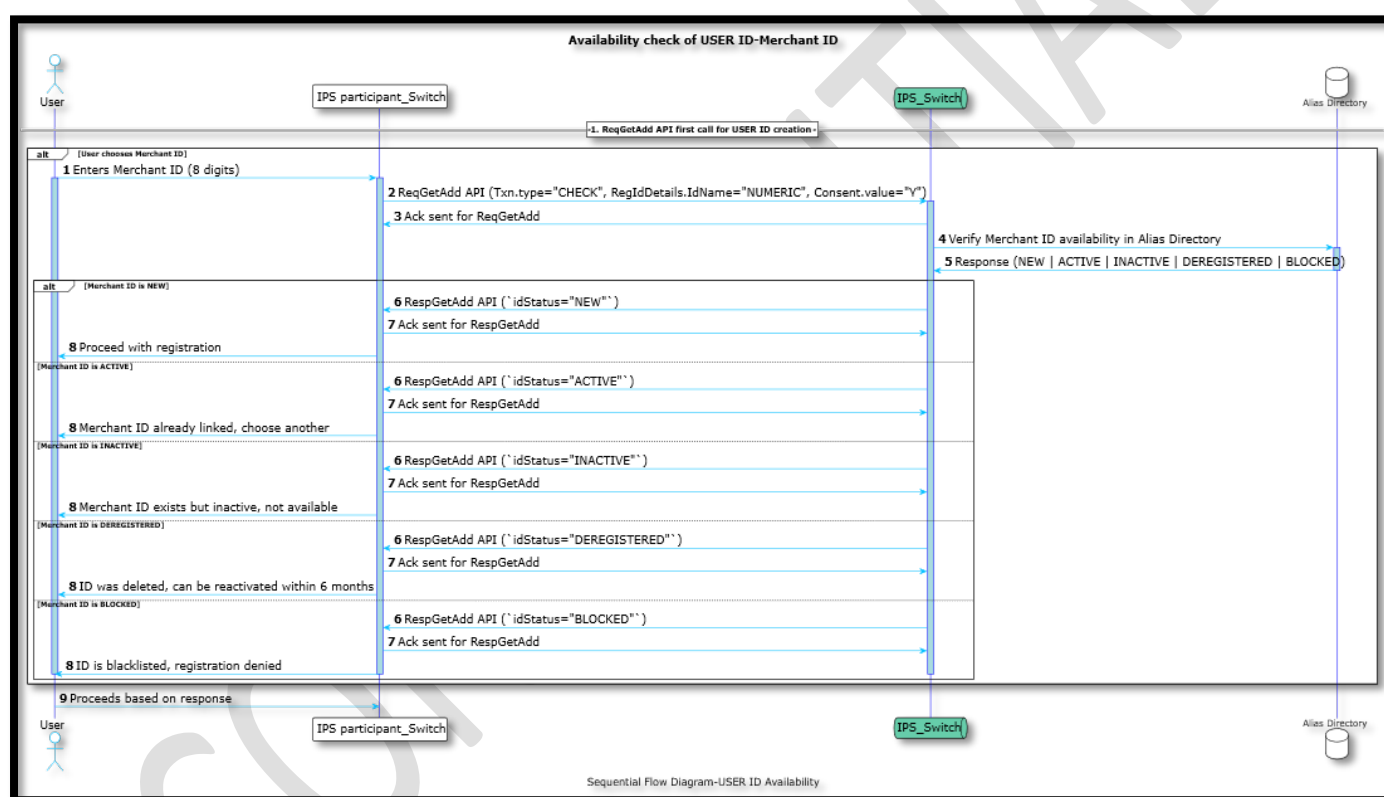

Steps for checking availability of Alias Directory ID-Merchant ID (8 digits):

1. The user opens the IPS application and enters a Merchant ID of 8 digits.
2. The app provides basic client-side validations (e.g., length, format).
3. The request sent to the IPS participant for availability check.
4. The IPS participant constructs a ReqGetAdd API request with the following key parameters and sent to IPS Switch.
 - Txn.type = "CHECK" – indicates a status check operation.
 - RegIdDetails.Id.name = "NUMERICID" – specifies the short form of alias type.
 - RegIdDetails.Id.value = <entered_numeric_id> – the actual ID(Merchant ID) entered by the user.

- Consent.name = "CMREGISTRATION" and Consent.value = "Y" – user consent for checking availability of the short form of alias.
5. IPS Switch sends an acknowledgment (ACK) to the IPS participant confirming receipt of the request.
 6. IPS Switch then forwards the request to the Alias Directory to check the status of the Merchant ID in the directory.
 7. The Alias Directory checks the Merchant ID and returns one of the following idStatus values.


idStatus.value	Meaning
NEW	ID does not exist in the system. Available for registration.
ACTIVE	ID is already registered and linked to an Alias. Not available.
INACTIVE	ID exists but is not currently active. Not available.
DEREGISTERED	ID was previously registered and deleted. Can be reclaimed within 6 months. Applicable only for Merchant ID
BLOCKED	ID is blacklisted due to compliance or fraud. Not available.

8. IPS Switch Sends RespGetAdd API to IPS participant with:
 - idStatus = <status_from_directory>
9. IPS participant sends an ACK back to IPS confirming receipt of the response.
10. Based on the idStatus, the IPS participant app displays appropriate messages to the user. Below are sample messages for reference only.

idStatus	User Message
NEW	"This ID is available. You can proceed with registration."
ACTIVE	"This ID is already linked to another account. Please choose a different ID."
INACTIVE	"This ID exists but is inactive. It cannot be used for registration."
DEREGISTERED	"This ID was deleted. You can reclaim it within 6 months."
BLOCKED	"This ID is blacklisted and cannot be used."

11. Based on the status received, user proceeds accordingly:
 - E. If the Merchant ID is NEW, the user proceeds to register it via ReqRegMapper API.
 - F. If not, the user may:
 - Choose a different Merchant ID.
 - Exit the registration process.

2.7.1.2. Checking availability based on Mobile Number

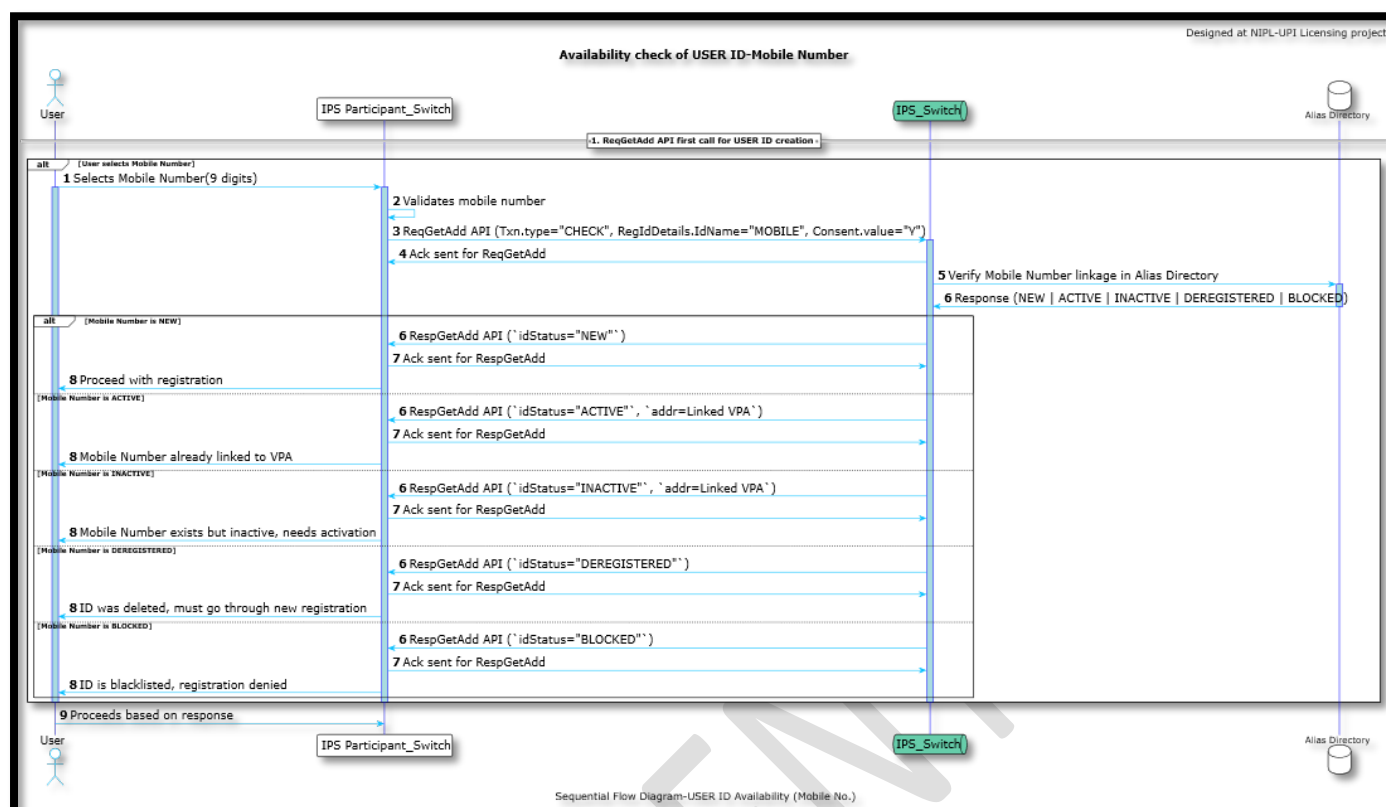


Steps for checking availability of USER ID-Mobile no. (9 digits):

1. The user opens the IPS application and selects the option to use their Mobile Number as their IPS User Id.
2. The app captures the mobile number (typically from the device SIM).
3. The IPS Participant performs local validation (e.g., format, length, duplication).
4. The IPS Participant constructs a ReqGetAdd API request with the following key parameters, sent to the IPS.
 - Txn.type = "CHECK" – indicates a status check operation.
 - RegIdDetails.Id.name = "MOBILE" – specifies the ID type.
 - RegIdDetails.Id.value = <user_mobile_number> – the actual mobile number.
 - Consent.name = "CMREGISTRATION" and Consent.value = "Y" – user consent for checking availability.
5. IPS sends an acknowledgment (ACK) to the IPS Participant confirming receipt of the request.
6. IPS Switch validates the following:
 - Validate the mobile number.
 - Check the status of the mobile number in alias directory.
7. The Alias Directory checks the mobile number and returns one of the idStatus values.
8. If the status is ACTIVE, INACTIVE, or DEREGISTERED, the response also includes, addr = <Linked Alias> – the Alias currently associated with the mobile number. Response sent back to IPS.
9. IPS constructs a RespGetAdd API response with:
 - idStatus = <status_from_alias_directory>

- addr = <linked_alias> (if applicable)
10. IPS sends this response to the IPS Participant.
 11. IPS Participant sends an ACK back to IPS Switch confirming receipt of the response.
 12. Based on the idStatus, the IPS Participant app displays appropriate messages to the user and user proceeds accordingly:
- G. If the Mobile number is NEW, the user proceeds to register it via ReqRegMapper API.
- H. If not, the user may:
- Choose for Porting.
 - Exit the registration process.

2.7.1.3. Fetch the existing status of Alias /IPS User ID (Merchant Id/Mobile No)

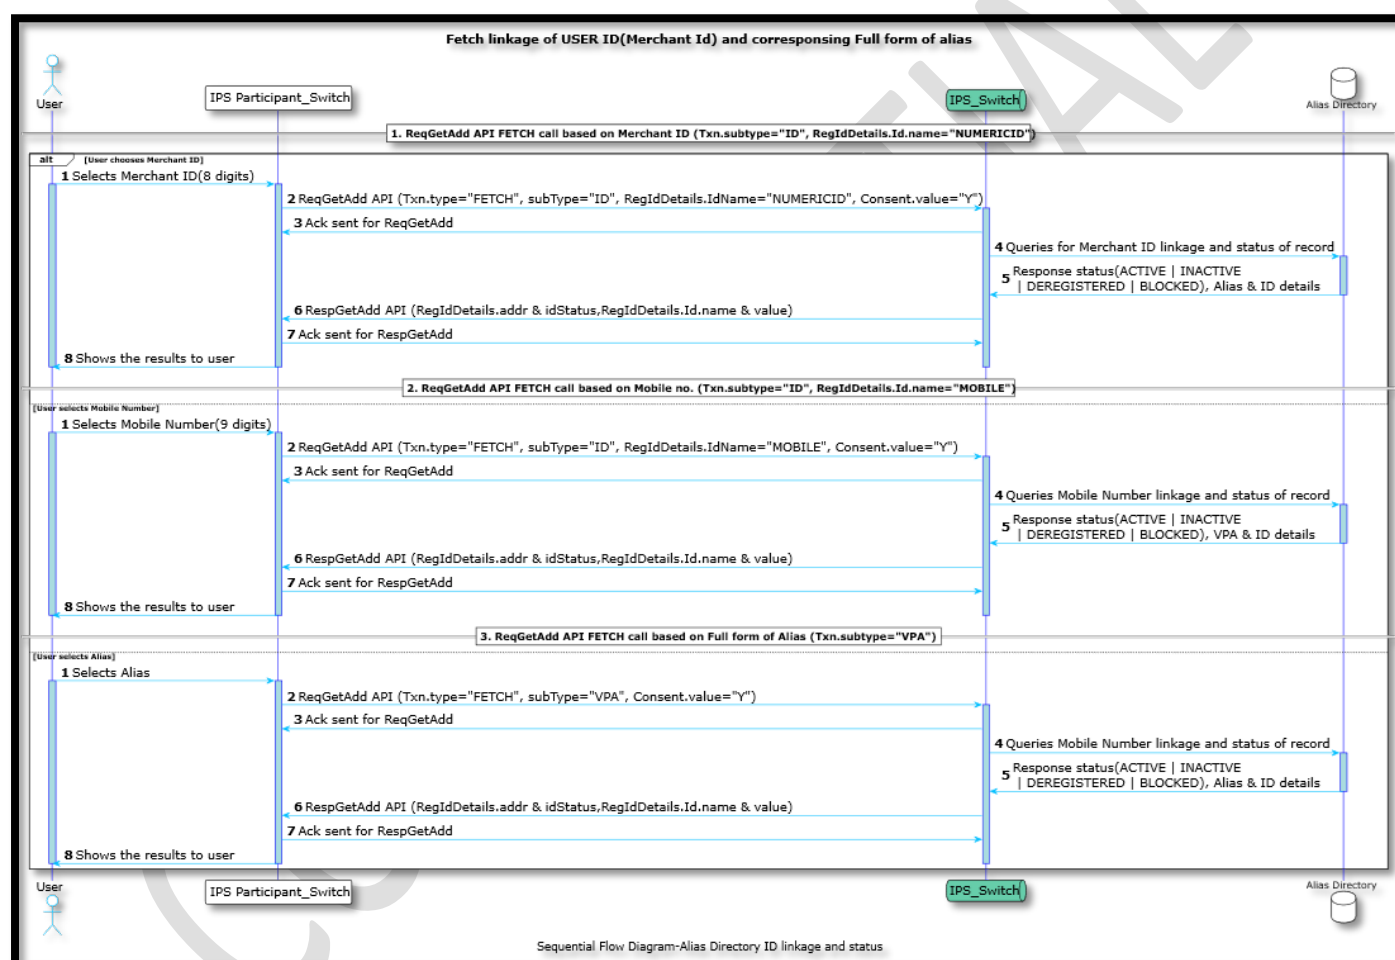

For fetching USER ID and its linkage details IPS Participant will call 'ReqGetAdd' API with 'FETCH' operation performed on basis on ID selection. The flow of events is similar across all conditions, with the main difference being the type of ID selected by the user (Merchant ID, Mobile Number or full form of alias).

Type "FETCH" will have subtype "ID|VPA" for retrieve functionality.

Condition 1: User selects the Merchant ID

The user selects a Merchant ID (8 digits) and sends it to the IPS Participant.

1. IPS Participant sends a ReqGetAdd API call to the IPS Switch with the following parameters:
 - Txn.type = "FETCH"
 - subType = "ID"
 - RegIdDetails.IdName = "NUMERICID"
 - Consent.value = "Y"
2. IPS Switch sends an acknowledgement (Ack) to the IPS Participant for the ReqGetAdd API call.
3. IPS Switch queries the Alias Directory for the Merchant ID linkage and status of the record.
4. The Alias Directory responds with the status (ACTIVE, INACTIVE, DEREGISTERED, BLOCKED), Alias, and ID details.
5. The IPS Switch sends a RespGetAdd API call to the IPS Participant with the response.
6. The IPS Participant sends an acknowledgement (Ack) to the IPS Switch for the RespGetAdd API call.
7. The IPS Participant shows the results to the user.

Condition 2: User selects Mobile Number

The user selects a Mobile Number and sends it to the IPS Participant.

1. The IPS Participant sends a ReqGetAdd API call to the IPS Switch with the following parameters:
 - Txn.type = "FETCH"
 - subType = "ID"
 - RegIdDetails.IdName = "MOBILE"
 - Consent.value = "Y"
2. The IPS Switch sends an acknowledgement (Ack) to the IPS Participant for the ReqGetAdd API call.
3. The IPS Switch queries the Alias Directory for the Mobile Number linkage and status of the record.
4. The Alias Directory responds with the status (ACTIVE, INACTIVE, DEREGISTERED, BLOCKED), full form of alias, and ID details.
5. The IPS Switch sends a RespGetAdd API call to the IPS Participant with the response from the Alias Directory.
6. The IPS Participant sends an acknowledgement (Ack) to the IPS Switch for the RespGetAdd API call.
7. The IPS Participant shows the results to the user.


Condition 3: User selects Full Form of Alias

The user selects a full form of Alias and sends it to the IPS Participant.


1. IPS Participant sends a ReqGetAdd API call to the IPS Switch with the following parameters:
 - Txn.type = "FETCH"
 - subType = "VPA"
 - Consent.value = "Y"
2. IPS Switch sends an acknowledgement (Ack) to the IPS Participant for the ReqGetAdd API call.
3. IPS Switch queries the Alias Directory for the Mobile Number linkage and status of the record.
4. The Directory responds with the status (ACTIVE, INACTIVE, DEREGISTERED, BLOCKED), full form alias, and ID details.
5. IPS Switch sends a RespGetAdd API call to the IPS Participant with the response.
6. IPS Participant sends an acknowledgement (Ack) to the IPS Switch for the RespGetAdd API call.
7. IPS Participant shows the results to the user.

2.7.2. Creation of IPS USER ID based on Merchant ID/Mobile No.

2.7.2.1. Based on Merchant ID

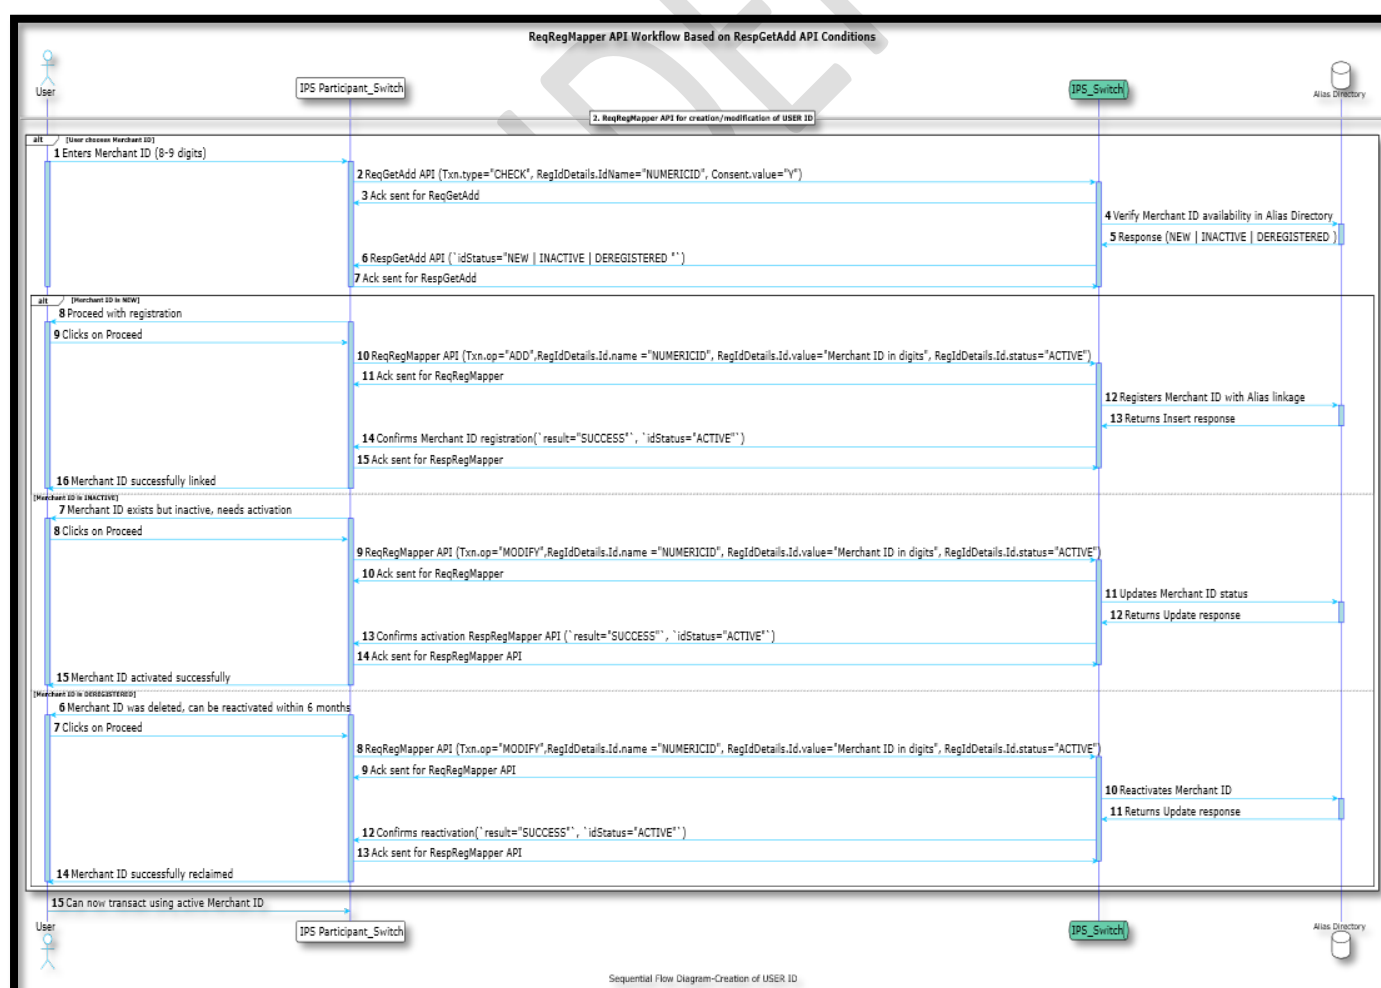

2.7.2.2. Based on Mobile Number

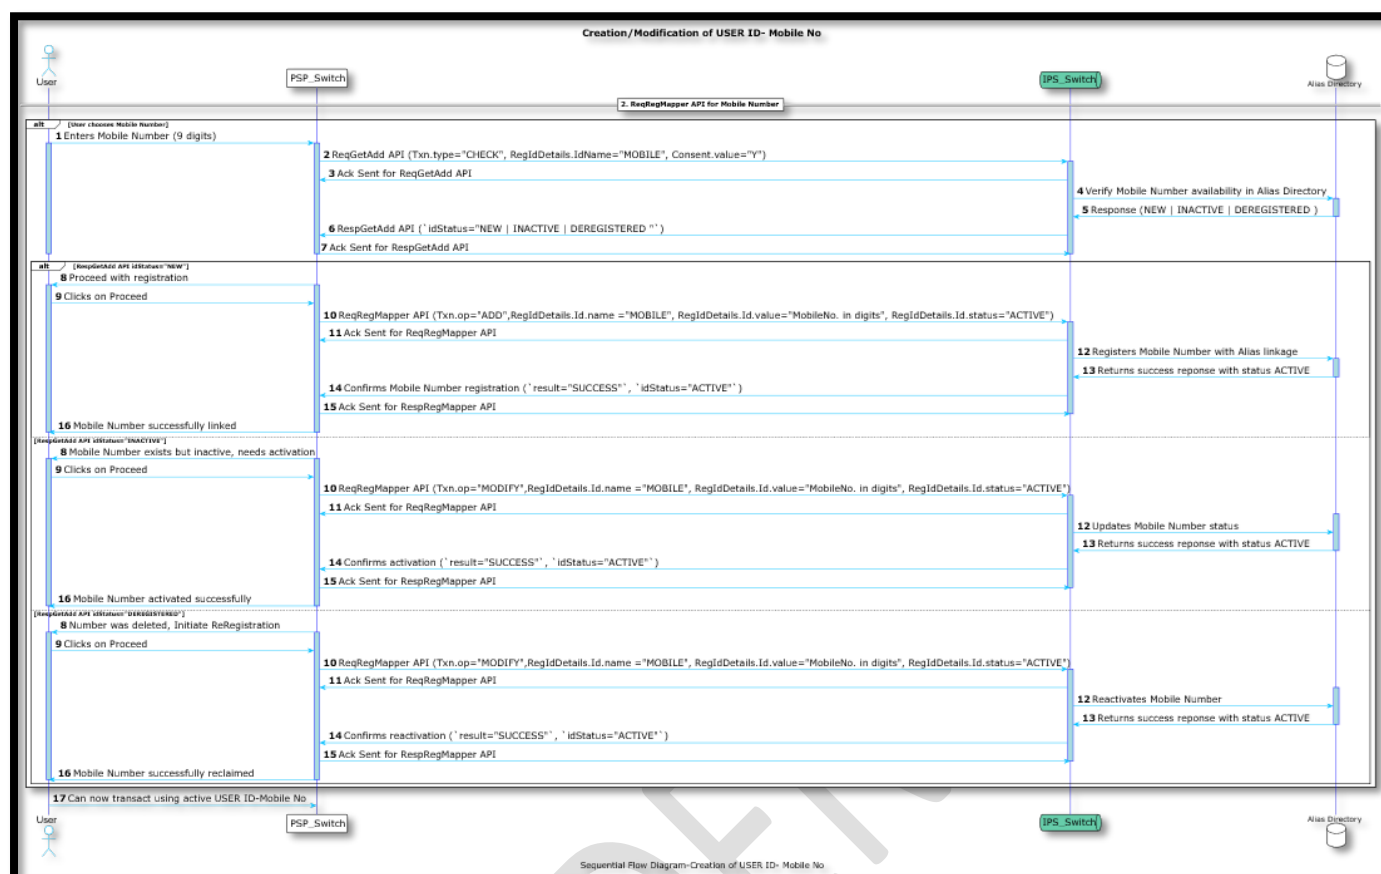

Steps for creation of IPS USER ID based on Mobile Number post availability check:


1. The user selects their 9-digit mobile number, which is received by the IPS Participant and triggers a ReqGetAdd API request to the IPS (IPS_Switch) with parameters such as Txn.type = "CHECK", RegIdDetails.IdName = "MOBILE", and Consent.value = "Y".
2. The IPS receives the ReqGetAdd API request and sends a request to the Alias Directory to verify the mobile number availability, responding with a status of "NEW", "INACTIVE", or "DEREGISTERED".
3. The IPS sends a RespGetAdd API response to the IPS Participant with the idStatus ("NEW", "INACTIVE", or "DEREGISTERED"), which determines the next course of action for the IPS Participant. The IPS Participant acknowledges the RespGetAdd response with an Ack for RespGetAdd request.
4. If the idStatus is "NEW", the IPS Participant proceeds with registration, sending a ReqRegMapper API request to the IPS with parameters such as Txn.op = "ADD", RegIdDetails.Id.name = "MOBILE", RegIdDetails.Id.value = "MobileNo. in digits", and RegIdDetails.Id.status = "ACTIVE". IPS registers the mobile number with full form of alias linkage and returns a success response with status "ACTIVE", confirming the registration of the mobile number. The IPS Participant acknowledges the RespRegMapper response with an Ack.

If the idStatus is "INACTIVE", the IPS Participant proceeds with activation, sending a ReqRegMapper API request to the IPS with parameters such as Txn.op = "MODIFY", RegIdDetails.Id.name = "MOBILE", RegIdDetails.Id.value = "MobileNo. in digits", and RegIdDetails.Id.status = "ACTIVE". The IPS updates the mobile number status and returns a success response with status "ACTIVE", confirming the activation of the mobile number. The IPS Participant acknowledges the RespRegMapper response with an Ack.

If the idStatus is "DEREGISTERED", the IPS Participant proceeds with re-registration, sending a ReqRegMapper API request to the IPS with parameters such as Txn.op = "MODIFY", RegIdDetails.Id.name = "MOBILE", RegIdDetails.Id.value = "MobileNo. in digits", and RegIdDetails.Id.status = "ACTIVE". The IPS reactivates the mobile number and returns a success response with status "ACTIVE", confirming the reactivation of the mobile number. The IPS Participant acknowledges the RespRegMapper response with an Ack.

5. The IPS Participant confirms the registration, activation, or reactivation of the mobile number and sends a message to the user that the mobile number is successfully linked, activated, or reactivated.
6. The user can now transact using their active IPS USER ID(cmld), completing the process of creating or modifying IPS USER ID.

2.7.3. Porting of IPS USER ID -Mobile No.

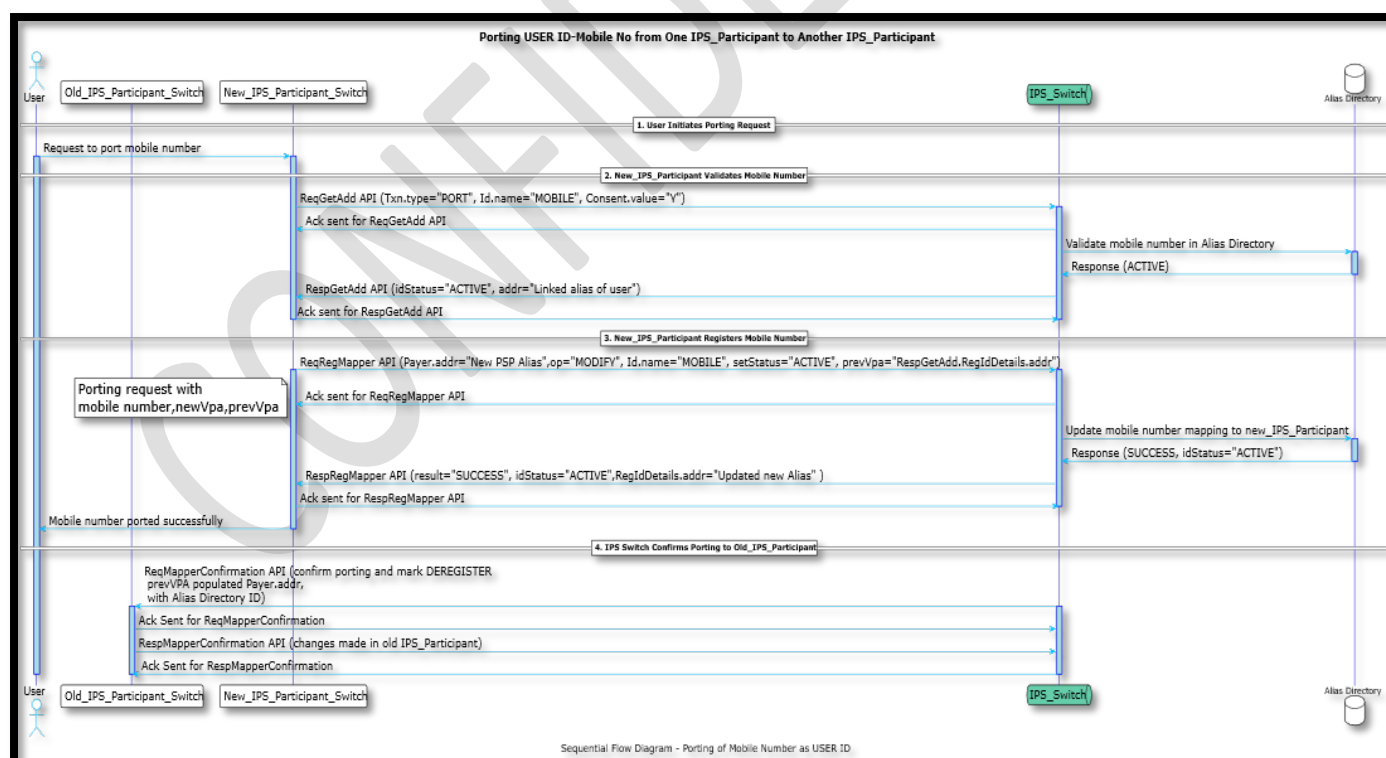

Steps for USER ID Porting Process (Mobile Number):

1. The user opens the New IPS Participant application and selects the option to update mobile number as IPS User ID(cmld).

2. This action triggers the porting workflow in the New IPS Participant system.
3. New IPS Participant PSP sends a “ReqGetAdd” API request to IPS Switch with:
 - Txn.type = "PORT"
 - RegIdDetails.Id.name = "MOBILE"
 - Consent.value = "Y"
4. IPS Switch forwards the request to the Alias Directory to:
 - Check if the mobile number exists.
 - Retrieve the status (“idStatus”) and the full form of alias linked
 Directory responds with the following response:
 - idStatus = "ACTIVE" or "INACTIVE" (porting allowed only in these states)
 - addr = <Linked Alias> (this becomes prevVpa)
5. IPS sends a “RespGetAdd” API response back to New IPS Participant PSP with the above details.


Note: If the mobile number is in “BLOCKED” status, the field “addr” will not be returned and porting will not be allowed.

6. Upon user confirmation, New IPS Participant PSP sends a “ReqRegMapper” API request to IPS Switch to initiate the porting:
 - op = "MODIFY"
 - Id.name = "MOBILE"
 - setStatus = "ACTIVE"
 - Payer.addr = <New PSP Alias> (new Alias to be linked)
 - Consent.prevVpa = <Linked Alias from RespGetAdd> (i.e., “prevVpa”)
7. IPS Switch updates the Alias Directory:
 - The mobile number is now mapped to the New IPS Participant PSP Alias.
 - The old mapping is marked for deactivation.
8. Alias Directory responds with result consists of “idStatus”, “addr” field values stored in directory.
9. IPS Switch sends a “RespRegMapper” API response to New IPS Participant PSP confirming the update.
10. IPS Switch sends a “ReqMapperConfirmation” API request to Old IPS Participant PSP to confirm the porting and to mark the old alias as `DEREGISTERED` .
The request includes:
 - op = "MODIFY"
 - idType = "MOBILE"
 - status = "DEREGISTER"
 - Payer.addr = <Old IPS Participant Alias>
 - cmdId = <Mobile Number>
11. Old IPS Participant PSP acknowledges the request and sends back “RespMapperConfirmation” with result as "SUCCESS".
12. IPS Switch confirms the completion of the porting process.


3. IPS Design

This chapter provides high-level technical specifications for various types of payments that can be done through the IPS, and the corresponding high-level flows.

3.1. IPS Pay Flow

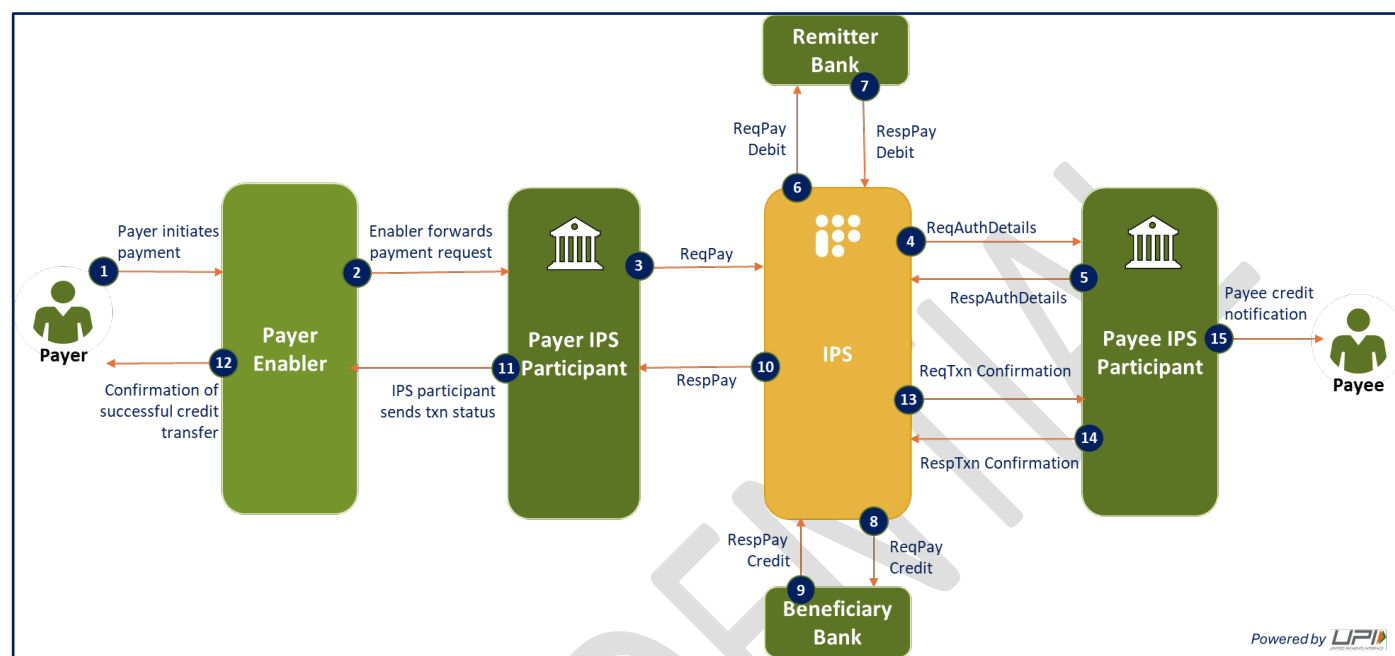

3.2. USSD Pay Flow

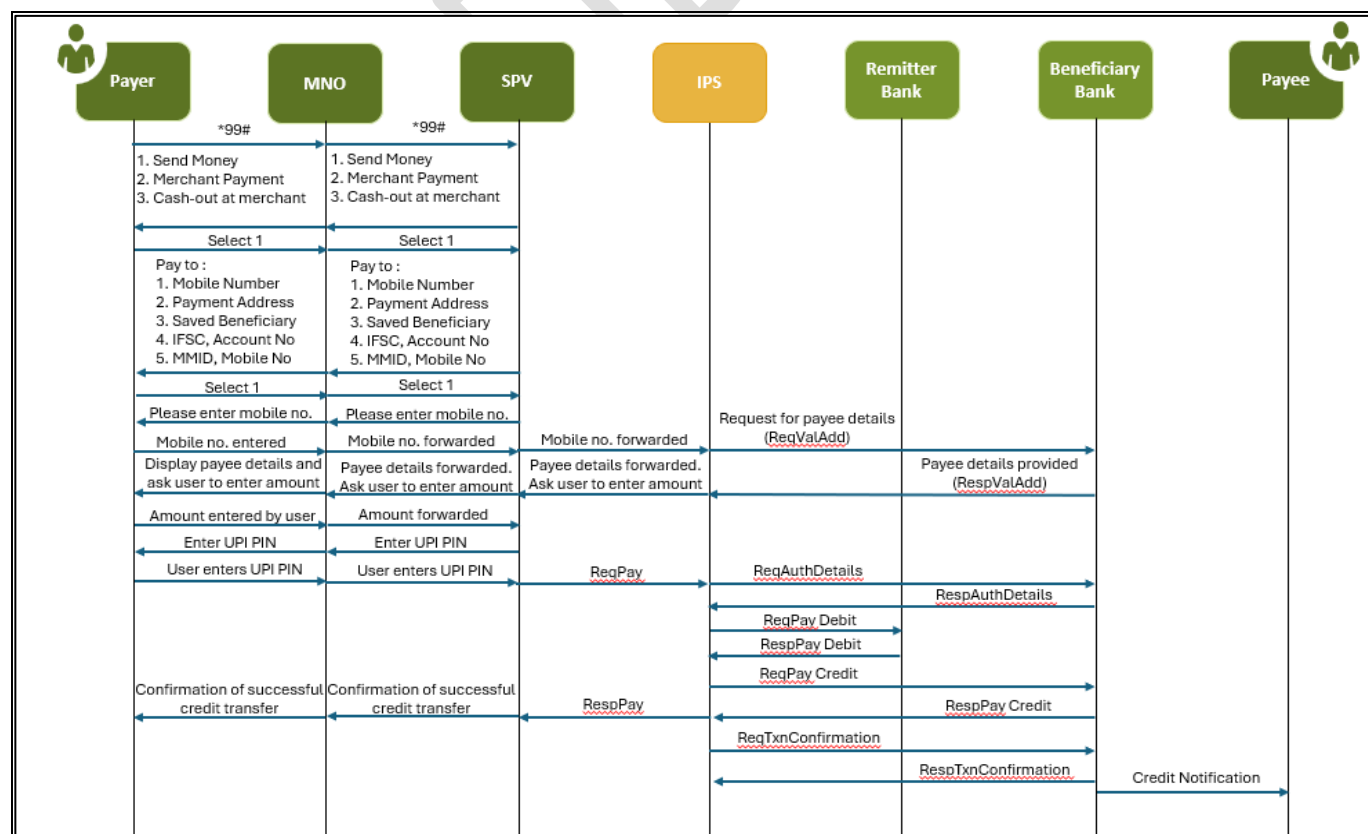

Note: SPV is responsible for converting the messages from USSD channel to IPS proprietary XML format.

3.3. API's Briefly

1. Asynchronous Communication

Principle: APIs are non-blocking; the system does not wait for a response after sending a request.

Benefits:

- Improves system responsiveness.
- Enables parallel processing of multiple transactions.
- Reduces latency and resource locking.

How it works:

- A request initiated with a unique transaction ID.
- The system immediately acknowledges receipt.
- The actual response initiated later through a separate response API, using the same transaction ID for reference.

2. Scalability and Performance

Principle: Asynchronous APIs allows the system to scale horizontally and manage high loads.

Benefits:

- Supports high transaction volumes.
- Avoids bottlenecks caused by synchronous waiting.
- Enables load balancing and distributed processing.

How it works:

- Incoming requests are queued and processed independently.
- Multiple backend services can process transactions in parallel.
- Load balancers distribute traffic across multiple nodes.

3. Transaction ID for Correlation

Principle: Every API call must include a unique transaction ID.

Benefits:

- Ensure traceability and auditability.
- Allows accurate matching of requests and responses.
- Facilitates error handling.

How it works:

- The client generates a unique transaction ID for each request.
- This ID included in both the request and the asynchronous response.
- Systems use this ID to correlate and track the transaction lifecycle.

4. Secure and Standardized Communication

Principle: All APIs must use HTTPS and XML for secure and consistent data exchange.

Benefits:

- HTTPS ensures encrypted transmission.

- XML provides a structured, interoperable format.
- Ensures compliance with regulatory and industry standards.

How it works:

- All API endpoints exposed over HTTPS.
- Request and response payloads formatted in XML.
- Digital signatures and encryption (for Cred block) applied to protect sensitive data.

5. Acknowledgement Mechanism (ACK)

Principle: Every request must be acknowledged immediately, even if processing is deferred.

Benefits:

- Confirms that the request received and queued.
- Prevents duplicate submissions of request/response.
- Improves user experience with instant feedback.

How it works:

- Upon receiving a request, the server queues for processing.
- An immediate ACK sent back to the client.
- The actual processing result sent later via the response API.

6. Uniform API Design Across Participants

Principle: The same REST-based APIs used by UPI and all its participants (banks, PSPs, TPAPs).

Benefits:

- Ensures interoperability across the ecosystem.
- Simplifies integration and reduces development effort.
- Promotes standardization and consistency.

How it works:

- IPS defines a common API specification.
- All participants implement the same set of endpoints and data structures.
- This uniformity allows any participant to interact with any other seamlessly.

3.4. Message Security, Trust and Authenticity

Key security features of the UPI Solution:

1. End-to-End Security and Data Protection:

Explanation: This means that from the moment a transaction is initiated to its completion, the data is protected. This is crucial in preventing unauthorized access or tampering with transaction data.

Importance: It ensures that sensitive information, such as financial details, remains secure throughout the transaction process, safeguarding both the sender's and receiver's information.

2. Digital Signature for Message Integrity and Authentication:

Explanation: Digital signatures are used to verify the authenticity of the sender and ensure that the message has not been altered during transmission. This is achieved through public-key cryptography, where the sender signs the message with their private key, and the recipient verifies it using the sender's public key.

Importance: This mechanism prevents impersonation and ensures that transactions are genuine and have not been tampered with, thereby maintaining the trust and integrity of the IPS system.

3. Cryptographic Operations via Hardware Security Module (HSM):

Explanation: An HSM is a physical computing device that safeguards and manages cryptographic keys, performs encryption and decryption, and handles other cryptographic functions. Using an HSM for cryptographic operations within the IPS ecosystem adds a layer of physical security to digital transactions.


Importance: HSMs are highly secure and resistant to tampering, which means that even if the system is compromised, the cryptographic keys and the ability to perform secure transactions remain protected, ensuring the security of the IPS transactions.

4. Secure Message Exchange Protocol:

Explanation: The use of HTTPS (Hypertext Transfer Protocol Secure) for communication ensures that all data exchanged between IPS participants and the IPS platform is encrypted via SSL certificate. Additionally, the use of XML-formatted messages that are digitally signed with the RSA-SHA256 algorithm provides confidentiality, integrity, and non-repudiation.

Importance: This ensures that all communication is secure, preventing eavesdropping, tampering, and man-in-the-middle attacks. The digital signature with RSA-SHA256 algorithm provides a high level of security, making it virtually impossible for an attacker to alter the message without being detected, and ensures that the sender cannot deny having sent the message.

UPI PIN flow:

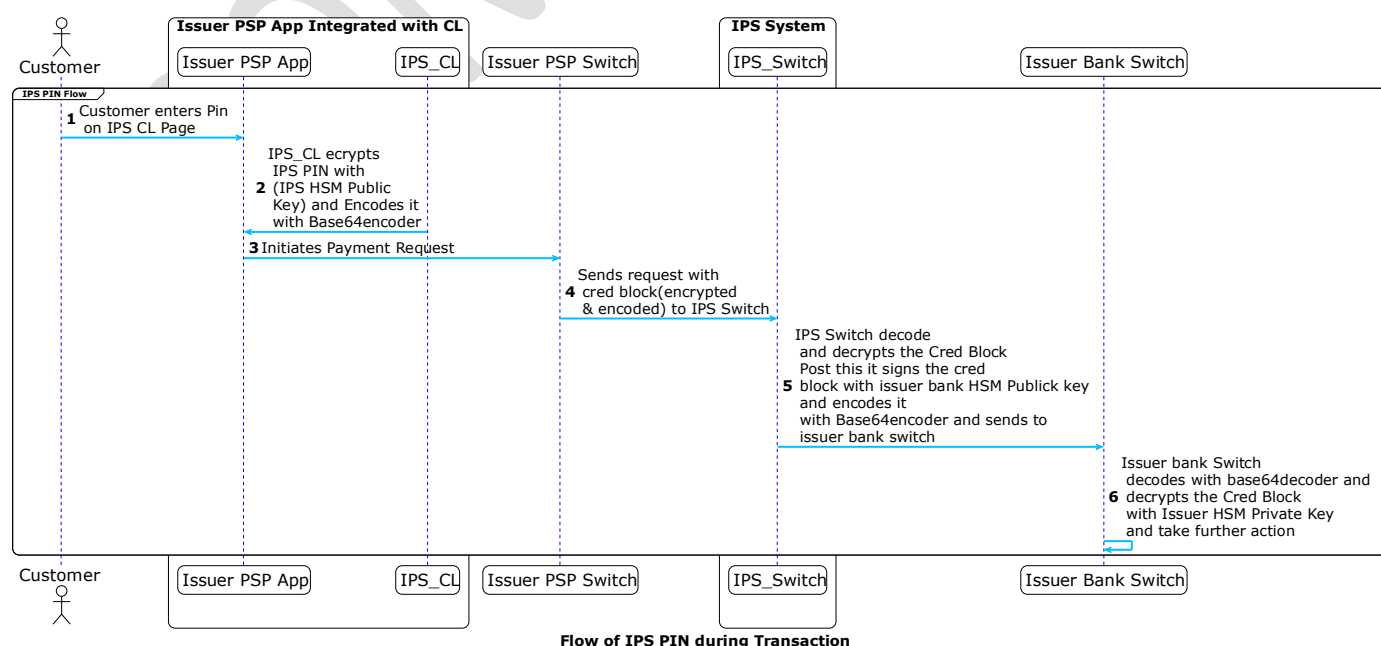

1. Customer Enters IPS PIN on the IPS CL Page within the Issuer PSP App.
2. Encrypts the entered PIN using the IPS HSM Public Key and encodes the encrypted PIN using Base64 encoding, sends the encrypted and encoded PIN back to the Issuer PSP App.
3. Issuer PSP App initiates a Payment Request to the Issuer PSP Switch, including the encrypted and encoded PIN (Cred Block).
4. Issuer PSP Switch forward Request to IPS Switch passing along the Cred Block.
5. IPS Switch processes it by decoding with Base64 Decoder and decrypting it with IPS HSM Private Key. Post this it signs using the Issuer SoV Provider HSM Public Key and encodes using Base64 encoder and sends the processed block to the Issuer SoV provider Switch.
6. Issuer SoV provider Switch decodes the received block using Base64 decoder and decrypts the block using the Issuer HSM Private Key and takes further action.

3.5. Certificate Requirement

Types of certificates are required, and they are as follows:

Sr No	Requirement	Key Length	Certification Type
1	SSL	RSA 2048	Class 3
2	Digital Signing	RSA 2028	Class 3
3	HSM Certificate	RSA 2028	Class 3

Certificates used by IPS:

Type of Certificate	Used By	Shared By	Reason
SSL	IPS	IPS Participant/SOV	For SSL Connection.
Digital Signing	IPS	IPS Participant/ SOV	To verify digital signature of the XML message.
HSM Certificate	IPS	SOV	This certificate will be used for the encryption of the PIN and card details.
HSM Certificate	IPS	IPS	Will be using CL library.

Certificates used by IPS Participant/ SOV:

Type of Certificate	Used By	Shared By	Reason
SSL	IPS Participant/SOV	IPS	For SSL Connection.
Digital Signing	IPS Participant/ SOV	IPS	To verify digital signature of the XML message.

HSM Certificate	IPS Participant	IPS	This certificate will be used for the encryption of the PIN and card details. This certificate will be used by IPS participants to encrypt the PIN, card related data and send it to IPS.
-----------------	-----------------	-----	---

DIGITAL SIGNATURE GUIDELINES (FOR REFERENCE ONLY)

This section provides the guidelines for generating and validating DOM based XML signatures following JSR 105. Following is a Java sample code with instructions:

- This java tool SignatureGenUtil.java is currently configured to use RSA 2048-bit signer. And tested in jdk 1.8 and above.
- Please change the qualified paths under main method -
qualifiedPathXMLToBeSigned, generatedSignedXML, targetSignedXML respectively pointing to the xml to be signed, where the signed xml will be generated and path of file whose signature will be validated.
- Please modify signer passphrase at line number 208 ('password') as required. Default is passphrase being used in issued test doc signer.
- Please modify signer and certificate qualified path in line number 203 & 218 respectively under init().
File signerFile = new File("D:\\signer\\signer.p12");
java.security.cert.Certificate cert = getCertificate("D:\\signer\\signer.crt");
- Java XML Digital Signature API Specification (JSR 105) is being followed as best practice for xml signature. hence, we are generating the xml signature on DOM.
- For any details regarding the XML canonicalization, please refer to <http://www.w3.org/TR/xml-exc-c14n/>

For RSA with SHA256 following is the signature method URI <http://www.w3.org/2001/04/xmldsig-more#rsa-sha256> One may need to use any JSR 105 provider depending upon the java version used.

```

1  import java.io.BufferedInputStream;
2  import java.io.File;
3  import java.io.FileInputStream;
4  import java.io.FileNotFoundException;
5  import java.io.IOException;
6  import java.io.InputStream;
7  import java.security.InvalidAlgorithmParameterException;
8  import java.security.KeyException;
9  import java.security.KeyStore;
10 import java.security.NoSuchAlgorithmException;
11 import java.security.PrivateKey;
12 import java.security.Provider;
13 import java.security.PublicKey;
14 import java.security.Security;
15 import java.security.Signature;
16 import java.security.cert.Certificate;
17 import java.security.cert.CertificateException;
18 import java.security.cert.CertificateFactory;
19 import java.security.cert.X509Certificate;
20 import java.util.Collections;
21
22 import javax.xml.crypto.MarshalException;
23 import javax.xml.crypto.dsig.CanonicalizationMethod;
24 import javax.xml.crypto.dsig.DigestMethod;
25 import javax.xml.crypto.dsig.Reference;
26 import javax.xml.crypto.dsig.SignatureMethod;
27 import javax.xml.crypto.dsig.SignedInfo;
28 import javax.xml.crypto.dsig.Transform;
29
30 import javax.xml.crypto.dsig.XMLSignature;
31 import javax.xml.crypto.dsig.XMLSignatureException;
32 import javax.xml.crypto.dsig.XMLSignatureFactory;
33 import javax.xml.crypto.dsig.dom.DOMSignContext;
34 import javax.xml.crypto.dsig.dom.DOMValidateContext;
35 import javax.xml.crypto.dsig.keyinfo.KeyInfo;
36 import javax.xml.crypto.dsig.keyinfo.KeyInfoFactory;
37 import javax.xml.crypto.dsig.keyinfo.KeyValue;
38 import javax.xml.crypto.dsig.spec.C14NMethodParameterSpec;
39 import javax.xml.crypto.dsig.spec.SignatureMethodParameterSpec;
40 import javax.xml.crypto.dsig.spec.TransformParameterSpec;
41 import javax.xml.parsers.DocumentBuilderFactory;
42 import javax.xml.parsers.ParserConfigurationException;
43 import javax.xml.transform.Transformer;
44 import javax.xml.transform.TransformerConfigurationException;
45 import javax.xml.transform.TransformerException;
46 import javax.xml.transform.TransformerFactory;
47 import javax.xml.transform.dom.DOMSource;
48 import javax.xml.transform.stream.StreamResult;
49 import org.w3c.dom.Document;
50 import org.w3c.dom.NodeList;
51 import org.xml.sax.SAXException;
52
53 public class SignatureGenUtil {
54     public static void generateXMLDigitalSignature(String originalXmlFilePath, String destnSignedXmlFilePath)
55         throws InstantiationException, IllegalAccessException, ClassNotFoundException {
56         // Get the XML Document object

```



```

57 Document doc = getXmlDocument(originalXmlFilePath);
58 // Create XML Signature Factory
59
60 /*
61 String providerName = "org.apache.jcp.xml.dsig.internal.dom.XMLDSigRI";
62 XMLSignatureFactory xmlSigFactory = XMLSignatureFactory.getInstance("DOM",
63 (Provider) Class.forName(providerName).newInstance());*/
64 XMLSignatureFactory xmlSigFactory = XMLSignatureFactory
65 .getInstance("DOM");
66 DOMSignContext domSignCtx = new DOMSignContext(privateKey, doc.getDocumentElement());
67 Reference ref = null;
68 SignedInfo signedInfo = null;
69 try {
70     ref = xmlSigFactory.newReference("", xmlSigFactory.newDigestMethod(DigestMethod.SHA256, null),
71 Collections.singletonList(
72     xmlSigFactory.newTransform(Transform.ENVELOPED, (TransformParameterSpec) null)),
73     null, null);
74
75     System.out.println("xmlSigFactory.getProvider(): " + xmlSigFactory.getProvider());
76     signedInfo = xmlSigFactory.newSignedInfo(xmlSigFactory.newCanonicalizationMethod(
77 CanonicalizationMethod.INCLUSIVE, (C14NMethodParameterSpec) null), xmlSigFactory.newSignatureMethod
78 ("http://www.w3.org/2001/04/xmldsig-more#rsa-sha256", (SignatureMethodParameterSpec) null),
79 Collections.singletonList(ref));
80 } catch (NoSuchAlgorithmException ex) {
81     ex.printStackTrace();
82 } catch (InvalidAlgorithmParameterException ex) {
83     ex.printStackTrace();
84 }
85
86 // Pass the Public Key File Path
87 KeyInfo keyInfo = getKeyInfo(xmlSigFactory);
88 // Create a new XML Signature
89 XMLSignature xmlSignature = xmlSigFactory.newXMLSignature(signedInfo, keyInfo);
90
91 try {
92     // Sign the document
93     xmlSignature.sign(domSignCtx);
94 } catch (MarshalException ex) {
95     ex.printStackTrace();
96 } catch (XMLSignatureException ex) {
97     ex.printStackTrace();
98 }
99 // Store the digitally signed document into a location
100 storeSignedDoc(doc, destnSignedXmlFilePath);
101
102
103 private static KeyInfo getKeyInfo(XMLSignatureFactory xmlSigFactory) {
104     KeyInfo keyInfo = null;
105     KeyValue keyValue = null;
106     KeyInfoFactory keyInfoFact = xmlSigFactory.getKeyInfoFactory();
107
108     try {
109         keyValue = keyInfoFact.newKeyValue(publicKey);
110     } catch (KeyException ex) {
111         ex.printStackTrace();
112     }
113
114     keyInfo = keyInfoFact.newKeyInfo(Collections.singletonList(keyValue));
115     return keyInfo;
116 }
117
118 private static void storeSignedDoc(Document doc, String destnSignedXmlFilePath) {
119     TransformerFactory transFactory = TransformerFactory.newInstance();
120     Transformer trans = null;
121     try {
122         trans = transFactory.newTransformer();
123     } catch (TransformerConfigurationException ex) {
124         ex.printStackTrace();
125     }
126     try {
127         StreamResult streamRes = new StreamResult(new File(destnSignedXmlFilePath));
128         trans.transform(new DOMSource(doc), streamRes);
129     } catch (TransformerException ex) {
130         ex.printStackTrace();
131     }
132     // System.out.println("XML file with attached digital signature
133     // generated successfully ...");
134 }
135
136 private static Document getXmlDocument(String xmlFilePath) {
137     Document doc = null;
138     DocumentBuilderFactory dbf = DocumentBuilderFactory.newInstance();
139     dbf.setNamespaceAware(true);
140     try {
141         doc = dbf.newDocumentBuilder().parse(new FileInputStream(xmlFilePath));
142     }

```



```

141     } catch (ParserConfigurationException ex) {
142         ex.printStackTrace();
143     } catch (FileNotFoundException ex) {
144         ex.printStackTrace();
145     } catch (SAXException ex) {
146         ex.printStackTrace();
147     } catch (IOException ex) {
148         ex.printStackTrace();
149     }
150     return doc;
151 }
152
153 public static boolean isXmlDigitalSignatureValid(String signedXmlFilePath) throws Exception {
154     boolean validFlag = false;
155     Document doc = getXmlDocument(signedXmlFilePath);
156     NodeList nl = doc.getElementsByTagNameNS(XMLSignature.XMLNS, "Signature");
157     if (nl.getLength() == 0) {
158         throw new Exception("No XML Digital Signature Found, document is discarded");
159     }
160     DOMValidateContext valContext = new DOMValidateContext(publicKey, nl.item(0));
161     // XMLSignatureFactory fac = XMLSignatureFactory.getInstance("DOM");
162     String providerName = "org.apache.jcp.xml.dsig.internal.dom.XMLDSigRI";
163     XMLSignatureFactory fac = XMLSignatureFactory.getInstance("DOM",
164         (Provider) Class.forName(providerName).newInstance());
165     XMLSignatureFactory fac = XMLSignatureFactory
166         .getInstance("DOM");
167     XMLSignature signature = fac.unmarshalXMLSignature(valContext);
168     validFlag = signature.validate(valContext);
169     return validFlag;
170 }
171
172 private static PrivateKey privateKey = null;
173 private static PublicKey publicKey = null;
174
175 public static void main(String[] args)
176     throws NoSuchAlgorithmException, InstantiationException, IllegalAccessException, ClassNotFoundException {
177     init();
178
179     // Call to generate digital signature
180     String qualifiedPathXMLToBeSigned = "D:\\signer\\ReqPay1.xml";
181     String generatedSignedXML = "D:\\signer\\ReqPay1_signed.xml";
182     generateXMLDigitalSignature(qualifiedPathXMLToBeSigned,
183         generatedSignedXML);
184     System.out.println("XML signature generated at " + generatedSignedXML);
185     try {
186         // Call to validate digital signature
187         String targetSignedXML = generatedSignedXML; // "D:\\signer\\ReqPay1_signed.xml";
188         boolean validationResult = isXmlDigitalSignatureValid(targetSignedXML);
189         System.out.println("Is target XML signature valid? " + validationResult);
190     } catch (Exception e) {
191         // TODO Auto-generated catch block
192         e.printStackTrace();
193     }
194 }
195
196 private static void init() {
197     try {
198         /* getting data for keystore */
199         File signerFile = new File("D:\\signer\\signer.p12");
200         FileInputStream is = new FileInputStream(signerFile);
201         KeyStore keystore = KeyStore.getInstance("PKCS12");
202
203         /* Information for certificate to be generated */
204         String password = "npiciupi";
205         String alias = "1";
206
207         /* getting the key */
208         keystore.load(((InputStream) is), password.toCharArray());
209         PrivateKey key = (PrivateKey) keystore.getKey(alias, password.toCharArray());
210
211         privateKey = key;
212
213         /* Get certificate of public key */
214         java.security.cert.Certificate cert = getCertificate("D:\\signer\\signer.crt");
215
216         // System.out.println("Not
217         // after:"+(X509Certificate)cert).getNotAfter());
218
219         publicKey = cert.getPublicKey();
220
221     } catch (Exception e) {
222         e.printStackTrace();
223     }
224 }

```

```

225     }
226
227 }
228
229 private static Certificate getCertificate(String file) throws CertificateException, FileNotFoundException {
230     CertificateFactory cf = CertificateFactory.getInstance("X.509");
231     InputStream is = new FileInputStream(new File(file));
232     InputStream caInput = new BufferedInputStream(is);
233     Certificate ca;
234     try {
235         ca = cf.generateCertificate(caInput);
236         return ca;
237     } finally {
238         try {
239             caInput.close();
240         } catch (IOException e) {
241         }
242     }
243     try {
244         is.close();
245     } catch (IOException e) {
246     }
247 }
248
249 }
250

```

Sample XML request with Digital Signature:

Hit URI: <https://<Source IP>/upi/ReqPay/2.0/urn:txnid:ABCef6fdfde87454cc084071ca3725e2979>

Received Message:<?xml version="1.0" encoding="UTF-8"?>

<ns2:ReqPay xmlns:ns2="http://npci.org/upi/schema/">

<Head msgId="YBL4a69d250abe6433899c2f5a08fc0d008" orgId="910001"

ts="2017-05-

11T00:00:41+05:30" ver="2.0"/>

<Txn custRef="713100747891" id="YBLef6fdfde87454cc084071ca3725e2979"

note="Payment" refId="P1705110000338829715467"

refUrl="http://www.npci.org.in/"

ts="2017-05-11T00:00:41+05:30"

type="PAY"/>

<Payer addr="ani@mypsp1" code="0000" name="ANI" seqNum="1" type="PERSON">

<Info>

<Identity id="12345678901234567" type="ACCOUNT"

verifiedName="ANI"/>

<Rating verifiedAddress="TRUE"/>

</Info>

<Device>

<Tag name="MOBILE" value="9898989898"/>

<Tag name="GEOCODE" value="25.4870,81.8727"/>

<Tag name="IP" value="106.219.54.221"/>

<Tag name="LOCATION" value="Mumbai, IN"/>

<Tag name="TYPE" value="MOB"/>

<Tag name="OS" value="Android"/>

<Tag name="APP" value="com.psp.app"/>

<Tag name="CAPABILITY"

value="5200000200000005600179648301605"/>

<Tag name="ID" value="1B682WNVAQSSKSOBQMDG"/>

</Device>

<Ac addrType="ACCOUNT">

<Detail name="IFSC" value="QAZX0001501"/>

<Detail name="ACNUM" value="12345678901234567"/>

```

        <Detail name="ACTYPE" value="SAVINGS"/>
    </Ac>
    <Creds>
        <Cred subType="MPIN" type="PIN">
            <Data code="NPCI" ki="20150822">2.0</Data>
        </Cred>
    </Creds>
    <Amount curr="NAD" value="100.00"/>
</Payer>
<Payees>
    <Payee addr="test@mypsp2" code="0000" name="Test user" seqNum="1"
    type="PERSON">
        <Info>
            <Identity id="12345678901234111" type="ACCOUNT"
            verifiedName="Test user"/>
            <Rating verifiedAddress="TRUE"/>
        </Info>
        <Ac addrType="ACCOUNT">
            <Detail name="IFSC" value="AXCA0851600"/>
            <Detail name="ACNUM" value="12345678901234111"/>
            <Detail name="ACTYPE" value="SAVINGS"/>
        </Ac>
        <Amount curr="NAD" value="100.00"/>
    </Payee>
</Payees>
<Signature xmlns="http://www.w3.org/2000/09/xmldsig#">
    <SignedInfo>
        <CanonicalizationMethod
            Algorithm="http://www.w3.org/TR/2001/REC-xml-c14n-20010315"/>
        <SignatureMethod Algorithm="http://www.w3.org/2001/04/xmldsig-
            more#rsasha256"/>
        <Reference URI="">
            <Transforms>
                <Transform
                    Algorithm="http://www.w3.org/2000/09/xmldsig#envelopedsignature"
                />
            </Transforms>
            <DigestMethod
                Algorithm="http://www.w3.org/2001/04/xmldsig#sha256"/>
                <DigestValue>d7c8r4DwxkC+XD+B+fqH27Zvdy5JhJPMiU9kbvPlsZE=<
            /DigestValue>
        </Reference>
    </SignedInfo>
    <SignatureValue>WS2WY36wk/wkptfS3gaYoqXGJ/n/jYGTtwOOZZ8y2xnnP2X/vO
    sTNyK9UQx+jjRyp+zkHmPbCEQmwZXu/z1qzGqvmgac6Sold9iEo6gGyBSbs+r3qV4M
    qTMQVooRAJ7RN1qnU6hvL/+aKNsrLzHIACHnmLW6wQoDRtVGX/2raGW08cB74VI8ZB
    b8t7fhTMYrK5zvPyZK33u5J2qUDz24gVvx0WAsVDM2QJQ+2svLyUUxRdxghMTHZeD
    Hiq/quM46sngjnj+TqPghwYNST+ofB5MjaMbysJIJY5s8Z7URnJ5B JUZ

```

```

zXKE91mPaCghCH9HoVooEgOTsZ9mVrBGUrjDMQ==</SignatureValue>
<KeyInfo>
  <KeyValue>
    <RSAKeyValue>
      <Modulus>vT5CxuS4WVHnDQPb4VEMB7EnaPcBJ73pKP127ACIsN
3HEgJw0kil+WQZaAmDQ6sJT5Q1gfAbvDAUZA43Ya3gOYC34yNt8M
sXF7Aw10F936sVxsCAdYtJ2/j7Ir+Br6BkOP0ovfg8l4r+MA6lHX
TWehwn4QFLZjCMUIaSQ13029aobgvVdB+wc3oU9pdWA004wZxD1e
gbCefO+6Po+GrpETUTGm+scBYu+e06x37JfuimWNbQyph5dmnOmH
00KjdhJQIpgw8ck7LK9YWn/DWRkK2M20jLI+QFKCJhpKUkIIIdwbJ
WRNJgePAOrLMdTBp1doAf2HKiZ/ZQf7IfDyyDyQ==</Modulus>
      <Exponent>AQAB</Exponent>
    </RSAKeyValue>
  </KeyValue>
</KeyInfo>
</Signature>
</ns2:ReqPay>

```

3.6. Security Considerations

IPS Solution provides strong end-to-end security and data protection. To maintain security and authenticity of the transactions, all API messages are generated with a digital signature by the sender which is validated by the receiver. Encryption / Decryption at IPS will be performed through the Hardware Security Module (HSM). Message communication between IPS Participant and IPS will be in XML format over HTTPS and all the messages will be digitally signed using RSA-SHA256.

For storing the data at IPS participant end, IPS participant needs to follow security standard applicable to them. IPS will support TLS 1.2 and above.

Signer certificate will be used for the message signing and validation.

The SSL certificate will be used for Secure TLS communication.

HSM certificates will be used for IPS PIN.

Common Library is a set of utilities which are embedded in the PSP App. This library is available for all major mobile operating systems viz. Android, iOS.

These libraries allow secure capture of credentials like OTP, PIN, etc. The secured credentials are always captured by the IPS common library which uses Public Key Infrastructure (PKI) Encryption.

IPS will be using PKI to encrypt the PIN using IPS Public Key which will be stored locally in the library. This encrypted block will be sent to IPS where IPS will decrypt using IPS Private Key.

Then IPS will encrypt it using the Issuer's Public Key and send it to the issuing bank which will decrypt & validate with its Private Key. The Issuer Bank has to mandatorily decrypt the PIN and/or any other data using HSM only.

For data security, the following classes of information are defined:

1. Sensitive Data - Data such as PIN, passwords etc. are not to be stored and should be transported in encrypted form.

2. Private Data - Data such as SOV Account numbers. This information may be stored by the IPS Participant, but only in encrypted form.
3. Non-Sensitive data - Name, transaction history (amount, timestamp, response code, location, etc.) can be stored in unencrypted form.

3.7. Identity & Account Validation

The following identity data needs to be validated in the messages to ensure trust in the system. In case the data has not been validated, it must be indicated:

Identity Data	Validated By	When	How
Mobile Number	IPS Participant	Customer Registration	Using OTP
	Originator	Account Registration	During first transaction
Customer Name	IPS Participant	Customer Registration	National ID KYC or Bank debit card details verification or any other KYC verification
Account Details - Number, Account Ownership,	IPS Participant using the issuer credentials (captured via common library)	Every time a payment account is added	During first transaction

3.7.1. Protecting Account Details

1. IPS Participants are mandated to use a secure protocol when transmitting sensitive data such as account details from the device to the IPS Participant server.
2. IPS Participants are mandated to safeguard account information within IPS Participant system as per regulatory and the payment card industry (when storing card details) compliance standards.

3.7.2. Protecting Authentication Credentials

1. Trusted common library for credential (IPS-PIN/ATMPIN etc.) capture is provided by IPS. This library needs to be integrated with an IPS Participant application.
2. Authentication credentials are captured and encrypted within the common library. IPS Participant should not capture issuer specific authentication credentials outside the common library.
3. The encrypted credentials are base64 encoded by the common library and given back to IPS Participant application for subsequent transports through IPS.
4. IPS Participant should not log, or store encrypted credentials within any permanent storage.

3.7.3. Protecting against Phishing

The following techniques may be used to protect against phishing:


1. IPS participants should ensure that their applications have anti phishing protection.
2. IPS participants should also have adequate awareness programs for their customers.

Message Security, Trust, and Non-Reputability

1. Every message within the unified system must be digitally signed.
2. Every message has a unique transaction ID (that spans across the organizations for the same transaction) and a unique message ID for every request-response pair.
3. All APIs must be done over a secure channel (HTTPS).
4. Auditing transaction (no sensitive data) data as per the regulatory requirements.

3.8. Registration Flow

3.8.1. Device Binding

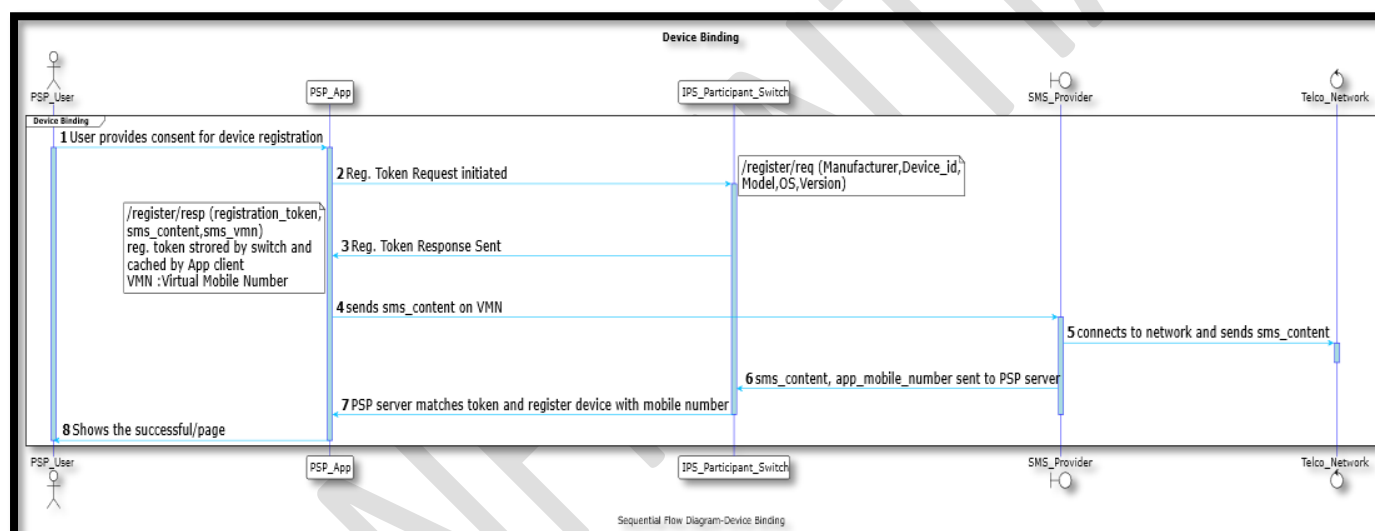

Steps involved in Device Binding:

1. The user opens the IPS-enabled PSP app and provides explicit consent to initiate device registration for IPS services.
2. The IPS Participant PSP app sends a device registration request to the IPS Participant Switch. This request includes device-specific metadata such as:
 - Manufacturer
 - Device ID
 - Model
 - OS and version
3. The IPS Participant Switch processes the request and responds with a registration token, along with:


“sms_content”: a pre-formatted SMS message

“sms_vmn”: a Virtual Mobile Number (VMN) to which the SMS should be sent

Note: The registration token is securely stored by the PSP Switch and temporarily cached by the IPS Participant app.

4. The IPS Participant app automatically sends the `sms\_content` to the provided `sms\_vmn` using the device's SMS service.
5. The SMS is routed through the SMS Provider, which connects to the Telco Network to deliver the message.
6. The SMS Provider forwards the received `sms\_content` along with the mobile number of the device (retrieved from the network) to the IPS Participant Switch.
7. The IPS Participant Switch validates the received SMS content and matches it with the previously issued registration token. Upon successful validation, the device is bound to the mobile number and registered for IPS services.
8. The IPS Participant app receives confirmation of successful device binding and displays a successful screen to the user.

3.8.2. Alias Creation at IPS Participant PSP

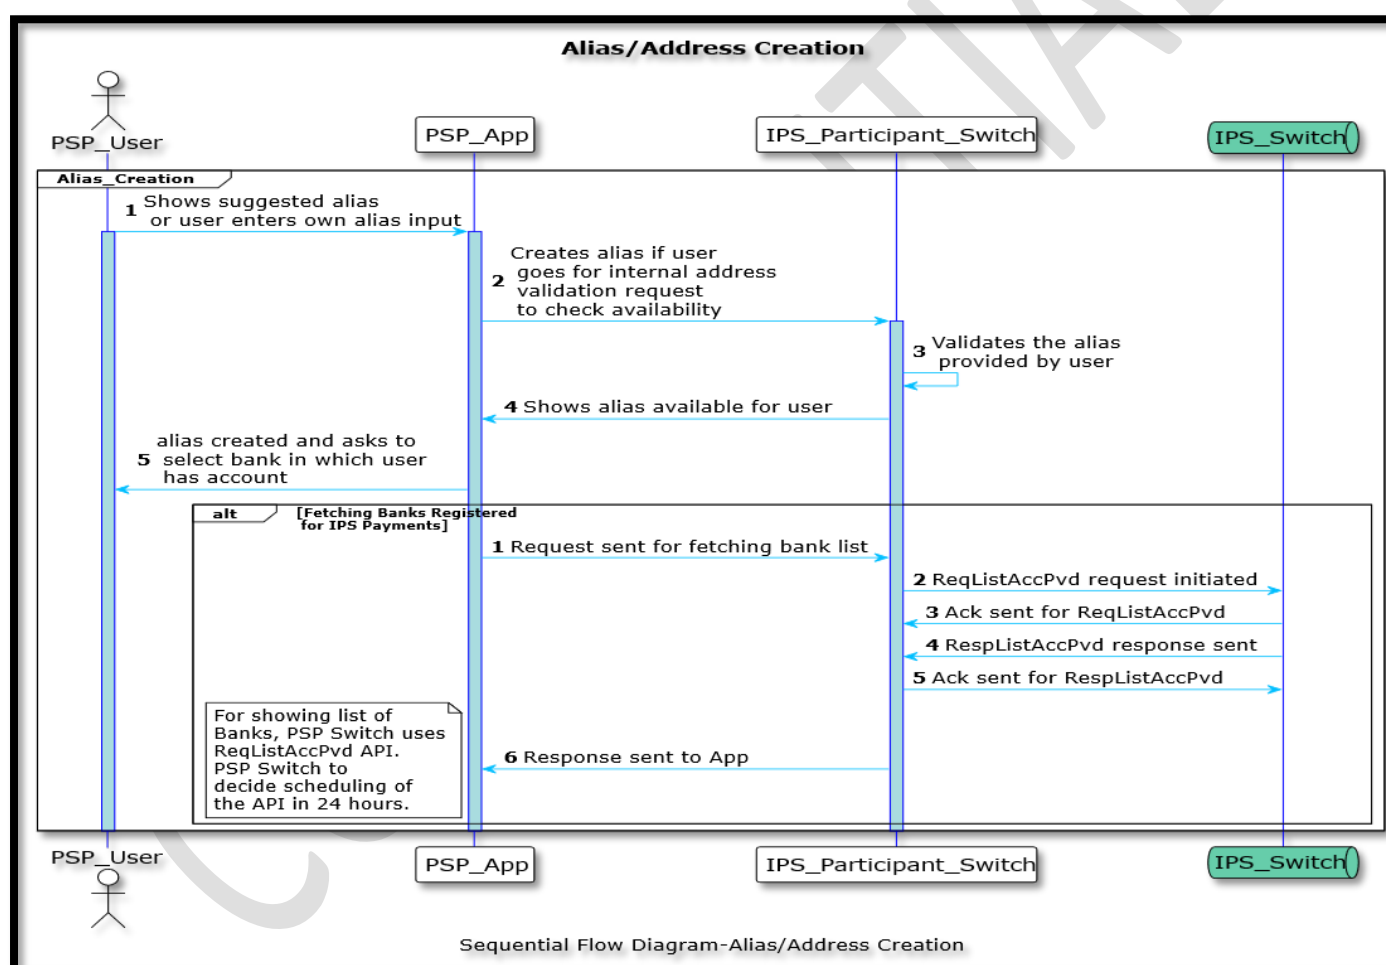


Steps for creation of full form of alias:

1. The user opens the IPS-enabled PSP app, where the app either displays a list of suggested aliases or allows the user to manually enter a preferred alias.
2. Once the user selects or enters a full form of alias, the IPS Participant app initiates an internal API request to the IPS Participant Switch to check the availability of the entered alias.

3. IPS Participant switch checks whether the alias is present in their system or not, if not available means alias is available for the user.
4. The IPS Participant app notifies the user that the alias has been successfully created and prompts the user to select a SoV provider where they hold an account to link with the newly created alias.
5. Further in later step the list of available SoV providers is fetched using the “ReqListAccPvd” API by the IPS Participant Switch, which helps the user choose the appropriate SoV provider for account linking.

3.8.3. Listing Accounts

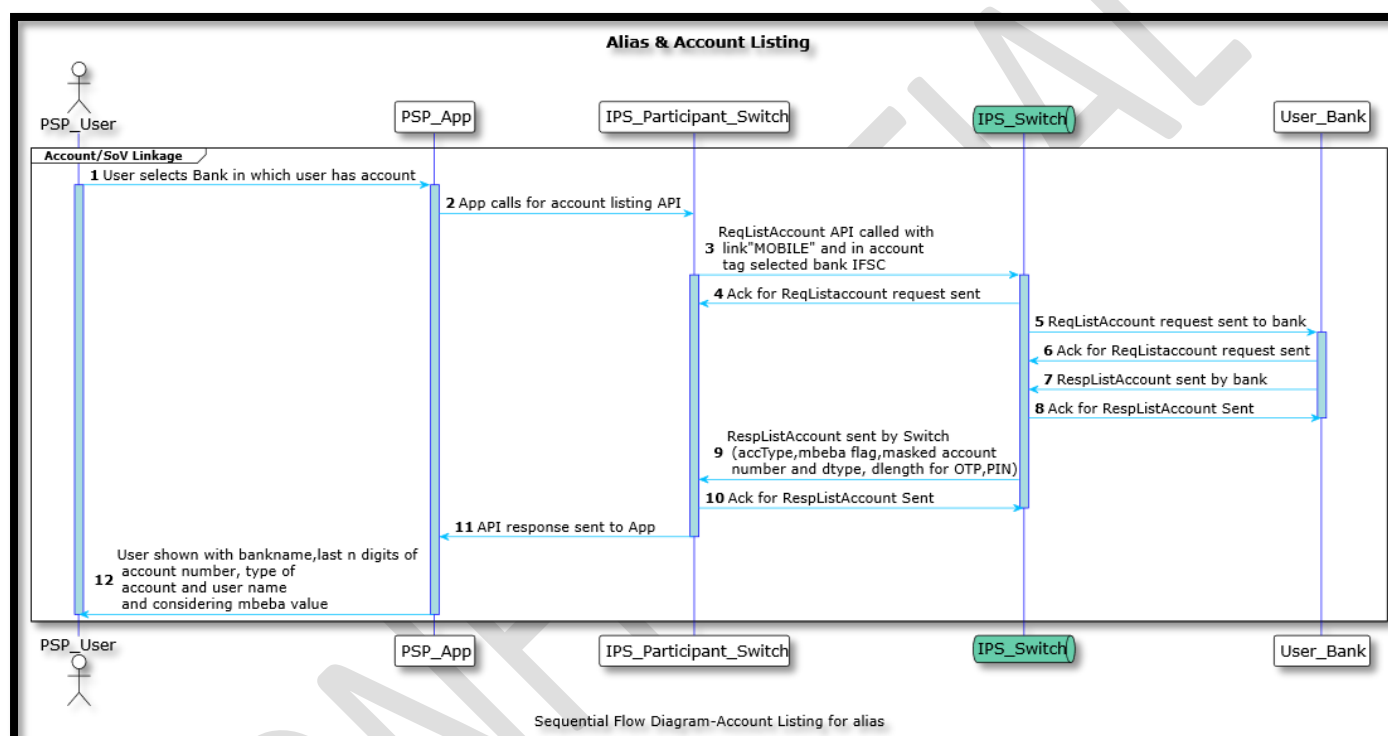

Steps for Listing of Account for created alias:

1. PSP User selects the bank in which the user has an account in the PSP App.
2. PSP App calls the account listing API to the IPS Participant Switch.
3. IPS Participant Switch calls the `ReqListAccount` API to the IPS Switch with link type **“MOBILE”** and the selected bank IFSC in the account tag.
4. IPS Switch acknowledges the `ReqListAccount` request to the IPS Participant Switch.
5. IPS Switch sends the `ReqListAccount` request to the User Bank.
6. User Bank acknowledges the `ReqListAccount` request to the IPS Switch.
7. User Bank sends the `ResplistAccount` response to the IPS Switch.
8. IPS Switch acknowledges the `ResplistAccount` response to the User Bank.
9. IPS Switch sends the `ResplistAccount` response to the IPS Participant Switch, including:
 - Account type(SAVINGS, BASIC, WALLET,)
 - mbeba flag (Indicates whether PIN set or not SoV provider)

- aeba flag (Indicates whether National ID stored at SoV end)
- Masked account number
- dtype and dlength for OTP/PIN type and length configuration

10. IPS Participant Switch acknowledges the `RespListAccount` response to the IPS Switch.

11. IPS Participant Switch sends the API response to the PSP App.


12. PSP App displays to the PSP User:

- Bank name
- Last N digits of account number
- Type of account
- User name
- mbeba value
- aeba value

Note:

- If the mbeba flag value is “N”, it means the IPS PIN is not set and proceed with the Set PIN journey. The value “Y” means the IPS pin is already set by the user.
- National Id will also be returned by the issuing bank, only if National Id consent (aadhaarConsent field=”Y”) is given by the customer.
- IPS will send only the masked National Id number (last 6 digits of National Id number) to the list account initiating PSP. If ‘aeba’ flag is Y, and if masked National Id number is returned then the PSP app will ask the customer to input the last 6 digits of National Id number and verify it against the masked National Id number provided by IPS to allow customer to set/reset IPS PIN.

3.8.4. Set/Reset IPS PIN (Using Card- For Account)

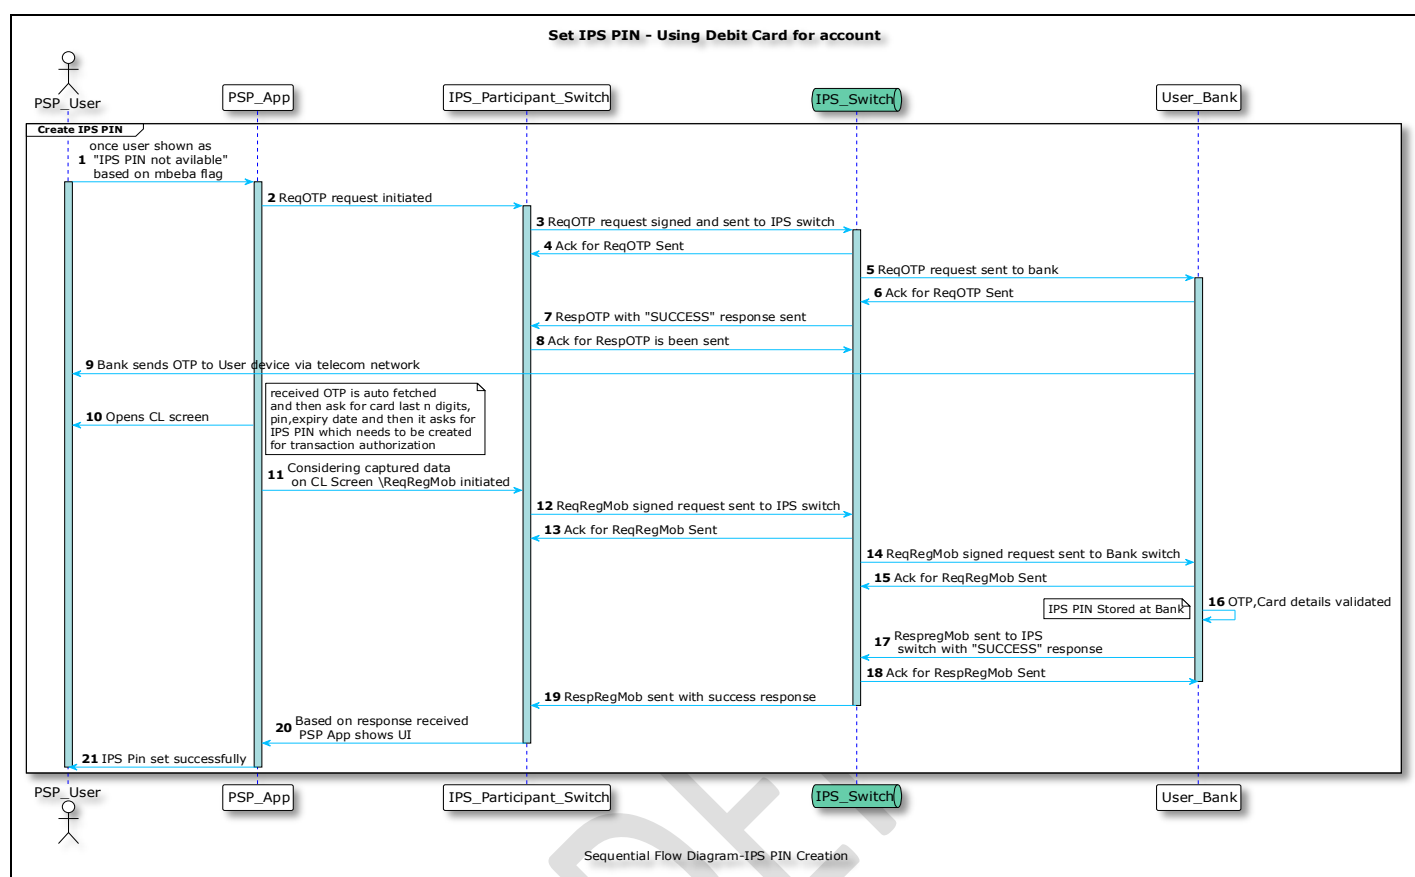

Steps for the IPS PIN creation:

1. PSP User sees the message “IPS PIN not available” on the PSP App based on the mbeba flag.
2. PSP App initiates a `ReqOTP` request to the IPS Participant Switch.
3. IPS Participant Switch signs and sends the `ReqOTP` request to the IPS Switch.
4. IPS Switch acknowledges the `ReqOTP` request to the IPS Participant Switch.
5. IPS Switch sends the `ReqOTP` request to the User Bank.
6. User Bank acknowledges the `ReqOTP` request to the IPS Switch.
7. IPS Switch sends a `RespOTP` response with “SUCCESS” to the IPS Participant Switch.
8. IPS Participant Switch sends an acknowledgement for RespOTP request received from IPS switch.
9. User Bank sends the OTP to the PSP User’s device via the telecom network.
10. PSP App opens the Card Linking (CL) screen.

Note: The OTP is auto fetched, and the app asks for card last N digits, PIN, expiry date, and then prompts the user to create an IPS PIN for transaction authorization.

The entered data above will be encrypted by CL using the IPS HSM public key and encoded with the Base64 encoder.

11. PSP App initiates a `ReqRegMob` request considering the captured data on the CL screen.
12. IPS Participant Switch signs and sends the `ReqRegMob` request to the IPS Switch.

Note: IPS switch decode the data (In Cred Block) using Base64 Decoder and decrypted using the IPS HSM Private Key. Again, the data will be encrypted using Issuer HSM public key and encoded with Base64 encoder.

13. IPS Switch acknowledges the `ReqRegMob` request to the IPS Participant Switch.

14. IPS Switch sends the signed `ReqRegMob` request to the User Bank.

Note: Issuer banks decode the encrypted data (In Cred Block) using Base64 Decoder and decrypt the data using Issuer HSM Private key and validate.

15. User Bank acknowledges the `ReqRegMob` request to the IPS Switch.

16. User Bank validates OTP and card details.

Note: IPS PIN is stored at the bank.

17. User Bank sends a `RespRegMob` response with "SUCCESS" to the IPS Switch.


18. IPS Switch acknowledges the `RespRegMob` response to the User Bank.

19. IPS Switch sends the `RespRegMob` response with success status to the IPS Participant Switch.

20. IPS Participant Switch sends the response to the PSP App, which updates the UI.

21. PSP App displays "IPS PIN set successfully" to the PSP User.

3.8.5. Set/Reset IPS PIN (Using National ID - For Account)

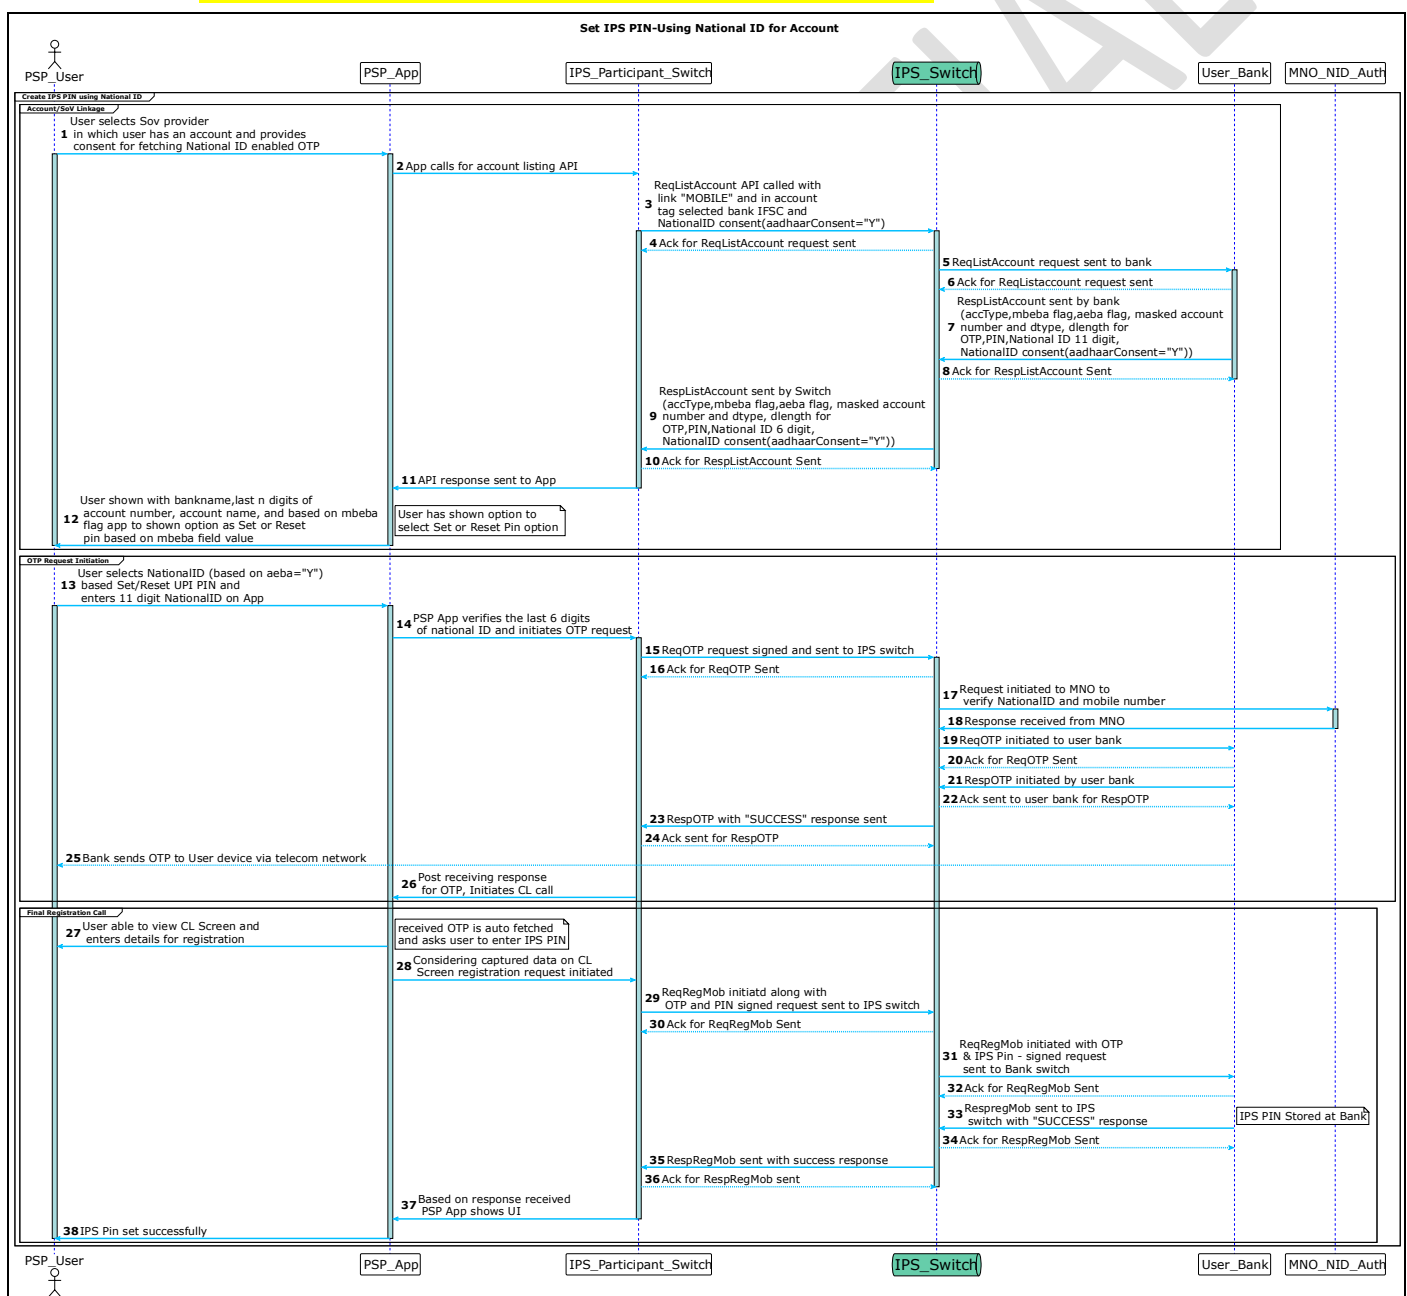

1. User Interface triggers SoV provider selection and consent for National ID-based OTP retrieval.
2. PSP Application invokes the Account Listing API to the IPS Participant switch.
3. IPS Participant Switch forwards the request with required parameters (mobile link, IFSC, National ID consent) to IPS Switch.
4. IPS Switch acknowledges the account listing request.
5. IPS Switch routes the request to the designated User Bank.
6. User Bank acknowledges receipt of the account listing request.
7. User Bank responds with account metadata including flags, masked account number, and National ID attributes.
8. IPS Switch sends acknowledgement for the account response to the bank.
9. IPS Switch forwards the account response to the IPS Participant Switch with updated National ID format.
10. IPS Participant Switch acknowledges the response from IPS Switch.
11. IPS Participant Switch returns the account listing response to the PSP Application.
12. PSP Application renders account details and PIN setup options to the user.
13. User Interface displays Set/Reset PIN option based on account flags.
14. User Interface captures National ID input and triggers Set/Reset PIN flow.
15. PSP Application validates last 6 digits of National ID received from IPS Switch and initiates OTP request to IPS Participant Switch.

Note: If PSP application fails to validate the National ID entered by user then PSP App shows the relevant error to the PSP User and should not initiate OTP request.

16. IPS Participant Switch sends signed OTP request to IPS Switch.
17. IPS Switch acknowledges the OTP request.
18. IPS Switch initiates identity verification with the MNO/NID(National ID) Authentication service.
19. MNO/NID(National ID) Auth Service returns verification result to IPS Switch.

Note: If IPS Switch didn't receive successful response from MNO service, no OTP request will be initiated to issuer and IPS Switch must send response for OTP request as "failure".

20. IPS Switch initiates OTP request to the User Bank.
21. User Bank acknowledges the OTP request.
22. User Bank sends OTP response to IPS Switch.
23. IPS Switch acknowledges the OTP response to the bank.
24. IPS Switch forwards OTP response with success status to IPS Participant Switch.
25. IPS Participant Switch acknowledges the OTP response.
26. User Bank delivers OTP to the user via telecom network.
27. IPS Participant Switch triggers Customer Login (CL) screen on the PSP Application.
28. User Interface displays CL screen for user to enter registration details.
29. User Interface auto-fetches OTP and prompts user to enter IPS PIN.

Note: The entered data above will be encrypted by CL using the IPS HSM public key and encoded with the Base64 encoder.

30. PSP Application sends registration request with captured data to IPS Participant Switch.
31. IPS Participant Switch sends signed registration request (` ReqRegMob `) with OTP and PIN to IPS Switch.
32. IPS Switch acknowledges the registration request.


Note: IPS switch decode the data (In Cred Block) using Base64 Decoder and decrypted using the IPS HSM Private Key. Again, the data will be encrypted using Issuer HSM public key and encoded with Base64 encoder.

33. IPS Switch forwards the registration request to the User Bank.
34. User Bank acknowledges the registration request.

Note: Issuer banks decode the encrypted data (In Cred Block) using Base64 Decoder and decrypt the data using Issuer HSM Private key and validate.

35. User Bank sends successful registration response (`RespRegMob`) to IPS Switch.
36. IPS PIN is securely stored at the User Bank.
37. IPS Switch acknowledges the registration response to the bank.
38. IPS Switch → IPS Participant Switch → PSP Application → User Interface: Final response propagated confirming successful IPS PIN setup.

3.8.6. Set/Reset IPS PIN (Using WALLET PIN – For Wallet)

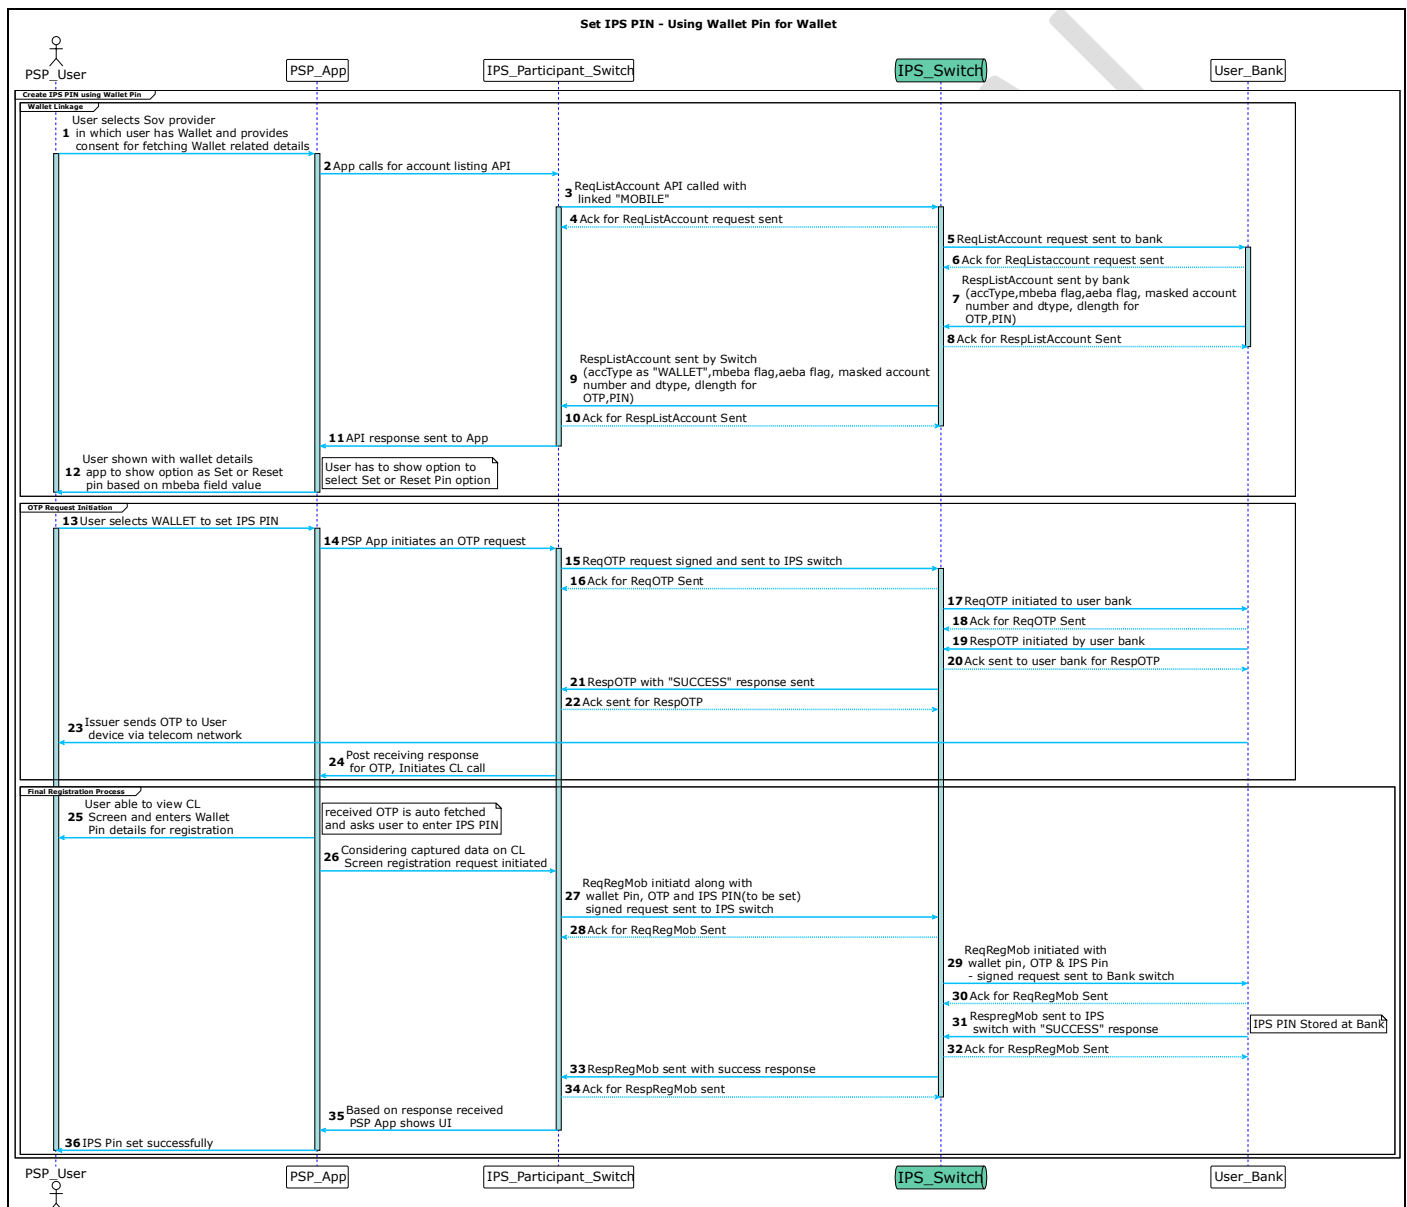

WALLET Linkage

1. User selects SoV provider in which user has Wallet and provides consent for fetching Wallet related details via PSP App.
2. PSP App initiates account listing API call to IPS Participant Switch.

3. IPS Participant Switch sends `ReqListAccount` with linked "MOBILE" to IPS Switch.
 4. IPS Switch acknowledges `ReqListAccount` request to IPS Participant Switch.
 5. IPS Switch forwards `ReqListAccount` request to User Bank.
 6. User Bank acknowledges `ReqListAccount` request to IPS Switch.
 7. User Bank sends `RespListAccount` with appropriate details to IPS Switch.
- Note: The masked account number and account reference number will consist of mobile number in case accType as WALLET.
8. IPS Switch acknowledges `RespListAccount` to User Bank.
 9. IPS Switch sends `RespListAccount` to IPS Participant Switch with.
 10. IPS Participant Switch acknowledges `RespListAccount` to IPS Switch.
 11. IPS Participant Switch sends API response to PSP App.
 12. PSP App shows wallet details to user and displays Set or Reset PIN option based on `mbeba` field.
 13. User sees option to Set or Reset PIN.

OTP Request Initiation

14. User selects WALLET to set IPS PIN.
15. PSP App initiates OTP request to IPS Participant Switch.
16. IPS Participant Switch sends signed `ReqOTP` to IPS Switch.
17. IPS Switch acknowledges `ReqOTP` to IPS Participant Switch.
18. IPS Switch sends `ReqOTP` to User Bank.
19. User Bank acknowledges `ReqOTP` to IPS Switch.
20. User Bank sends `RespOTP` to IPS Switch.
21. IPS Switch acknowledges `RespOTP` to User Bank.
22. IPS Switch sends `RespOTP` with "SUCCESS" response to IPS Participant Switch.
23. IPS Participant Switch acknowledges `RespOTP` to IPS Switch.
24. Issuer (User Bank) sends OTP to user device via telecom network.
25. IPS Participant Switch initiates CL call to PSP App.
26. PSP App shows CL screen to user for PIN entry.
27. User enters Wallet PIN and IPS PIN on CL screen.


Note: OTP received is auto-fetched. The entered data will be encrypted using IPS HSM public key and encoded with Base64 encoder.

Final Registration Process

28. PSP App sends registration request to IPS Participant Switch with captured CL screen data.
 29. IPS Participant Switch sends signed `ReqRegMob` to IPS Switch with Wallet PIN, OTP, and IPS PIN.
 30. IPS Switch acknowledges `ReqRegMob` to IPS Participant Switch.
- Note: IPS Switch decodes the data (Cred Block) using Base64 Decoder and decrypts using IPS HSM Private Key. Then re-encrypt using Issuer HSM public key and encodes with Base64 encoder.
31. IPS Switch sends `ReqRegMob` to User Bank.
 32. User Bank acknowledges `ReqRegMob` to IPS Switch.
- Note: Issuer Bank decodes encrypted data (Cred Block) using Base64 Decoder and decrypts using Issuer HSM Private Key for validation.
33. User Bank sends `RespRegMob` with "SUCCESS" response to IPS Switch.
 34. IPS PIN is securely stored at Issuer Bank.
 35. IPS Switch acknowledges `RespRegMob` to User Bank.
 36. IPS Switch sends `RespRegMob` to IPS Participant Switch → PSP App → User (IPS PIN setup)

successful).

3.8.7. Change IPS PIN

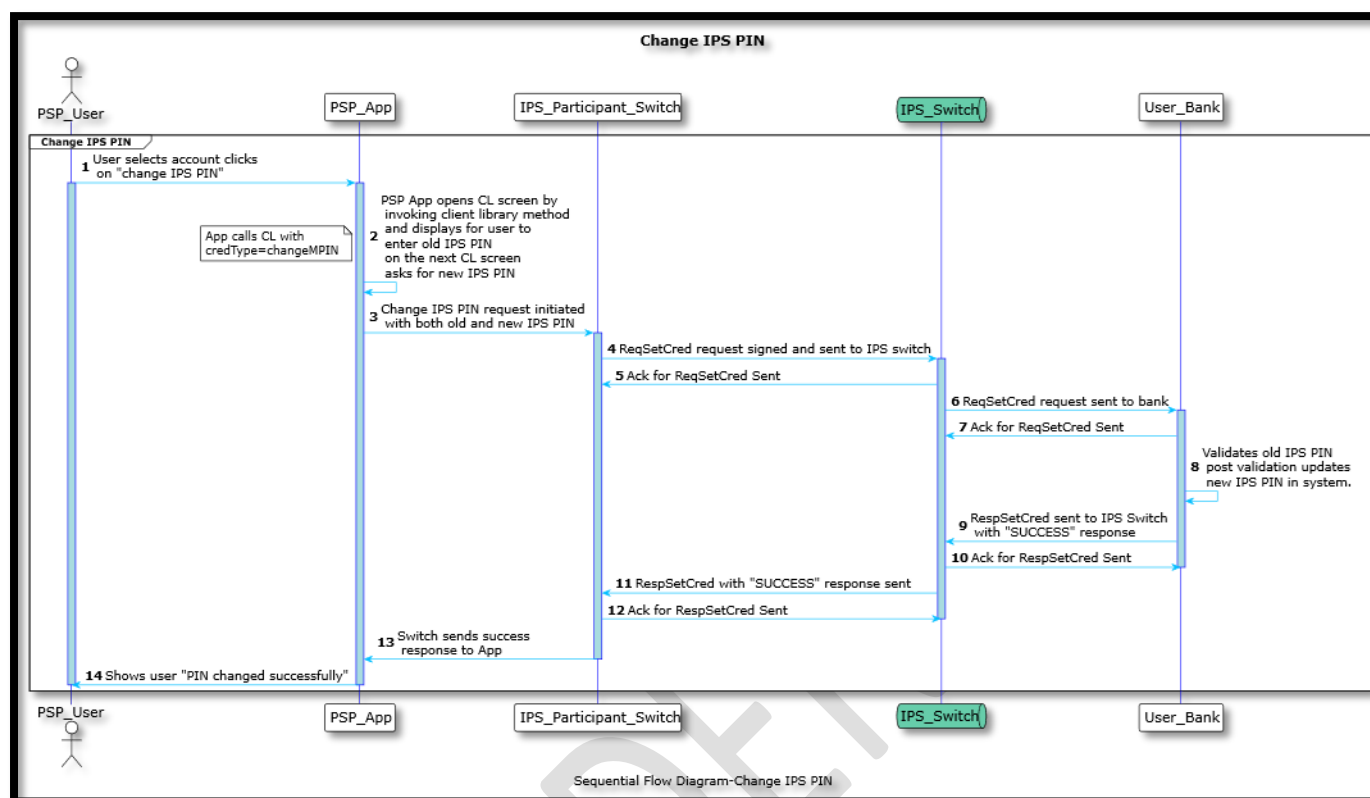

Steps for changing the IPS PIN process:

1. PSP User selects the account and clicks on "Change IPS PIN" in the PSP App.
2. PSP App opens the Card Linking (CL) screen by invoking the client library method and displays fields for the user to enter the old IPS PIN, On the next CL screen, the PSP App asks for the new IPS PIN.
Note: App calls CL with `credType=changeMPIN`.
Note: The entered data above will be encrypted by CL using the IPS HSM public key and encoded with the Base64 encoder.
3. PSP App initiates a Change IPS PIN request with both old and new IPS PIN values to the PSP Switch.
4. PSP Switch signs and sends the `ReqSetCred` request to the IPS Switch.
Note: IPS switch decode the data (In Cred Block) using Base64 Decoder and decrypted using the IPS HSM Private Key. Again, the data will be encrypted using Issuer HSM public key and encoded with Base64 encoder.
5. IPS Switch acknowledges the `ReqSetCred` request to the PSP Switch.
6. IPS Switch sends the `ReqSetCred` request to the User Bank.
Note: Issuer banks decode the encrypted data (In Cred Block) using Base64 Decoder and decrypt the data using Issuer HSM Private key and validate.
7. User Bank acknowledges the `ReqSetCred` request to the IPS Switch.
8. User Bank validates the old IPS PIN and, after successful validation, updates the new IPS PIN in its system.
9. User Bank sends a `RespSetCred` response with "SUCCESS" to the IPS Switch.

10. IPS Switch acknowledges the `RespSetCred` response to the User Bank.
11. IPS Switch sends the `RespSetCred` response with "SUCCESS" to the PSP Switch.
12. PSP Switch acknowledges the `RespSetCred` response to the IPS Switch.
13. PSP Switch sends the success response to the PSP App.
14. PSP App displays "PIN changed successfully" to the PSP User.

3.9. Direct Pay (Sender/Payer initiated)

In this flow, the payer initiates a payment transaction, while specifying the recipient. There are 2 sub-flows – when the sender is an individual, or a system (presumably a company).

3.9.1. Person Initiated


The sender uses an application to send money to a receiver by providing sender credentials and receiver/beneficiary "alias". For ex. to pay a friend via a mobile banking application.

3.9.2. System Initiated

The sender system initiates payment, using a digitally signed request. For example, the system generates a daily commission payment to users.

3.9.3. Transaction Flow

3.9.3.1 Validate Payee VPA

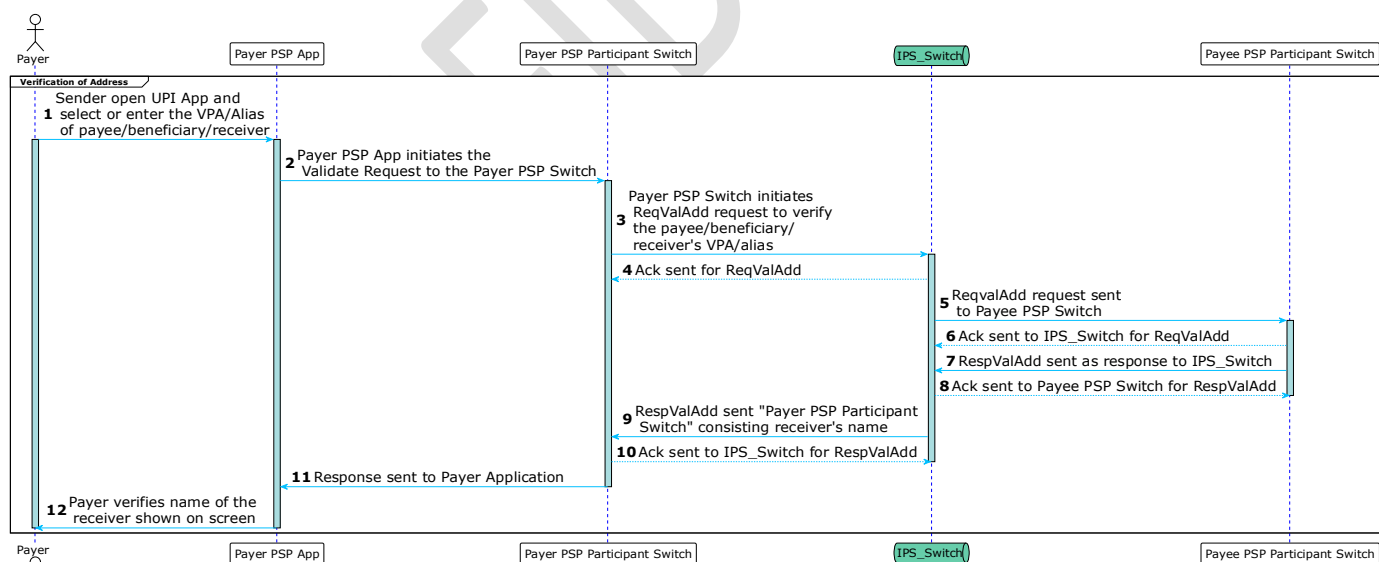


Sequential Flow Diagram - Validate Alias

1. Payer launches the IPS application and selects or enters the alias of the intended payee.
2. Payer PSP App initiates a validation request to the Payer IPS Participant Switch for the entered alias.
3. Payer IPS Participant Payer Switch sends a `ReqValAdd` request to the IPS Switch to validate the payee's alias.
4. IPS Switch acknowledges the `ReqValAdd` request and sends an acknowledgment to the Payer

IPS Participant Switch.

5. IPS Switch forwards the `ReqValAdd` request to the Payee IPS Participant Switch for alias verification.
6. Payee IPS Participant Switch acknowledges the request and sends an acknowledgment to the IPS Switch.
7. Payee IPS Participant Switch sends a `RespValAdd` response to the IPS Switch containing the payee's name and other details.
8. IPS Switch acknowledges the `RespValAdd` response to the Payee IPS Participant Switch.
9. IPS Switch forwards the `RespValAdd` response to the Payer IPS Participant Switch, including the receiver's name.
10. Payer IPS Participant Switch acknowledges the response to the IPS Switch.
11. Payer IPS Participant Switch sends the response to the Payer PSP App.
12. Payer PSP App displays the receiver's name to the payer for verification.


3.9.3.2 Validate Payee Mobile Number

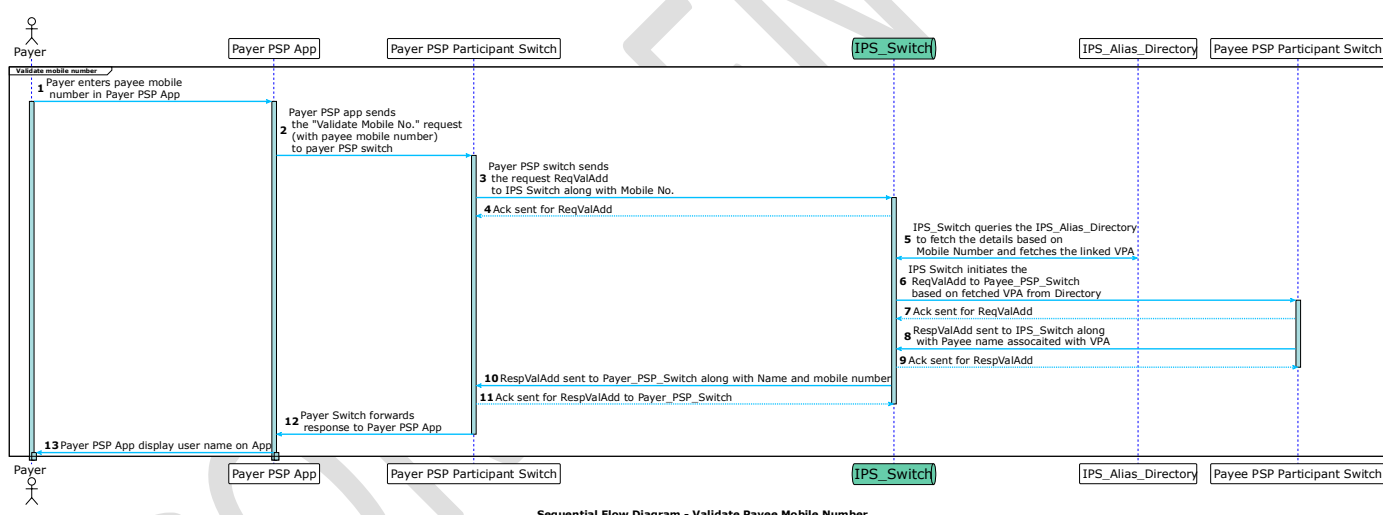

1. Payer enters the payee's mobile number in the Payer IPS Participant App.
2. Payer IPS Participant App sends a mobile number validation request to the Payer IPS Participant Switch.
3. Payer IPS Participant Switch sends a `ReqValAdd` request to the IPS Switch with the mobile number.
4. IPS Switch acknowledges the request and sends an acknowledgment to the Payer IPS Participant Switch.
5. IPS Switch queries the IPS Alias Directory to resolve the mobile number and retrieve the linked alias.
6. IPS Switch sends a `ReqValAdd` request to the Payee IPS Participant Switch using the resolved alias.
7. Payee IPS Participant Switch acknowledges the request to the IPS Switch.
8. Payee IPS Participant Switch sends a `RespValAdd` response to the IPS Switch with the payee's name and other details associated with the alias.


9. IPS Switch acknowledges the response to the Payee IPS Participant Switch.
10. IPS Switch forwards the `RespValAdd` response to the Payer IPS Participant Switch, including the payee's name and mobile number and other details.
11. Payer IPS Participant Switch acknowledges the response to the IPS Switch.
12. Payer IPS Participant Switch forwards the response to the Payer IPS Participant App.
13. Payer IPS Participant App displays the payee's name to the payer for confirmation.

3.9.3.3 Validate Merchant ID (8-Digits)

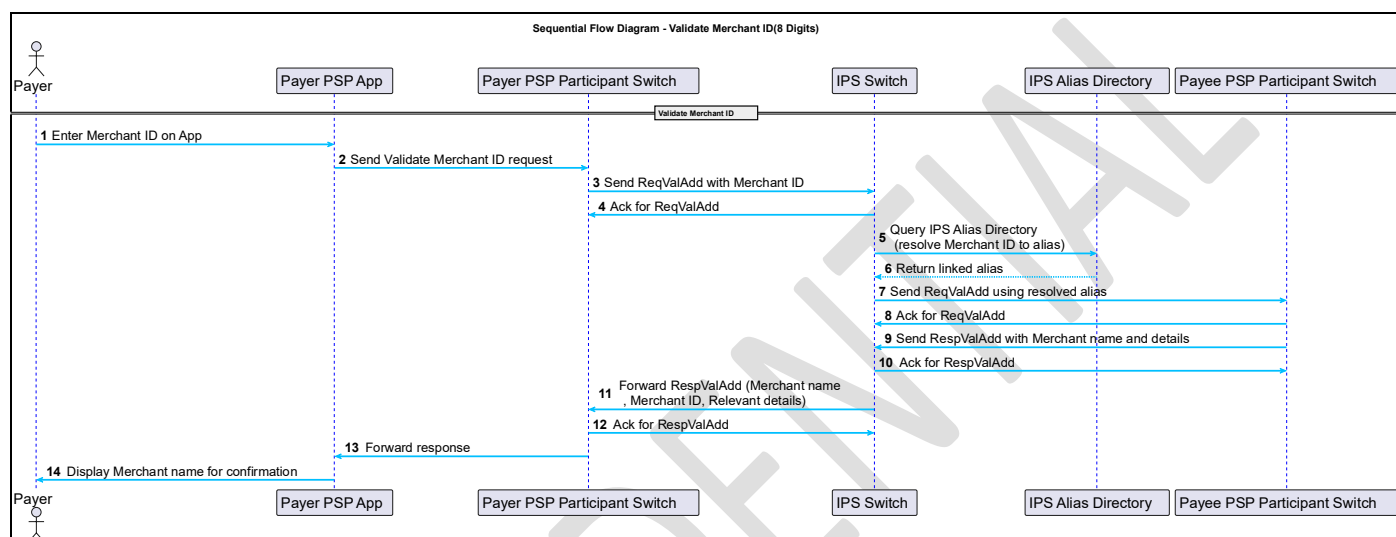

1. Payer enters the Merchant ID on the Payer PSP App.
2. Payer PSP App sends a Merchant ID validation request to the Payer PSP Participant Switch.
3. Payer PSP Participant Switch sends a ReqValAdd request to the IPS Switch with the Merchant ID.
4. IPS Switch acknowledges the request and sends an acknowledgment to the Payer PSP Participant Switch.
5. IPS Switch queries the IPS Alias Directory to resolve the Merchant ID and retrieve the linked alias.
6. IPS Alias Directory returns the linked alias to the IPS Switch.
7. IPS Switch sends a ReqValAdd request to the Payee PSP Participant Switch using the resolved alias.
8. Payee PSP Participant Switch acknowledges the request to the IPS Switch.
9. Payee PSP Participant Switch sends a RespValAdd response to the IPS Switch with the Merchant name and other details associated with the alias.
10. IPS Switch acknowledges the response to the Payee PSP Participant Switch.
11. IPS Switch forwards the RespValAdd response to the Payer PSP Participant Switch, including the Merchant name, Merchant ID, and other relevant details.
12. Payer PSP Participant Switch acknowledges the response to the IPS Switch.
13. Payer PSP Participant Switch forwards the response to the Payer PSP App.
14. Payer PSP App displays the Merchant name to the payer for confirmation.

3.9.3.4 Payment flow:

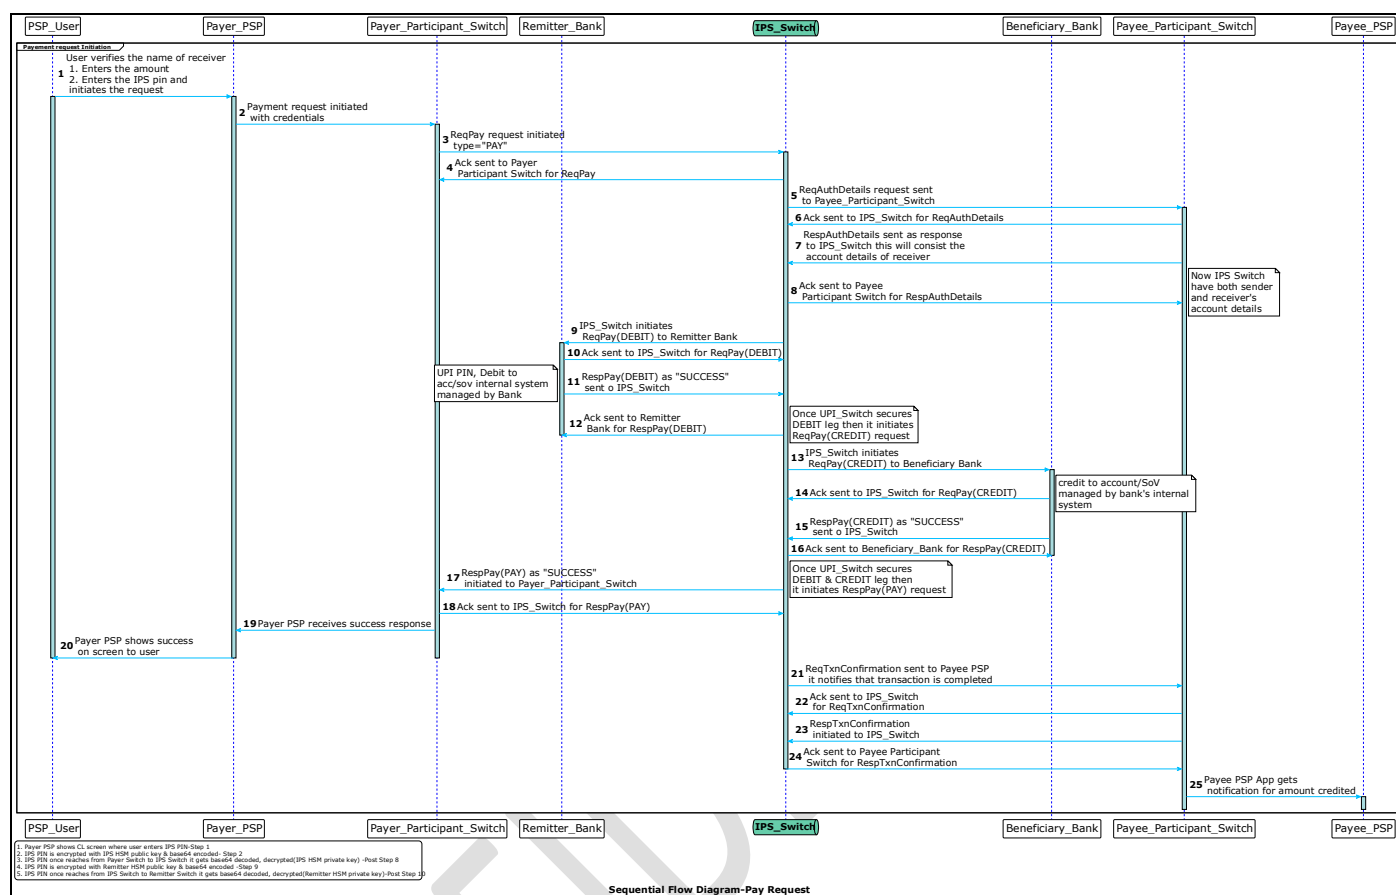

1. PSP User initiates the payment request by verifying the receiver's name, entering the amount, and providing the IPS PIN through the PSP interface.

Note: Common Library in PSP APP encrypts the IPS PIN using IPS HSM public key and encode with base64 encoder.

2. Payer PSP sends the payment request to the Payer IPS Participant Switch, including the user credentials and transaction details.

3. Payer Participant Switch initiates a `ReqPay` request to the IPS Switch with transaction type "PAY".

4. IPS Switch sends an acknowledgment to the Payer Participant Switch confirming receipt of the `ReqPay` request.

5. IPS Switch sends a ReqAuthDetails request to the Payee Participant Switch to retrieve the receiver's account details.

6. Payee Participant Switch acknowledges the ReqAuthDetails request to the IPS Switch.

7. Payee Participant Switch sends a RespAuthDetails response to the IPS Switch containing the receiver's account information.

8. IPS Switch sends an acknowledgment to the Payee Participant Switch for the `RespAuthDetails` response.

Note: IPS will decode the IPS PIN using base64 decoder and then decrypt it using IPS HSM private Key

and again encrypt it using Issuer HSM public Key and encode with base64 encoder.

9. IPS Switch initiates a `ReqPay(DEBIT)` request to the Remitter Bank to debit the payer's account.

10. Remitter Bank acknowledges the debit request to the IPS Switch.

Note: Remitter banks decode the IPS PIN using base 64 decoder and decrypt the IPS pin using its own HSM private key and do the validation.

11. Remitter Bank sends a `RespPay(DEBIT)` response with "SUCCESS" status to the IPS Switch after validating the IPS PIN and debiting the account.

12. IPS Switch sends an acknowledgment to the Remitter Bank for the successful debit response.

Note: Once the debit leg is secured, IPS Switch proceeds to initiate the credit leg of the transaction.

13. IPS Switch initiates a ReqPay(CREDIT) request to the Beneficiary Bank to credit the receiver's account.

14. Beneficiary Bank acknowledges the credit request to the IPS Switch.

15. Beneficiary Bank sends a RespPay(CREDIT) response with "SUCCESS" status to the IPS Switch.

16. IPS Switch sends an acknowledgment to the Beneficiary Bank for the successful credit response.

17. IPS Switch sends a RespPay(PAY) response with "SUCCESS" status to the Payer Participant Switch, indicating that both debit and credit legs are completed.

Note: This response confirms that the transaction is successfully processed end-to-end.

18. Payer Participant Switch acknowledges the RespPay(PAY) response to the IPS Switch.

19. Payer Participant Switch sends the success response to the Payer PSP.

20. Payer PSP displays the success message to the PSP User on the screen.

Transaction Confirmation to Payee:

21. IPS Switch sends a ReqTxnConfirmation request to the Payee Participant Switch to notify that the transaction is completed.

22. Payee Participant Switch acknowledges the transaction confirmation request to the IPS Switch.

23. Payee Participant Switch sends a RespTxnConfirmation response to the IPS Switch.

24. IPS Switch sends an acknowledgment to Payee Participant Switch for the transaction confirmation response.

25. Payee Participant Switch sends a notification to the Payee PSP indicating that the amount has been credited to the receiver's account.

3.10. Failure Scenarios

This section explains how various failure scenarios are handled during the PAY transaction. The transaction flow mentioned above will be considered while describing the failure scenarios.

3.10.1. IPS Payer participant unable to notify the Payer:

In this scenario, when the IPS participants is not able to notify the end customer of the status of the transaction, a mechanism must be put in place by the Payer IPS participant to notify the customer at a later stage. This can be achieved by Payer IPS participant reinitiating the notification message to customer or by providing the customer with an option to check the status of the transaction through his application, or by providing a list of all transactions (with status) in the application.

3.10.2. Response from IPS does not reach IPS Payer/Payee Participant:

In this scenario, when the response sent by IPS does not reach IPS Payer/Payee Participant, the IPS Payer/Payee Participant must have a mechanism to initiate a Check Status API to know the status of the transaction. The IPS Payer/Payee Participant can only initiate the Check Status API to IPS after the

time of Transaction expiry time.

3.10.3. Response from Payee bank does not reach IPS:

In this scenario, when the response sent by Payee Participant does not reach IPS, this transaction will be considered as deemed. Based on the response of check transaction, credit reversal or settlement will be applicable. The updated response will be sent to Payer IPS participant.

3.10.4. Declined Response from Payee bank to IPS:

In this scenario, when the Payee bank responds with a declined response to IPS, IPS will send the reversal request to Payer bank and respond to Payee and SoV Provider with declined response.

3.10.5. Payee bank is not available to IPS:

In this scenario, when the Payee Participant is not available to IPS, IPS will send the reversal request to Payer participant and respond to Payee and Payer participant with declined response.

3.10.6. Declined Response from Payer bank to IPS:

In this scenario, when the Payer bank responds with a declined response to IPS, IPS will respond to Payee and Payer participant with declined response. No credit request will be initiated to Payee participant.

3.10.7. Response from Payer bank does not reach IPS:

In this scenario, when the response sent by a Payer participant does not reach IPS, IPS will time out the transaction. IPS will respond to Payee/Payer participant with timeout response.

3.10.8. Payer bank is not available to IPS:

In this scenario, when the Payer participant is not available to IPS, IPS will respond to Payee and Payer participant with declined response.

3.10.9. Declined Response from IPS Payee Participant to IPS:

In this scenario, when the Payee participant responds with a declined response to IPS, IPS will respond to Payer participant with declined response.

3.10.10. Response from IPS Payee Participant does not reach IPS:

In this scenario, when the response sent by Payee Participant does not reach IPS, IPS will wait for the response till the timeout period. Payee participants may have a mechanism to re-send the response within the timeout period. If IPS does not receive a response within the timeout period, IPS will time out the transaction and respond to IPS Payer participant with a timeout response.

3.10.11. IPS Payee Participant is not available to IPS:

In this scenario, when the IPS Payee Participant is not available to IPS, IPS will respond to Payer participant with declined response.

3.10.12. IPS is not available to Payer IPS Participants:

In this scenario, when IPS is not available to Payer Participant, Payer Participant will have a mechanism to re-initiate the Pay request to IPS.

For a failed/declined preapproved transaction remitter participant should reverse the debit on

receiving the declined response from the IPS.

4. Detail API Specifications

4.1. API Protocol

All APIs are exposed as stateless service over HTTPS. IPS Participant should ensure idempotent behavior for all APIs. Usage of open data format in XML and widely used protocol such as HTTP allows easy adoption by the members. IPS expect a response from the participants. In case of any issue in response, IPS send NACK to participants.

IPS will configure the endpoint URL for each participant while on-boarding on IPS. All the requests and responses will be posted to this URL. IPS must send request/response to only one endpoint which is configured while on boarding the entity. IPS participants must manage the necessary routing and load balancing at their end to send the specific requests internally to their systems.

HTTPS POST method is used while making the API calls.

API input data should be sent to the following URL as XML document using Content-Type "application/xml" or "text/xml".

`https://<host>/<api>/<ver>/urn:txnId:<txnId>`

- host– API server address (Actual production server address will be provided to members at the time of rollout and all API clients should ensure that actual URL is configurable).
- upi– static value denoting the root of all API URL paths under the IPS.
- api– name of the API URL endpoint.
- ver– version of the API. Multiple versions of the same API may be available for supporting gradual migration. As of this specification, default version is "2.0".
- txnId– Transaction id which will be used for load balancing purpose at IPS end.

All APIs have same ack response as given below:

`<upi:Ack xmlns:upi="" api="" reqMsgId="" errCode="" ts=""/>`

- Ack – root element name of the acknowledgement message.
- api– name of the API for which acknowledgement is given out.
- reqMsgId - message ID of the input for which the acknowledgement is given out. err - this denotes any error in receiving the original request message.
- ts - the timestamp of the acknowledgement sent by the receiver.
- Sample for successful ACK is below:

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?><ns2:Ack
  xmlns:ns2="http://npci.org/upi/schema/"
  xmlns:ns3="http://npci.org/cm/schema/" api="ReqHbt"
  reqMsgId="SSFDF53CA09B6434C649A3BCDAD0D339D4C" ts="2024-12-
  05T08:00:41+05:30"/>
```

- Negative acknowledgement (NACK) is provided by IPS. IPS provided the HTTP response code 200 in case of the NACK to IPS participants. Below is the sample for NACK from IPS-to-IPS Participants:

```
<Ack api="ReqChkTxn"
reqMsgId="TRPa392f2f3c96047e9a61d0f6b9f94a39f"
err="VALIDATION_ERR" ts="2025-05-05T13:30:02+05:30">
  <errorMessages>
    <errorCd>X09</errorCd>
    <errorDtl>TXN.ORGTXNDATE SHOULD BE WITHIN 90
    DAYS</errorDtl>
  </errorMessages>
</Ack>
```

Note:

- M/O/C in the API Data Specification Table signifies Mandatory/ Optional/ Conditional field.
- API specifications provided in the respective API Data Specification Table below take precedence over the sample messages captured for the same API. The sample messages provided are for reference and illustration purposes only. For any clarification you may contact Subject Matter Expert (SME).
- If parent field is classified as “Optional” and is populated with the appropriate value, then the underlying child fields with “Mandatory” tag must be populated with correct value by the IPS participants.
- If field is not required to be part of the request as per the specification, then the same can be omitted from the request.
- Typically for all non-financial API’s the timeout is 10 seconds. Similarly for financial API’s the time out is 30 seconds. The end-to-end transaction timeout is 90 seconds.
- Head.msgId in request and Resp.reqMsgId in response, reqMsgId in Ack will be the same.

Below is the list of non-financial APIs (META-API’s) defined in the IPS system.

Sr. No	Non-Financial Names	API Description
1	Heartbeat	This API monitors the IPS system, checks the connection with IPS participants.
2	List PSP	The IPS Operator maintains a list of all registered IPS participants and their details. This API allows IPS participants to request the list of all registered IPS participants for local caching. The data is used to validate the payment alias before initiating any instant payment transaction.
3	List Account Providers	This API allows IPS participants to get a list of all store of value provides providers who are connected by using the IPS. IPS participants maintain the list for registered store of value providers before registering a customer store of value within their application.
4	List Keys	The IPS Operator maintains a list of all public keys for encryption purposes. This API allows IPS participants to request and cache

		the list of public keys of the IPS Operator. The IPS Operator provides the trusted and certified libraries that IPS participant use for credential capture and PKI public key encryption at the time of capture.
5	List Verified Addresses	This API allows IPS participants to request a list of verified alias entries to protect customers from attempts to spoof. Alias of well-known merchants, such as e-commerce players, MNOs and bill payment entities are provided in response list.
6	List Account	This API allows IPS participants to find a list of accounts that are linked to the mobile by a particular store of value provider.
7	Manage Verified Address Entities	This API allows IPS participants to manage and access the common collection of verified alias entries.
8	Validate Address	This API is used by IPS participant to fetch beneficiary name & full form alias.
9	Set Credentials	This API is required to provide a unified channel for setting and changing the IPS PIN across various store of value providers. This feature is critical as customers can easily change the IPS PIN by using the mobile.
10	Mobile Banking Registration	This API allows the customer to set a new IPS PIN for the first time.
11	Check Transaction Status	This API allows the IPS participants to request for the status of the transaction. The IPS participants must request status only after the specified timeout period.
12	OTP Request	This API allows IPS participants to request an OTP for a specific customer from a remitter.
13	Balance Enquiry	This API allows IPS participants to enquire the account balance of a user.
14	Transaction Confirmation	This API will be used to inform the status of the transaction to IPS participants.
15	Get Address	This API shall be used for checking the availability of an ID before creating a new record as well as for fetching status in case of timeout of CREATE/MODIFY/DELETE record.
16	Register Alias Directory	This API will facilitate IPS Mobile Applications to Register/Modify user IDs at the alias directory. Using this API user can create the user ID more than once and can be linked to an active full form alias.
17	Alias Directory Confirmation	Alias Directory will send the notification of Porting of Mobile Number to old IPS participants.

Below is the list of Financial APIs defined in the IPS system.

Sr. No	Financial API Names	API Description
1	Request Pay Details	This is the primary API that is used by the IPS participants to initiate the payment request to the IPS Switch. This API is used for sending back the response of financial transactions that are initiated through the ReqPay API to the IPS participants. For example, Direct Pay or Collect Pay transaction.
2	Request Authentication Details	This API is used to authorize payment and translate IPS participants' specific payment aliases to any of the common global addresses of the customer, such as account numbers that IPS can understand. Following is the request format of the Request Authentication Details API.

CONFIDENTIAL

4.2. Heartbeat API

The IPS platform uses Heartbeat API to check the connectivity and monitor system uptime of the onboarded entities. This API can be initiated by both the parties i.e., IPS and IPS payment participants.

The steps to perform HeartBeat API are as follows:

1. Partner initiates ReqHbt API to IPS.
2. IPS sends a subsequent Ack to the ReqHbt API from partner.
3. IPS sends a RespHbt to partner.
4. Partner sends back an Ack to the RespHbt API from IPS.

Refer Reference Logs [HeartBeat](#)

4.2.1. ReqHbt

Sr. No	Message Item	<XMLTag>	Occurrence	Datatype	Length	M/O/C	Rules
1.1	API Name	<ReqHbt>	1..1	Alphabetic	Fixed	M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min:1 Max:255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	This field indicates the Version of the API	ver	1..1	Numeric	Min:1 Max:6	M	019_Head_Version
2.1.2	This field indicates the Request time set by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	This field indicates the ID of the Organization that created the message	orgId	1..1	Numeric	Min: 1 Max: 20	M	055_OrgId

2.1.4	This field indicates the Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	35	M	021_Head_MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
3.1	This field indicates the Transaction information, carried throughout the system which is visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	This field indicates the Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	35	M	022_Txn_UUID
3.1.2	This field indicates Remarks/ note	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	reference Id	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.4	This field indicates the URL for the transaction	refurl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
3.1.5	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	Hbt
3.1.6	Request generation timestamp	ts	0..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
4.1	Heartbeat Message Tag	<HbtMsg>	1..1	Alphanumeric	Fixed	M	
4.1.1	Heartbeat Message Type	type	1..1	Alphanumeric	Fixed	M	Always pass "ALIVE" In this field.

4.1.2	This field indicates Value of risk evaluation	value	1..1	Code	Fixed	M	Please pass: NA
-------	---	-------	------	------	-------	---	-----------------

Sample API message is given below –

```
<upi:ReqHbt xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI" />
  <Txn id="" note="" refId="" refUrl="" ts="" type="Hbt" />
  <HbtMsg type="ALIVE" value="NA"/>
</upi:ReqHbt>
```

4.2.2. RespHbt

Sr No	Message Item	<XML TAG>	Occurrence	DataType	Length	M/O/C	Rules
1.1	API Name	<RespHbt >	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgId	1..1	Numeric	Min: 1 Max: 20	M	055_OrgId
2.1.4	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	Length: 35	M	021_Head_MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
2.1.6	This denoted Organization Id of the partner.	destinationOrgId	1..1	Numeric	Min: 1 Max: 20	O	

3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.4	URL for the transaction	refurl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
3.1.6	Type of the Transaction	type	1..1	Code	Min:1 Max: 20	M	Value to be passed: "Hbt"
4.1	Response	<Resp>	1..1	Alphabetic	Fixed	M	
4.1.1	Request Message Identifier	reqMsgId	1..1	Alphanumeric	Length = 35	M	
4.1.2	Result of the transaction	result	1..1	Code	Min:1 Max:20	M	SUCCESS FAILURE
4.1.3	Error code if failed	errCode	1..1	Alphanumeric	Min:1 Max:20	C	027_Response_ErrCode

Sample API message is given below –

```
<upi:RespHbt xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI" destinationOrgId="" />
  <Txn id="" note="" refId="" refUrl="" ts="" type="Hbt" />
  <Resp reqMsgId="" result="SUCCESS|FAILURE" errCode="" />
</upi:RespHbt>
```

4.3. Non-Financial APIs

4.3.1. List PSP API

IPS will maintain the list of all registered IPS participants and their details. This API allows the IPS participants to request the list of all registered IPS participants for local caching. This data should be used for validating an alias before initiating the transaction. PSP needs to call this API once a day.

Refer Reference Logs [List PSP](#)

4.3.1.1. ReqListPsp

Complete (not all elements/attributes are required for all transactions) XML input message structure for ReqListPsp API is given below.

Sr No	Message Item	<XML TAG>	Occurrence	DataType	Length	M/O/C	Rules
1.1	API Name	<ReqListPsp >	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgld	1..1	Numeric	Min: 1 Max: 20	M	055_Orgld
2.1.4	Message identifier- used to correlate between request and response	msgld	1..1	Alphanumeric	Length: 35	M	021_Head_Msgld
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID

	originator						
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.4	URL for the transaction	refurl	1..1	Alphanumeric	Min: 1 Max: 99	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
3.1.6	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	ListPsp

Sample API message is given below –

```
<upi:ReqListPsp xmlns:upi="http://npci.org/upi/schema/">
<Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI" />
<Txn id="" note="" refId="" refUrl="" ts="" type="ListPsp" />
</upi:ReqListPsp>
```

4.3.1.2. RespListPsp

Sr No	Message Item	<XML TAG>	Occurrence	Data Type	Length	M/O/C	Rules
1.1	API Name	<RespListPsp >	1..1		Fixed	M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the	orgId	1..1	Numeric	Min: 1	M	055_OrgId

	message				Max: 20		
2.1.4	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	Length: 35	M	021_Head_MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022 Txn UUID
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020 Head ts
3.1.6	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	ListPsp
4.1	Response	<Resp>	1..1	Alphabetic	Fixed	M	
4.1.1	Request Message Identifier	reqMsgId	1..1	Alphanumeric	Length= 35	M	
4.1.2	Result of the transaction	result	1..1	Code	Min:1 Max:20	M	SUCCESS FAILURE
4.1.3	Error code if failed	errCode	1..1	Alphanumeric	Min:1 Max:20	C	027 Response Err Code
5.1	PSP List	<PspList>	1..1	Alphabetic	Fixed	M	
5.1.1	Details related to registered IPS participants	< PspList.Psp>	1..n	Alphabetic	Fixed	M	
5.1.1.1.	Name of the IPS participants	name	1..1	Alphabetic	Fixed	M	

5.1.1.2	Codes defined for the IPS participants	codes	1..n	Alphanumeric		M	Handle of IPS Participant (after): e.g., bon/fnb/wndb
5.1.1.3	Status of the IPS participants if it is active or not	active	1..1	Boolean	Fixed	M	Y/N
5.1.1.4	URL link provided by IPS participants	url	0..n	Alphanumeric		O	URL used during onboarding
5.1.1.5	Name of the SPOC	spocName	0..n	Alphanumeric		O	
5.1.1.6	E-mail of the SPOC	spocEmail	0..n	Alphanumeric		O	
5.1.1.7	Phone Number of the SPOC	spocPhone	0..n	Numeric		O	
5.1.1.8	Last Modified date of the IPS participants information in the IPS system	lastModifiedTs	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
5.2	Version supports	<PspList.Psp.VersionSupported>	1..1	Alphabetic	Fixed	M	
5.2.1	Details of versioning	<PspList.Psp.VersionSupported.Version>	1..n	Alphabetic	Fixed	M	
5.2.1.1	Version Number	no	1..1	Alphanumeric		M	
5.2.1.2	Version descriptions	description	1..1	Alphanumeric		M	
5.2.1.3	Description of mandatory flag	mandatory	1..1	Boolean		M	true/false

Sample API message is given below –

```
<upi:RespListPsp xmlns:upi="http://npci.org/upi/schema/">
<Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI"/>
  <Txn id="" note="" refId="" refUrl="" ts="" type="ListPsp"/>
  <Resp reqMsgId="" result="SUCCESS|FAILURE" errCode=""/>
<PspList>
<Psp name="" codes="" active="Y|N" url="" spocName="" spocEmail="" spocPhone="" lastModifiedTs="">
  <VersionSupported>
```

```

        <Version no="2.0" description="UPI 2.0: ALL TAG LEVEL CHANGES" mandatory="TRUE"/>
    </VersionSupported>
</Psp>
<Psp name="" codes="" active="Y|N" url="" spocName="" spocEmail="" spocPhone="" lastModifiedTs="">
    <VersionSupported>
<Version no="2.0" description="UPI 2.0: ALL TAG LEVEL CHANGES" mandatory="TRUE"/>
    </VersionSupported>
</Psp>
</PspList>
</upi:RespListPsp>

```

4.3.2. List Account Providers API

IPS will maintain the list of all account providers who are connected via IPS. IPS participants should maintain the list and check for registered account providers before registering a customer account within their application.

List Account Provider API will provide the issuer capability to verify ATM PIN for all the registered IPS participants with IPS. IPS participants needs to call this API once a day.

Refer Reference Logs [List Account Providers](#)

4.3.2.1. ReqListAccPvd

Sr No	Message Item	<XML TAG>	Occurrence	Data Type	Length	M/O/C	Rules
1.1	API Name	<ReqListAccPvd >	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of	ts	1..1	ISODatetime	Min: 1	M	020_Head_ts

	the message				Max: 255		
2.1.3	Organization id that created the message	orgId	1..1	Numeric	Min: 1 Max: 20	M	055_OrgId
2.1.4	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	Length: 35	M	021_Head_MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 99	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
3.1.6	Type of the Transaction	type	1..1	Code	Min:1 Max: 20	M	ListAccPvd

Sample API message is given below –

```
<upi:ReqListAccPvd xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI"/>
  <Txn id="" note="" refId="" refUrl="" ts="" type="ListAccPvd" />
</upi:ReqListAccPvd>
```


4.3.2.2. RespListAccPvd

Sr No	Message Item	<XML TAG>	Occurrence	Data Type	Length	M/O/C	Rules
1.1	API Name	<RespListAccPvd >	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgId	1..1	Numeric	Min: 1 Max: 20	M	055_OrgId
2.1.4	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	Length: 35	M	021_Head_MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl

3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020 Head ts
3.1.6	Type of the Transaction	type	1..1	Code	Min:1 Max: 20	M	ListAccPvd
4.1	Response	<Resp>	1..1	Alphabetic	Fixed	M	
4.1.1	Request Message Identifier/	reqMsgId	1..1	Alphanumeric	Length= 35	M	
4.1.2	Result of the transaction	result	1..1	Code	Min:1 Max:20	M	SUCCESS FAILURE
4.1.3	Error code if failed	errCode	1..1	Alphanumeric	Min:1 Max:20	C	027 Response ErrCode
5.1	Account providers List	<AccPvdList>	1..1	Alphabetic	Fixed	M	
5.2	Details of registered Account providers List	<AccPvdList.AccPvd>	1..n	Alphabetic	Fixed	M	
5.2.1	Name of the Account Provider	name	1..1	Alphabetic	Min:1 Max:255	M	
5.2.2	IIN of Account provider	iin	1..n	Numeric		M	IIN is Issuer Identification Number / Bank's Identification number provided by Bank
5.2.3	IFSC	ifsc	1..n	Alphanumeric	Length:1 1	M	The IFSC code of the respective bank should be 11-digits. ex: BWLINA04837
5.2.4	Status of the account provider if it is active or not	active	1..1	Boolean	Length:1	M	Y/N
5.2.5	URL link provided by account provider	url	0..n	Alphanumeric		O	
5.2.6	Name of the SPOC	spocName	0..n	Alphanumeric		O	
5.2.7	E-mail of the SPOC	spocEmail	0..n	Alphanumeric		O	

5.2.8	Phone Number of the SPOC	spocPhone	0..n	Numeric		O	
5.2.9	List of IPS products for which account provider is live	prods	0..n	Alphanumeric		O	
5.2.10	Last Modified date of the account provider information in the IPS system	lastModifiedTs	1..1	ISODateTime	Min: 1 Max: 255	M	020 Head ts
5.2.11	Register format of the account provider information in the IPS system	mobRegFormat	1..1	Alphanumeric	Fixed	M	Value to be passed: “FORMAT1” if SoV provider supporting registration through the Debit Card (Card Number and Expiry Date) for USSD channel only. “FORMAT2” if SoV provider supporting registration through the Debit Card (Card Number and Expiry Date and ATM PIN) for Mobile APP channel only. “FORMAT6” if Sov provider supporting the registration through NationalID using Mobile APP only.

							“FORMAT7” if Sov provider supporting registration through the WALLETPIN (Mobile APP or USSD channel) If the SOV provider supports multiple formats, the value will be passed as a pipe-separated string, for example: FORMAT1 FORMAT2 FORMAT6 FORMAT7.
5.3	Version supports	<AccPvdList.AccPvd .VersionSupported>	1..1	Alphabetic		M	
5.3.1.1	Details of versioning	<AccPvdList.AccPvd .VersionSupported .Version>	1..n	Alphabetic		M	
5.3.1.2	Version Number	no	1..1	Alphanumeric		M	
5.3.1.3	Version descriptions	description	1..1	Alphanumeric		M	
5.3.1.4	Description of mandatory flag	mandatory	1..1	Boolean	Fixed	M	true/false

Sample API message is given below –

```
<upi:RespListAccPvd xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="1.0|2.0" ts="" orgId="" msgId="" prodType="UPI" />
  <Txn id="" note="" refId="" refUrl="" ts="" type="ListAccPvd" />
  <Resp reqMsgId="" result="SUCCESS|FAILURE" errCode="" />
</upi:RespListAccPvd>
```

```

<AccPvdList>
  <AccPvd name="" iin="" ifsc="" active="Y/N" url="" spocName="" spocEmail="" spocPhone=""
  prods="UPI" lastModifiedTs="" mobRegFormat="FORMAT6" >
    <VersionSupported>
      <Version no="2.0" description="UPI 2.0: ALL TAG LEVEL CHANGES" mandatory="true"/>
    </VersionSupported>
  </AccPvd>
  <AccPvd name="" iin="" ifsc="" active="Y/N" url="" spocName="" spocEmail="" spocPhone=""
  prods="UPI" lastModifiedTs="" mobRegFormat="FORMAT1|FORMAT2|FORMAT6|FORMAT7">
    <VersionSupported>
      <Version no="2.0" description="UPI 2.0: ALL TAG LEVEL CHANGES" mandatory="true"/>
    </VersionSupported>
  </AccPvd>
</AccPvdList>
</upi:RespListAccPvd>

```

Note:

1. <! – If mandatory="true", then psp should be live in this root version before going live with next or any child version (2.1, 2.2, ...) -->
2. Below FORMAT will be used for registration:

FORMAT	Channel	Using Card	Using Wallet Pin	National ID
FORMAT1	USSD	Yes (Last six digit and Expiry)	NO	NO
FORMAT2	APP	Yes (Last six digit and Expiry and ATM PIN)	NO	NO
FORMAT6	APP	NO	NO	YES
FORMAT7	APP/USSD	NO	YES	NO

4.3.3. List Keys API

IPS maintains the list of all public keys for encryption. This API allows the IPS Participant to request and cache the list of public keys of IPS. Trusted and certified libraries will be used by IPS Participant for credential capture and PKI public key encryption at capture time. These libraries will be provided by IPS.

Refer Reference Logs [List Keys](#)

4.3.3.1. ReqListKeys

Sr No	Message Item	<XML TAG>	Occurrence	DataType	Length	M/O/C	Rules
1.1	API Name	<ReqListKeys>	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max:255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODatetime	Min: 1 Max:255	M	020_Head_ts
2.1.3	Organization id that created the message	orgId	1..1	Numeric	Min: 1 Max: 20	M	055_OrgId
2.1.4	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	Length: 35	M	021_Head_MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
2.1.6	Pagesize	pageSize	0..1	Numeric	Length:5	O	
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3./1.1	Unique Identifier of the	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID

	transaction across all entities, created by the originator						
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 99	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
3.1.6	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	ListKeys GetToken ListPSPKeys
3.1.7	pspOrgId	pspOrgId	0..1	Numeric	XXXX	O	
3.1.8	Common Library Version	clVersion	0..1	Alphanumeric	Fixed Length =15	C	This field will be mandatory when type="ListKeys" else optional The clVersion field will follow an alphanumeric format with validation structured as: clVersion-subVersion-expiryOfPublicKey Each component is separated by a hyphen ('-'). A sample value along with a

							detailed explanation has been included in the Common Library document for clarity.
4.1	Cred tag	<Creds>	0.1	Alphabetic	Fixed	C	It is Encrypted value provided by Common Library. Entire Creds block will be used if type= GetToken else not required
4.1.1	Cred details	<Creds.Cred>	1.n	Alphabetic	Fixed	M	
4.1.1.1	Cred type	type	1.1	Alphabetic	Fixed	M	"Challenge"
4.1.1.2	Cred Subtype	subType	1.1	Alphabetic	Fixed	M	initial reset rotate
4.1.2	Data for Cred	<Creds.Cred.data>	1.1	Alphabetic	Fixed	M	
4.1.2.1	Code for Cred	code	1.1	Alphabetic	Fixed	M	
4.1.2.2	Key date	ki	1.1	Alphanumeric	Length:8	M	format is yyyyymmdd

Sample API message is given below –

```
<upi:ReqListKeys xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI" pageSize="5000" />
  <Txn id="" note="" refId="" refUrl="" ts="" type="ListKeys|GetToken|ListPSPKeys" pspOrgId="" />
  <Creds>
    <Cred type="challenge" subType="initial|reset|rotate">
      <data code="" ki="">
      </data>
    </Cred>
  </Creds>
</upi:ReqListKeys>
```

Note :

1. Type: <! – If type="ListPspKeys", the field "pspOrgId" is used to get the public signed intent key of the respective psp involved in signed intent call. It is an optional field. If pspOrgId is not populated, IPS will provide the IPS participants signed intent keys. Psp should fire Reqlist keys once in a day->
2. *pageSize* : <! — the default page size will be 1000, if psp wants to change they can change the required page value between min="1000" to max="10000" -- >

4.3.3.2. RespListKeys

Sr No	Message Item	<XML TAG>	Occurrence	DataType	Length	M/O/C	Rules
1.1	API Name	<RespListKeys >	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODatetime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgId	1..1	Numeric	Min: 1 Max: 20	M	055_OrgId
2.1.4	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	Length: 35	M	021_Head_MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
2.1.6	Page record start count	pageRecStart	0..1	Numeric	Min:1 Max:5	O	
2.1.7	Page record end count	pageRecEnd	0..1	Numeric	Min:1 Max:5	O	
2.1.8	Total no.of.pages	pageTotal	0..1	Numeric	Min:1 Max:5	O	

2.1.9	pageSeqNum	pageSeqNum	0..1	Numeric	Min:1 Max:5	O	
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODatetime	Min: 1 Max: 255	M	020_Head_ts
3.1.6	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	ListKeys GetToken ListPSPKeys
3.1.7	pspOrgId	pspOrgId	0.1			O	
4.1	Response	<Resp>	1..1	Alphabetic	Fixed	M	
4.1.1	Request Message Identifier	reqMsgId	1..1	Alphanumeric	Length= 35	M	
4.1.2	Result of the transaction	result	1..1	Code	Min: 1 Max: 20	M	SUCCESS FAILURE
4.1.3	Error code if failed	errCode	0..1	Alphanumeric	Min: 1 Max:20	C	027_Response_ErrCode
5.1	List of Public Keys of Account providers	<KeyList>	1..1	Alphabetic		M	
5.2	Details related to Public Keys	<KeyList.key>	1..n	Alphabetic		M	For IPS Keys, It's "NPCI" and for PSP keys it's OrgId assigned to the PSP at the time of onboarding

5.2.1	Account provider code	code	1..1	Alphanumeric		M	For IPS Keys, It's "NPCI" and for PSP keys it's OrgId assigned to the PSP at the time of onboarding
5.2.2	Owner of the Key	owner	1..1	Alphabetic	Fixed	M	NPCI
5.2.3	Type of the Key	type	1..1	Alphabetic	Fixed	M	PKI,CLF, SIGNEDINTENT
5.2.4	Key Index Date	ki	1..1	Alphanumeric	Length: 8	M	Format is yyyyymmdd
5.2.5	Base64 encoded certificate	<KeyList .key.keyValue>	1..1	Alphanumeric		M	

Sample API message is given below –

```
<upi:RespListKeys xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI" pageSeqNum="" pageRecStart="1"
    pageRecEnd="" pageTotal="" />
  <Txn id="" note="" refId="" refUrl="" ts="" type="ListKeys|GetToken|ListPSPKeys"
    pspOrgId="" />
  <Resp reqMsgId="" result="SUCCESS|FAILURE" errCode="" />
  <keyList>
    <key code="NPCI" type="PKI" owner="" ki="yyyyymmdd">
      <keyValue>base64 encoded certificate</keyValue>
    </key>
    <key code="NPCI" type="CLF" owner="" ki="yyyyymmdd">
      <keyValue>Token|Encrypted/base64 encoded certificate</keyValue>
    </key>
    <key code="" type="" owner="" ki="yyyyymmdd">
      <keyValue>Token|Encrypted/base64 encoded certificate</keyValue>
    </key>
    <key code="" type="" owner="" ki="yyyyymmdd">

```

```

        <keyValue>Token|Encrypted/base64 encoded certificate</keyValue>
    </key>
</keyList>
</upi:RespListKeys>

```

Note:

1. Page size, pageRecStart, pageRecEnd & pageTotal only applicable for ver 2.0 and above
2. pageTotal : <! — for e.g. if records are 10,000 & pageTotal="2" for, then IPS participant receives 2 RespListKeys from IPS -->

4.3.4. List Verified Address Entries API

IPS offers a mechanism to protect customers from attempts to spoof well-known merchants.

Refer Reference Logs [List Verified Address Entries](#)

4.3.4.1. ReqListVae

Sr No	Message Item	<XML TAG>	Occurrence	DataType	Length	M/O/C	Rules
1.1	API Name	<ReqListVae>	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODatetime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgld	1..1	Numeric	Min: 1 Max: 20	M	055_Orgld
2.1.4	Message identifier- used to correlate	msgld	1..1	Alphanumeric	Length:	M	021_Head_Msgld

	between request and response				35		
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
2.1.6	Pagesize	pageSize	0..1	Numeric	Length: 5	C	By default, the UPI like system provides the 1000 records, if PSP wants more records than PSP needs to populate this field with mentioned above value.
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022 Txn UUID
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
3.1.6	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	ListVae

Sample API message is given below –

```
<upi:ReqListVae xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI" pageSize="1000"/>
  <Txn id="" note="" refId="" refUrl="" ts="" type="ListVae"/>
</upi:ReqListVae>
```

Comments:

1. pageSize: <! — The default page size will be 1000, if IPS participant wants to change they can change the required page value between min="1000" to max="10000" -- >

4.3.4.2. RespListVae

Sr No	Message Item	<XML TAG>	Occurrence	DataType	Length	M/O/C	Rules
1.1	API Name	<RespListVae>	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODatetime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgId	1..1	Numeric	Min: 1 Max: 20	M	055_OrgId
2.1.4	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	Length: 35	M	021_Head_MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
2.1.6	Page record start count	pageRecStart	0..1	Numeric	Min:1 Max:5	O	
2.1.7	Page record end count	pageRecEnd	0..1	Numeric	Min:1 Max:5	O	

2.1.8	Total no.of.pages	pageTotal	0..1	Numeric	Min:1 Max:5	O	
2.1.9	pageSeqNum	pageSeqNum	0..1	Numeric	Min:1 Max:5	O	
3.1	Transaction information on, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022 Txn UUID
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refld	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020 Head ts
3.1.6	Type of the Transaction	type	1..1	Code	Min:1 Max: 20	M	ListVae
4.1	Response	<Resp>	1..1	Alphabetic	Fixed	M	
4.1.1	Request Message identifier	reqMsgId	1..1	Alphanumeric	Length= 35	M	
4.1.2	Result of the transaction	result	1..1	Code	Min:1 Max:20	M	SUCCESS FAILURE
4.1.3	Error code if failed	errCode	0..1	Alphanumeric	Min:1 Max:20	C	027_Response_ErrCodes
5.1	List of Verified Address Entries	<VaeList>	1..1	Alphabetic	Fixed	M	
5.2	Details Related to list of Verified Address Entries	<VaeList.Vae>	1..n	Alphabetic	Fixed	M	
5.2.1	Name of the Merchant	name	1..1	Alphanumeric		M	Name of the Merchant

5.2.2	Payment Alias of the Merchant	addr	1..1	Alphanumeric		M	Alias of the Merchant
5.2.3	Logo of the Merchant	logo	1..n	Alphanumeric		M	
5.2.4	URL Link provided by Merchant	url	1..n	Alphanumeric		M	
5.3	Key Details Related to list of Verified Address Entries	<VaeList.Vae.key>	1..n	Alphabetic	Fixed	M	
5.3.1	Code for the Key	code	1.1	Alphabetic	Fixed	M	it's OrgId assigned to the PSP at the time of onboarding.
5.3.2	Type pf Key	type	1.1	Alphabetic	Fixed	M	PKI format.
5.3.3	Date of key	ki	1.1	Alphanumeric	Length:8	M	The format is: yyymmdd
5.3.4	base64 encoded certificate	<VaeList.Vae.key.k eyValue>	1.1	Alphanumeric		M	

Sample API message is given below –

```
<upi:RespListVae xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI" pageSeqNum=""
pageRecStart="1" pageRecEnd="" pageTotal="" />
  <Txn id="" note="" refId="" refUrl="" ts="" type="ListVae" />
  <Resp reqMsgId="" result="SUCCESS|FAILURE" errCode="" />
  <VaeList>
    <Vae name="LIC" addr="" logo="image" url="">
      <key code="NPCI" type="PKI" ki="yyymmdd">
        <keyValue>base64 encoded certificate</keyValue>
      </key>
    </Vae>
    <Vae name="IRCTC" addr="" logo="image" url="">
      <key code="NPCI" type="PKI" ki="yyymmdd">
        <keyValue>base64 encoded certificate</keyValue>
      </key>
    </Vae>
  </VaeList>
</upi:RespListVae>
```

```

</Vae>
</VaeList>
</upi:RespListVae>

```

Comments :

1. pageTotal : <! — for e.g. if records are 10,000 & pagesize=”1000”, then IPS participant receives 10 RespListVae from IPS -- >

4.3.5. List Account API

IPS participants to find the list of accounts linked to the mobile by a particular account provider. If the destination bank name is not known details of account provider will be fetched from **alias directory**.

As part of ATM PIN introduction, the Payer SoV provider bank has to respond with new cred block with subtype as ATM PIN, its type and length, where PIN length can be 4 or 6 digits. This info will be used to capture ATM PIN in the common library.

Refer Reference Logs [List Account API](#)

4.3.5.1. ReqListAccount

Sr No	Message Item	<XML TAG>	Occurrence	DataType	Length	M/O/C	Rules
1.1	API Name	<ReqListAccount>	1..1			M	-
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	-
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	-

2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODatetime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgId	1..1	Numeric	Min: 1 Max: 20	M	055_OrgId
2.1.4	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	Length: 35	M	021_Head_MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	-
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	-
3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl

3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
3.1.6	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	ListAccount
4.1	Linked account list	<Link>	1..1	Alphabetic		M	-
4.1.1	Account linkage to Mobile	type	1..1	Alphabetic		M	MOBILE
4.1.2	Mobile number	value	1..1	numeric		M	-
5.1	Details related to Payer Alias	<Payer>	1..1	Alphabetic	Fixed	M	-
5.1.1	Alias Of the Payer	addr	1..1	Alphanumeric	Min:1 Max: 255	M	-
5.1.2	Name of the Payer	name	1..1	Alphanumeric	Min:1 Max: 99	M	-
5.1.3	Unique identifier for each transaction inside a file including payer and payee	seqNum	1..1	Numeric	Min:1 Max: 3	M	056_seqNum
5.1.4	Type of the Payer	type	1..1	Code	Fixed	M	029_Payer/Payee_Type
5.1.5	Merchant Classification Code – MCC	code	1..1	Numeric	Length=4	M	024_Txn_code
5.1.6	National ID consent	aadhaarConsent	1..1	Alphabetic	Length=1	M	Y/N This is the consent that user needs to provide if National ID needs to be fetched in response.
5.2	Device Tag	<Payer.Device>	1..1	Alphabetic	Fixed	M	-
5.2.1	Device Tag	<Payer.Device .Tag>	1..n	Alphabetic	Fixed	M	

5.2.1.1	Name of the property	name	1..n	Code (MOBILE, GEOCODE, LOCATION, IP, TYPE, ID, OS, APP, CAPABILITY)	Fixed	M	-
5.2.1.1	Value of the properties	value	1..n	Alphanumeric		M	-
5.3	Only one Entity is allowed for a payer	<Payer.Ac>	1..1	Alphabetic	Fixed	M	-
5.3.1	Type of the Alias	addrType	1..1	Code	Min:1 Max:20	M	046_ReqPay_Ac_addrType
c5.4	Details related to Payer Alias	<Payer.Ac.Detail>	1..n	Alphabetic	Min:1 Max:255	M	-
5.4.1	Name of the property	name	1..n	Code	Fixed	M	048_ReqPay_Ac_name_Account 049_ReqPay_Ac_name_Mobile 050_ReqPay_Ac_name_Card
5.4.2	Value of the property	value	1..n	Alphanumeric	Min:1 Max:20	M	-

Sample API message is given below –

```
<upi:ReqListAccount xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="1.0|2.0" ts="" orgId="" msgId="" prodType="UPI"/>
  <Txn id="" note="" refId="" refUrl="" ts="" type="ListAccount" />
  <Link type="MOBILE" value="" />
  <Payer addr="" name="" seqNum="" type="PERSON|ENTITY" code="" aadhaarConsent="Y|N">
    <Device>
```

```

<Tag name="MOBILE" value=""/>
<Tag name="GEOCODE" value=""/>
<Tag name="LOCATION" value="" />
<Tag name="IP" value=""/>
<Tag name="TYPE" value=""/>
<Tag name="ID" value=""/>
<Tag name="OS" value=""/>
<Tag name="APP" value=""/>
<Tag name="CAPABILITY" value=""/>
<Tag name="TELECOM" value=""/>
</Device>
<Ac addrType="ACCOUNT">
  <Detail name="IFSC" value=""/>
</Ac>
</Payer>
</upi:ReqListAccount>

```

4.3.5.2. RespNetAccount

Sr no	Message Item	<XML TAG>	Occurrence	DataType	Length	M/O/C	Rules
1.1	API Name	<RespNetAccount>	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgld	1..1	Numeric	Min: 1 Max: 20	M	055_Orgld
2.1.4	Message identifier- used to correlate between request and response	msgld	1..1	Alphanumeric	Length: 35	M	021_Head_Msgld
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be

							passed: "UPI"
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refld	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
3.1.6	Type of the Transaction	type	1..1	Code	Min:1 Max: 20	M	ListAccount
4.1	Response	<Resp>	1..1	Alphabetic	Fixed	M	
4.1.1	Request Message Identifier	reqMsgId	1..1	Alphanumeric	Length =35	M	
4.1.2	Result of the transaction	result	1..1	Code	Min: 1 Max: 20	M	SUCCESS FAILURE
4.1.3	Error code if failed	errCode	0..1	Alphanumeric	Min:1 Max:20	C	027_Response_ErrorCode
5.1	Account List	<AccountList>	1..1	Alphabetic	Fixed	M	
5.2	Details Related to Account	<AccountList.Account>	1..n	Alphabetic	Fixed	M	
5.2.1	Masked Account Number	maskedAccNumber	1..1	Alphanumeric	Min: 2 Max: 40	M	For wallet , mobile number needs to be populated
5.2.2	IFSC code of the Account	ifsc	1..1	Alphanumeric	Length: 11	M	
5.2.3	MMID linked to Mobile	mmid	1..1	Numeric	Length:7	M	Random 7-digit

							numeric value required.
5.2.4	Name of the Account Holder	name	1..1	Alphabetic	Max: 255	M	Based on the Core Banking records
5.2.5	National ID Enabled Bank Account or not	aeba	1..1	Boolean	Fixed	M	Y/N
5.2.6	National ID No	aadhaarNo	0..1	Numeric	Fixed:11	C	If user consent for National ID (aadhaarConsent) is "Y" in request and aeba="Y" then bank should send the National ID number in response.
5.2.7	Account reference number provided by Bank	accRefNumber	1..1	Numeric	Min: 2 Max: 40	M	For wallet , mobile number needs to be populated
5.2.8	Mobile banking enabled bank account or not	mbeba	1..1	Boolean	Fixed	M	Y/N
5.2.9	Account Type	accType	1..1	Alphabetic		M	Account Type supported by IPS

5.3	Details related to credentials supported for an Account	<AccountList.Account.CredsAllowed>	1..n	Alphabetic	Fixed	M	The CredsAllowed tag lists details related to the credentials that are supported for an account. The types of Creds that are allowed are PIN (MPIN / ATMPIN) / OTP (SMS)
5.3.1	Creds type	type	1..1	Alphabetic	Fixed	M	PIN/OTP
5.3.2	Creds subtype	subtype	1..1	Alphabetic	Fixed	M	SMS/MPIN/ATMPIN/WALLETPIN
5.3.3.	Creds Allowed format alphanumeric/numeric	dType	1..1	Alphabetic	Fixed	M	It's always dType = "Numeric"
5.3.4	Allowed length of the credential.	dLength	1..1	Numeric	Min length: 4 or 6	M	This field represents the length of the OTP /PIN.

Sample API message is given below –

```
<upi:RespListAccount xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI"/>
  <Txn id="" note="" refId="" refUrl="" ts="" type="ListAccount"/>
  <Resp reqMsgId="" result="SUCCESS|FAILURE" errCode=""/>
  <AccountList>
    <Account accType="" mbeba="" accRefNumber="" maskedAccnumber="" ifsc="" mmid="" name="" aeba="Y|N">
      <CredsAllowed type="PIN" subType="ATMPIN" dType="" dLength=""/>
    </Account>
  </AccountList>
</upi:RespListAccount>
```

```

</Account>
<Account accType="" mbeba="" accRefNumber="" maskedAccnumber="" ifsc="" mmid="" name=""
aeba="Y|N">
    <CredsAllowed type="PIN" subType="MPIN" dType="" dLength=""/>
    <CredsAllowed type="PIN" subType="ATMPIN" dType="" dLength=""/>
    <CredsAllowed type="OTP" subType="SMS" dType="" dLength=""/>
</Account>
</AccountList>
</upi:RespListAccount>

```

NOTE:

1. mbeba : Mbeba flag is used to mention the IPS PIN availability.
2. **aadhaarNo** : if user consent for National ID (**aadhaarConsent**) is "Y" and aeba="Y" then bank should send the National ID number in response in aadhaarNo field.
3. Masked accout.no should be masked with capital letter "X". **accRefNumber** field needs to populate with account number.
4. In Case of Account type other than WALLET like "SAVINGS", the Issuer bank provides the details below:

```

<Account accType="SAVINGS" accRefNumber="117795514570123" maskedAccnumber="XXXXXXXXXX570123"
ifsc="AABY0000382" mmid="3004010" name="ABC" aeba="Y" mbeba="Y" aadhaarNo="56789012346">
    <CredsAllowed dLength="6" dType="Numeric" subType="SMS" type="OTP"/>
    <CredsAllowed dLength="6" dType="Numeric" subType="MPIN" type="PIN"/>
    <CredsAllowed dLength="6" dType="Numeric" subType="ATMPIN" type="PIN"/>
</Account>

```

5. In Case of Account type WALLET, the Issuer bank provides the wallet details below:

```

<Account accType="WALLET" mbeba="N" accRefNumber="123456789" maskedAccnumber="XXXXXX6789" ifsc="
AABY0000382" mmid="123456" name="Shyam" aeba="N">
    <CredsAllowed type="PIN" subType="MPIN" dType="NUMERIC" dLength="6"/>
    <CredsAllowed type="PIN" subType="WALLETPIN" dType="NUMERIC" dLength="6"/>
    <CredsAllowed type="OTP" subType="SMS" dType="NUMERIC" dLength="6"/>
</Account>

```

4.3.6. Manage Verified Address Entries API

IPS offers a mechanism to protect customers from attempts to spoof well known merchants such as e-commerce players, telecom players, bill payment entities, etc. This mechanism is an API, where the IPS participants can manage, and access the common collection of verified address entries. IPS, with the help of IPS participants, will define a process to manage these entries. IPS Participant needs to fire this API once in day.

Refer Reference Logs [Manage Verified Address Entries API](#)

4.3.6.1. ReqManageVae

Sr No	Message Item	<XML TAG>	Occurrence	Data Type	Length	M/O/C	Rules
1.1	API Name	<ReqManageVae >	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgId	1..1	Numeric	Min: 1 Max: 20	M	055_OrgId
2.1.4	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	Length: 35	M	021_Head_MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	

3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODatetime	Min: 1 Max: 255	M	020_Head_ts
3.1.6	Type of the Transaction	type	1..1	Code	Min:1 Max: 20	M	ManageVae
4.1	Details vae	<VaeList>	1..n	Alphabetic	Fixed	M	
4.1.1	Details vae	<VaeList.Vae>	1..n	Alphabetic	Fixed	M	
4.1.2	Option to Update or Remove	op	1..1	Alphabetic	Fixed	M	ADD UPDATE REMOVE For UPDATE: All the fields can be updated except the “addr” field. For REMOVE all fields will be passed including Key.
4.1.3	Sequence Number	seqNum	1..1	Numeric	Min:1 Max:3	M	056_seqNum
4.1.4	Payment alias	addr	1..1	Alphanumeric	Min: 1 Max: 255	M	
4.1.5	Logo	logo	1..1	Alphanumeric	Min: 1 Max: 255	M	

4.1.6	URL Link	url	1..1	Alphanumeric	Min: 1 Max: 255	M	
4.1.7	name	name	1..1	Alphanumeric	Min: 1 Max: 255	M	
4.2	Details related to Public Keys	<VaeList.Vae.key>	1..1	Alphabetic	Fixed	M	
4.2.1	Account provider code	code	1..1	Alphabetic	Fixed	M	NPCI
4.2.2	Type of the Key	type	1..1	Alphabetic		M	PKI
4.2.3	Key Index Date	ki	1..1	Alphanumeric	Length :8	M	Format is: yyyyymmdd
4.2.4	Base64 encoded certificate	<VaeList.Vae.key .keyValue>	1..1	Alphabetic		M	

Sample API message is given below –

```
<upi:ReqManageVae xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI"/>
  <Txn id="" note="" refId="" refUrl="" ts="" type="ManageVae"/>
  <VaeList>
    <Vae op="ADD|UPDATE|REMOVE" seqNum="1" name="" addr="" logo="image" url="">
      <key code="NPCI" type="PKI" ki="yyyyymmdd">
        <keyValue>base64 encoded certificate</keyValue>
      </key>
    </Vae>
    <Vae op="ADD|UPDATE|REMOVE" seqNum="2" name="" addr="" logo="image" url="">
      <key code="NPCI" type="PKI" ki="yyyyymmdd">
        <keyValue>base64 encoded certificate</keyValue>
      </key>
    </Vae>
  </VaeList>
</upi:ReqManageVae>
```

4.3.6.2. RespManageVae

Sr No	Message Item	<XML TAG>	Occurrence	DataType	Length	M/O/C	Rules
1.1	API Name	<RespManageVae >	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgld	1..1	Numeric	Min: 1 Max: 20	M	055_Orgld
2.1.4	Message identifier- used to correlate between request and response	msgld	1..1	Alphanumeric	Length: 35	M	021_Head_Msgld
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refld	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts

3.1.6	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	ManageVae
4.1	Response	<Resp>	1..1	Alphabetic	Fixed	M	
4.1.1	Request Message Identifier	reqMsgId	1..1	Alphanumeric	Length= 35	M	
4.1.2	Result of the transaction	result	1..1	Code	Min:1 Max:20	M	SUCCESS FAILURE
4.1.3	Error code if failed	errCode	0..1	Alphanumeric	Min:1 Max:20	C	027 Response Err Code
5.1	Ref type	<Resp.Ref>	1..n	Code	Fixed	M	
5.2	Option to Update or Remove	op	1..1	Alphabetic	Fixed	M	ADD UPDATE REMOVE
5.2.1	Sequence Number	seqNum	1..1	Numeric	Min:1 Max:3	M	056_seqNum
5.2.2	Payment alias	addr	1..1	Alphanumeric	Min: 1 Max:255	M	
5.2.3	Result of the transaction	result	1..1	Code	Min:1 Max:20	M	SUCCESS FAILURE
5.2.4	Response code of the transaction	respCode	1..1	Alphanumeric	Min:1 Max: 20	M	

Sample API message is given below –

```
<upi:RespManageVae xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI" />
  <Txn id="" note="" refId="" refUrl="" ts="" type="ManageVae" />
  <Resp reqMsgId="" result="SUCCESS|FAILURE" errCode="">
    <Ref op="" seqNum="1" addr="" result="SUCCESS|FAILURE" respCode="" />
    <Ref op="" seqNum="2" addr="" result="SUCCESS|FAILURE" respCode="" />
  </Resp>
</upi:RespManageVae>
```

4.3.7. Validate Address API

This API will be used by the IPS participants when their customer wants to add a beneficiary within IPS Participant application (for sending money). This API provides the full form of alias mapped to the short form of alias(From Alias Directory) and beneficiary name in response from the Payee IPS participant

In case of the Payer mentioned the full form of alias of the Payee, then IPS will send it to Payee IPS participant for retrieving other details of the beneficiary as mentioned in the specification. In this case the request will not come to the Alias directory.

Refer Reference Logs [Validate Address](#)

4.3.7.1. ReqValAdd

Sr No	Message Item	<XML TAG>	Occurrence	DataType	Length	M/O/C	Rules
1.1	API Name	<ReqValAdd >	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019 Head Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODatetime	Min: 1 Max: 255	M	020 Head ts
2.1.3	Organization id that created the message	orgId	1..1	Numeric	Min: 1 Max: 20	M	055 OrgId
2.1.4	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	Length: 35	M	021 Head MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	

3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
3.1.6	Type of the Transaction	type	1..1	Code	Min:1 Max: 20	M	ValAdd
3.1.7	Customer Ref Number	custRef	1..1	Alphanumeric		M	This is the unique value generated by the participant for the transaction.
4.1	Details related to the Payer	<Payer>	1..1	Alphabetic	Fixed	M	
4.1.1	Alias of the Payer	addr	1..1	Alphanumeric	Min:1 Max: 255	M	This field contains the Payer alias.
4.1.2	Name of the Payer	name	1..1	Alphanumeric	Min:1 Max: 99	M	This field contains the Payer Name
4.1.3	Unique identifier for each transaction inside a file including payer and payee	seqNum	1..1	Numeric	Min:1 Max: 3	M	056_seqNum
4.1.4	Type of the Payer	type	1..1	Code	Fixed	M	029_Payer/Payee_Type
4.1.5	Merchant Classification Code – MCC	code	1..1	Numeric	Length=4	M	024_Txn_code
4.2	Information related to the Payer	<Payer.Info>	1..1	Alphabetic	Fixed	M	The Info tag maintains information

							verifying the payer's identity. This tag is populated by the initiator of a transaction. The Identity tag captures payer Identity which can be either of the following, National ID / ACCOUNT
4.2.1	Payer Identity Is mandatory for “pay” and optional for “collect”	<Payer.Info.Identity>	1..1	Alphabetic	Fixed	M	
4.2.1.1	Id of the identifier	id	1..1	Alphanumeric	Min: 1 Max: 99	M	
4.2.1.2	Type of the identifier	type	1..1	Code	Fixed	M	AADHAAR ACCOUNT
4.2.1.3	Name as per the identifier	verifiedName	1..1	Alphanumeric	Min: 1 Max: 99	M	Payer Name that is associated with Account or National ID
4.3	Rating of the payer	<Payer.Info.Rating>	0..1	Alphabetic	Fixed	O	If this tag is present in Request, then verifiedAddress field should be present with value.
4.3.1	verifiedAddress	verifiedAddress	1..1	Code	Boolean	M	TRUE/FALSE
4.4	Details of Device from which the transaction was Initiated	<Payer.Device>	1..1	Alphabetic	Fixed	M	

4.4.1	Device Tag	< Payer.Device .Tag>	1..n	Alphabetic	Fixed	M	
4.4.1.1	Name of the property	name	1..n	Code (MOBILE, GEOCODE, LOCATION, IP, TYPE, ID, OS, APP, CAPABILITY, TELECOM)	Fixed	M	
4.4.1.2	Value of the Properties	value	1..n	Alphanumeric		M	
5.1	Details related to the Payee	<Payee>	1..1	Alphabetic	Fixed	M	
5.1.1	Alias of the Payee	addr	1..1	Alphanumeric	Min:1 Max: 255	M	
5.1.2	Unique identifier for each transaction	seqNum	1..1	Alphanumeric	Min:1 Max: 3	M	

Sample API message is given below –

```
<upi:ReqValAdd xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI"/>
  <Txn id="" note="" refId="" refUrl="" ts="" type="ValAdd" custRef="" />
  <Payer addr="" name="" seqNum="" type="PERSON|ENTITY" code="">
    <Info>
      <Identity id="" type="ACCOUNT" verifiedName="" />
      <Rating VerifiedAddress="TRUE|FALSE"/>
    </Info>
    <Device>
      <Tag name="MOBILE" value="" />
      <Tag name="GEOCODE" value="" />
      <Tag name="LOCATION" value="" />
      <Tag name="IP" value="" />
      <Tag name="TYPE" value="" />
      <Tag name="ID" value="" />
      <Tag name="OS" value="" />
    </Device>
  </Payer>
</upi:ReqValAdd>
```

```

        <Tag name="APP" value=""/>
        <Tag name="CAPABILITY" value=""/>
        <Tag name="TELECOM" value=""/>
    </Device>
</Payer>
<Payee seqNum="" addr=""/>
</upi:ReqValAdd>

```

4.3.7.2. RespValAdd

Sr No	Message Item	<XML TAG>	Occurrence	DataType	Length	M/O/C	Rules
1.1	API Name	<RespValAdd >	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODatetime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgId	1..1	Numeric	Min: 1 Max: 20	M	055_OrgId
2.1.4	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	Length: 35	M	021_Head_MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	

3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
3.1.6	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	ValAdd
3.1.7	Customer Ref Number	custRef	1..1	Alphanumeric		M	This is the unique value generated by the participant for the transaction.
4.1	Response	<Resp>	1..1	Alphabetic	Fixed	M	
4.1.1	Request Message identifier	reqMsgId	1..1	Alphanumeric	Length= 35	M	
4.1.2	Result of the transaction	result	1..1	Code	Min:1 Max:20	M	SUCCESS FAILURE
4.1.3	Error code if failed	errCode	0..1	Alphanumeric	Min:1 Max:20	C	027_Response_Err Code
4.1.4	Mask Name of the Beneficiary	maskName	1.1	Alphabetic	Min:1 Max:99	M	
4.1.5	Merchant Classification Code -MCC	code	1..1	Numeric	Length= 4	M	024_Txn_code
4.1.6	IFSC code	IFSC	1..1	Alphanumeric	Length: 11	M	032_RespPay_RefT ag_IFSC

4.1.7	IIN of Account provider	IIN	1.1	Numeric	Length:6	M	
4.1.8	Account type	accType	1..1	Code	Fixed	M	048 ReqPay Ac name Account
4.1.9	If it is an IPS mandate, this field is mandatory. It will return as UPIMANDATE	pType	0..1	Alphabetic		O	This will be used only in the case of Mandate Functionality
4.1.10	IPS Number of the alias	cmd	0.1	Numeric	Min:6 Max:16	C	If the “addr” field in request is populated with mapper.npci , then in response the IPS will send the short form of alias in this field For ex: addr= 976994869@mapper.npci then cmd = “976994869”
4.1.11	Alias of the Payer	addr	1.1	Alphanumeric	Min:1 Max:255	M	
4.1.12	Initiating Channel	channel	1.1	Alphabetic	Fixed	M	Value to be passed: MOB/USDC
4.1.13	Type of the Payee	type	1..1	Code	Fixed	M	029 Payer/Payee Type

4.2	Feature supported tag	<Resp.FeatureSupported>	0..n	Alphabetic		C	This will be used only in the case of Mandate Functionality
4.2.1	Value of the feature supported tag	value	0..n	Numeric		M	
5.1	This field indicates the Merchant Block.	<Resp.Merchant>	0..1	Alphabetic	Fixed	C	037_ReqPay_Payer/Payee_MerchantTag
5.1.1	This field indicates the Merchant Identifier.	<Resp.Merchant.Identifier>	0..1	Alphabetic	Fixed	M	
5.1.1.1	This field indicates the SubCode.	subCode	0..1	Code	4	O	This is the subcategorization MCC(Merchant classification Code) as per Merchant.
5.1.1.2	This field indicates the Merchant Identifier.	mid	1..1	Alphanumeric	Min:1 Max: 20	M	037_ReqPay_Payer/Payee_MerchantTag
5.1.1.3	This field indicates the Store Id.	sid	0..1	Alphanumeric	Min: 1 Max: 20	O	037_ReqPay_Payer/Payee_MerchantTag
5.1.1.4	This field indicates the Terminal Identifier. It is the POS terminal identifier value.	tid	0..1	Alphanumeric	Min: 1 Max: 20	O	037_ReqPay_Payer/Payee_MerchantTag
5.1.1.5	This field indicates the Merchant Type.	merchantType	0..1	Alphabetic	Fixed	O	037_ReqPay_Payer/Payee_MerchantTag

5.1.1.6	This field indicates the Merchant Genre.	merchantGenre	0..1	Alphabetic	Fixed	O	037_ReqPay_Payer/Payee_MerchantTag
5.1.1.7	This field indicates the Merchant Onboarding Type.	onBoardingType	1..1	Alphabetic	Fixed	O	037_ReqPay_Payer/Payee_MerchantTag
5.1.1.8	This field indicates the Merchant Institution Code. It is the unique ID for each merchant provided by the acquiring party.	merchantInstCode	0..1	Alphanumeric	Min :1 Max :20	O	024_Txn_code
5.1.1.9	This field indicates the Area pincode	pinCode	0..1	Numeric	Fixed	O	
5.1.1.10	This field indicates the tier of the city	tier	0..1	Alphanumeric	Code	O	
5.1.11	This field indicates the Registration Id	regIdNo	0..1	Alphanumeric	Max:35	O	
5.1.2	the Merchant Name	<Resp.Merchant.Name>	1..1	Alphabetic	Min: 1 Max: 99	M	
5.1.2.1	This field indicates the Brand Name.	brand	1..1	Alphanumeric	Min: 1 Max: 99	M	037_ReqPay_Payer/Payee_MerchantTag
5.1.2.2	This field indicates the Legal Name.	legal	0..1	Alphanumeric	Min: 1 Max: 99	O	037_ReqPay_Payer/Payee_MerchantTag

5.1.2.3	This field indicates the Franchise Name.	franchise	0..1	Alphanumeric	Min: 1 Max: 99	O	037_ReqPay_Payer/ Payee_MerchantTag
5.1.3	Ownership tag	<Resp.Merchan t.Ownership>	0..1	Alphabetic	Fixed	M	038_ReqPay_Merch ant
5.1.3.1	Type of ownership	type	0..1	Alphabetic	Fixed	M	

Sample API message is given below –

```
<upi:RespValAdd xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI"/>
  <Txn id="" note="" refId="" refUrl="" ts="" type="ValAdd" custRef="" />
  <Resp reqMsgId="" result="SUCCESS|FAILURE" errCode="" maskName="" code="" type="" IFSC=""
  accType="" IIN="" pType="UPIMANDATE" cmId="" addr="" channel="" >
    <Merchant>
      <Identifier subCode="" mid="" sid="" tid="" merchantType="" merchantGenre="" pinCode=""
      regIdNo="" tier="" onBoardingType="" />
      <Name brand="" legal="" franchise="" />
      <Ownership type="" />
    </Merchant>
    <FeatureSupported value="" />
  </Resp>
</upi:RespValAdd>
```

Note:

1. Feature supported value tag is only applicable for mandate
2. pType: <! –only when payee psp alias is umn@handle, pType=UPIMANDATE -- >
3. <! – In case mandate functionality is supported by the customer VPA, then psp should send RespValAdd with feature supported tag 01-MANDATE, otherwise “FeatureSupport” tag itself should not be present. 02 to 09 for future purpose -- >

4.3.8. Set Credentials API

This API is required for providing a unified channel for resetting and changing IPS PIN across various account providers. This is critical to ensure customers can easily change IPS PIN via their mobile.

Refer Reference Logs [Set Credential API](#)

4.3.8.1. ReqSetCre

Sr No	Message Item	<XML TAG>	Occurrence	DataType	Length	M/O/C	Rules
1.1	API Name	<ReqSetCre >	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgId	1..1	Numeric	Min: 1 Max: 20	M	055_OrgId
2.1.4	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	Length: 35	M	021_Head_MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID

3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
3.1.6	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	SetCre
3.1.8	Common Library Version	clVersion	1..1	Alphanumeric	Fixed Length =15	M	The clVersion field will follow an alphanumeric format with validation structured as: clVersion-subVersion-expiryOfPublicKey Each component is separated by a hyphen ('-'). A sample value along with a detailed explanation has been included in the Common

4.1	Details related to the Payer	<Payer>	1..1	Alphabetic	Fixed	M	
4.1.1	Alias Of the Payer	addr	1..1	Alphanumeric	Min:1 Max: 255	M	
4.1.2	Name of the Payer	name	1..1	Alphanumeric	Min:1 Max:99	M	
4.1.3	Unique Identifier of the transaction across all entities, created by the originator	seqNum	1..1	Numeric	Min:1 Max:3	M	
4.1.4	Type of the Payer	type	1..1	Code	Fixed	M	029_Payer/Payee_Type
4.1.5	Merchant Classification Code – MCC	code	1..1	Numeric	Length:4	M	024_Txn_code
4.2	Details of Device from which the transaction was Initiated	<Payer.Device>	1..1	Alphabetic	Fixed	M	
4.2.1	Device Tag	<Payer.Device.Tag>	1..n	Alphabetic	Fixed	M	
4.2.1.1	Name of the property	name	1..n	code (MOBILE, GEOCODE, LOCATION, IP, TYPE, ID, OS, APP, CAPABILITY, TELECOM)	Fixed	M	
4.2.1.2	Value of the Properties	value	1..n	Alphanumeric		M	

4.3	This field indicates Account details of the Payer	<Payer.Ac>	1..1	Alphabetic	Fixed	M	Only one entity is allowed for a payer
4.3.1	This field indicates Type of the alias	addrType	1..1	Code	Min: 1 Max: 20	M	046_ReqPay_Ac_addrType
4.3.2	This field indicates Details related to Payer Alias	<Payer.Ac.Detail>	1..n	Alphabetic	Min: 1 Max:255	M	
4.3.2.1	This field indicates Name of the property	name	1..n	Code	Fixed	M	048_ReqPay_Ac_name_Account
4.3.2.2	This field indicates Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 20	M	
4.4	This field indicates Information related to Payer Credentials	<Payer.Creds>	1..1	Alphabetic	Min: 1 Max: 20	M	
4.4.1	This field indicates Credentials used to authenticate the request	<Payer.Creds.Cred>	1..1	Alphabetic	Min: 1 Max: 20	M	040_ReqPay_Cred_block 007_ReqPay_PreApproved 025_Response_AprovalNum
4.4.1.1	This field indicates Type of financial instrument used for authentication	type	1..1	Code	Fixed	M	PIN
4.4.1.2	This field indicates subType	subType	1..1	Code	Fixed	M	MPIN
4.4.2	This field indicates base-64 encoded/ encrypted authentication data	<Payer.Creds.Cred.Data>	1..1	Alphabetic	Fixed	M	
4.4.2.1	Code for Cred	code	1..1	Alphabetic	Fixed	M	
4.4.2.2	Key date	ki	1..1	Alphanumeric	Length:8	M	

4.4.3	This field indicates Information related to Payer Credentials	<Payer.NewCred>	1..1	Alphabetic	Min: 1 Max: 20	M	This field contains the new IPS pin that needs to be set
4.4.4	This field indicates Credentials used to authenticate the request	<Payer.NewCred.Cred>	1..1	Alphabetic	Min: 1 Max: 20	M	
4.4.4.1	This field indicates Type of financial instrument used for authentication	type	1..1	Code	Fixed	M	PIN
4.4.4.2	This field indicates subType	subType	1..1	Code	Fixed	M	MPIN
4.4.5	This field indicates base-64 encoded/ encrypted authentication data	<Payer.NewCred.Cred.Data>	1..1	Alphabetic	Max: 1000	M	
4.4.5.1	Code for Cred	code	1..1	Alphabetic	Fixed	M	
4.4.5.2	Key date	ki	1..1	Alphanumeric	Length:8	M	

Sample API message is given below –

```
<upi:ReqSetCre xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI"/>
  <Txn id="" note="" refId="" refUrl="" ts="" type="SetCre" />
  <Payer addr="" name="" seqNum="" type="PERSON|ENTITY" code="">
    <Device>
      <Tag name="MOBILE" value="" />
      <Tag name="GEOCODE" value="" />
      <Tag name="LOCATION" value="" />
      <Tag name="IP" value="" />
      <Tag name="TYPE" value="" />
      <Tag name="ID" value="" />
      <Tag name="OS" value="" />
    </Device>
  </Payer>
</upi:ReqSetCre>
```



```

    <Tag name="APP" value=""/>
    <Tag name="CAPABILITY" value=""/>
    <Tag name="TELECOM" value=""/>
  </Device>
  <Ac addrType="ACCOUNT">
    <Detail name="IFSC" value=""/>
    <Detail name="ACTYPE" value=""/>
    <Detail name="ACNUM" value=""/>
  </Ac>
  <Creds>
    <Cred type="PIN" subType=" MPIN">
      <Data> base-64 encoded/encrypted authentication data</Data>
    </Cred>
  </Creds>
  <NewCred>
    <Cred type="PIN" subType=" MPIN">
      <Data> base-64 encoded/encrypted authentication data</Data>
    </Cred>
  </NewCred>
</Payer>
</upi:ReqSetCre>

```

4.3.8.2. RespSetCre

Sr. No	Message Item	<XML TAG>	Occurrence	DataType	Length	M/O/C	Rules
1.1	API Name	<RespSetCre >	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	

2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODatetime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgld	1..1	Numeric	Min: 1 Max: 20	M	055_Orgld
2.1.4	Message identifier- used to correlate between request and response	msgld	1..1	Alphanumeric	Length: 35	M	021_Head_Msgld
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refld	1..1	Alphanumeric	Min: 1 Max: 35	M	

3.1.4	URL for the transaction	refurl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
3.1.6	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	SetCre
4.1	Response	<Resp>	1..1	Alphabetic	Fixed	M	
4.1.1	Request Message Identifier	reqMsgId	1..1	Alphanumeric	Length= 35	M	
4.1.2	Result of the transaction	result	1..1	Code	Min:1 Max:20	M	SUCCESS FAILURE
4.1.3	Error code if failed	errCode	1..1	Alphanumeric	Min:1 Max:20	C	027_Response_ErrCode

Sample API message is given below –

```
<upi:RespSetCre xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI"/>
  <Txn id="" note="" refId="" refUrl="" ts="" type="SetCre"/>
  <Resp reqMsgId="" result="SUCCESS|FAILURE" errCode=""/>
</upi:RespSetCre>
```

4.3.9. Mobile Banking Registration API

This API allows the customer to set new IPS PIN for the first time. IPS participant will send the “FORMAT1” or “FORMAT2” to the remitter banks based on their readiness. Cred block with subtype “ATMPIN” is allowed only for FORMAT2.

Refer Reference Logs [Mobile Banking Registration API](#)

4.3.9.1. ReqRegMob

Sr No	Message Item	<XML TAG>	Occurrence	DataType	Length	M/O/C	Rules
1.1	API Name	<ReqRegMob>	1..1	Alphabetic	Fixed	M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODatetime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgId	1..1	Numeric	Min: 1 Max: 20	M	055_OrgId
2.1.4	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	Length: 35	M	021_Head_MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: “UPI”

3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min:1 Max: 35	M	
3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
3.1.6	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	ReqRegMob
3.1.7	Common Library Version	clVersion	1..1	Alphanumeric	Fixed Length =15	M	The clVersion field will follow an alphanumeric format with validation structured as: clVersion-subVersion-expiryOfPublicKey Each component is separated by a hyphen ('-'). A

sample value along with a detailed explanation has been included in the Common Library document for clarity.

4.1	Details related to the Payer	<Payer>	1..1	Alphabetic	Fixed	M	
4.1.1	Alias Of the Payer	addr	1..1	Alphanumeric	Min:1 Max:255	M	
4.1.2	Name of the Payer	name	1..1	Alphanumeric	Min:1 Max:99	M	
4.1.3	Unique identifier for each transaction inside a file including payer and payee	seqNum	1..1	Numeric	Min:1 Max:3	M	
4.1.4	Type of the Payer	type	1..1	Code	Fixed	M	029_Payer/Payee_Type
4.1.5	Merchant Classification Code – MCC	code	1..1	Numeric	Length:4	M	024 Txn code
4.2	Details of Device from which the transaction was Initiated	<Payer.Device>	1..1	Alphabetic	Fixed	M	
4.2.1	Device Tag	<Payer.Device.Tag>	1..n	Alphabetic	Fixed	M	

4.2.1.1	Name of the property	name	1..n	code (MOBILE, GEOCODE, LOCATION, IP, TYPE, ID, OS, APP, CAPABILITY, TELECOM)	Fixed	M	
4.2.1.2	Value of the Properties	value	1..n	Alphanumeric		M	
4.3	This field indicates Account details of the Payer	<Payer.Ac>	1..1	Alphabetic	Fixed	M	Only one entity is allowed for a payer
4.3.1	This field indicates Type of the alias	addrType	1..1	Code	Min :1 Max: 20	M	046_ReqPay_Ac_addrType
4.4	This field indicates Details related to Payer Alias	<Payer.Ac.Detail>	1..n	Alphabetic	Min:1 Max:255	M	
4.4.1	This field indicates Name of the property	name	1..n	Code	Fixed	M	048_ReqPay_Ac_name_Account
4.4.2	This field indicates Value of the property	value	1..n	Alphanumeric	Min:1 Max: 20	M	
5.1	New credentials for Authentication	<RegDetails>	1.1	Alphabetic	Fixed	M	
5.1.1	Type of the Cred detail	type	1.1	Alphabetic	Fixed	M	
5.1.2	Details tag	<RegDetails.Details>	1..1	Alphabetic	Fixed	M	
5.1.2.1	This field indicates Name of the property	name	1..n	Alphabetic	Fixed	M	059_Detail.name

5.1.4	This field indicates Value of the property	value	1..n	Numeric	Max:20	M	
5.2	This field indicates Information related to Payer Credentials	<RegDetails.Creds>	1..1	Alphabetic	Min :1 Max: 20	M	
5.3	Cred Tag	<RegDetails.Creds.Cred>	1..1	Alphabetic	Min: 1 Max: 20	M	040 ReqPay Credblock 007 ReqPay PreApproved 025 Response ApprovalNum
5.3.1	Cred type	type	1..1	Alphabetic	Fixed	M	
5.3.2	Cred Subtype	subtype	1..1	Alphabetic	Fixed	M	
5.3.3	Data for Cred	<RegDetails.Creds.Cred.Data>	1..1	Alphabetic	Fixed	M	
5.3.4	Code for Cred	code	1..1	Alphabetic	Fixed	M	
5.3.5	Key date	ki	1..1	Alphanumeric	Length:8	M	Format: yyyymmdd

Sample API message is given below –

```
<upi:ReqRegMob xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI"/>
  <Txn id="" note="" refId="" refUrl="" ts="" type="ReqRegMob"/>
  <Payer addr="" name="" seqNum="" type="PERSON|ENTITY" code="">
    <Device>
      <Tag name="MOBILE" value=""/>
      <Tag name="GEOCODE" value=""/>
      <Tag name="LOCATION" value="" />
      <Tag name="IP" value=""/>
      <Tag name="TYPE" value=""/>
      <Tag name="ID" value=""/>
      <Tag name="OS" value=""/>
    </Device>
  </Payer>
</ReqRegMob>
```



```

    <Tag name="APP" value=""/>
    <Tag name="CAPABILITY" value=""/>
    <Tag name="TELECOM" value=""/>
  </Device>
  <Ac addrType="ACCOUNT">
    <Detail name="IFSC" value=""/>
    <Detail name="ACTYPE" value=""/>
    <Detail name="ACNUM" value=""/>
  </Ac>
</Payer>
<RegDetails type="FORMAT1|FORMAT2|FORMAT6|FORMAT7">
  <Creds>
    <Cred type="CARD" subType="CARDDetails">
      <Data code="" ki="">base-64 encoded/encrypted authentication data </Data>
    </Cred>
    <Cred type="OTP" subType="SMS|EMAIL|HOTP|TOTP">
      <Data code="" ki="">base-64 encoded/encrypted authentication data</Data>
    </Cred>
    <Cred type="PIN" subType="MPIN">
      <Data code="" ki="">base-64 encoded/encrypted authentication data</Data>
    </Cred>
    <Cred type="PIN" subType="ATMPIN|WALLETPIN">
      <Data code="" ki="">base-64 encoded/encrypted authentication data</Data>
    </Cred>
  </Creds>
</RegDetails>
</upi:ReqRegMob>

```

Note:

Cred Block:

1. Card Type will come based on card details being captured at APP or CL -- >

- a. <! – The below block will be used if the payer psp is getting the card details in the APP itself -- ><Detail name="MOBILE" value=""/><Detail name="CARDDIGITS" value=""/><last 6 digit of card no><Detail name="EXPDATE" value=""/># MMY format

2. Cred Type : Consists of MOBILE, CARD DIGITS, EXPDATE!
3. Cred Type = “OTP”: <! This cred block is used when the payer psp has upgraded to new CL version, which supports capture of card detail in CL itself-- >
4. <! –The formation of the cred blocks will depend on the remitter bank supported format as given below

FORMAT1 – Cred type = “ “PIN” and (subType =”MPIN”).

This will be used while Onboarding through the USSD only for accountType=”Account”

FORMAT2 – Cred type = “OTP” (subType=”SMS”), “PIN” (subType =”MPIN”) and “PIN” (subType =”ATMPIN”) ATM_REDIRECT – Cred type = “OTP” (subType=”SMS”), “PIN” (subType =”MPIN”) and “PIN” (subType =”ATMPIN”) ATMPIN block will contain the value passed by remitter bank page -->

This will be used while onboarding through the Card Details using the card details and pin for account type =”ACCOUNT”

FORMAT6: Cred type = “OTP” (subType=”SMS”), “PIN” (subType =”MPIN”).

This will be used while onboarding through the National Id.

FORMAT7: Cred type = “OTP” (subType=”SMS”), “PIN” (subType =”MPIN”) and “PIN” (subType =”WALLETPIN”).

This will be used while onboarding through the WALLET PIN through mobile application.

FORMAT7 – Cred type = “ “PIN” and (subType =”MPIN”)

Cred type = “ “PIN” and (subType =”WALLETPIN”)

This will be used while Onboarding through the USSD only for accountType=”WALLET”.

The SOV provider will have to check the source of request(USSD or application) to decide whether three parameters(OTP, wallet pin and MPIN) or two parameters(wallet pin and MPIN) will be considered for registration.

If Payer.device.tag.type field is “USDC” then its USSD channel and if its “MOB” then its Mobile application channel.

4.3.9.2. RespRegMob

Sr No	Message Item	<XML TAG>	Occurrence	DataType	Length	M/O/C	Rules
1.1	API Name	<RespRegMob >	1..1	Alphabetic	Fixed	M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODatetime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgId	1..1	Numeric	Min: 1 Max: 20	M	055_OrgId
2.1.4	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	Length: 35	M	021_Head_MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: “UPI”
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	

3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
3.1.6	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	ReqRegMob
4.1	Response	<Resp>	1..1	Alphabetic	Fixed	M	
4.1.1	Request Message Identifier	reqMsgId	1..1	Alphanumeric	Length= 35	M	
4.1.2	Result of the transaction	result	1..1	Code	Min:1 Max :20	M	SUCCESS FAILURE
4.1.3	Error code if failed	errCode	0..1	Alphanumeric	Min:1 Max:20	C	027_Response_Err Code

Sample API message is given below –

```
<upi:RespRegMob xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="1.0|2.0" ts="" orgId="" msgId="" prodType="UPI"/>
  <Txn id="" note="" refId="" refUrl="" ts="" type="ReqRegMob"/>
  <Resp reqMsgId="" result="SUCCESS|FAILURE" errCode=""/>
</upi:RespRegMob>
```

4.3.10. Check Transaction Status API

This API allows the IPS participants to request for the status of the transaction. The IPS participants must request for status only after the specified timeout period. IPS can request check transaction request for status only after the specified timeout period to IPS Participants.

Refer Reference Logs [Check Transaction](#)

4.3.10.1. ReqChkTxn

Sr No	Message Item	<XML TAG>	Occurrence	DataType	Length	M/O/C	Rules
1.1	API Name	<ReqChkTxn>	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODatetime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgId	1..1	Numeric	Min: 1 Max: 20	M	055_OrgId
2.1.4	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	Length: 35	M	021_Head_MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UID

	originator						
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
3.1.6	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	ChkTxn
3.1.7	Customer Ref Number	custRef	1..1	Alphanumeric		M	This is the unique value generated by the participant for the transaction.
3.1.8	UMN Number	umn	0..1	Alphanumeric	Length:3 5	C	If subType=Mandate then umn is mandatory and type=ChkTxn
3.1.9	Original Request Message Identifier	orgMsgId	1..1	Alphanumeric	Length:3 5	M	
3.1.10	Original Request RRN	orgRrn	0..1	Numeric	Length:1 2	O	
3.1.11	Original Transaction Id	orgTxnId	1..1	Alphanumeric	Length:3 5	M	
3.1.12	Sub Type of the transaction	subtype	1..1	Code		M	030_Txn_SubType
3.1.13	Original transaction date time	orgTxnDate	1..1	ISODateTime	Min:11 Max:255	M	
3.1.14	Initiation mode of the transaction	initiationMode	1..1	Code	Min:1	M	031_Txn_Initiation mode

4					Max:3		
3.1.1	Purpose code of the transaction	purpose	1..1	Code	Min:1 Max:3	M	
5							
3.1.1	Ref Category	refCategory	0..1	Numeric	Length:2	O	
7							

Sample API message is given below –

```
<upi:ReqChkTxn xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI"/>
  <Txn id="" note="" refId="" refUrl="" refCategory="" ts="" type="ChkTxn|BackOffice" custRef=""
    umn="" orgMsgId="" orgRrn="" orgTxnId="" subType="" orgTxnDate="" initiationMode="" purpose="" />
</upi:ReqChkTxn>
```

Note:

1. If IPS sends the ReqChkTxn, “subType=DEBIT|CREDIT” to bank.
2. If IPS participant sends to IPS, then “subType=PAY|COLLECT|REVERSAL|MANDATE
3. If subType=Mandate, then umn is mandatory and type=ChkTxn
4. If Chktxn is initiated by IPS then status as per the bank i.e, success or failure with respective response code.
5. If Chktxn initiated by bank / IPS participants, then status given by IPS as SUCCESS/DEEMED/FAILURE/PENDING along with complete details.

4.3.10.2. RespChkTxn

Sr No	Message Item	<XML TAG>	Occurrence	DataType	Length	M/O/C	Rules
1.1	API Name	<RespChkTxn >	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version

2.1.2	Time of request from the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgId	1..1	Numeric	Min: 1 Max: 20	M	055_OrgId
2.1.4	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	Length: 35	M	021_Head_MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
3.1	Transaction information on, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
3.1.6	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	ChkTxn
3.1.7	UMN Number	umn	0.1	Alphanumeric	Length: 35	C	In case of Mandate transaction this needs to be populated
3.1.8	Customer Ref Number	custRef	1..1	Alphanumeric	Length: 12	M	This is the unique value generated by the participant for the transaction.

3.1.9	Ref Category	refCategory	0..1	Numeric	Length:2	O	
3.1.10	Original Request Message Identifier	orgMsgId	1.1	Alphanumeric	Length: 35	M	
3.1.11	Original Request RRN	orgRrn	0.1	Numeric	Length: 12	O	
3.1.12	Original Transaction Id	orgTxnId	1.1	Alphanumeric	Length: 35	M	
3.1.13	Sub Type of the transaction	subtype	1.1	Code		M	030 Txn SubType
3.1.14	Original transaction date time	orgTxnDate	1.1	ISODateTime	Min: 1 Max:255	M	
3.1.15	Initiation mode of the transaction	initiationMode	1.1	Code	Min:1 Max:3	M	031 Txn Initiation mode
3.1.16	Purpose code of the transaction	purpose	1.1	Code	Min:1 Max:3	M	
4.1	Response	<Resp>	1..1	Alphabetic	Fixed	M	
4.1.1	Request Message Identifier	reqMsgId	1..1	Alphanumeric	Length= 35	M	
4.1.2	Result of the transaction	result	1..1	Code	Min:1 Max:20	M	SUCCESS FAILURE DEEMED
4.1.3	Error code if failed	errCode	0..1	Alphanumeric	Min:1 Max:20	C	027 Response Err Code
4.1.4	Operation Type	opType	0..1	Alphabetic	Fixed	C	CREATE UPDATE REVOKE This field will be applicable in case of subtype="MANDATE"
4.1.5	Transaction response Code	txnRespCode	0..1	Code	Min:1 Max:20	C	This will be populated in case of type="BackOffice"

5.1	This field indicates the Response Reference	<Resp.Ref>	1..n	Alphabetic	Fixed	M	
5.1.1	This field indicates the Reference type	type	1..1	Code	Fixed	M	If Payer initiated the check transaction, then IPS provides details for Payer. If Payee initiated the check transaction, then IPS provides details for Payee. If IPS initiated the check transaction to Payer/Payee then Payer/Payee will provide respective Ref details.
5.1.2	This field indicates the Sequence Number (Default value should be set to 1 except for Autopay)	seqNum	1..1	Numeric	Min: 1 Max:3	M	
5.1.3	This field indicates the Payment alias	addr	1..1	Alphanumeric	Min: 1 Max: 255	M	If the Payer responds to a CheckTransaction, then under the Ref tag, when the type is PAYER , the addr field represents the Payer's Address .

							If the Payee responds to a CheckTransaction, then under the Ref tag, when the type is PAYEE , the addr field represents the Payee's Address .
5.1.4	This field indicates the Settlement Amount	settAmount	1..1	Numeric	Min Inclusive:0 total Digits: 15	M	051 ReqPay Amount Value
5.1.5	This field indicates the Settlement Currency	settCurrency	1..1	Text	Min: 1 Max: 3	M	
5.1.6	This field indicates the Approval Reference Number	approvalNum	1..1	Alphanumeric	Length: 6	M	025 Response ApprovalNum
5.1.7	This field indicates the Response code	respCode	1..1	Alphanumeric	Min: 1 Max: 20	M	This field refers to the actual response code of the transaction.
5.1.8	This field indicates the Registered name with bank	regName	1..1	Alphanumeric	Min: 1 Max: 99	M	
5.1.9	This field indicates the original amount	orgAmount	1..1	Numeric	Min Inclusive:0 total Digits: 15	M	051 ReqPay Amount Value
5.1.10	This field indicates the Reversal Response Code	reversalRespCode	0..1	Alphanumeric	Min: 1 Max: 20	C	This will be populated in case of

							type="BackOffice"
5.1.11	Dispute response code as per back office system	disputeRespCode	0..1	Alphanumeric	Min: 1 Max: 20	C	This will be populated in case of type="BackOffice"
5.1.12	Adjustment date as per back office system	adjustmentDate	0..1	Alphanumeric	Min: 1 Max: 20	C	This will be populated in case of type="BackOffice"
5.1.13	Adjustment flag as per back office system	adjustmentFlag	0..1	Alphanumeric	Min: 1 Max: 20	C	This will be populated in case of type="BackOffice"
5.1.14	Adjustment raised bank as per back office system	adjustmentRaisedBank	0..1	Alphanumeric	Min: 1 Max: 20	C	This will be populated in case of type="BackOffice"

Sample API message is given below –

If type="ChkTxn", then the below RespChktxn will be provided by IPS

```
<upi:RespChkTxn xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="1.0|2.0" ts="" orgId="" msgId="" prodType="UPI" />
  <Txn id="" note="" refId="" refUrl="" refCategory="" ts="" type="ChkTxn" orgMsgId="" orgTxnId=""
  orgTxnDate="" initiationMode="" purpose="" umn="" custRef="" subType="" />
  <Resp reqMsgId="" result="SUCCESS|FAILURE|DEEMED|PENDING" errCode="" opType="CREATE|UPDATE|REVOKE">
    <Ref type="PAYER" seqNum="" addr="" regName="" settAmount="" orgAmount="" settCurrency=""
    acNum="" approvalNum="" accType="" respCode="" reversalRespCode="" />
    <Ref type="PAYEE" seqNum="" addr="" regName="" settAmount="" orgAmount="" settCurrency=""
    acNum="" approvalNum="" accType="" respCode="" reversalRespCode="" />
  </Resp>
</upi:RespChkTxn>
```

NOTE:

1. “opType” is applicable if subType=MANDATE.

4.3.11. OTP API

This API allows the IPS participants to request for an OTP for a particular customer.

Refer Reference Logs [OTP API](#)

4.3.11.1. ReqOtp

Sr No	Message Item	<XML TAG>	Occurrence	DataType	Length	M/O/C	Rules
1.1	API Name	<ReqOtp>	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019 Head Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODatetime	Min: 1 Max: 255	M	020 Head ts
2.1.3	Organization id that created the message	orgId	1..1	Numeric	Min: 1 Max: 20	M	055_OrgId
2.1.4	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	Length: 35	M	021 Head MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: “UPI”
3.1	Transaction information, Carried	<Txn>	1..1	Alphabetic	Fixed	M	

	throughout the system, visible to all parties						
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min:1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
3.1.6	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	Otp
4.1	Details related to the Payer	<Payer>	1..1	Alphabetic	Fixed	M	
4.1.1	Alias Of the Payer	addr	1..1	Alphanumeric	Min:1 Max: 255	M	
4.1.2	Name of the Payer	name	1..1	Alphanumeric	Min:1 Max:99	M	
4.1.3	Unique identifier for each transaction inside a file including payer and payee	seqNum	1..1	Numeric	Min:1 Max: 3	M	
4.1.4	Type of the Payer	type	1..1	Code	Fixed	M	029_Payer/Payee_Type
4.1.5	Merchant Classification Code – MCC	code	1..1	Numeric	Length = 4	M	024_Txn_code
4.2	Details of Device from which the transaction was Initiated	<Payer.Device>	1..1	Alphabetic	Fixed	M	
4.2.1	Device Tag	<Payer.Device.Tag>	1..n	Alphabetic	Fixed	M	
4.2.1.1	Name of the property	name	1..n	code (MOBILE, GEOCODE, LOCATION, IP, TYPE, ID,	Fixed	M	

				OS, APP, CAPABILITY, TELECOM)			
4.2.1.2	Value of the Properties	value	1..n	Alphanumeric		M	
4.3	This field indicates Account details of the Payer	<Payer.Ac>	1..1	Alphabetic	Fixed	M	Only one entity is allowed for a payer
4.3.1	This field indicates Type of the alias	addrType	1..1	Code	Min:1 Max: 20	M	046_ReqPay_Ac_addrType
4.4	This field indicates Details related to Payer Alias	<Payer.Ac.Detail>	1..n	Alphabetic	Min:1 Max: 255	M	
4.4.1	This field indicates Name of the property	name	1..n	Code	Fixed	M	048_ReqPay_Ac_name_Account
4.4.2	This field indicates Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 20	M	

Sample API message is given below –

```
<upi:ReqOtp xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI"/>
  <Txn id="" note="" refId="" refUrl="" ts="" type="Otp" />
  <Payer addr="" name="" seqNum="" type="PERSON|ENTITY" code="">
    <Device>
      <Tag name="MOBILE" value="" />
      <Tag name="GEOCODE" value="" />
      <Tag name="LOCATION" value="" />
      <Tag name="IP" value="" />
      <Tag name="TYPE" value="" />
      <Tag name="ID" value="" />
      <Tag name="OS" value="" />
      <Tag name="APP" value="" />
      <Tag name="CAPABILITY" value="" />
      <Tag name="TELECOM" value="" />
    </Device>
  </Payer>
</ReqOtp>
```

```

    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value=""/>
      <Detail name="ACTYPE" value=""/>
      <Detail name="ACNUM" value=""/>
    </Ac>
  </Payer>
</upi:ReqOtp>

```

4.3.11.2. RespOtp

Tag No	Message Item	<XML TAG>	Occurrence	DataType	Length	M/O/C	Rules
1.1	API Name	< RespOtp >	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgld	1..1	Numeric	Min: 1 Max: 20	M	055_Orgld
2.1.4	Message identifier- used to correlate between request and response	msgld	1..1	Alphanumeric	Length: 35	M	021_Head_Msgld
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID

3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head ts
3.1.6	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	Otp
4.1	Response	<Resp>	1..1	Alphabetic	Fixed	M	
4.1.1	Request Message identifier	reqMsgId	1..1	Alphanumeric	Length= 35	M	
4.1.2	Result of the transaction	result	1..1	Code	Min:1 Max:20	M	SUCCESS FAILURE
4.1.3	Error code if failed	errCode	0..1	Alphanumeric	Min:1 Max:20	C	027_Response_ErrCode
4.1.4	URL redirecting to the Issuer IPS participants page from CL	securePinUrl	0.1	Alphanumeric		O	

Sample API message is given below –

```
<upi:RespOtp xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI"/>
  <Txn id="" note="" refId="" refUrl="" ts="" type="Otp" />
  <Resp reqMsgId="" result="SUCCESS|FAILURE" errCode="" securePinUrl="" />
</upi:RespOtp>
```

4.3.12. Balance-Enquiry API

This API allows IPS participants to enquire balance of customer.

Refer Reference Logs [Balance Enquiry](#)

4.3.12.1. ReqBalEnq

Sr No	Message Item	<XML TAG>	Occurrence	DataType	Length	M/O/C	Rules
1.1	API Name	<ReqBalEnq>	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min:1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODatetime	Min:1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgld	1..1	Numeric	Min: 1 Max: 20	M	055_Orgld
2.1.4	Message identifier- used to correlate between request and response	msgld	1..1	Alphanumeric	Length: 35	M	021_Head_Msgld
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
3.1	Transaction information Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refld	1..1	Alphanumeric	Min: 1 Max: 35	M	

3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min:1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min:1 Max: 255	M	020_Head_ts
3.1.6	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	BalEnq or BalChk (Use “BalEnq”)
3.1.7	Customer Ref number	custRef	1..1	Alphanumeric	Length: 12	M	This is the unique value generated by the participant for the transaction.
3.1.8	Common Library Version	clVersion	1..1	Alphanumeric	Fixed Length =15	M	The clVersion field will follow an alphanumeric format with validation structured as: clVersion-subVersion-expiryOfPublicKey Each component is separated by a hyphen ('-'). A sample value along with a detailed explanation has been included in the Common Library document for clarity.
4.1	This field indicates Risk Score related to the transaction and the entities	<Txn.RiskScores>	0..1	Alphabetic	Fixed	O	

4.2	This field indicates Risk Score related to the transaction and the entities	<Txn.RiskScore s.Score>	0..n	Alphabetic	Fixed	O	
4.2.1	This field indicates Entity providing the risk score	provider	1..1	Code	Min: 1 Max: 20	M	
4.2.2	This field indicates Type of risk	type	1..1	Code	Min:1 Max: 99	M	This will be decided once EFRM finalized.
4.2.3	This field indicates Value of risk evaluation	value	1..1	Integer	Min: 1 Max: 50	M	This will be decided once EFRM finalized.
5.1	Details related to the Payer	<Payer>	1..1	Alphabetic	Fixed	M	
5.1.1	Alias of the Payer	addr	1..1	Alphanumeric	Min:1 Max: 255	M	
5.1.2	Name of the Payer	name	1..1	Alphanumeric	Min:1 Max: 99	M	
5.1.3	Unique identifier for each transaction inside a file including payer and payee	seqNum	1..1	Numeric	Min:1 Max: 3	M	Default to value "1".
5.1.4	Type of the Payer	type	1..1	Code	Fixed	M	029 Payer/Payee Type
5.1.5	Merchant Classification Code – MCC	code	1..1	Numeric	Length = 4	M	024 Txn_code
5.2	This field indicates Information related to the Payer	<Payer.Info>	1..1	Alphabetic	Fixed	M	
5.2.1	This field indicates Payer Identity	<Payer.Info.Identity>	1..1	Alphabetic	Min: 1 Max: 20	M	This is mandatory for "pay" and optional for "collect"
5.2.1.1	This field indicates Id of the identifier	id	1..1	Alphanumeric	Min: 1 Max: 99	M	
5.2.1.2	This field indicates Type of the identifier	type	1..1	Code	Fixed	M	029 Payer/Payee Type
5.2.1.3	This field indicates Name as per the identifier	verifiedName	1..1	Alphanumeric	Min:1 Max: 99	M	

5.2.2	This field indicates Rating of the payer	<Payer.Info.Rat ing>	0..1	Alphabetic	Fixed	O	
5.2.2.1	This field indicates the verified Address	verifiedAddress	0..1	Code	Boolean TRUE/FA LSE	O	026 Payer/Payee I nfoRating Default Value as "TRUE".
5.3	Details of Device from which the transaction was Initiated	<Payer.Device >	1..1	Alphabetic	Fixed	M	
5.3.1	Device Tag	<Payer.Device .Tag>	1..n	Alphabetic	Fixed	M	
5.3.1.1	Name of the property	name	1..n	code (MOBILE, GEOCODE, LOCATION, IP, TYPE, ID, OS, APP, CAPABILITY, TELECOM)	Fixed	M	
5.3.1.2	Value of the Properties	value	1..n	Alphanumeric		M	
5.4	This field indicates Account details of the Payer	<Payer.Ac>	1..1	Alphabetic	Fixed	M	Only one entity is allowed for a payer
5.4.1	This field indicates Type of the alias	addrType	1..1	Code	Min: 1 Max: 20	M	046 ReqPay Ac ad rType
5.4.2	This field indicates Details related to Payer Alias	<Payer.Ac.Deta il>	1..n	Alphabetic	Min: 1 Max: 255	M	
5.4.2.1	This field indicates Name of the property	name	1..n	Code	Fixed	M	048 ReqPay Ac_na me_Account
5.4.2.2	This field indicates Value of the property	value	1..n	Alphanumeric	Min:1 Max: 20	M	
5.5	This field indicates Information related to Payer Credentials	<Payer.Creds>	1..1	Alphabetic	Min: 1 Max: 20	M	

5.5.1	This field indicates Credentials used to authenticate the request	<Payer.Creds.Cred>	1..1	Alphabetic	Min: 1 Max: 20	M	040_ReqPay_Credb lock 007_ReqPay_PreApproved 025_Response_ApprovalNum
5.5.1.1	This field indicates Type of financial instrument used for authentication	type	1..1	Code	Fixed	M	
5.5.1.2	This field indicates subType	subType	1..1	Code	Fixed	M	040_ReqPay_Credb lock
5.5.1.3	Base 64 encoded authentication	<Payer.Creds.Cred.Data>	1..1	Alphabetic	Fixed	M	
5.5.1.4	Code for Cred	code	1..1	Alphabetic	Fixed	M	
5.5.1.5	Key date	ki	1..1	Alphanumeric	Length:8	M	Format: yyymmdd
5.6	This field indicates Information related to the amounts in the transaction	<Payer.Amount>	0..1	Alphabetic	Fixed	C	This field will be populated in case of Txn.type = "BalChk"
5.6.1	This field indicates Transaction amount	value	1..1	Numeric	Min Inclusive: 0 Total Digits: 15	M	051_ReqPay_Amount_Value
5.6.2	This field indicates Currency of the transaction	curr	1..1	Text	Min: 1 Max: 3	M	
5.6.2.1	This field indicates Details of transaction amount	<Payer.Amount.Split>	0..1	Alphabetic	Fixed	O	This tag will be for future purposes.
5.6.2.1.1	This field indicates Name of the property	name	1..n	Code	Min: 1 Max: 20	M	

5.6.2.1. 2	indicates Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 99	M	
---------------	---------------------------------	-------	------	--------------	-------------------	---	--

Sample API message is given below –

```
<upi:ReqBalEnq xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI"/>
  <Txn id="" note="" refId="" refUrl="" ts="" type="BalEnq" custRef="">
    <RiskScores>
      <Score provider="sp" type="TXNRISK" value=""/>
      <Score provider="NPCI" type="TXNRISK" value=""/>
    </RiskScores>
  </Txn>
  <Payer addr="" name="" seqNum="" type="PERSON|ENTITY" code="">
    <Info>
      <Identity id="" type="ACCOUNT" verifiedName="" />
      <Rating VerifiedAddress="TRUE|FALSE"/>
    </Info>
    <Device>
      <Tag name="MOBILE" value=""/>
      <Tag name="GEOCODE" value=""/>
      <Tag name="LOCATION" value="" />
      <Tag name="IP" value=""/>
      <Tag name="TYPE" value=""/>
      <Tag name="ID" value=""/>
      <Tag name="OS" value=""/>
      <Tag name="APP" value=""/>
      <Tag name="CAPABILITY" value=""/>
      <Tag name="TELECOM" value=""/>
    </Device>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value=""/>
      <Detail name="ACTYPE" value=""/>
      <Detail name="ACNUM" value=""/>
    </Ac>
  </Payer>
</upi:ReqBalEnq>
```

```

<Creds>
  <Cred type="PIN" subType=" MPIN">
    <Data> base-64 encoded/encrypted authentication data</Data>
  </Cred>
</Creds>
<Amount value="" curr="NAD">
  <Split name="PURCHASE|CASHBACK" value=""/>
</Amount>
</Payer>
</upi:ReqBalEnq>

```

4.3.12.2. RespBalEnq

Tag No	Message Item	<XML TAG>	Occurrence	DataType	Length	M/O/C	Rules
1.1	API Name	<RespBalEnq >	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODatetime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgId	1..1	Numeric	Min: 1 Max: 20	M	055_OrgId
2.1.4	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	Length: 35	M	021_Head_MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	

3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODatetime	Min: 1 Max: 255	M	020_Head_ts
3.1.6	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	BalEnq
3.2	This field indicates Risk Score related to the transaction and the entities	<Txn.RiskScores>	0..1	Alphabetic	Fixed	O	
3.2.1	This field indicates Risk Score related to the transaction and the entities	<Txn.RiskScores.Score>	0..n	Alphabetic	Fixed	O	
3.2.1.1	This field indicates Entity providing the risk score	provider	1..1	Code	Min: 1 Max: 20	M	
3.2.1.2	This field indicates Type of risk	type	1..1	Code	Min: 1 Max: 99	M	This will be decided once EFRM finalized.
3.2.1.3	This field indicates Value of risk evaluation	value	1..1	Integer	Min: 1 Max: 50	M	This will be decided once EFRM finalized.
4.1	Response	<Resp>	1..1	Alphabetic	Fixed	M	
4.1.1	Request Message Identifier	reqMsgId	1..1	Alphanumeric	Length=35	M	
4.1.2	Result of the transaction	result	1..1	Code	Min:1 Max:20	M	SUCCESS FAILURE
4.1.3	Error code if failed	errCode	0..1	Alphanumeric	Min:1 Max:20	C	027_Response_Err Code

4.1.4	Authentication code	actn	0..1	Numeric	Min:1 Max:4	O	033_RespPay_Act Code
5.1	Details related to the Payer	<Payer>	1..1	Alphabetic	Fixed	M	
5.1.1	Alias of the Payer	addr	1..1	Alphanumeric	Min:1 Max: 255	M	
5.1.2	Name of the Payer	name	1..1	Alphanumeric	Min:1 Max: 99	M	
5.1.3	Unique identifier for each transaction inside a file including payer and payee	seqNum	1..1	Numeric	Min:1 Max: 3	M	
5.1.4	Type of the Payer	type	1..1	Code	Fixed	M	029_Payer/Payee_Type
5.1.5	Merchant Classification Code – MCC	code	1..1	Numeric	Length=4	M	024_Txn_code
5.2	Data for For Balance enquiry	<Payer.Bal>	1.1	Alphabetic	Fixed	M	
5.2.1	Base 64 encoded authentication	<Payer.Bal.Data >	1.1	Alphanumeric		M	This will contain base 64 encoded data, and the format is given below before the encoding.

Sample API message is given below –

```
<upi:RespBalEnq xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI"/>
  <Txn id="" note="" refId="" refUrl="" ts="" type="BalEnq" >
    <RiskScores>
      <Score provider="sp" type="TXNRISK" value=""/>
      <Score provider="NPCI" type="TXNRISK" value=""/>
    </RiskScores>
  </Txn>
</Resp reqMsgId="" result="SUCCESS|FAILURE" errCode="" actn=""/>
```

```

<Payer addr="" name="" seqNum="" type="PERSON|ENTITY" code="">
  <Bal>
    <Data>base-64 encoded/encrypted data</Data>
    <Data> Y|N </Data> <!-- if type=BalChk !-->
  </Bal>
</Payer>
</upi:RespBalEnq>

```

BALANCE ENQUIRY FORMAT :

Bal.Data tag contains the encoded string. After decoding it looks like below:

1001356C0000029282001002356C000002916191

The breakdown of the above string is descibed in below table:

Leger Balance: Rs. 29282.00

Available Balance: Rs. 29161.91

It's on Bank if they want to send both ledger and available balance or anyone.

Amount populated should be in cent

Digit 01-02	Account type	For Ledger- Flag/Value	For Available amount- Flag/Value
00	Unspecified/Unknown		
10	Savings		
20	Checking		
30	Credit Card		
40	Cashback		
Digit 03-04	Amount type/ Balance Type		
00	Default		
01	Ledger Balance		
02	Available Balance		

90	Cashback		
Digit 05-07	Currency code		
NNN	ISO Currency Code		
Digit 8	Amount, sign		
C	Positive balance		
D	Negative balance		
Digit 9-20	Amount		
		1001356C000002928200	1002356C000002916191

4.3.13. Transaction Confirmation API

This API will be used to inform the status of the transaction to IPS participants.

Refer Reference Logs [Payment Request](#)

4.3.13.1. ReqTxnConfirmation

Sr No	Message Item	<XML Tag>	Occurrence	Datatype	Length	M/O/C	Rules
1.1	API Name	<ReqTxnConfirmation>	1..1			M	
1.1.1	API Schema	xmlns	1..1	Alphanumeric		M	
2.1	Header for the message	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgld	1..1	Numeric	Min: 1 Max: 20	M	055_Orgld

2.1.4	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	Length: 35	M	021_Head_MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min:1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
3.1.6	refCategory	refCategory	0..1	Numeric	length=2	O	
3.1.7	Original transaction ID when reversal/Refund has to be done	orgTxnId	1..1	Alphanumeric	Length:35	M	023_Txn_orgTxnId
3.1.8	Customer reference number for the initiated transaction	custRef	1..1	Numeric	Length:12	M	This is the unique value generated by the participant

							for the transaction.
3.1.9	Initiation mode	initiationMode	1..1	Code	Min: 1 Max: 3	M	031 Txn Initiation mode
3.1.10	Transaction Type	type	1..1	Code	Min Length: 1	M	“TxnConfirmation”
3.1.11	purpose code	purpose	1..1	Numeric	length=2	M	
3.2.1.3	Transaction Confirmation	<TxnConfirmation>	1..1	Alphabetic	Fixed	M	
4.1	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057 note
4.1.1	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	012_ReqTxn_Pay 013_ReqTxn_Collect
4.1.2	Original transaction error code	orgErrCode	0..1	Code	Min: 1 Max: 20	O	
4.1.3	Original transaction status	orgStatus	1..1	Code	Min: 1 Max: 20	M	
4.1.4	Authentication code	actn	0..1	Numeric	Min:1 Max:4	O	033 RespPay Act Code
4.1.5	Reversal Response Code	reversalRespCode	0..n	Code	Min: 1 Max: 20	O	028 Response Reversal
4.2	Ref tag	<TxnConfirmation.Ref>	1..1	Alphanumeric	Fixed	M	
4.2.1	Ref type	type	1..1	Code		M	012_ReqTxn_Pay 013_ReqTxn_Collect
4.2.2	Sequence Number	seqNum	1..1	Numeric	Length: 4	M	
4.2.3	Payment alias	addr	1..1	Alphanumeric	Min: 1 Max: 255	M	
4.2.4	Settlement Amount	settAmount	1..1	Numeric	Min Inclusive: 0	M	051_ReqPay_Amount_Value

					total Digits: 15		
4.2.5	Settlement Currency	settCurrency	1..1	Text	Min: 1 Max: 3	M	
4.2.6	Approval Reference Number	approvalNum	1..1	Alphanumeric	Length: 6	M	025_Response_Ap provalNum
4.2.7	Response code	respCode	1..1	Alphanumeric	Min:1 Max: 20	M	
4.2.8	Registered name with bank	regName	1..1	Alphanumeric	Min:1 Max: 99	M	
4.2.9	Original amount	orgAmount	1..1	Numeric	Min Inclusive: 0 total Digits: 15	M	051_ReqPay_Am ount_Value
4.2.10	Account number	acNum	1..1	Alphanumeric	Min:1 Max: 30	M	
4.2.11	Merchant Classification Code – MCC	code	1..1	Numeric	Length: 4	M	024_Txn_code
4.2.12	IFSC code	IFSC	1..n	Alphanumeric	Length:11	M	032_RespPay_Ref Tag_IFSC
4.2.13	Account type	accType	1..n	Code	Fixed	M	048_ReqPay_Ac name_Account
4.2.14	Alias Directory Id/ numeric Id/cmlId	cmlId	0..1	Alphanumeric	Min:6 Max:25	C	This will be populated in case of transaction during short form of alias.
4.2.15	Reversal Response Code	reversalRespCode	0..n	Code	Min:1 Max: 20	O	028_Response_Rev ersal

Sample API message is given below –

```
<upi:ReqTxnConfirmation xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI"/>
  <Txn id="" note="" refId="" refUrl="" ts="" type="TxnConfirmation" orgTxnId="" initiationMode=""
  custRef="" purpose="00|01|02|03|04|05|06|07|08|09|10"
  refCategory="00|01|02|03|04|05|06|07|08|09"/>
  <TxnConfirmation note="" orgStatus="SUCCESS/FAILURE/PENDING" orgErrCode="" type="" actn="">
    <Ref type="PAYER|PAYEE" seqNum="" addr="" regName="" settAmount="" orgAmount=""
    settCurrency="" approvalNum="" acNum="" IFSC="" code="" accType=""
    SAVINGS|CURRENT|DEFAULT|WALLET" respCode="" reversalRespCode="" cmId="" />
  </TxnConfirmation>
</upi:ReqTxnConfirmation>
```

4.3.13.2. RespTxnConfirmation

Sr No	Message Item	<XML Tag>	Occurrence	DATATYPE	LENGTH	M/O/C	Rules
1.1	API Name	<RespTxnConfirmation>	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header for the message	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODatetime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgId	1..1	Numeric	Min: 1 Max: 20	M	055_OrgId
2.1.4	Message identifier-used to correlate between request and response	msgId	1..1	Alphanumeric	Length:35	M	021_Head_MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"

3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refld	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
3.1.6	Original transaction ID when reversal/Refund has to be done	orgTxnId	1..1	Alphanumeric	Length:35	M	023_Txn_orgTxnId
3.1.7	Customer reference number for the initiated transaction	custRef	1..1	Numeric	Length:12	M	This is the unique value generated by the participant for the transaction.
3.1.8	Transaction Type	type	1..1	Code	Min: 1 Max: 20	M	
3.1.9	Initiation mode	initiationMode	1..1	Code	Min: 1 Max: 35	M	031_Txn_Initiationmode
3.1.10	refCategory	refCategory	1..1	Numeric	length=2	M	
3.2.1	purpose code	purpose	1..1	Numeric	length=2	M	
4.1	Response	<Resp>	1..1	Alphabetic	Fixed	M	
4.1.1	Request Message Identifier	reqMsgId	1..1	Alphanumeric	Length:35	M	
4.1.2	Result of the transaction	result	1..1	Code	Min: 1 Max: 20	M	

4.1.3	Error code if failed	errCode	0..1	Alphanumeric	Min:1 Max:20	C	027 Response Er rCode
-------	----------------------	---------	------	--------------	-----------------	---	---

Sample API message is given below –

```
<upi:RespTxnConfirmation xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI"/>
  <Txn id="" custRef="123456789012"note="" refId="" refUrl="" ts="" type="TxnConfirmation"
    refCategory="00|01|02|03|04|05|06|07|08|09"
    purpose="00|01|02|03|04|05|06|07|08|09|10" orgTxnId=""initiationMode=""/>
  <Resp reqMsgId="" result="SUCCESS/Failure" errCode=""/>
</upi:RespTxnConfirmation>
```

4.3.14. RegMapper API

This API will facilitate IPS participants Apps to Register/Modify Unique Number at Alias Directory. Using this API user can create a unique number more than once and can be mapped to active alias. Likewise, the user can also use the mobile number as unique number. The ReqRegMapper API will store the details in Alias Directory in an encrypted format.

The ReqRegMapper API shall perform various operations in the Alias Directory given below

1. Add – Create a new Merchant ID at the time of registration of alias.
 2. Modify – Modify the Merchant ID against alias by selecting any of the created Merchant ID's or Update the Unique Number as Mobile Number against the alias.
- @mapper.npci will be the new handle that shall be appended to the Unique Number (Merchant ID / mobile number) for identifying the request to Alias Directory.

Refer Reference Logs [RegMapper API](#)

4.3.14.1. ReqRegMapper

Sr No	Message Item	<XMLTag>	Occurrence	Datatype	Length	M/O /C	Rules
1.1	API Name	<ReqRegMapper>	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019 Head Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020 Head ts
2.1.3	Organization id that created the message	orgId	1..1	Numeric	Min: 1 Max: 20	M	055 OrgId
2.1.4	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	Min: 1 Max: 35	M	021 Head MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: “UPI”
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022 Txn UUID
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note

3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
3.1.6	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	CMREGISTRATION
3.1.7	Operation to be performed by the request	op	1..1	Code	Fixed	M	ADD MODIFY
4.1	Details related to the Payer	<Payer>	1..1	Alphabetic	Fixed	M	
4.1.1	Alias of the Payer	addr	1..1	Alphanumeric	Min: 1 Max: 255	M	
4.1.2	Name of the Payer	name	1..1	Alphanumeric	Min: 1 Max: 99	M	
4.1.3	Unique identifier for each transaction inside a file including payer and payee	seqNum	1..1	Numeric	Min: 1 Max: 35	M	
4.1.4	Type of the Payer	type	1..1	Code	Fixed	M	PERSON ENTITY
4.1.5	Merchant Classification Code - MCC	code	1..1	Numeric	Length: 4	M	024_Txn_code
5.1	Details of the Registration ID	<Payer.RegIdDetails>	1..1	Code	Fixed	M	

5.1.1	RegDetails ID tag	<Payer.RegIdDetails.Id>	1..1	Alphabetic	Fixed	M	
5.1.2	Name	name	1..n	Alphabetic	Fixed	M	MOBILE NUMERICID
5.1.4	Value	value	1..n	Alphanumeric	Min: 1 Max: 100	M	
6.1	Status of the ID	setStatus	1..1	Alphabetic	Min: 1 Max: 35	M	ACTIVE INACTIVE BLOCK UNBLOCK DEREGISTER
6.1.1	Consent	<Payer.Consent>	1..n	Alphabetic	Fixed	M	
6.1.2	Name	name	1..1	Alphanumeric	Min: 1 Max: 50	M	CMREGISTRATION
6.1.3	Value	value	1..1	Code	Fixed	M	Y N
6.1.4	Previous VPA	prevVpa	0..1	Code	Min: 6 Max: 9	C	Only during 'Modify'
6.1.5	Type	type	1..n	Numeric	Fixed	M	NUMERICID MOBILE
7.1	Details of device from which the transaction was initiated	<Payer.Device>	1..n	Alphabetic	Fixed	M	
7.1.1	Device Tag	<Payer.Device.Tag>	1..n	Alphabetic	Fixed	M	

7.1.1.1	Name of the Property	name	1..n	Code (MOBILE, GEOCODE, LOCATION, IP, TYPE, ID, OS, APP, CAPABILITY, TELECOM)	Fixed	M	TELECOM in case of USSD.
7.1.1.2	Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 20	M	
7.2	This field indicates Account details of the Payer	<Payer.Ac>	1..1	Alphabetic	Fixed	M	Only one entity is allowed for a payer
7.2.1	This field indicates Type of the alias	addrType	1..1	Code	Min:1 Max: 20	M	046 ReqPay_Ac_addrType
7.3	This field indicates Details related to Payer Alias	<Payer.Ac.Detail>	1..n	Alphabetic	Min:1 Max:255	M	
7.3.1	This field indicates Name of the property	name	1..n	Code	Fixed	M	048 ReqPay_Ac_name Account
7.3.2	This field indicates Value of the property	value	1..n	Alphanumeric	Min:1 Max:20	M	

Sample API message is given below –

```
<upi:ReqRegMapper xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI"/>
  <Txn id="" note="" refId="" refUrl="" ts="" type="CMREGISTRATION" op="ADD|MODIFY" />
  <Payer addr="" name="" seqNum="" type="PERSON|ENTITY" code="">
    <RegIdDetails>
      <Id name="MOBILE|NUMERICID" value="" setStatus="ACTIVE|INACTIVE|BLOCK|UNBLOCK|DEREGISTER"/>
    </RegIdDetails>
  </Payer>
</upi:ReqRegMapper>
```

```

</RegIdDetails>
<Consent name="CMREGISTRATION" value="Y|N" prevVpa="" />
<Device>
  <Tag name="MOBILE" value=""/>
  <Tag name="GEOCODE" value=""/>
  <Tag name="LOCATION" value=""/>
  <Tag name="IP" value=""/>
  <Tag name="TYPE" value="MOB|IVR|USDC"/>
  <Tag name="ID" value=""/>
  <Tag name="OS" value=""/>
  <Tag name="APP" value=""/>
  <Tag name="CAPABILITY" value=""/>
  <Tag name="TELECOM" value=""/>
</Device>
</Ac>
<Ac addrType="ACCOUNT">
  <Detail name="IFSC" value=""/>
  <Detail name="ACTYPE" value=""/>
  <Detail name="ACNUM" value=""/>
</Ac>
</Payer>
</upi:ReqRegMapper>

```

NOTE: In case of mobile number transfer b/w old IPS participants and new IPS participants shall fire a ReqGetAdd first and fetch the old active alias for validation by the customer followed by getting consent to update the same. The ReqRegMapper shall be fired with the alias received in RespGetAdd in the ReqRegMapper under tag - prevVpa i.e. last updated alias

For Numeric ID, addr tag is not mandatory. For Mobile Number, addr tag is mandatory in response in which Username of the alias will be masked and handle will not be present.

4.3.14.2. RespRegMapper

Sr No	Message Item	<XMLTag>	Occurrence	Datatype	Length	M/O /C	Rules
1.1	API Name	<RespRegMapper>	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min:1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min:1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODateTime	Min:1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgId	1..1	Numeric	Min:1 Max: 20	M	055_OrgId
2.1.4	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	Min:1 Max: 35	M	021_Head_MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: “UPI”
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min:1 Max: 50	M	057_note

3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min:1 Max: 35	M	
3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min:1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min:1 Max: 255	M	020_Head_ts
3.1.6	Type of the Transaction	type	1..1	Code	Min:1 Max: 20	M	“CMREGISTRATION”
3.1.7	Operation to be performed by the request	op	1..1	Code	Fixed Length	M	ADD MODIFY
4.1	Response	<Resp>	1..1	Alphabetic	Fixed	M	
4.1.1	Request Message identifier	reqMsgId	1..1	Alphanumeric	Length: 35	M	
4.1.2	Result of the transaction	result	1..1	Code	Min:1 Max: 20	M	SUCCESS FAILURE
4.1.3	Error code if failed	errCode	0..1	Alphanumeric	Min:1 Max: 20	C	
5.1	Details of the Registration ID	<Resp.RegIdDetails>	1..1	Code	Fixed	M	
5.1.1	Alias of the Payer	addr	1..1	Alphanumeric	Min:1 Max: 255	M	
5.1.2	RegDetails ID tag	<Resp.RegIdDetails .Id>	1..1	Alphabetic	Fixed	M	
5.1.3	Name	name	1..n	Alphabetic	Fixed	M	MOBILE NUMERICID
5.1.4	Value	value	1..n	Alphanumeric	Min:1 Max: 100	M	

5.1.5	Status of the ID	setStatus	1..1	Alphabetic	Min:1 Max: 35	M	ACTIVE INACTIVE BLOCK UNBLOCK DEREGISTER
5.1.6	Expiry Time Stamp. Will be shared during deregistration	expiryTs	0..1	ISODateTime	Min: 1 Max: 255	C	In case of deregistration request, expiryTs will be shared in the response and the IPS participant can refer the same to calculate the cooling period of the Merchant Id. The string format should be: YYYY-MMDDTHH:mm:ss.sssZ , where: YYYY-MM-DD – is the date: year- month day. The character "T" is used as the delimiter. HH:mm:ss: sss – is the time: hours, minutes, seconds and milliseconds. 'h' 'Z' part denotes the time zone in the format +- hh:mm HH/hh = two digits of hour (00 through 23) (am/pm NOT allowed) mm = two digits of minute (00 through 59) ss = two digits of second (00 through 59)

sss= three digit of millisecond (000 through 999)
+/- hh:mm = followed by time zone difference from GMT in hours and minutes. This is Mandatory

Sample API message is given below –

```
<upi:RespRegMapper xmlns: upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType= "UPI" />
  <Txn id="" note="" refId="" refUrl="" ts="" type="CMREGISTRATION" op="ADD|MODIFY"/>
  <Resp reqMsgId="" result="SUCCESS|FAILURE" errCode="" >
    <RegIdDetails addr=""> <!--VPA of customer. In case of mobile number transfer b/w IPS
      participants the response shall have the final/latest VPA as per CM! -- >
      <Id name="MOBILE|NUMERICID" value="" setStatus="
        ACTIVE|INACTIVE|BLOCK|UNBLOCK|DEREGISTER " expiryTs = "" />
    </RegIdDetails>
  </Resp>
</upi:RespRegMapper >
```

4.3.15. Get Address API

This API is majorly used to retrieve the alias linked to the Merchant id or mobile number.

The customer can use his own credentials for enquiries. IPS participant should not allow any 3rd party to fetch the different credentials. This API is also used during onboarding to see the availability of the selected numeric id.

GetAdd is mandatory for the below scenarios

1. Creation of Unique Number (Mobile Number /Merchant ID)
2. Transfer of Mobile Number to different PSP

This new API shall be used for checking the availability of an ID before creating a new record as well as for fetching status in case of timeout of CREATE/MODIFY/DELETE record.

Reference Logs [Get Address API](#)

4.3.15.1. ReqGetAdd

Sr No	Message Item	<XMLTag>	Occurrence	Datatype	Length	M/O /C	Rules
1.1	API Name	<ReqGetAdd>	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min:1 Max:255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min:1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODatetime	Min:1 Max:255	M	020_Head_ts
2.1.3	Organization id that created the message	orgId	1..1	Numeric	Min:1 Max: 20	M	055_OrgId
2.1.4	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	Min:1 Max: 35	M	021_Head_MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID

3.1.2	Description n of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min:1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min:1 Max: 35	M	
3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min:1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min:1 Max: 255	M	020_Head_ts
3.1.6	Type of the Transaction	type	1..1	Code	Min:1 Max:20	M	“CHECK FETCH PORT”
3.1.7	Subtype of the Transaction	subType	0..1	Alphabetic	Fixed	C	Value will be: “VPA ID” This will be populated in the case of type= “FETCH” For subType=“VPA”, RegIdDetails block not required. For subType=“ID”, Payer.addr + RegIdDetails.value is mandatory. To fetch the linked full form of alias , user has to try the combination available full form of alias against the numeric id and GetAdd

							API will provide just the status and it will reject the invalid combination
4.1	Details related to the Payer	<Payer>	1..1	Alphabetic	Fixed	M	
4.1.1	Alias of the Payer	addr	1..1	Alphanumeric	Min:1 Max:255	M	
4.1.2	Name of the Payer	name	1..1	Alphanumeric	Min:1 Max: 99	M	
4.1.3	Unique identifier for each transaction inside a file including payer and payee	seqNum	1..1	Numeric	Min:1 Max: 35	M	056_seqNum
4.1.4	Type of the Payer	type	1..1	Code	Fixed	M	PERSON ENTITY
4.1.5	Merchant Classification Code - MCC	code	1..1	Numeric	Length: 4	M	
5.1	Details of the Registration ID	<Payer.RegIdDetails>	0..1	Code	Fixed	C	In case of type="FETCH" and subtype="VPA", this RegIdDetails block will not be present.
5.1.1	RegDetails ID tag	<Payer.RegIdDetails .Id>	1..1	Alphabetic	Fixed	M	
5.1.2	Name	name	1..n	Alphabetic	Fixed	M	MOBILE
5.1.3	Value	value	1..n	Alphanumeric	Min:1 Max:100	M	This field will have mobile number for whom registration is supposed to be checked.
6.1	Consent	<Payer.Consent>	1..n	Alphabetic	Fixed	M	

6.1.1	Name	name	1..1	Alphanumeric	Min:1 Max: 50	M	CMREGISTRATION
6.1.2	Value	value	1..1	Code	Fixed	M	
7.1	Details of device from which the transaction was initiated	<Payer.Device>	1..n	Alphabetic	Fixed	M	
7.1.1	Device Tag	<Payer.Device.Tag>	1..n	Alphabetic	Fixed	M	
7.1.1.1	Name of the Property	name	1..n	Code (MOBILE, GEOCODE, LOCATION, IP, TYPE, ID, OS, APP, CAPABILITY, TELECOM)	Fixed	M	
7.1.1.2	Value of the property	value	1..n	Alphanumeric	Min:1 Max: 20	M	

Sample API message is given below –

```
<upi:ReqGetAdd xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI"/>
  <Txn id="" note="" refId="" refUrl="" ts="" type="CHECK|FETCH|PORT" subType="ID|VPA"/>
  <!--For subType="VPA", RegIdDetails block not required
  For subType="ID" , Payer.addr + RegIdDetails.value is mandatory -->
  <Payer addr="" name="" seqNum="" type="PERSON|ENTITY" code="">
    <RegIdDetails>
      <Id name="MOBILE" value=""/>
      <Id name="NUMERICID" value=""/>
    </RegIdDetails>
    <Consent name="CMREGISTRATION" value="Y|N"/>
    <Device>
      <Tag name="MOBILE" value=""/>
    </Device>
  </Payer>
</upi:ReqGetAdd>
```

```

        <Tag name="GEOCODE" value=""/>
        <Tag name="LOCATION" value="" />
        <Tag name="IP" value=""/>
        <Tag name="TYPE" value="MOB|IVR|USDC"/>
        <Tag name="ID" value=""/>
        <Tag name="OS" value=""/>
        <Tag name="APP" value=""/>
        <Tag name="CAPABILITY" value=""/>
        <Tag name="TELECOM" value=""/>
    </Device>
</Payer>
</upi: ReqGetAdd>

```

4.3.15.2. RespGetAdd

Sr No	Message Item	<XMLTag>	Occurrence	Datatype	Length	M/O /C	Rules
1.1	API Name	<RespGetAdd>	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODatetime	Min: 1 Max:255	M	020_Head_ts
2.1.3	Organization id that created the message	orgId	1..1	Numeric	Min: 1 Max: 20	M	055_OrgId
2.1.4	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	Min: 1 Max: 35	M	021_Head_MsgId

2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: “UPI”
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID
3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
3.1.6	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	“CHECK FETCH PORT”
4.1	Response	<Resp>	1..1	Alphabetic	Fixed	M	
4.1.1	Request Message identifier	reqMsgId	1..1	Alphanumeric	Length: 35	M	
4.1.2	Result of the transaction	result	1..1	Code	Min: 1 Max: 20	M	“SUCCESS FAILURE”
4.1.3	Error code if failed	errCode	0..1	Alphanumeric	Min: 1 Max: 20	C	027_Response_ErrCode

5.1	Details of the Registration ID	<Resp.RegIdDetails >	1..1	Code	Fixed	M	
5.1.1	Alias of the Payer	addr	1..1	Alphanumeric	Min: 1 Max:255	M	
5.1.2	Type of the Payer	type	1..1	Code	Fixed	M	“PERSON ENTITY”
5.1.3	Status of the Id	idStatus	1..1	Code	Fixed	M	NEW ACTIVE INACTIVE BLOCK UNBLOCK DE REGISTER
5.1.4	Last Modified date of the account provider information in the IPS system	lastUpdatedTs	0..1	ISODateTime	Min: 1 Max: 255	C	Populate this field when type=“FETCH” or “PORT” The string format should be: YYYY- MMDDTHH:mm:ss.sss Z, where: YYYY-MM-DD – is the date: year- monthday. The character "T" is used as the delimiter. HH:mm:ss:sss – is the time: hours, minutes, seconds and milliseconds. ‘h’ 'Z' part denotes the time zone in the format +- h:mm HH/hh = two digits of hour (00 through 23) (am/pm

							NOT allowed) mm = two digits of minute (00 through 59) ss= two digits of second (00 through 59) sss= three digit of millisecond (000 through 999) +/- hh:mm = followed by time zone difference from GMT in hours and minutes. This is Mandatory
5.1.5	Initiating Channel	channel	0..1	Alphabetic	Fixed	C	MOB USDC Populate this field when type="FETCH" or "PORT"
5.1.6	RegDetails ID tag	<Resp.RegIdDetails.Id>	1..1	Alphabetic	Fixed	M	
5.1.7	Name	name	1..n	Alphabetic	Fixed	M	"MOBILE NUMERICID"
5.1.8	Value	value	1..n	Alphanumeric	Min: 1 Max:100	M	
5.1.9	Unique identifier for each transaction inside a file including payer and payee	seqNum	0..1	Numeric	Min: 1 Max: 35	O	056 seqNum

Sample API message is given below –

```
<upi:RespGetAdd xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI" />
  <Txn id="" note="" refId="" refUrl="" ts="" type="CHECK|FETCH|PORT"/>
  <Resp reqMsgId="" result="SUCCESS|FAILURE" errCode="">
    <RegIdDetails addr="" type="PERSON|ENTITY" idStatus="
    NEW|ACTIVE|INACTIVE|BLOCK|UNBLOCK|DEREGISTER" lastUpdatedTs="" channel="MOB|USDC" ><!--VPA of
    customer !-->
      <Id name="MOBILE" value="" />
      <Id name="NUMERICID" value="" seqNum="1" />
    </RegIdDetails>
  </Resp>
</upi:RespGetAdd>
```

Note:

Type 'PORT' will while porting of mobile number from one IPS participant to Other IPS participant. The 'result' will be success if the number is available and the IPS participant can initiate the ReqRegMapper API for modify request. When 'result' is failure user has to register the mobile number for alias directory.

4.3.16. ReqMapperConfirmation API

Alias Directory will send the notification of Porting of Mobile Number to old IPS participants.

Reference Logs [Mapper Confirmation](#)

4.3.16.1. ReqMapperConfirmation

Sr No	Message Item	<XMLTag>	Occurrence	Datatype	Length	M/O/C	Rules
1.1	API Name	<ReqMapperConfirmation >	1..1			M	

1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min:1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min:1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODateTime	Min:1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgld	1..1	Numeric	Min:1 Max: 20	M	055_Orgld
2.1.4	Message identifier-used to correlate between request and response	msgld	1..1	Alphanumeric	Min:1 Max: 35	M	021_Head_Msgld
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID
3.1.2	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min:1 Max:255	M	020_Head_ts

3.1.3	Type of the Transaction	type	1..1	Code	Fixed Length	M	ReqMapperConfirmation
3.1.4	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min:1 Max: 35	M	
3.1.5	URL for the transaction	refUrl	1..1	Alphanumeric	Min:1 Max: 35	M	058_refUrl
3.1.6	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min:1 Max: 50	M	057_note
3.1.7	Original Transaction Id. (Txn Id of GetAddress API)	orgTxnId	1..1	Alphabetic	Fixed	M	
3.1.8	Customer reference number for the initiated transaction	custRef	1..1	Numeric	Length=12	M	This is the unique value generated by the participant for the transaction.
4.1	Transaction Confirmation	<TxnConfirmation>	1..1	Alphabetic	Fixed	M	
4.1.1	Operation to be performed by the request	op	1..1	Code	Fixed Length	M	MODIFY
4.1.2	Type of Identification	idType	1..n	Alphabetic	Fixed	M	MOBILE NUMERICID
4.1.3	Original transaction status	orgStatus	1..1	Code	Min:1 Max: 20	M	
5.1.3	Unique identifier for each transaction inside a file including payer and payee	seqNum	1..1	Numeric	Min:1 Max: 35	M	056_seqNum
5.1	Response Reference	<TxnConfirmation.Refs>	1..n	Alphabetic	Fixed	M	

5.1	Ref type	type	1..1	Code		M	
5.1.1	Alias of the Payer	addr	1..1	Alphanumeric	Min:1 Max: 255	M	
5.1.2	Name of the Payer	name	1..1	Alphanumeric	Min:1 Max: 99	M	
5.1.3	Merchant Classification Code - MCC	code	1..1	Numeric	Length: 4	O	
5.1.4	IPS Number of the alias	cmId	1..1	Numeric	Min:6 Max: 16	M	
5.1.5	Status of the cmId	status	1..1	Code	Fixed	M	“ACTIVE INACTIVE NEW DEREGISTER BLOCK U NBLOCK“
5.1.6	Initiating Channel	channel	1..1	Alphabetic	Fixed	M	MOB USDC
5.2	Consent	<TxnConfirmation.Consent>	1..1	Alphabetic	Fixed	M	
5.2.1	Name	name	1..1	Alphanumeric	Min: 1 Max: 50	M	CMREGISTRATION
5.2.2	Value	value	1..1	Code	Fixed	M	Y N This will be always “Y”
5.2.3	Previous VPA	prevVpa	1..1	Code	Min: 6 Max: 9	C	Only during op=‘Modify’. This field will contain the previously mapped full alias to short alias.

Sample API message is given below –

```
<upi:ReqMapperConfirmation xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI"/>
  <Txn id="" note="" custRef="" refId="" refUrl="" ts="" type="CMREGISTRATION" orgTxnId=""/>
  <TxnConfirmation orgStatus="SUCCESS|FAILURE" op="ADD|MODIFY" idType="MOBILE|NUMERICID">
    <Refs type="PAYER" addr="" cmId="" code="" channel="MOB|IVR" status="DEREGISTER"/>
  </TxnConfirmation>
</upi:ReqMapperConfirmation>
```

```
<Consent name="CMREGISTRATION" value="" prevVpa="" />
</TxnConfirmation>
</upi:ReqMapperConfirmation>
```

4.3.16.2. RespMapperConfirmation

Sr No	Message Item	<XMLTag>	Occurrence	Datatype	Length	M/O /C	Rules
1.1	API Name	<RespMapperConfirmation>	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgld	1..1	Numeric	Min: 1 Max: 20	M	055_Orgld
2.1.4	Message identifier-used to correlate between request and response	msgld	1..1	Alphanumeric	Min: 1 Max: 35	M	021_Head_Msgld
3.1	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"

3.1.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.2	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID
3.1.3	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
3.1.4	Type of the Transaction	type	1..1	Code	Fixed	M	ReqMapperConfirmation
3.1.5	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.6	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.1.7	Original Transaction Id. (Txn Id of Get Address API)	orgTxnId	1..1	Alphabetic	Fixed	M	

3.1.8	Customer reference number for the initiated transaction	custRef	1..1	Numeric	Length=12	M	This is the unique value generated by the participant for the transaction.
4.1	Response	<Resp>	1..1	Alphabetic	Fixed	M	
4.1.1	Request Message identifier	reqMsgId	1..1	Alphanumeric	Length: 35	M	
4.1.2	Result of the transaction	result	1..1	Code	Min: 1 Max: 20	M	
4.1.3	Error code if failed	errCode	0..1	Alphanumeric	Min: 1 Max: 20	C	027_Response_ErrCode

Sample API message is given below –

```
<upi:RespMapperConfirmation xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="" orgId="" msgId="" prodType="UPI"/>
  <Txn id="" custRef="" note="" refId="" refUrl="" ts="" type="ReqMapperConfirmation" orgTxnId="" />
  <Resp reqMsgId="" result="SUCCESS|FAILURE" errCode="" />
</upi:RespMapperConfirmation>
```

Note: orgStatus should be success in case of Transfer of mobile number between IPS participant.

4.4. Financial APIs

4.4.1. Pay API

Refer Reference Logs [Payment Request](#)

4.4.1.1. ReqPay

Sr No	Message Item	<XMLTag	Occurrence	Datatype	Length	M/O/C	Rules
1.1	API Name	<ReqPay>	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgId	1..1	Numeric	Min: 1 Max: 20	M	055_OrgId
2.1.4	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	Length: 35	M	021_Head_MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
3.1	Meta data primarily for analytics purpose	<Meta>	0..1	Alphabetic	Fixed	O	

3.2	Meta data primarily for analytics purposes	<Meta.Tag>	0..1	Alphabetic	Fixed	M	
3.2.1	Name of the property	name	1..n	Code	Min: 1 Max: 20	M	
3.2.2	Value of the property	value	1..n	ISODateTime	Min: 1 Max: 255	M	
4.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
4.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022 Txn UUID
4.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
4.1.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	
4.1.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
4.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
4.1.6	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	001 ReqPay Pay 002 ReqPay Collect 003 ReqPay Debit 004 ReqPay Credit 005 ReqPay DebitReversal 006 ReqPay CreditReversal
4.1.7	Original transaction ID when reversal/Refund has to be done	orgTxnId	0..1	Alphanumeric	Length: 35	C	023_Txn_orgTxnId

4.1.8	Customer reference number for the initiated transaction	custRef	1..1	Numeric	Length: 12	M	This is the unique value generated by the participant for the transaction.
4.1.9	Subtype of transaction	subType	0..1	Code	Min: 1 Max: 20	C	030 Txn SubType subType field is only applicable for ReqPay_debit/credit/reversal
4.1.10	Initiation mode	initiationMode	1..1	Code	Min: 1 Max: 35	M	031 Txn Initiation mode
4.1.11	OrgRespCode of the transaction	orgRespCode	0..1	Alphanumeric	Min: 1 Max: 20	C	039 ReqPay OrgRespCode
4.1.12	Purpose of the txn	purpose	1..1	Code	Fixed	M	045 ReqPay Txn purpose
4.1.13	Original RRN	orgRrn	0..1	Numeric	Length:12	C	This field will be mandatory in case of type="REVERSAL"
4.1.14	Original Date of the txn	orgTxnDate	0..1	ISODateTime	Min: 1 Max: 255	C	This field will be mandatory in case of type="REVERSAL"
4.1.15	Reference Category	refCategory	0..1	Code	Fixed	O	052 ReqPay Txn refCategory
4.1.16	Common Library Version	clVersion	1..1	Alphanumeric	Fixed Length =15	M	The clVersion field will follow an alphanumeric format with validation structured as: clVersion-subVersion-expiryOfPublicKey

							Each component is separated by a hyphen ('-'). A sample value along with a detailed explanation has been included in the Common Library document for clarity.
4.2	Risk Score related to the transaction and the entities	<Txn.RiskScores>	0..1	Alphabetic	Fixed	O	
4.3	Risk Score related to the transaction and the entities	<Txn.RiskScores.Score>	1..n	Alphabetic	Fixed	M	
4.3.1	Entity providing the risk score	provider	1..1	Code	Min: 1 Max: 20	M	
4.3.2	Type of risk	type	1..1	Code	Min: 1 Max: 99	M	
4.3.3	Value of risk evaluation ranging from 0 (No Risk) to 100(Maximum Risk)	value	1..1	Integer	Min: 1 Max: 50	M	
4.4	Rules that govern the payment	<Txn.Rules>	0..1	Alphabetic	Fixed	C	This field is mandatory in case of type="COLLECT"
4.5	Rule for the transaction	<Txn.Rules.Rule>	1..n	Alphabetic	Fixed	M	
4.5.1	Name of the property	name	1..n	Code	Min: 1 Max: 20	M	
4.5.2	Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 255	M	
4.6	Qr Block	<Txn.Qr>	0..1	Alphabetic		O	This is for the future scope

4.6.1	This field indicates the version of IPS QR being used.	qVer	1..1	Numeric	Min :1 Max : 6	M	
4.6.2	This field indicates QR generation timestamp	ts	0..1	ISODateTime	Min :1 Max : 255	O	
4.6.3	This field indicates the QR medium tag denotes Source channel i.e. creation point of the QR.	qrMedium	0..1	Numeric	Min :1 Max :99	O	
4.6.4	This field indicates QR Expiry date & time Mapped to 'QRexpiry' parameter in QR string.	ExpireTs	0..1	ISODateTime	Min :1 Max :255	O	
4.6.5	This field indicates Query	query		JSON		O	
4.6.6	This field indicates Verification token for QR request. This will be passed in the financial request Reference to International partner for ValQr and Financial request generated by the International Partner	verToken	0..1	String	Min :1 Max :80	O	
4.6.7	This field indicates STAN present in QR It denotes the value generated and passed by the acquiring bank for internal reconciliation	stan	0..1	String	6	O	
5.1	Details related to the Payer	<Payer>	1..1	Alphabetic	Fixed	M	
5.1.1	Alias of the Payer	addr	1..1	Alphanumeric	Min: 1 Max: 255	M	
5.1.2	Name of the Payer	name	1..1	Alphanumeric	Min: 1 Max: 99	M	

5.1.3	Unique identifier for each transaction inside a file including payer and payee	seqNum	1..1	Numeric	Min: 1 Max: 35	M	056_seqNum
5.1.4	Type of the Payer	type	1..1	Code	Fixed	M	029 Payer/Payee Type
5.1.5	Merchant Classification Code – MCC	code	1..1	Numeric	Length: 4	M	024_Txn_code
5.1.6	Alias Directory Id/ numeric Id/cmlid	cmlid	0..1	Alphanumeric	Min:6 Max:25	C	Mandatory In case of transaction being done using Mobile Number/Merchant ID else optional
5.2	Merchant block	<Payer.Merchant>	0..1	Alphabetic	Fixed	C	037 ReqPay Payer/Payee MerchantTag For type="REFUND", this tag is mandatory
5.2.1	Identifier	<Payer.Merchant.Identifier>	1..1	Alphabetic	Fixed	M	
5.2.1.1	Subcode	subCode	0..1	Code	Length:4	O	
5.2.1.2	Merchant Identifier	mid	1..1	Alphanumeric	Min: 1 Max: 20	M	
5.2.1.3	Store id	sid	0..1	Alphanumeric	Min: 1 Max: 20	O	
5.2.1.4	Terminal Identifier	tid	0..1	Alphanumeric	Min: 1 Max: 20	O	
5.2.1.5	Merchant type	merchantType	0..1	Alphabetic	Fixed	O	SMALL LARGE
5.2.1.6	Merchant Genre	merchantGenre	0..1	Alphabetic	Fixed	O	ONLINE OFFLINE
5.2.1.7	Merchant onboarding Type	onBoardingType	0..1	Alphabetic	Fixed	O	

5.2.1.8	This field indicates the Registration Id	regIdNo	0..1	Alphanumeric	Max:35	O	
5.2.1.9	This field indicates the Area pincode	pinCode	0..1	Numeric	Fixed	O	
5.2.1.10	This field indicates the tier of the city	tier	0..1	Alphanumeric	Code	O	
5.2.2	Name	<Payer.Merchant.Name>	0..1	Alphabetic	Min: 1 Max: 99	O	
5.2.2.1	Brand	brand	1..1	Alphanumeric	Min: 1 Max: 99	M	
5.2.2.2	Legal	legal	0..1	Alphanumeric	Min: 1 Max: 99	O	
5.2.2.3	Franchise	franchise	0..1	Alphanumeric	Min: 1 Max: 99	O	
5.2.3	Ownership	<Payer.Merchant.Ownership>	0..1	Alphabetic	Fixed	O	
5.2.3.1	Type	type	1..1	Code	Fixed	M	038 ReqPay MerchantTag Ownership Type
5.2.4	This field indicates the invoice details.	<Payer.Merchant.Invoice>	0..1	Alphabetic	Fixed	O	
5.2.4.1	This field indicates the invoice name	name	1..1	Alphanumeric	Min:1 Max:99	M	
5.2.4.2	This field indicates the Invoice Number.	num	1..1	Alphanumeric	Max:20	M	053 Payee.Merchant.Invoice_num
5.2.4.3	This field indicates the Invoice Date.	date	1..1	ISODateTime	Min:1 Max: 255	M	054 Payee.Merchant.Invoice_date
6.1	Institution	<Payer.Institution>	1..n	Alphabetic	Fixed	O	042 ReqPay Initiationmode This is for future use.

6.1.1	Type	type	1..1	Code	Fixed	M	043 ReqPay Institution type
6.1.2	Route	route	1..1	Code	Fixed	M	044 ReqPay Institution route
6.2	Name	<Payer.Institution.Name>	1..1	Alphabetic	Fixed	M	
6.2.1	Value	value	1..1	Alphanumeric	Min: 1 Max: 100	M	
6.2.2	acNum	acNum	1..1	Alphanumeric	Min: 1 Max: 30	M	
6.3	Purpose	<Payer.Institution.purpose>	1..1	Alphabetic	Fixed	M	
6.3.1	Code	code	1..1	Code	Min: 1 Max: 50	M	
6.3.2	Note	note	1..1	Alphanumeric	Min: 1 Max: 50	M	
6.4	Originator	<Payer.Institution.Originator>	1..1	Alphabetic	Fixed	M	
6.4.1	Name	name	1..1	Alphanumeric	Min: 1 Max: 50	M	
6.4.2	Type	type	1..1	Code	Fixed	M	
6.4.3	refNo	refNo	1..1	Alphanumeric	Min: 1 Max: 30	M	
6.4.4	Address	<Payer.Institution.Originator.Address>	1..1	Alphabetic	Fixed	M	
6.4.4.1	Location	location	1..1	Alphanumeric	Min: 1 Max: 40	M	
6.4.4.2	City	city	1..1	Alphanumeric	Min: 1 Max: 100	M	
6.4.4.3	Country	country	1..1	Alphanumeric	Min: 1	M	

					Max: 100		
6.4.4.4	Geocode	geocode	1..1	Alphanumeric	nn.nn nn,nn.nnnn	M	
6.5	Beneficiary	<Payer.Institution.Beneficiary>	1..1	Alphabetic	Fixed	M	
6.5.1	Name	name	1..1	Alphabetic	Min: 1 Max : 50	M	
7.1	Information related to the Payer	<Payer.Info>	0..1	Alphabetic	Fixed	C	001_ReqPay_Pay 002_ReqPay_Collect 003_ReqPay_Debit 004_ReqPay_Credit 005_ReqPay_DebitReversal 006_ReqPay_CreditReversal
7.1.1	Payer Identity Is mandatory for “pay” and optional for “collect”	<Payer.Info.Identity>	1..1	Alphabetic	Min: 1 Max: 20	M	
7.1.1.1	Id of the identifier	id	1..1	Alphanumeric	Min: 1 Max: 99	M	
7.1.1.2	Type of the identifier	type	1..1	Code	Fixed	M	
7.1.1.3	Name as per the identifier	verifiedName	1..1	Alphanumeric	Min: 1 Max: 99	M	
7.2	Rating of the payer	<Payer.Info.Rating>	0..1	Alphabetic	Fixed	O	
7.2.1	verifiedAddress	verified Address	1..1	Code	Boolean TRUE/FALSE	M	026 Payer/Payee InfoRating
8.1	Details of device from which the transaction was initiated	<Payer.Device>	0..1	Alphabetic	Fixed	C	001_ReqPay_Pay 002_ReqPay_Collect 003_ReqPay_Debit 004_ReqPay_Credit

							005_ReqPay_DebitReversal 006_ReqPay_CreditReversal
8.1.1	Device Tag	<Payer.Device.Tag>	1..n	Alphabetic	Fixed	M	
8.1.1.1	Name of the property	name	1..n	Code (MOBILE, GEOCODE, LOCATION, IP, TYPE, ID, OS, APP, CAPABILITY, TELECOM)	Fixed	M	
8.1.1.2	Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 20	M	034_ReqPay_DeviceDetails Values 035_ReqPay_DeviceDetails type 036_ReqPay_DeviceDetails OS
9.1	Only one entity is allowed for a payer	<Payer.Ac>	0..1	Alphabetic	Fixed	C	001_ReqPay_Pay 002_ReqPay_Collect 003_ReqPay_Debit 004_ReqPay_Credit 005_ReqPay_DebitReversal 006_ReqPay_CreditReversal
9.1.1	Type of the Alias	addrType	1..1	Code	Min: 1 Max: 20	M	046_ReqPay_Ac_addrType

9.1.2	Details related to Payer Alias	< Payer.Ac .Detail>	1..n	Alphabetic	Min: 1 Max: 255	M	
9.1.3	Name of the property	name	1..n	Code	Fixed	M	048_ReqPay_Ac_name_Account 049_ReqPay_Ac_name_Mobile 050_ReqPay_Ac_name_Card
9.1.4	Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 20	M	
10.1	Information related to Payer Credentials	<Payer.Creds>	1..1	Alphabetic	Min: 1 Max: 20	M	
10.1.1	Credentials are used to authenticate the request	<Payer.Creds .Cred>	1..n	Alphabetic	Min: 1 Max: 20	M	040_ReqPay_Credblock 041_RespAuthDetailUPI_mandate_CollectCredblock 007_ReqPay_PreApproved 025_Response_Approval Num
10.1.1.1	Type of financial instrument used for authentication	type	1..1	Code	Fixed	M	
10.1.1.2	Subtype	subType	1..1	Code	Fixed	M	040_ReqPay_Credblock
10.1.2	base-64 encoded/ encrypted authentication data	< Payer.Creds .Cred.Data>	1..1	Alphabetic	Fixed	M	
10.1.2.1	Data Code	code	1..1	Code	Fixed	M	
10.1.2.2	Key Index	ki	1..1	Alphanumeric	Fixed	M	
11.1	Information related to the amounts in the transaction	<Payer.Amount >	0..1	Alphabetic	Fixed	C	001_ReqPay_Pay 002_ReqPay_Collect

							003_ReqPay_Debit 004_ReqPay_Credit 005_ReqPay_DebitReversal 006_ReqPay_CreditReversal
11.1.1	Transaction amount	value	1..1	Numeric	min Inclusive: 0 Total Digits: 15	M	051_ReqPay_Amount_Value
11.1.2	Currency of the transaction	curr	1..1	Text	Min: 1 Max: 3	M	
11.1.3	Details of transaction amount	<Payer.Amount.Split>	0..1	Alphabetic	Fixed	O	This is for future Use
11.1.3.1	Name of the property	name	1..n	Code	Min: 1 Max: 20	M	
11.1.3.2	Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 99	M	CASHBACK PUCHASE
12.1	Details related to the Payees	<Payees>	1..1	Alphabetic	Fixed	M	
12.1.1	Details related to the Payees	<Payee>	1..1	Alphabetic	Fixed	M	
12.1.1.1	Alias of the Payee	addr	1..1	Alphanumeric	Min: 1 Max: 255	M	
12.1.1.2	Name of the Payee	name	1..1	Alphanumeric	Min: 1 Max: 99	M	
12.1.1.3	Unique identifier for each transaction inside a file including Payee and payee	seqNum	1..1	Numeric	Min: 1 Max: 3	M	056_seqNum
12.1.1.4	Type of the Payee	type	1..1	Code	Fixed	M	029_Payer/Payee_Type

12.1.1.5	Alias Directory Id/ numeric Id/cmlid	cmlid	0..1	Alphanumeric	Min:6 Max:25	O	This needs to be populated if the transaction is done using Mobile number/Merchant Id
13.1	Merchant block	<Payee.Merchant>	0..1	Alphabetic	Fixed	C	037_ReqPay_Payer/Payee_MerchantTag In case of a P2M txn the merchant tag is mandatory
13.1.1	Identifier	<Payee.Merchant.Identifier>	1..1	Alphabetic	Fixed	M	
13.1.1.1	Subcode	subCode	0..1	Code	Length:4	O	
13.1.1.2	Merchant Identifier	mid	1..1	Alphanumeric	Min: 1 Max: 20	M	
13.1.1.3	Store id	sid	0..1	Alphanumeric	Min: 1 Max: 20	O	
13.1.1.4	Terminal Identifier	tid	0..1	Alphanumeric	Min: 1 Max: 20	O	
13.1.1.5	Merchant type	merchantType	0..1	Alphabetic	Fixed	O	
13.1.1.6	Merchant Genre	merchantGenre	0..1	Alphabetic	Fixed	O	
13.1.1.7	Merchant onboarding Type	onBoardingType	0..1	Alphabetic	Fixed	O	
13.1.1.8	This field indicates the Registration Id	regIdNo	0..1	Alphanumeric	Max:35	O	

13.1.1.9	This field indicates the Area pincode	pinCode	0..1	Numeric	Fixed	O	
13.1.1.10	This field indicates the tier of the city	tier	0..1	Alphanumeric	Code	O	
13.1.1.11	This fields indicates the Merchant location	merchantLoc	0..1	Alphanumeric	Min: 1 Max: 99	O	
13.1.1.12	This fields indicates the Merchant Institution Id	merchantInstld	0..1	Alphanumeric	Min: 1 Max: 99	O	
13.1.2	Name	<Payee.Merchant.Name>	0..1	Alphabetic	Min: 1 Max: 99	O	
13.1.2.1	Brand	brand	1..1	Alphanumeric	Min: 1 Max: 99	M	
13.1.2.2	Legal	legal	0..1	Alphanumeric	Min: 1 Max: 99	O	
13.1.2.3	Franchise	franchise	0..1	Alphanumeric	Min: 1 Max: 99	O	
13.1.3	Ownership	<Payee.Merchant.Ownership>	0..1	Alphabetic	Fixed	O	
13.1.3.1	Type	type	1..1	Code	Fixed	M	038 ReqPay MerchantTag Ownership Type
13.1.4	This field indicates the invoice details.	<Payee.Merchant.Invoice>	0..1	Alphabetic	Fixed	O	
13.1.4.1	This field indicates the invoice name	name	1..1	Alphanumeric	Min:1 Max:99	M	
13.1.4.2	This field indicates the Invoice Number.	num	1..1	Alphanumeric	Max:20	M	053 Payee.Merchant.Invoice_num
13.1.4.3	This field indicates the Invoice Date.	date	1..1	ISODateTime	Min:1 Max: 255	M	054 Payee.Merchant.Invoice_date

15.1	Information related to the Payer	<Payee.Info>	0..1	Alphabetic	Fixed	C	002_ReqPay_Collect 003_ReqPay_Debit 004_ReqPay_Credit 005_ReqPay_DebitReversal 006_ReqPay_CreditReversal
15.1.1	Payee Identity	<Payee.Info.Identity>	1..1	Alphabetic	Fixed	M	
15.1.1.1	Type of the identifier	type	1..1	Code	Fixed	M	
15.1.1.2	Name as per the identifier	verifiedName	1..1	Alphanumeric	Min: 1 Max: 99	M	
15.1.1.3	Id of the identifier	id	1..1	Alphanumeric	Min: 1 Max: 99	M	
15.1.2	Rating of the Payee	<Payee.Info.Rating>	0..1	Alphabetic	Fixed	O	
15.1.2.1	verified Address	verified Address	1..1	Code	Boolean TRUE/FALSE	M	026 Payer/Payee InfoRating
16.1	Details of Device from which the transaction was initiated	<Payee.Device>	0..1	Alphabetic	Fixed	C	002_ReqPay_Collect 003_ReqPay_Debit 004_ReqPay_Credit
16.1.1	Device Tag	<Payee.Device.Tag>	1..n	Alphabetic	Fixed	M	
16.1.1.1	Name of the property	name	1..n	Code	Fixed	M	
16.1.1.2	Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 99	M	
17.1	Only one entity is allowed for a Payee	<Payee.Ac>	0..1	Alphabetic	Fixed	C	002_ReqPay_Collect 003_ReqPay_Debit 004_ReqPay_Credit

							006_ReqPay_CreditReversal
17.1.1	Type of the Alias	addrType	1..1	Code	Min: 1 Max: 20	M	
17.1.2	Details related to Payee Alias	<Payee.Ac .Detail>	1..n	Alphabetic	Fixed	M	
17.1.2.1	Name of the property	name	1..n	Code	Fixed	M	
17.1.2.2	Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 99	M	
18.1	Consent	<Consent>	0..1	Alphabetic	Fixed	O	Reserved for future use
18.1.1	Name	name	1..1	Alphanumeric	Min:1 Max: 50	M	
18.1.2	Value	value	1..1	Code	Fixed	M	
18.1.3	Type	type	1..1	Alphabetic	Fixed	M	
19.1	Information related to the amounts in the transaction	<Payee.Amount>	0..1	Alphabetic	Fixed	C	001_ReqPay_Pay 002_ReqPay_Collect 003_ReqPay_Debit 004_ReqPay_Credit 006_ReqPay_CreditReversal
19.1.1	Transaction amount	value	1..1	Numeric	Min Inclusive: 0 Total Digits: 15	M	051_ReqPay_Amount_Value
19.1.2	Currency of the transaction	curr	1..1	Text	Min: 1 Max:3	M	

19.1.3	Details of transaction amount	<Payee.Amount t.Split>	0..1	Alphabetic	Fixed	O	This is for future use.
19.1.3.1	Name of the property	name	1..n	Code	Fixed	M	
19.1.3.2	Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 99	M	

ATM Cash Withdrawal :

Only for the ATM cash withdrawal functionality, ReqPay request will have two cred blocks.

- 1) One Cred block will be used for PIN and
- 2) Another cred block will be used for OTP.

The encryption process for OTP and Wallet-PIN during the ATM cash withdrawal transaction will be integrated within the CRED block. This process will occur in two parts:

1. **From ATM Acquirer to IPS:** The ATM Acquirer will encrypt PIN/OTP using existing Signer certificate with RSA2048 bit encryption and RSA/ECB/OAEPWithSHA-256AndMGF1Padding using the public key of IPS. The encrypted PIN/OTP will be sent in the CRED block of ReqPay (type pay) to IPS. IPS will then decrypt PIN/OTP using its own private key.
2. **From IPS to SOV participants:** IPS will encrypt PIN/OTP using the HSM public key of the SOV participants and send it in the CRED block of ReqPay type Debit. The SOV participants will decrypt the CRED using its own private key to obtain the PIN/OTP.

Below is the sample cred block present in ReqPay request for capturing OTP and PIN for ATM flow:

```
<Creds>
  <Cred type="PIN" subType="MPIN">
<Data code="" ki=""> base-64 encoded/encrypted authentication data</Data>
</Cred>
<Cred type="OTP" subType="SMS">
<Data code="" ki=""> base-64 encoded/encrypted authentication data</Data>
```

```
</Cred>
</Creds>
```

G2P Payment:

Refer Reference Logs [G2P Transaction](#)

1. IFSC code and account number combination, resolved directly by IPS, is represented as account-no@ifsc-code.ifsc.npci (e.g. [123456789012@ABCD0123456.ifsc.npci](#))
2. SoV provider needs to pass above in the addr field ReqPay request to IPS.
3. ReqAuthDetails not required for G2P payments as IPS getting the Account+IFSC details in ReqPay request from SoV provider.
4. ReqTxnConfirmation will not be sent to Payee participants from IPS in case of G2P payments.
5. Debit/Debit reversal is outside the scope of IPS in this use case.(as there is no Debit request to IPS)
6. In case of credit timeout , transaction will be settled in next settlement cycle.
7. Onboarding of Payee is not required as payee Account+IFSC is used.

Sample API message is given below –

```
<upi:ReqPay xmlns:upi="http://npci.org/upi/schema/">
<Head ver="2.0" ts="" orgId="" msgId="" prodType= "UPI"/>
<Meta>
  <Tag name="PAYREQSTART" value=""/>
  <Tag name="PAYREQEND" value=""/>
</Meta>
<Txn      id=""      note=""      custRef=""      refId=""      refUrl=""      ts=""      refCategory=""
type="PAY | COLLECT | DEBIT | CREDIT | REVERSAL | REFUND"  orgTxnId=""      purpose=""      initiationMode=""      subType=""
orgRespCode="">
  <RiskScores>
    <Score provider="sp" type="TXNRISK" value=""/>
  </RiskScores>
</Txn>
```

```

        <Score provider="npci" type="TXNRISK" value=""/>
    </RiskScores>
    <Rules>
        <Rule name="EXPIREAFTER" value="1 minute to max 64800 minutes"/>
        <Rule name="MINAMOUNT" value=""/>
    </Rules>
    <QR qVer="" ts="" qrMedium="" expireTs="" query="" verToken="" stan=""/>
</Txn>
<Payer addr="" name="" seqNum="" type="PERSON|ENTITY" code="" cmId="">
<Merchant>
    <Identifier subCode="" mid="" sid="" tid="" merchantType="SMALL|LARGE" merchantGenre="OFFLINE|ONLINE"
onBoardingType="BANK|AGGREGATOR|NETWORK|TPAP" pinCode="" regIdNo="" tier="" merchantLoc="" merchantInstId=""
/>
    <Ownership type="PROPRIETARY|PARTNERSHIP|PRIVATE|PUBLIC|OTHERS"/>
    <Invoice name="" num="" date="" />
</Merchant>
    <Institution type="MTO|BANK" route="MTSS|RDA">
        <Name value="" acNum=""/>
        <Purpose code="" note=""/>
        <Originator name="" type="INDIVIDUAL|COMPANY" refNo="">
            <Address location="" city="" country="" geocode=""/>
        </Originator>
        <Beneficiary name=""/>
    </Institution>
<Info>
    <Identity id="" type="ACCOUNT" verifiedName="" />
    <Rating VerifiedAddress="TRUE|FALSE"/>
</Info>
<Device>
    <Tag name="MOBILE" value=""/>

```

```

    <Tag name="GEOCODE" value=""/>
    <Tag name="LOCATION" value="" />
    <Tag name="IP" value=""/>
    <Tag name="TYPE" value=""/>
    <Tag name="ID" value=""/>
    <Tag name="OS" value=""/>
    <Tag name="APP" value=""/>
    <Tag name="CAPABILITY" value=""/>
    <Tag name="TELECOM" value=""/>
</Device>
<Ac addrType ="ACCOUNT">
    <Detail name="IFSC" value=""/>
    <Detail name="ACTYPE" value=""/>
    <Detail name="ACNUM" value=""/>
</Ac>
<Creds>
    <Cred type="PIN" subType="MPIN">
<Data code="" ki=""> base-64 encoded/encrypted authentication data</Data>
    </Cred>
    <Cred type="PREAPPROVED" subType="NA">
        <Data> base-64 encoded</Data>
    </Cred>
</Creds>
<Amount value="" curr="NAD">
    <Split name="" value=""/>
</Amount>
</Payer>
<Payees>
    <Payee addr="" name="" seqNum="" type="PERSON|ENTITY" code="" cmId="">
        <Merchant>

```

```

<Identifier subCode="" mid="" sid="" tid="" merchantType="SMALL|LARGE" merchantGenre="OFFLINE|ONLINE"
onBoardingType="BANK|AGGREGATOR|NETWORK|TPAP" pinCode="" regIdNo="" tier=""/>
<Ownership type="PROPRIETARY|PARTNERSHIP|PRIVATE|PUBLIC|OTHERS"/>
<Invoice name="" num="" date="" />
  </Merchant>
  <Info>
    <Identity id="" type="ACCOUNT" verifiedName=""/>
    <Rating VerifiedAddress="TRUE|FALSE"/>
  </Info>
  <Device>
    <Tag name="MOBILE" value=""/>
    <Tag name="GEOCODE" value=""/>
    <Tag name="LOCATION" value="" />
    <Tag name="IP" value=""/>
    <Tag name="TYPE" value=""/>
    <Tag name="ID" value=""/>
    <Tag name="OS" value=""/>
    <Tag name="APP" value=""/>
    <Tag name="CAPABILITY" value=""/>
    <Tag name="TELECOM" value=""/>
  </Device>
  <Ac addrType="ACCOUNT">
    <Detail name="IFSC" value=""/>
    <Detail name="ACTYPE" value=""/>
    <Detail name="ACNUM" value=""/>
  </Ac>
  <Amount value="" curr="NAD">
    <Split name="" value=""/>
  </Amount>
</Payee>

```

</Payees>
</upi:ReqPay>

4.4.1.2. RespPay

Sr No	Message Item	<XML Tag>	Occurrence	Datatype	Length	M/O/C	Rules
1.1	API Name	<RespPay>	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min:1 Max:255	M	
2.1	Header for the message	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min:1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODatetime	Min:1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgId	1..1	Numeric	Min:1 Max: 20	M	055_OrgId
2.1.4	Message identifier-used to correlate between request and response	msgId	1..1	Alphanumeric	Length= 35	M	021_Head_MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities created by the originator	id	1..1	Alphanumeric	Length= 35	M	022_Txn_UUID

3.1.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min:1 Max :50	M	057_note
3.1.3	Consumer reference number to identify (like Loan number, etc.)	refld	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.1.4	URL for the transaction	refurl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
3.1.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min:1 Max :255	M	020_Head_ts
3.1.6	Type of the Transaction	type	1..1	Code	Min:1 Max: 20	M	
3.1.7	Original transaction ID when reversal/ Refund must be done	orgTxnId	0..1	Alphanumeric	Length= 35	C	023_Txn_orgTxnId
3.1.8	Subtype of transaction	subType	0..1	Code	Min:1 Max: 20	C	030_Txn_SubType PAY
3.1.9	Initiation mode	initiationMode	1..1	Code	Min: 1 Max: 3	M	031_Txn_Initiationmode
3.1.10	Customer Reference number	custRef	1..1	Alphanumeric	Max:12	M	This is the unique value generated by the participant for the transaction.
3.1.11	Purpose of the txn	Purpose	1..1	Code	Fixed	M	045_ReqPay_Txn_purpose
3.1.12	Original RRN	orgRrn	0..1	Numeric	Length:12	C	

							This field is mandatory to be populated in case of REVERSAL
3.1.13	Original Date of the txn	orgTxnDate	0..1	ISODateTime	Min: 1 Max: 255	C	This field is mandatory to be populated in case of REVERSAL
3.1.14	Reference Category	refCategory	0..1	Code	Fixed	O	052_ReqPay_Txn_refCategory
3.2	Risk Score related to the transaction and the entities	<Txn.RiskScores>	0..1	Alphabetic	Fixed	O	
3.2.1	Risk Score related to the transaction and the entities	<Txn.RiskScores.Score>	1..n	Alphabetic	Fixed	M	
3.2.1.1	Entity providing the risk score	provider	1..1	Code	Min: 1 Max: 20	M	
3.2.1.2	Type of risk	type	1..1	Code	Min: 1 Max: 99	M	
3.2.1.3	Value of risk evaluation ranging from 0 (No Risk) to 100(Maximum Risk)	value	1..1	Integer	Min: 1 Max: 50	M	
4.1	Response tag	<Resp>	1..1	Alphabetic	Fixed	M	
4.1.1	Request Message identifier	reqMsgId	1..1	Alphanumeric	Length= 35	M	
4.1.2	Result of the transaction	result	1..1	Code	Min :1 Max:20	M	
4.1.3	Error code if failed	errCode	0..1	Alphanumeric	Min:1 Max:20	C	027_Response_ErrCode
4.1.4	Authentication code	actn	0..n	Numeric	Min:1 Max:40	O	033_RespPay_ActnCode
4.2	Response Reference	<Resp.Ref>	1..n	Alphabetic	Fixed	M	012_ReqTxn_Pay

							013_ReqTxn_Collect 016_RespPay_Pay 017_RespPay_Collect 018_RespPay_Reversal
4.2.1	Reference type	type	1..1	Code	Fixed	M	016_RespPay_Pay
4.2.2	Sequence Number	seqNum	1..1	Numeric	Min:1 Max:3	M	056_seqNum
4.2.3	Payment alias	addr	1..1	Alphanumeric	Min:1 Max:255	M	
4.2.4	Settlement Amount	settAmount	1..1	Numeric	Min Inclusive : 0 total Digits: 15	M	051_ReqPay_Amount_Value
4.2.5	Settlement Currency	settCurrency	1..1	Text	Min:1 Max:3	M	
4.2.6	Approval Reference Number	approvalNum	1..1	Alphanumeric	Length=6	M	025_Response_ApprovalNum
4.2.7	Response code	respCode	1..1	Alphanumeric	Min:1 Max:20	M	
4.2.8	Registered name with bank	regName	1..1	Alphanumeric	Min:1 Max:99	M	
4.2.9	Original amount	orgAmount	1..1	Numeric	Min Inclusive: 0 total Digits: 15	M	051_ReqPay_Amount_Value
4.2.10	Reversal Response Code	reversalRespCode	0..1	Alphanumeric	Min: 1 Max: 20	C	028_Response_Reversal This is mandatory in the case of REVERSAL

4.2.11	Alias Directory Id/ numeric Id/cmId	cmId	1.1	Alphanumeric	Min:6 Max:25	C	This needs to be populated in case a transaction is done using Mobile number
4.2.12	Account number	acNum	1..1	Alphanumeric	Min:1 Max:30	M	
4.2.13	Merchant Classification Code MCC	code	1..1	Numeric	Length= 4	M	024_Txn_code
4.2.14	IFSC code	IFSC	1..n	Alphanumeric	Length: 11	M	032_RespPay_RefTag_IFSC
4.2.15	Account type	accType	1..n	Code	Fixed	M	048_ReqPay_Ac_name_Account
4.3	Consent	<Resp.Consent >	0..1	Alphabetic	Fixed	O	For future use
4.3.1	Name	name	1..n	Alphanumeric	Min:1 Max: 50	M	
4.3.2	Value	value	1..1	Code	Fixed	M	
4.3.3	Type	type	1..1	Alphabetic	Fixed	M	

Sample API message is given below –

```
<upi:RespPay xmlns:upi="http://npci.org/upi/schema/">
<Head ver="2.0" ts="" orgId="" msgId="" prodType= "UPI"/>
<Txn id="" note="" refId="" custRef="" refUrl="" ts="" purpose=""
type="PAY|COLLECT|DEBIT|CREDIT|REVERSAL" subType="" initiationMode="" orgTxnId="" refCategory="">
  <RiskScores>
    <Score provider="sp" type="TXNRISK" value=""/>
    <Score provider="npci" type="TXNRISK" value=""/>
  </RiskScores>
</Txn>
</upi:RespPay>
```

```

</Txn>
  <Resp reqMsgId="" result="SUCCESS|FAILURE|DEEMED" errCode="" actn="">
    <Ref type="PAYER" seqNum="" addr="" regName="" acNum="" IFSC="" code="" accType="" settAmount="" orgAmount=""
    settCurrency="" approvalNum="" respCode="" reversalRespCode="" cmId="" />
    <Ref type="PAYEE" seqNum="" addr="" regName="" acNum="" IFSC="" code="" accType="" settAmount="" orgAmount=""
    settCurrency="" approvalNum="" respCode="" reversalRespCode="" cmId="" />
  </Resp>
</upi:RespPay>

```

4.4.2. Authorization Details API

Refer Reference Logs [Payment Request](#)

4.4.2.1. ReqAuthDetails

Sr No	Message Item	<XMLTag>	Occurrence	Data type	Length	M/O/C	Rules
1.1	API Name	<ReqAuthDetails>	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header for the message	<Head>	1..1	Alphabetic	Fixed	M	
2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgId	1..1	Numeric	Min: 6 Max: 20	M	055_OrgId
2.1.4	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	Length: 35	M	021_Head_MsgId

2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
3.1	Transaction information on, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022 Txn UUID
3.2.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.2.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.2.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
3.2.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
3.2.6	Type of the Transaction	type	1..1	Code	Min: 1 Max: 35	M	008 ReqAuth Pay 009 ReqAuth Collect
3.2.7	Original transaction ID when reversal/ Refund has to be done	orgTxnId	0..1	Alphanumeric	Length: 35	C	023 Txn orgTxnId
3.2.8	Customer reference number for the initiated transaction	custRef	1..1	Numeric	Length: 12	M	This is the unique value generated by the participant for the transaction.
3.2.9	Initiation mode	initiationMode	1..1	Code	Min: 1 Max: 3	M	031_Txn_Initiationmode
3.2.10	Purpose of the txn	purpose	1..1	Code	Fixed	M	045 ReqPay Txn purpose

3.2.11	Reference Category	refCategory	0..1	Code	Fixed	O	052_ReqPay_Txn_refCategory
4.1	Risk Score related to the transaction and the entities	<Txn.RiskScores>	0..1	Alphabetic	Fixed	O	
4.1.1	Risk Score related to the transaction and the entities	<Txn.RiskScores.Score>	1..n	Alphabetic	Fixed	M	
4.1.1.1	Entity providing the risk score	provider	1..1	Code	Min: 1 Max: 20	M	
4.1.1.2	Type of risk	type	1..1	Code	Min: 1 Max: 99	M	
4.1.1.3	Value of risk evaluation ranging from 0 (No Risk) to 100 (Maximum Risk)	value	1..1	Integer	Min: 1 Max: 5	M	
5.1	Rules that govern the payment	<Txn.Rules>	0..1	Alphabetic	Fixed	C	This field is mandatory in case of type="COLLECT"
5.2	Rule for the transaction	<Txn.Rules.Rule>	1..n	Alphabetic	Fixed	M	
5.2.1	Name of the property	name	1..n	Code	Min: 1 Max: 255	M	
5.2.2	Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 99	M	
5.3	Qr Block	<Txn.Qr>	0..1	Alphabetic		O	
5.3.1	This field indicates the version of IPS QR being used.	qVer	1..1	Numeric	Min :1 Max : 6	M	
5.3.2	This field indicates QR generation timestamp	ts	0..1	ISODateTime	Min :1 Max : 255	O	
5.3.3	This field indicates the QR medium tag denotes Source channel i.e. creation point of the QR.	qrMedium	0..1	Numeric	Min :1 Max :99	O	
5.3.4	This field indicates QR Expiry date &	expireTs	0..1	ISODateTime	Min :1	O	

	time Mapped to 'QRexpire' parameter in QR string.				Max :255		
5.3.5	This field indicates Query	query		JSON		O	
5.3.6	This field indicates Verification token for QR request. This will be passed in the financial request Reference to International partner for ValQr and Financial request generated by the International Partner	verToken	0..1	String	Min :1 Max :80	O	
5.3.7	This field indicates STAN present in QR It denotes the value generated and passed by the acquiring bank for internal reconciliation	stan	0..1	String	Length:6	O	
6.1	Details related to the Payer	<Payer>	1..1	Alphabetic	Fixed	M	
6.1.1	Alias of the Payer	addr	1..1	Alphanumeric	Min: 1 Max: 255	M	
6.1.2	Name of the Payer	name	1..1	Alphanumeric	Min: 1 Max: 99	M	
6.1.3	Unique identifier for each transaction inside a file including payer and payee	seqNum	1..1	Numeric	Min: 1 Max: 3	M	056 seqNum
6.1.4	Type of the Payer	type	1..1	Code	Fixed	M	029 Payer/Payee Type
6.1.5	Merchant Classification Code – MCC	code	1..1	Numeric	Length: 4	M	024 Txn_code
6.2	Merchant block	<Payer.Merchant>	0..1	Alphabetic	Fixed	O	037 ReqPay_Payer/Payee_MerchantTag
6.2.1	Identifier	<Payer.Merchant.Identifi	0..1	Alphabetic	Fixed	O	

		er>					
6.2.1.1	Subcode	subCode	0..1	Code	Length:4	O	
6.2.1.2	Merchant Identifier	mid	1..1	Alphanumeric	Min: 1 Max: 20	O	
6.2.1.3	Store id	sid	0..1	Alphanumeric	Min: 1 Max: 20	O	
6.2.1.4	Terminal Identifier	tid	0..1	Alphanumeric	Min: 1 Max: 20	O	
6.2.1.5	Merchant type	merchantType	0..1	Alphabetic	Fixed	O	
6.2.1.6	Merchant Genre	merchantGenre	0..1	Alphabetic	Fixed	O	
6.2.1.7	Merchant onboarding Type	onBoardingType	0..1	Alphabetic	Fixed	O	
6.2.1.8	This field indicates the Registration Id	regIdNo	0..1	Alphanumeric	Max:35	O	
6.2.1.9	This field indicates the Area pin code	pinCode	0..1	Numeric	Fixed	O	
6.2.1.10	This field indicates the tier of the city	tier	0..1	Alphanumeric	Code	O	
6.3	Name of the merchant	<Payer.Merchant.Name>	0..1	Alphabetic	Min: 1 Max: 99	O	
6.3.1	Brand	brand	1..n	Alphanumeric	Min: 1 Max: 99	M	
6.3.2	Legal	legal	0..1	Alphanumeric	Min: 1 Max: 99	O	
6.3.3	Franchise	franchise	0..1	Alphanumeric	Min: 1 Max: 99	O	
6.4	Ownership	<Payer.Merchant.Owner ship>	0..1	Alphabetic	Fixed	O	
6.4.1	Type	type	0..1	Code	Fixed	O	038_ReqPay_MerchantTag_Owner ship_Type
6.5	This field indicates the invoice	<Payer.Merchant.Invoice	0..1	Alphabetic		O	

	details.	>					
6.5.1	This field indicates the invoice name	name	1..1	Alphanumeric	Min: 1 Max: 99	M	
6.5.2	This field indicates the Invoice Number.	num	1..1	Alphanumeric	Max :20	M	
6.5.3	This field indicates the Invoice Date.	date	1..1	ISODatetime	Min: 1 Max: 255	M	
6.6	Information related to the Payer	<Payer.Info>	0..1	Alphabetic	Fixed	C	008_ReqAuth_Pay 009_ReqAuth_Collect
6.6.1	Payer Identity is mandatory for “pay” and optional for “collect”	<Payer.Info.Identity>	1..1	Alphabetic	Fixed	M	
6.6.1.2	Id of the identifier	id	1..1	Alphanumeric	Min: 1 Max: 99	M	
6.6.1.3	Type of the Identifier	type	1..1	Code	Fixed	M	
6.6.1.4	Name as per the identifier	verifiedName	1..1	Alphanumeric	Min: 1 Max: 99	M	
6.7	Rating of the payer	<Payer.Info.Rating>	0..1	Alphabetic	Fixed	O	
6.7.1	Verified Address	verifiedAddress	0..1	Code	Boolean TRUE/ FALSE	M	026_Payer/Payee_InfoRating
6.8	Only one entity is allowed for a payer	<Payer.Ac>	0..1	Alphabetic	Fixed	C	008_ReqAuth_Pay 009_ReqAuth_Collect
6.8.1	Type of the alias	addrType	1..1	Code	Min: 1 Max: 20	M	046_ReqPay_Ac_addrType
6.9	Details related to Payer Alias	<Payer.Ac.Detail>	1..n	Alphabetic	Fixed	M	

6.9.1	Name of the property	name	1..n	Code	Fixed	M	048_ReqPay_Ac_n ame_Account 049_ReqPay_Ac_n ame_Mobile 050_ReqPay_Ac_n ame_Card
6.9.2	Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 20	M	
6.10	Information related to the amounts in the transaction	<Payer.Amount>	1..1	Alphabetic	Fixed	M	
6.10.1	Transaction amount	value	1..1	Numeric	Min Inclusive: 0 total Digits:15	M	051_ReqPay_Amou nt_Value
6.10.2	Currency of the transaction	curr	1..1	Text	Min: 1 Max: 3	M	
6.10.3	Details of transaction amount	<Payer.Amount.Split>	0..1	Alphabetic	Fixed	O	This is for future use.
6.10.3.1	Name of the property	name	1..n	Code	Fixed	M	
6.10.3.2	Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 99	M	
7.1	Details related to the Payees	<Payees>	1..1	Alphabetic	Fixed	M	
7.1.1	Details related to the Payee	< Payees.Payee>	1..1	Alphabetic	Fixed	M	
7.1.1.1	Alias of the Payee	addr	1..1	Alphanumeric	Min: 1 Max: 255	M	
7.1.1.2	Name of the Payee	name	1..1	Alphanumeric	Min: 1 Max: 99	M	
7.1.1.3	Unique identifier for each transaction inside a file including Payee and payee	seqNum	1..1	Alphanumeric	Min: 1 Max: 3	M	056_seqNum
7.1.1.4	Type of the Payee	type	1..1	Numeric	Fixed	M	029_Payer/Payee_

							Type
7.1.1.5	Merchant Classification Code - MCC	code	1..1	Numeric	Length:4	M	024_Txn_code
7.1.1.6	Alias Directory Id/ numeric Id/cmld	cmld	0.1	Alphanumeric	Min:6 Max:25	C	This is mandatory in case of transaction done using Mobile Number /Merchant Id
7.2	Information related to the Payee	<Payee.Info>	1..1	Alphabetic	Fixed	C	008_ReqAuth_Pay 009_ReqAuth_Collect
7.2.1	Payee Identity	<Payee.Info.Identity>	1..1	Alphabetic	Fixed	M	
7.2.1.1	Type of the identifier	type	1..1	Code	Fixed	M	
7.2.1.2	Name as per the identifier	verifiedName	1..1	Alphanumeric	Min: 1 Max: 99	M	
7.2.1.3	Id of the identifier	id	1..1	Alphanumeric	Min: 1 Max: 99	M	
7.2.2	Rating of the Payee	<Payee.Info.Rating>	0..1	Alphabetic	Fixed	O	
7.2.2.1	verifiedAddress	verifiedAddress	1..1	Code	Boolean TRUE/FALSE	M	026_Payer/Payee InfoRating
7.3	Merchant block	<Payee.Merchant>	0..1	Alphabetic	Fixed	C	037_ReqPay_Payer/Payee_MerchantTag In case of a P2M txn the merchant tag is mandatory.

7.3.1	Identifier	<Payee.Merchant.Identifier>	1..1	Alphabetic	Fixed	M	
7.3.1.1	Subcode	subCode	0..1	Code	Length:4	O	
7.3.1.2	Merchant Identifier	mid	1..1	Alphanumeric	Min: 1 Max: 20	M	
7.3.1.3	Store id	sid	0..1	Alphanumeric	Min: 1 Max: 20	O	
7.3.1.4	Terminal Identifier	tid	0..1	Alphanumeric	Min: 1 Max: 20	O	
7.3.1.5	Merchant type	merchantType	0..1	Alphabetic	Fixed	O	
7.3.1.6	Merchant Genre	merchantGenre	0..1	Alphabetic	Fixed	O	
7.3.1.7	Merchant onboarding Type	onBoardingType	0..1	Alphabetic	Fixed	O	
7.3.1.8	This field indicates the RegistrationId	regIdNo	0..1	Alphanumeric	Max:35	O	
7.3.1.9	This field indicates the Area pincode	pinCode	0..1	Numeric	Fixed	O	
7.3.1.10	This field indicates the tier of the city	tier	0..1	Alphanumeric	Code	O	
7.4	Name	<Payee.Merchant.Name>	0..1	Alphabetic	Min: 1 Max: 99	O	
7.4.1	Brand	brand	1..1	Alphanumeric	Min: 1 Max: 99	M	
7.4.2	Legal	legal	0..1	Alphanumeric	Min: 1 Max: 99	O	
7.4.3	Franchise	franchise	0..1	Alphanumeric	Min: 1 Max: 99	O	
7.5	Ownership	<Payee.Merchant.Owner ship>	0..1	Alphabetic	Fixed	O	
7.5.1	Type	type	1..1	Code	Fixed	M	038_ReqPay_MerchantTag_Ownership_Type

7.5.2	This field indicates the invoice details.	<Payee.Merchant.Invoice>	0..1	Alphabetic		C	
7.5.2.1	This field indicates the invoice name	name	1..1	Alphanumeric	Min:1 Max: 99	M	
7.5.2.2	This field indicates the Invoice Number.	num	1..1	Alphanumeric	Max :20	M	
7.5.2.3	This field indicates the Invoice Date.	date	1..1	ISODateTime	Min: 1 Max: 255	M	
7.6	Only one entity is allowed for a Payee	<Payee.Ac>	0..1	Alphabetic	Fixed	C	009 ReqAuth Collect
7.6.1	Type of the alias	addrType	1..1	Code	Min: 1 Max: 20	M	
7.7	Details related to Payee Alias	<Payee.Ac.Detail>	1..n	Alphabetic	Fixed	M	
7.7.1	Name of the property	name	1..n	Code	Fixed	M	
7.7.2	Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 99	M	
7.8	Information related to the amounts in the transaction	<Payee.Amount>	1..1	Alphabetic	Fixed	M	
7.8.1	Transaction amount	value	1..1	Numeric	Min Inclusive: 0 total Digits: 15	M	051 ReqPay Amount Value
7.8.2	Currency of the transaction	curr	1..1	Text	Min: 1 Max: 3	M	
7.8.3	Details of transaction amount	<Payee.Amount.Split>	0..1	Alphabetic	Fixed	O	
7.8.3.1	Name of the property	name	1..n	Code	Fixed	M	
7.8.3.2	Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 99	M	

Sample API message is given below –

```

<upi:ReqAuthDetails xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="1.0|2.0" ts="" orgId="NPCI" msgId="" prodType="UPI"/>
  <Txn id="" note="" refId="" custRef="" refUrl="" ts=""
type="PAY|COLLECT|DEBIT|CREDIT|REVERSAL|REFUND" initiationMode="" purpose="" refCategory="" >
    <RiskScores>
      <Score provider="sp" type="TXNRISK" value=""/>
      <Score provider="NPCI" type="TXNRISK" value=""/>
    </RiskScores>
    <Rules>
      <Rule name="EXPIREAFTER" value="1 minute to max 64800 minutes"/>
      <Rule name="MINAMOUNT" value=""/>
    </Rules>
    <QR qVer="" ts="" qrMedium="" expireTs="" query=""/>
  </Txn>
  <Payer addr="" name="" seqNum="" type="PERSON|ENTITY" code="">
    <Merchant>
      <Identifier subCode="" mid="" sid="" tid="" merchantType="" merchantGenre=""
onBoardingType="" pinCode="" regIdNo="" tier="" />
      <Ownership type=""/>
      <Invoice name="" num="" date="" />
    </Merchant>
    <Info>
      <Identity id="" type="ACCOUNT" verifiedName=""/>
      <Rating VerifiedAddress="TRUE|FALSE"/>
    </Info>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value=""/>
      <Detail name="ACTYPE" value=""/>
      <Detail name="ACNUM" value=""/>
    </Ac>
    <Amount value="" curr="NAD">
      <Split name="" value=""/>
    </Amount>
  </Payer>

```

```

<Payees>
  <Payee seqNum="" addr="" name="" type="PERSON|ENTITY" code="" cmId="">
    <Info>
      <Identity id="" type="ACCOUNT" verifiedName=""/>
      <Rating VerifiedAddress="TRUE|FALSE"/>
    </Info>
    <Merchant>
      <Identifier subCode="" mid="" sid="" tid="" merchantType="" merchantGenre=""
onBoardingType="" pinCode="" regIdNo="" tier="" />
      <Ownership type=""/>
      <Invoice name="" num="" date="" />
    </Merchant>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value=""/>
      <Detail name="ACTYPE" value=""/>
      <Detail name="ACNUM" value=""/>
    </Ac>
    <Amount value="" curr="NAD">
      <Split name="" value=""/>
    </Amount>
  </Payee>
</Payees>
</upi:ReqAuthDetails>

```

4.4.2.2. RespAuthDetails

Sr No	Message Item	<XMLTag>	Occurrence	Data type	Length	M/O/C	Rules
1.1	API Name	<RespAuthDetails>	1..1			M	
1.1.1	API Schema namespace	xmlns	1..1	Alphanumeric	Min: 1 Max: 255	M	
2.1	Header for the message	<Head>	1..1	Alphabetic	Fixed	M	

2.1.1	Version of the API	ver	1..1	Numeric	Min: 1 Max: 6	M	019_Head_Version
2.1.2	Time of request from the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
2.1.3	Organization id that created the message	orgId	1..1	Numeric	Min: 1 Max: 20	M	055_OrgId
2.1.4	Message identifier- used to correlate between request and response	msgId	1..1	Alphanumeric	Length: 35	M	021_Head_MsgId
2.1.5	This field denotes the Product Type	prodType	1..1	Alphanumeric	Fixed	M	Value to be passed: "UPI"
3.1	Transaction information, Carried throughout the system, visible to all parties	<Txn>	1..1	Alphabetic	Fixed	M	
3.1.1	Unique Identifier of the transaction across all entities, created by the originator	id	1..1	Alphanumeric	Length: 35	M	022_Txn_UUID
3.2.2	Description of the transaction (which will be printed on Passbook)	note	1..1	Alphanumeric	Min: 1 Max: 50	M	057_note
3.2.3	Consumer reference number to identify (like Loan number, etc.)	refId	1..1	Alphanumeric	Min: 1 Max: 35	M	
3.2.4	URL for the transaction	refUrl	1..1	Alphanumeric	Min: 1 Max: 35	M	058_refUrl
3.2.5	Transaction origination time by the creator of the message	ts	1..1	ISODateTime	Min: 1 Max: 255	M	020_Head_ts
3.2.6	Type of the Transaction	type	1..1	Code	Min: 1 Max: 20	M	010_RespAuth_Pay 011_RespAuth_Collect
3.2.7	Original transaction ID when reversal/Refund has to be done	orgTxnId	0..1	Alphanumeric	Length: 35	C	023_Txn_orgTxnId
3.2.8	Customer reference number for the initiated transaction	custRef	1..1	Numeric	Length: 12	M	This is the unique value

							generated by the participant for the transaction.
3.2.9	Initiation mode	initiation Mode	1..1	Code	Min: 1 Max: 3	M	031_Txn_Initiation mode
3.2.10	Purpose of the txn	purpose	1..1	Code	Fixed	M	045_ReqPay_Txn purpose
3.2.11	Reference Category	refCategory	1..n	Code	Fixed	O	052_ReqPay_Txn_refCategory
4.1	Risk Score related to the transaction and the entities	<Txn.RiskScores>	0..1	Alphabetic	Fixed	O	
4.1.1	Risk Score related to the transaction and the entities	<Txn.RiskScores.Score>	1..n	Alphabetic	Fixed	M	If the Txn.Riskscores tag is present, then this tag is Mandatory
4.1.1.1	Entity providing the risk score	provider	1..1	Code	Min: 1 Max: 20	M	
4.1.1.2	Type of risk	type	1..1	Code	Min: 1 Max: 99	M	
4.1.1.3	Value of risk evaluation ranging from 0 (No Risk) to 100 (Maximum Risk)	value	1..1	Integer	Min: 1 Max: 50	M	
5.1	Rules that govern the payment	<Txn.Rules>	0..1	Alphabetic	Fixed	C	This field will be mandatory in case of type="COLLECT"
5.2	Rule for the transaction	<Txn.Rules.Rule>	1..n	Alphabetic	Fixed	M	
5.2.1	Name of property	name	1..n	Code	Min: 1 Max: 20	M	
5.2.2	Value of the property	value	1..n	Alphanumeric	Min: 1	M	

					Max: 255		
6.1	Details related to the Payer	<Payer>	1..1	Alphabetic	Fixed	M	
6.1.1	Alias of the Payer	addr	1..1	Alphanumeric	Min: 1 Max: 255	M	
6.1.2	Name of the Payer	name	1..1	Alphanumeric	Min: 1 Max: 99	M	
6.1.3	Unique identifier for each transaction inside a file including payer and payee	seqNum	1..1	Numeric	Min: 1 Max: 3	M	056_seqNum
6.1.4	Type of the Payer	type	1..1	Code	Fixed	M	029_Payer/Payee_Type
6.1.5	Merchant Classification on Code –MCC	code	1..1	Numeric	Length: 4	M	024_Txn_code
6.2	Merchant block	<Payer.Merchant>	0..1	Alphabetic	Fixed	C	037_ReqPay_Payer/Payee_MerchantTag In case of a Refund txn the merchant tag is mandatory.
6.2.1	Identifier	<Payer.Merchant.Identifier>	1..1	Alphabetic	Fixed	M	
6.2.1.1	Subcode	subCode	0..1	Code	Length:4	O	
6.2.1.2	Merchant Identifier	mid	1..1	Alphanumeric	Min: 1 Max: 20	M	
6.2.1.3	Store id	sid	0..1	Alphanumeric	Min: 1 Max: 20	O	
6.2.1.4	Terminal Identifier	tid	0..1	Alphanumeric	Min: 1 Max: 20	O	
6.2.1.5	Merchant type	merchantType	0..1	Alphabetic	Fixed	O	
6.2.1.6	Merchant Genre	merchantGenre	0..1	Alphabetic	Fixed	O	
6.2.1.7	Merchant onboarding Type	onBoardingType	0..1	Alphabetic	Fixed	O	

6.2.1.8	This field indicates the Registration ID	regIdNo	0..1	Alphanumeric	Max:35	O	
6.2.1.9	This field indicates the Area pin code	pinCode	0..1	Numeric	Fixed	O	
6.2.1.10	This field indicates the tier of the city	tier	0..1	Alphanumeric	Code	O	
6.3	Name	<Payer.Merchant.Name>	0..1	Alphabetic	Min: 1 Max: 99	O	
6.3.1	Brand	brand	1..1	Alphanumeric	Min: 1 Max: 99	M	
6.3.2	Legal	legal	0..1	Alphanumeric	Min: 1 Max: 99	O	
6.3.3	Franchise	franchise	0..1	Alphanumeric	Min: 1 Max: 99	O	
6.4	Ownership	<Payer.Merchant.Ownership>	0..1	Alphabetic	Fixed	O	
6.4.1	Type	type	1..1	Code	Fixed	M	038 ReqPay MerchantTag Ownership Type
6.5	This field indicates the invoice details.	<Payer.Merchant.Invoice>	0..1	Alphabetic		O	
6.5.1	This field indicates the invoice name	name	1..1	Alphanumeric	Min: 1 Max: 99	M	
6.5.2	This field indicates the Invoice Number.	num	1..1	Alphanumeric	Max:20	M	
6.5.3	This field indicates the Invoice Date.	date	1..1	ISODateTime	Min: 1 Max: 255	M	
6.6	Information related to the Payer	<Payer.Info>	0..1	Alphabetic	Fixed	C	010_RespAuth_Pay 011_RespAuth_Collect
6.6.1	Payer Identity is mandatory for “pay” and optional for “collect”	<Payer.Info.Identity>	1..1	Alphabetic	Fixed	M	
6.6.1.2	Id of the identifier	id	1..1	Alphanumeric	Min: 1	M	

					Max: 99		
6.6.1.3	Type of the identifier	type	1..1	Code	Fixed	M	
6.6.1.4	Name as per the identifier	verifiedName	1..1	Alphanumeric	Min: 1 Max: 99	M	
6.7	Rating of the payer	< Payer.Info.Rating>	0..1	Alphabetic	Fixed	O	
6.7.1	verified Address	verifiedAddress	1..1	Code	Boolean TRUE/FALSE	M	026_Payer/Payer_InfoRating
6.8	Details of device from which the transaction was initiated	<Payer.Device>	0..1	Alphabetic	Fixed	C	011_RespAuth_Collect
6.9	Device Tag	< Payer.Device.Tag>	1..n	Alphabetic	Fixed	M	
6.9.1	Name of the property	name	1..n	Code (MOBILE, GEOCODE, LOCATION, IP, TYPE, ID, OS, APP, CAPABILITY, TELECOM)	Fixed	M	
6.9.2	Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 20	M	034_ReqPay_DeviceDetails_Values 035_ReqPay_DeviceDetails_type 036_ReqPay_DeviceDetails_OS
6.10	Only one entity is allowed for a payer	<Payer.Ac>	0..1	Alphabetic	Fixed	C	010_RespAuth_Pay 011_RespAuth_Collect
6.10.1	Type of the alias	addrType	1..1	Code	Min: 1	M	046_ReqPay_Ac

					Max: 20		addrType
6.11	Details related to Payer Alias	< Payer.Ac.Detail>	1..n	Alphabetic	Fixed	M	
6.11.1	Name of the property	name	1..n	Code	Fixed	M	048_ReqPay_Ac_name_Account 049_ReqPay_Ac_name_Mobile 050_ReqPay_Ac_name_Card
6.11.2	Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 20	M	
6.12	Information related to the Payer Credentials	<Payer.Creds>	0..1	Alphabetic	Fixed	C	011_RespAuth_Collect This will be mandatory in case of type = "COLLECT"
6.12.1	Credentials are used to authenticate the request	<Payer.Creds.Cred>	1..1	Alphabetic	Fixed	M	040_ReqPay_Credblock 041_RespAuthDetailUPI-MandateCollectCredblock 007_ReqPay_PreviewApproved 025_ResponseApprovalNum
6.12.1.1	Type of financial instrument used for authentication	type	1..1	Code	Fixed	M	
6.12.1.2	Subtype	subType	1..1	Code	Fixed	M	040_ReqPay_Credblock
6.12.2	base-64 encoded/ encrypted	<Payer.Creds.Cred.D	1..1	Alphabetic	Fixed	M	

	authentication data	ata>					
6.12.2.1	Data Code	code	1..1	Code	Fixed	M	
6.12.2.3	Key Index	ki	1..1	Alphanumeric	Fixed	M	
6.13	Information related to the amounts in the transaction	<Payer.Amount>	1..1	Alphabetic	Fixed	M	
6.13.1	Transaction amount	value	1..1	Numeric	Min Inclusive :0 total Digits:15	M	051_ReqPay_Amount_Value
6.13.2	Currency of the transaction	curr	1..1	Text	Min: 1 Max: 3	M	
6.14	Details of transaction amount	<Payer.Amount.Split>	0..1	Alphabetic	Fixed	O	
6.14.1	Name of the property	name	1..n	Code	Min: 1 Max: 20	M	
6.14.2	Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 99	M	
7.1	Details related to the Payees	<Payees>	1..1	Alphabetic	Fixed	M	
7.1.1	Details related to the Payee	<Payees.Payee>	1..1	Alphabetic	Fixed	M	
7.1.1.2	Alias of the Payee	addr	1..1	Alphanumeric	Min: 1 Max: 99	M	
7.1.1.3	Name of the Payee	name	1..1	Alphanumeric	Min: 1 Max: 99	M	
7.1.1.4	Unique identifier for each transaction inside a file including Payee and Payee	seqNum	1..1	Numeric	Min: 1 Max: 3	M	056_seqNum
7.1.1.5	Type of the Payee Merchant	type	1..1	Code	Fixed	M	029_Payer/Payee_Type
7.1.1.6	Merchant Classification on Code –MCC	code	1..1	Code	Length: 4	M	024_Txn_code
7.1.1.7	Alias Directory Id/ numeric Id/cmlId	cmlId	0.1	Alphanumeric	Min:6 Max:25	C	This will be populated in case of

							transaction done using Mobile number/Merchant ID
7.1.1.8	Information related to the Payee	<Payee.Info>	0..1	Alphabetic	Fixed	C	010_RespAuth_Pay 011_RespAuth_Collect
7.2	Payee Identity	<Payee.Info.Identity>	1..1	Alphabetic	Fixed	M	
7.2.1	Type of the identifier	type	1..1	Code	Fixed	M	
7.2.2	Name as per the identifier	verifiedName	1..1	Alphanumeric	Min: 1 Max: 99	M	
7.2.3	Id of the identifier	id	1..1	Alphanumeric	Min: 1 Max: 99	M	
7.4	Rating of the Payee	<Payee.Info.Rating>	0..1	Alphabetic	Fixed	O	
7.4.1	verifiedAddress	verifiedAddress	1..1	Code	Boolean TRUE/FALSE	M	026_Payer/Payee_InfoRating
7.5	Merchant block	<Payee.Merchant>	0..1	Alphabetic	Fixed	C	037_ReqPay_Payer/Payee_MerchantTag This tag is mandatory in case of P2M transaction
7.5.1	Identifier	<Payee.Merchant.Identifier>	1..1	Alphabetic	Fixed	M	

7.5.1.1	Subcode	subCode	0..1	Code	Length:4	O	
7.5.1.2	Merchant Identifier	mid	1..1	Alphanumeric	Min: 1 Max: 20	M	
7.5.1.3	Store id	sid	0..1	Alphanumeric	Min: 1 Max: 20	O	
7.5.1.4	Terminal Identifier	tid	0..1	Alphanumeric	Min: 1 Max: 20	O	
7.5.1.5	Merchant type	merchantType	0..1	Alphabetic	Fixed	O	
7.5.1.6	Merchant Genre	merchantGenre	0..1	Alphabetic	Fixed	O	
7.5.1.7	Merchant onboarding Type	onBoardingType	0..1	Alphabetic	Fixed	O	
7.5.1.8	This field indicates the Registration Id	regIdNo	0..1	Alphanumeric	Max:35	O	
7.5.1.9	This field indicates the Area pincode	pinCode	0..1	Numeric	Fixed	O	
7.5.1.10	This field indicates the tier of the city	tier	0..1	Alphanumeric	Code	O	
7.6	Name	<Payee.Merchant.Name>	0..1	Alphabetic	Min: 1 Max: 99	O	
7.6.1	Brand	brand	1..1	Alphanumeric	Min: 1 Max: 99	M	
7.6.2	Legal	legal	0..1	Alphanumeric	Min: 1 Max: 99	O	
7.6.3	Franchise	franchise	0..1	Alphanumeric	Min: 1 Max: 99	O	
7.7	Ownership	<Payee.Merchant.Ownership>	0..1	Alphabetic	Fixed	O	
7.7.1	Type	type	1..1	Code	Fixed	M	038 ReqPay MerchantTag_Ownership_Type
7.8	This field indicates the invoice details.	<Payee.Merchant.Invoice>	0..1	Alphabetic	Fixed	O	
7.8.1	This field indicates the invoice name	name	1..1	Alphanumeric	Min:1 Max: 99	M	
7.8.2	This field indicates the Invoice	num	1..1	Alphanumeric	Max:20	M	

	Number.						
7.8.3	This field indicates the Invoice Date.	date	1..1	ISODatetime	Min: 1 Max: 255	M	
7.9	Device Tag	<Payee.Device>	0..1	Alphabetic	Fixed	O	
7.9.1	Name of the property	name	1..n	Code(M OBILE,G EOCOD E,LOCAT ION,IP,T YPE,ID,OS,APP ,CA PABILITY,TELE COM	Fixed	M	
7.9.2	Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 20	M	034_ReqPay_DeviceDetails_Values 035_ReqPay_DeviceDetails_type 036_ReqPay_DeviceDetails_OS
7.10	Only one entity is allowed for a Payee	<Payee.Ac>	1..1	Alphabetic	Fixed	M	
7.10.1	Type of the alias	addrType	1..1	Code	Min: 1 Max: 20	M	
7.11	Details related to Payee Alias	<Payee.Ac.Detail>	1..n	Alphabetic	Fixed	M	
7.11.1	Name of the property	name	1..n	Code	Fixed	M	
7.11.2	Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 99	M	
7.12	Information related to the amounts in the transaction	<Payee.Amount>	1..1	Alphabetic	Fixed	M	
7.12.1	Transaction amount	value	1..1	Numeric	Min	M	051_ReqPay_A

					Inclusive :0 total Digits: 15		<u>mount Value</u>
7.12.2	Currency of the transaction	curr	1..1	Text	Min: 1 Max: 3	M	
7.12.3	Details of transaction amount	<Payee.Amount.Split >	0..1	Alphabetic	Fixed	O	
7.12.3.1	Name of the property	name	1..n	Code	Fixed	M	
7.12.3.2	Value of the property	value	1..n	Alphanumeric	Min: 1 Max: 99	M	

Sample API message is given below –

```
<upi:RespAuthDetails xmlns:upi="http://npci.org/upi/schema/">
  <Head ver="1.0|2.0" ts="" orgId="" msgId="" prodType="UPI"/>
  <Resp reqMsgId="" result="SUCCESS|FAILURE" errCode=""/>
  <Txn id="" note="" refId="" custRef="" refUrl="" ts="" orgTxnId=""
type="PAY|COLLECT|DEBIT|CREDIT|REVERSAL|REFUND" refCategory="" initiationMode="" purpose="" >
    <RiskScores>
      <Score provider="sp" type="TXNRISK" value=""/>
      <Score provider="NPCI" type="TXNRISK" value=""/>
    </RiskScores>
    <Rules>
      <Rule name="EXPIREAFTER" value="1 minute to max 64800 minutes"/>
      <Rule name="MINAMOUNT" value=""/>
    </Rules>
  </Txn>
  <Payer addr="" name="" seqNum="" type="PERSON|ENTITY" code="">
    <Merchant>
      <Identifier subCode="" mid="" sid="" tid="" merchantType="" merchantGenre=""
onBoardingType="" pinCode="" regIdNo="" tier="" />
    </Merchant>
  </Payer>
</upi:RespAuthDetails>
```

```

        <Ownership type="" />
        <Invoice name="" num="" date="" />
    </Merchant>
    <Info>
        <Identity id="" type="ACCOUNT" verifiedName="" />
        <Rating VerifiedAddress="TRUE|FALSE" />
    </Info>
    <Device>
        <Tag name="MOBILE" value="" />
        <Tag name="GEOCODE" value="" />
        <Tag name="LOCATION" value="" />
        <Tag name="IP" value="" />
        <Tag name="TYPE" value="" />
        <Tag name="ID" value="" />
        <Tag name="OS" value="" />
        <Tag name="APP" value="" />
        <Tag name="CAPABILITY" value="" />
        <Tag name="TELECOM" value="" />
    </Device>
    <Ac addrType="ACCOUNT">
        <Detail name="IFSC" value="" />
        <Detail name="ACTYPE" value="" />
        <Detail name="ACNUM" value="" />
    </Ac>
    <Creds>
        <Cred type="PIN" subType="MPIN">
            <Data code="" ki=""> base-64 encoded/encrypted authentication data</Data>
        </Cred>
        <Cred type="PREAPPROVED" subType="NA">
            <Data> base-64 encoded</Data>
        </Cred>
        <Cred type="UPI-Mandate" subType="DS">
            <Data> base-64 encoded digitally signed UPI-Mandate</Data>
        </Cred>
    </Creds>

```

```

    <Amount value="" curr="NAD">
      <Split name="PURCHASE|CASHBACK" value=""/>
    </Amount>
  </Payer>
  <Payees>
    <Payee addr="" name="" seqNum="" type="PERSON|ENTITY" code="" cmId="" >
      <Merchant>
        <Identifier subCode="" mid="" sid="" tid="" merchantType="" merchantGenre=""
          onBoardingType="" pinCode="" regIdNo="" tier="" />
        <Ownership type=""/>
        <Invoice name="" num="" date="" />
      </Merchant>
      <Info>
        <Identity id="" type="ACCOUNT" verifiedName="" />
        <Rating VerifiedAddress="TRUE|FALSE"/>
      </Info>
      <Device>
        <Tag name="MOBILE" value=""/>
        <Tag name="GEOCODE" value=""/>
        <Tag name="LOCATION" value="" />
        <Tag name="IP" value=""/>
        <Tag name="TYPE" value=""/>
        <Tag name="ID" value=""/>
        <Tag name="OS" value=""/>
        <Tag name="APP" value=""/>
        <Tag name="CAPABILITY" value=""/>
        <Tag name="TELECOM" value=""/>
      </Device>
      <Ac addrType="ACCOUNT">
        <Detail name="IFSC" value=""/>
        <Detail name="ACTYPE" value=""/>
        <Detail name="ACNUM" value=""/>
      </Ac>
      <Amount value="" curr="NAD">
        <Split name="" value=""/>
      </Amount>
    </Payee>
  </Payees>

```

```
</Amount>
</Payee>
</Payees>
</upi:RespAuthDetails>
```

CONFIDENTIAL

5. Appendix

Rule Id	Condition	Value	Action
001_ReqPay_Pay	if(type=PAY)	PAY	If it is a PAY txn below tags are mandatory Under Payer 1. Info Tag 2. Device tag 3. Account tag 4. Amount tag 5. Cred tag Under Payee 1. Payee tag. 2. Amount tag
002_ReqPay_Collect	if(type=COLLECT)	COLLECT	If it is a COLLECT txn below tags are mandatory. Under payee tag 1. Info Tag 2. Device tag details 3. Account tag 4. Amount tag. Under Payer tag 1. Amount tag.
003_ReqPay_Debit	if(type=DEBIT)	DEBIT	If type is DEBIT below tags are mandatory. Under Payer tag 1. Info Tag 2. Device tag 3. Account tag 4. Amount tag. 5. Cred tag Under Payee tag 1. Info tag 2. Account tag 3. Amount tag 4. Device tag (applicable only in

			case of COLLECT)
004_ReqPay_Credit	if(type=CREDIT)	CREDIT	If type is CREDIT below tags are mandatory. Under Payer tag 1. Info Tag 2. Device tag 3. Account tag 4. Amount tag Under Payee tag 1. Info tag 2. Device tag (applicable only in case if COLLECT) 3. Account tag 4. Amount tag
005_ReqPay_DebitorReversal	if(type=REVERSAL)	REVERSAL	This leg will be sent for reversal from IPS to Remitter If type is REVERSAL below tags are mandatory. Under Payer tag 1. Info Tag 2. Account tag 3. Amount tag
006_ReqPay_CreditReversal	if(type=REVERSAL)	REVERSAL	This leg will be sent for reversal from IPS to Beneficiary If type is REVERSAL below tags are mandatory. Under Payee tag 1. Info Tag 2. Account tag 3. Amount tag

007_ReqPay_PreApproved	if(type=PAY&&Cred.type="PREAPPROVED")/(type=COLLECT&&Cred.type="PREAPPROVED")	PREAPPROVED	1. If txn type is PAY and PREAPPROVED, then the following cred block should be present in ReqPay 2. If txn type is COLLECT and PREAPPROVED, then the following cred block should be present in RespAuthDetails <Cred type="PREAPPROVED subType="NA"">. Format: respCode approvalNum Example -00 972345 " " - to be used as delimiter
008_ReqAuth_Pay	if(type=PAY)	PAY	If type is PAY below tags are mandatory in ReqAuthDetails Under Payer tag 1. Info Tag 2. Account tag 3. Amount tag Under Payee tag 1. Amount tag
009_ReqAuth_Collect	if(type=COLLECT)	COLLECT	If type is COLLECT below tags are mandatory in ReqAuthDetails Under Payer tag 1. Amount tag Under Payee tag 1. Info Tag 2. Account tag 3. Amount tag

010_RespAuth_Pay	if(type=PAY)	PAY	If type is PAY below tags are mandatory in RespAuthDetails Under Payer tag 1. Info Tag 2. Account tag 3. Amount tag Under Payee tag 1. Info Tag 2. Account tag 3. Amount tag
011_RespAuth_Collect	if(type=COLLECT)	COLLECT	If type is COLLECT below tags are mandatory in RespAuthDetails Under Payer tag 1. Info Tag 2. Account tag 3. Amount tag 4. Device tag 5. Cred tag Under Payee tag 1. Info Tag 2. Account tag 3. Amount tag
012_ReqTxn_Pay	if(type=PAY)	PAY	Ref tag of payee details will be present in the ReqTxnConfirmation.
013_ReqTxn_Collect	if(type=COLLECT)	COLLECT	Ref tag of payer details will be present in the ReqTxnConfirmation
016_RespPay_Pay	if(type=DEBIT)	DEBIT	Ref tag of payer details will only be sent in the RespPay

017_RespPay_Collect	if(type=CREDIT)	CREDIT	Ref tag of payee details will only be sent in the RespPay
018_RespPay_Reversal	if(type=REVERSAL)	REVERSAL	Ref tag of Payer details will be sent in debit reversal Ref tag of Payee details will be sent in credit reversal
019_Head_Version	General	Numeric	Default is '2.0'
020_Head_ts	General	ISODateTime format	The string format should be: YYYY-MM-DDTHH:mm:ss.sssZ, where: YYYY-MM-DD – is the date: year-month-day. The character "T" is used as the delimiter. HH:mm:ss: sss – is the time: hours, minutes, seconds and milliseconds. The 'Z' part denotes the time zone in the format +/- hh:mm HH/hh = two digits of hour (00 through 23) (am/pm NOT allowed) mm = two digits of minute (00 through 59) ss = two digits of second (00 through 59) sss= three digit of milli second (000 through 999) +/- hh:mm = followed by time zone difference from GMT in

			hours and minutes. This is Mandatory
021_Head_MsgId	General	Alphanumeric	Message ID is unique for API. It should be always 35 Digits. The first 3 digit should be bank Participation code assigned by IPS followed by 32 digits generated by UUID logic. msgId field is populated in the request by participants. The same msgId will be provided in the acknowledgement and response. Message id will be different for the different API.
022_Txn_UUID	General	Alphanumeric	Transaction ID is unique for any transaction. It should be always 35 Digits. First 3-digit should be bank Participation code assigned by IPS followed by 32-digit generated by UUID Logic. This field is populated in the request by the participants. The same will be provided in the acknowledgement and response. id will be different for the different API.
023_Txn_orgTxnId	if(type=REVERSAL)	Alphanumeric	Mandatory, used only if REVERSAL/ Refund happens
024_Txn_code	General	PERSON=0000 ENTITY=X XXX	“XXXX” is MCC (Merchant Category Code) of the Merchant. MCC follows ISO 18245: 2003 standards. In case of the type =PERSON the MCC code is 0000. If the type=ENTITY then MCC code will be populated accordingly on the agreed MCC.
025_Response_ApprovalNum	if(Result=SUCCESS)	Alphanumeric	6-digits must be Alphanumeric. If result is success, Approval number is mandatory
026_Payer/Payee_Info Rating	General	Numeric	TRUE FALSE

027_Response_ErrCode	General	Alphanumeric	This field will be populated in case of a FAILURE. Error code and response code document shared to Bank.
028_Response_Reversal	if(type=REVERSAL)	Numeric	Mandatory only if FAILURE
029_Payer/Payee_Type	General	PERSON/ENTITY	Either PERSON/ENTITY. If the type = ENTITY, then the Merchant tag and its associated fields mentioned in the respective API need to be populated based on the merchant.
030_Txn_SubType	If(type=DEBIT/CREDIT/REVERSAL/REFUND)	DEBIT/CREDIT/REVERSAL/REFUND	PAY/COLLECT
031_Txn_Initiationmode	If(type=PAY COLLECT DEBIT CREDIT REVERSAL REFUND ChkTxn TxnConfirmation) In mandate, if (type=CREATE UPDATE REVOKE)	01/02/ 04/05/ 10/14/00	00=Default 01=QR Code 02=Secure QR Code 04=Intent 05=Secure Intent 10=SDK (Software Development Kit) 15-18 for future purpose
032_RespPay_RefTag_IFSC	if(Response.result=SUCCESS)	IFSC	IFSC code of the respective bank should be 11-digits. ex: XXXX0483772
033_RespPay_ActCode	If (UIDAIAuth=FAILURE)	Tag value = XXX ZZZ" Authentication code	Tag XXX" – Will be populated by IPS from "err" tag of UIDAI AuthRes ZZZ – Will be populated by IPS if present in "actn" of UIDAI AuthRes. Else only XXX will be present Please refer the IPS error code document for UIDAI response codes
034_ReqPay_DeviceDetails_Values	if(DEVICE.Tag occurs)	Device Values	MOBILE:91nnnnnnnnnn GEOCODE:nn.nnnn,nn.nnnn LOCATION:Area with city, state and Country Code 01-23- Terminal Address 24-36- Terminal City 37-38- Terminal State Code 39-40- Terminal Country Code

			IP: Valid IP address format(v4,v6) TYPE:Min Length – 1 , Max Length – 20 (Refer Rule_035) ID:Min Length – 1 , Max Length–35 OS:Min Length – 1 , Max Length–20 APP:Min Length – 1 , Max Length–20 CAPABILITY:Min Length – 1 , Max Length – 99 (refer to DE-61) e.g: “5200000200010004000 639292929292 “. For more details, refer annexure document TELECOM OPERATOR:Min Length-1,Max Length-99 (It is mandatory for USSD)
035_ReqPay_DeviceDetails_type	If(Device.tag.name="Type")	Device type	Initiating Channel 1. MOB(Mobile) 2. INET(Internet) 3. USDC/USDB(USSD) 4. POS(Point of Sale)
036_ReqPay_DeviceDetails_OS	If(Device.tag.name="OS")	Device OS	OS of the initiating Device 1. iOS 2. Android
037_ReqPay_Payer/Payee_MerchantTag	If(Payer.type/Payee.type=ENTITY)	Payer/Payee Merchant block	If the merchant comes through an aggregator, then the merchant block element will contain the merchant details as follows 1. Identifier.subCode=MCC code of the merchant 2. Identifier.mid="Merchant id" 3. Identifier.sid="Store id" 4. Identifier.tid="Terminal id" 5. Name.brand = Brand any of the merchant 6. Name.Legal=Legal Name of the merchant 7. Name.Franchise=Franchise agent name 8. Ownership.type= See rule 038 9. merchantType="SMALL LARGE"

			10. merchantGenre="OFFLINE ONLINE" 11. onBoardingType="BANK AGGREGATOR"
038_ReqPay_MerchantTag_Ownership_Type	If(Payer.type=ENTITY)	Payer/Payee Merchant tag_owner_type	Type of Ownership: PROPRIETARY PARTNERSHIP PRIVATE PUBLIC OTHERS
039_ReqPay_OrgRespCode	If(txn.type=REVERSAL)	TxnTag_Reversal	Possible only if Reversal/Refund scenario occurs
041_RespAuthDetail UPI-mandate_CollectCredblock	If(Txn.type=Collect)	Cred block	This cred block will come in ReqPay(Debit)and RespAuthDetails for IPS Mandate transactions. <Cred type="UPI-Mandate" subType="DS">.
042_ReqPay_Initiation mode	If(initiation mode="12")	Payers institution block	This institution block should contain all the mandatory fields mentioned in the ReqPay table. This XML block will be applicable to ReqPay & ReqAuthDetails.
043_ReqPay_Institution_type	If(type="MTO BANK")	Payers Institution type	Only these two modes of payment type are admissible. 1. MTO- Money Transfer Operator 2. BANK
044_ReqPay_Institution_route	If(route="MTSS RDA")	Payers Institution route	Only these two modes of payment route is admissible. 1.MTSS-Money transfer service scheme 2.RDA-Rupee Drawing Arrangement
045_ReqPay_Txn_purpose	If(txn_type=PAY COLLECT REFUND REVERSAL DEBIT CREDIT) For mandate txn also	00 01 02 03 04 05 06 07 08 09 10	The purpose field is specially used for 00- DEFAULT 01- AMC 02- Travel 03- Hospitality 04- Hospital 05- Telecom

			06- Insurance 07- Education 08- Gifting 09- Others
046_ReqPay_Ac_addrType	If(addrType=ACCOUNT MOBILE CARD)	Account values	1. If addrType=ACCOUNT is applicable for account + IFSC txn's 2. If addrType=MOBILE is applicable for mobile banking txn's 3. If addrType=CARD is applicable for card payments.
047_ReqPay_Ac_name_NationalID	If(addrType=AADHAAR)	National ID values	If addrType=AADHAAR, then two below details are mandatory IIN= It should be 6-digit numeric UIDNUM= It should be 11-digit numeric assigned by UIDAI
048_ReqPay_Ac_name_Account	If(addrType=ACCOUNT)	Account values	If addrType=ACCOUNT, then three below details are mandatory IFSC= It should be 11-digit alphanumeric ACTYPE= It should be a fixed value SAVINGS DEFAULT CURRENT NRE NRO PPIWALLET BANKWALLET CREDIT SOD UOD ACNUM= it should be max 30 Digits
049_ReqPay_Ac_name_Mobile	If(addrType=MOBILE)	Mobile values	If addrType=MOBILE, then two below details are mandatory 9-digit mobile number MMID=It should contain 7 digits numeric.
050_ReqPay_Ac_name_Card	If(addrType=CARD)	Card values	If addrType=CARD, then the below values are mandatory ACTYPE= It should be a fixed value SAVINGS DEFAULT CURRENT CARDNUM=It should be Max- 16 digits Numeric

051_ReqPay_Amount_Value	If(amount,orgAmount,settamount)	Amount value	The amount value should be numeric. It should be populated in the format below. 2 digits should come after the decimal. e.g., (Amount Value="100.00")
052_ReqPay_Txn_refCategory	If(txn_type=PAY COLLECT REFUND REVERSAL DEBIT CREDIT) For mandate txn also	00 01 02 03 04 05 06 07 08 09	If refUrl is present, then refCategory is mandatory. The refCategory field is used to identify the category of the transaction 00 -NULL 01 - Advertisement 02- Invoice Others for future use
053_Payee.Merchant.Invoice_num			This tag consists of the Number on the invoice printed or shared to the customer.
054_Payee.Merchant.Invoice_date			This tag consists of the date on the invoice printed or shared to the customer
055_OrgId			orgId will be provided to the participants at the time of onboarding by IPS. At the time of onboarding a three-character code will be provided to the participant that will be used while forming the msgId or transaction id
056_seqNum			Use always seqNum=1 irrespective of payer or payee.
057_note			This field is used for specifying any remarks or note for the transactions. Participants may use this field to print on the receipt.
058_refUrl			This will be the website url for the sender of the message.
059_Detail.name			1. Wallet-Based Onboarding When the onboarding is based on a wallet, and the format used is FORMAT7, the detail name should be set to

		MOBILE. This applies when the user is accessing the service either through a mobile application or via a feature phone using the USSD channel. 2. National ID-Based Onboarding For onboarding that uses a National ID, and the format specified is FORMAT6, This condition is applicable when the user is accessing the service through a mobile application. 3. Account-Based Onboarding In the case of account-based onboarding, the detail name should be set to MOBILE EXPDATE CARDDIGITS. This applies under two conditions: 3.1 When the user is using a mobile application, and the format is FORMAT1. 3.2 When the user is using a feature phone via USSD, and the format is FORMAT2.
--	--	--

CONFIDENTIAL

6. Reference Request/Response Logs

The sample logs provided are for reference and illustration purposes only.

Note: The sample examples in the annexes do not include the digital signature because all APIs are signed using a signer certificate (IPS Participant/SoV Provider/IPS). The sample logs are intended to help understand the API structure and field values, which is why the signature element has been excluded.

If IPS Participant/SOV Provider (Initiating system) sends the request to IPS switch (destination system) it will sign the request from UPI like switch's public key and if IPS switch is sending request to IPS Participant/SoV Provider, it will sign the request from IPS Participant/SoV Provider public key. Sample Log does not contain the Ack as logs are intended to help understand the API structure and field values, which is why the signature element has been excluded.

However, a sample request that includes the digital signature is provided in Section 3.5 – Certificate Requirement.

6.1. HeartBeat

Refer Specifications [Heartbeat API](#)

Request :

```
<ReqHbt>
  <Head ver="2.0" ts="2025-06-03T12:39:25.510+02:00" orgId="700001" msgId="7000011748947165510"
prodType="UPI"/>
  <Txn id="7000011748947165510" note="Heart Beat Msg" refId="BARBE8F8C899A574886AECEB39151596F4F"
refUrl="http://lcodetechnologies.com/" ts="2025-06-03T12:39:25.510+02:00" type="Hbt"/>
  <HbtMsg type="ALIVE" value="NA"/>
</ReqHbt>
```

Response :

```
<RespHbt>
  <Head ver="2.0" ts="2025-06-03T12:39:25+02:00" orgId="NPCI" msgId="1xysV832akKh" prodType="UPI"/>
  <Resp reqMsgId="7000011748947165510" result="SUCCESS"/>
  <Txn id="7000011748947165510" note="Heart Beat Msg" ts="2025-06-03T12:39:25+02:00" type="Hbt"
refId="BARBE8F8C899A574886AECEB39151596F4F" refUrl="http://lcodetechnologies.com/" />
</RespHbt>
```

6.2. List PSP

Refer Specifications [List PSP API](#)

Request :

```
<ReqListPsp>
  <Head ver="2.0" ts="2025-06-02T10:55:41+02:00" orgId="700001"
msgId="CNRebd1f8702193436493722c63660e203a" prodType="UPI" />
  <Txn id="MYSIM00000000001vRPtRTgqKswACfYgXyo" note="Listing PSPs"
refId="CNRe6b6f56d66d24fc0aaf510862235a247" refUrl="http://psp.ref.test.com"
ts="2017-01-23T14:24:12+05:30" type="ListPsp" />
</ReqListPsp>
```

Response :

```
<RespListPsp>
  <Head ver="2.0" ts="2025-06-02T10:55:41+02:00" orgId="NPCI" msgId="1xysV6fNQcLl" prodType="UPI" />
  <Resp reqMsgId="CNRebd1f8702193436493722c63660e203a" result="SUCCESS" />
  <Txn id="MYSIM00000000001vRPtRTgqKswACfYgXyo" note="Listing PSPs"
refId="CNRe6b6f56d66d24fc0aaf510862235a247" refUrl="http://psp.ref.test.com"
ts="2017-01-23T14:24:12+05:30" type="ListPsp" />
  <PspList>
    <Psp name="Mypsp" codes="mypsp,oksbi,okicici,okaxis" active="Y" url="http://127.0.0.1:30002"
```

```

    spocName="npciuser" spocEmail="npci@npci.org.in" spocPhone="1234567890"
    lastModifiedTs="2025-05-30T11:44:05+02:00">
    <VersionSupported>
      <Version no="2.0" description="ITS A 2.0 BASE VERSION" mandatory="true" />
    </VersionSupported>
  </Psp>
</PspList>
</RespListPsp>

```

6.3. List Account Providers

Refer Specifications [List Account Providers API](#)

Request:

```

<ReqListAccPvd>
  <Head ver="2.0" ts="2025-06-02T11:04:51+02:00" orgId="700001"
    msgId="BARBB7FFC80252C4F2EAA6BEAD7B349094F" prodType="UPI" />
  <Txn id="MYSIM000000000001vRPtRTgqKswADe15dgo" note="Account provider Listing"
    refId="BARBE8F8C899A574886AECEB39151596F4F" refUrl="http://lcodetechnologies.com/"
    ts="2017-01-23T14:09:59+05:30" type="ListAccPvd" />
</ReqListAccPvd>

```

Response:

```

<RespListAccPvd>
  <Head ver="2.0" ts="2025-06-02T11:04:51+02:00" orgId="NPCI" msgId="1xysV6gySmlZ" prodType="UPI" />
  <Resp reqMsgId="BARBB7FFC80252C4F2EAA6BEAD7B349094F" result="SUCCESS" />
  <Txn id="MYSIM000000000001vRPtRTgqKswADe15dgo" note="Account provider Listing"
    refId="BARBE8F8C899A574886AECEB39151596F4F" refUrl="http://lcodetechnologies.com/"
    ts="2017-01-23T14:09:59+05:30" type="ListAccPvd" />
  <AccPvdList>

```

```
<AccPvd name="Mypsp" iin="500001" ifsc="AABY0000382" active="Y" url="http://127.0.0.1:30002"
  spocName="npciuser" spocEmail="npci@npci.org.in" spocPhone="1234567890" prods="UPI"
  lastModifiedTs="2025-05-30T11:44:05+02:00" mobRegFormat="FORMAT2">
  <VersionSupported>
    <Version no="2.0" description="ITS A 2.0 BASE VERSION" mandatory="true" />
  </VersionSupported>
</AccPvd>
</AccPvdList>
</RespListAccPvd>
```

6.4. List Keys

Refer Specifications [List Keys API](#)

For type="ListKeys"

Request:

```
<ReqListKeys>
  <Head ver="2.0" ts="2025-06-02T11:14:36+02:00" orgId="700001"
    msgId="MYSIM000000000001vRPtRTgqKswAEfXXMnS" prodType="UPI" />
  <Txn id="MYSIM000000000001vRPtRTgqKswAEfXXMnS" note="List Keys"
    refId="1f92232e14811e685c6f998defba8a" refUrl="http://www.npci.org.in/"
    ts="2017-01-23T14:20:09+05:30" type="ListKeys" />
</ReqListKeys>
```

Response:

```
<RespListKeys>
  <Head ver="2.0" ts="2025-06-02T11:14:37+02:00" orgId="NPCI" msgId="1xysV6gCQeAz" prodType="UPI" />
  <Resp reqMsgId="MYSIM000000000001vRPtRTgqKswAEfXXMnS" result="SUCCESS" />
  <Txn id="MYSIM000000000001vRPtRTgqKswAEfXXMnS" note="List Keys"
    refId="1f92232e14811e685c6f998defba8a" refUrl="http://www.npci.org.in/"
    ts="2017-01-23T14:20:09+05:30" type="ListKeys" />
```

```

<keyList>
  <key code="NPCI" owner="NPCI" type="PKI" ki="20150822">
    <keyValue>
NA|MIIBIjANBqkqhkiG9w0BAQEFAAOCAQ8AMIIBCgKCAQEAuMKxWfy0WcPp98muBwa6yhpmb6ZGZGSKHRIov05U1IN5TbUP16yEerh7Wj0
+JyKfsOntRdAVhkLJGRoHwH6gEEeFNHge7kPea/B33cQAbqa39mnP5FlaaZT3tjJnKrfI1Wum0crdb7dAMzft4JILOEa+s3Uh7OdYE1/Xp
7EisdSoJ345Cj0LTfLZEQzRdVGovXZrflByJysH11V9tDrIVv75C/3UndwjHt3NrqnBoUMh5VZRFkcwuebUakhIed5gvoysJwd0yYGrAU
XNrXJJDTAj5diCuasWyfWZR9lsX5l14hdxF+lqadR/pgII53DW5oEy2LMXgvt2u/qmSml8wIDAQAB
    </keyValue>
  </key>
</keyList>
</RespListKeys>

```

For type="GetToken"

Request:

```

<ReqListKeys>
  <Head ver="2.0" ts="2025-06-02T12:21:16+02:00" orgId="700001"
    msgId="MYSIM00000000001vRPtRTgqKswALiunyko" prodType="UPI" />
  <Txn id="MYSIM00000000001vRPtRTgqKswALiunyko" note="List Keys"
    refId="1f92232e14811e685c6f998defba8a" refUrl="http://www.npci.org.in/"
    ts="2017-01-23T14:20:09+05:30" type="GetToken" />
  <Creds>
    <Cred type="Challenge" subType="initial">
      <Data code="NPCI" ki="20150822">
0000000000000002|org.npci.upi.maggi|993456789|PWxc4VegbL/KZiVlaWMD6Ds6/MeCFj+cFEHJjSXE2/qv+gvWbEUH7pzknBed
GBWlt8hYfGsHIMw&#xd;K9LLMs1LVJr7wE5yn4dXcNTrnq4WGwGm9JETncaTCxR/vq0q3Cf2SxiwabdbQ1Nu4XrI0Vgt6KzD&#xd;wABpW
EP0uOQUM/pq1/dCUqmQaRo8L3JmblzQwnEk3o5jcAcinun0ugNwj3Bu3HldWkeha4XwIHDg&#xd;uFbBotTDovqlMdNN16wIE9EOpSd20v
p/Zd12S1xuREMUIRF3vjUlze8qVakKHLHmeSGh3yDZuRg&#xd;ya85I9dmpNnK4BtcF9Y8duMsmrCeG3axgts/Dg==&#xd;
      </Data>
    </Cred>
  </Creds>
</ReqListKeys>

```

Response:

```
<RespListKeys>
  <Head ver="2.0" ts="2025-06-02T12:21:16+02:00" orgId="NPCI" msgId="1xysV6hLdxEE" prodType="UPI" />
  <Resp reqMsgId="MYSIM000000000001vRPtRTgqKswALiunyko" result="SUCCESS" />
  <Txn id="MYSIM000000000001vRPtRTgqKswALiunyko" note="List Keys"
    refId="1f92232e14811e685c6f998defba8a" refUrl="http://www.npci.org.in/"
    ts="2017-01-23T14:20:09+05:30" type="GetToken" />
  <keyList>
    <key code="NPCI" owner="NPCI" type="CLF" ki="20150822">
      <keyValue>VBMKoz0lvTEDoaDaomYz4KD4SFMjrJpfxaboeGAj6mU=</keyValue>
    </key>
  </keyList>
</RespListKeys>
```

type="ListPSPKeys"

Request:

```
<ReqListKeys>
  <Head ver="2.0" ts="2025-06-09T11:13:31+02:00" orgId="700001"
    msgId="MYSIM000000000001vRPtRTgqKswROVu1LsA" prodType="UPI" />
  <Txn id="MYSIM000000000001vRPtRTgqKswROVu1LsA" note="List Keys"
    refId="1f92232e14811e685c6f998defba8a" refUrl="http://www.npci.org.in/"
    ts="2017-01-23T14:20:09+05:30" type="ListPSPKeys" />
</ReqListKeys>
```

Response :

```
<RespListKeys>
  <Head ver="2.0" ts="2025-06-09T11:13:31+02:00" orgId="NPCI" msgId="1xysViAHrrM4" prodType="UPI" />
  <Resp reqMsgId="MYSIM000000000001vRPtRTgqKswROVu1LsA" result="SUCCESS" />
  <Txn id="MYSIM000000000001vRPtRTgqKswROVu1LsA" note="List Keys"
    refId="1f92232e14811e685c6f998defba8a" refUrl="http://www.npci.org.in/"
    ts="2017-01-23T14:20:09+05:30" type="ListPSPKeys" />
```



```

<keyList>
  <key code="700001" owner="NPCI" type="SIGNEDINTENT" ki="20250606">
    <keyValue>
      MIIBIjANBgkqhkiG9w0BAQEFAAOCAQ8AMIIBCgKCAQEAmVzLJ+0RUfVn6wh7hOpILl06WTvuV8jraL7zxA3UxW1SHWY3IDCNfNFABFx7aK
      pK9FXBpVPMi5Zup3H1lzTfozFwz+9mtU5pPP7J2l+Uick4Ixdpp2yyk+B+qOD1uEc1yI2OqyMXjAaOifPCc1otVttMlhOh2wY3LQ2qMwr
      koL08MYNXos2nCnZrjhC8OpI93y8nho0D28zIVwV0whhCccr12k530ZJpmKvqTfiU+N4mKQeuawAtg80jUKvR6YUUYBc9G3Bx0luFH+LwM
      UQNsBt9JVdepi3FjTKVWWRUouRWZXiualvROEN/cDjTR0juPwZymmqRlUDB5vtpEi8HwIDAQAB</keyValue>
    </key>
  </keyList>
</RespListKeys>

```

6.5. List Verified Address Entries

Refer Specifications [List Verified Address Entries API](#)

Request:

```

<ReqListVae>
  <Head ver="2.0" ts="2025-06-26T16:07:52+05:30" orgId="700001"
  msgId="HPDSFVC4QOS7X1UGPY7JGUV555PL9T2C3QM" prodType="UPI" />
  <Txn id="MYSIM00000000005sp20iQPvjgQPLOp7Xy" refId="aaa" refUrl="http://www.abc.com" ts="2015-02-
  16T22:02:35+05:30" note="List vae" type="ListVae"/>
</ReqListVae>

```

Response:

```

<RespListVae>
  <Head ver="2.0" ts="2025-06-26T16:07:53+05:30" orgId="NPCI" msgId="4EZsCT3tG" prodType="UPI" />
  <Resp reqMsgId="HPDSFVC4QOS7X1UGPY7JGUV555PL9T2C3QM" result="SUCCESS"/>
  <Txn id="MYSIM00000000005sp20iQPvjgQPLOp7Xy" refId="aaa" refUrl="http://www.abc.com" ts="2015-02-
  16T22:02:35+05:30" note="List vae" type="ListVae"/>
  <VaeList>

```

```
<Vae name="India0" addr="0jun@mypsp" logo="http://myurl.com/russia" url="http://myurl.com">
  <key code="NPCI" type="PKI" ki="20201111">
<keyValue>MFkwEwYHkoZIZj0CAQYIKoZIZj0DAQcDQgAE6BBQUnO+Z+gpO2BeLp/3vbl1m5VC4UQ0+hh2/PGaxCa38FEzUjf3eNWOiySt
PFGK5x/PjZ0xrAj7KSzJyAxG5w==</keyValue>
  </key>
</Vae>
</VaeList>
</ns2:RespListVae>
```

6.6. List Account API

Refer Specifications [List Account API](#)

Request from Acquirer to IPS:

```
<ReqListAccount>
  <Head ver="2.0" ts="2025-06-06T07:18:07+02:00" orgId="700001"
    msgId="IDF8D7DA2D2978542558A71C9B1AD0102C8" prodType="UPI"/>
  <Txn id="MYSIM000000000001vRPtRTgqKswK3ISYYhO" note="List Accounts" refId="112713671978"
    refUrl="http://www.idfcbank.com/" ts="2021-05-07T13:03:10+05:30" type="ListAccount" />
  <Payer addr="deviprd@mypsp" name="Devi" seqNum="1" type="PERSON" code="0000" aadhaarConsent="N">
    <Device>
      <Tag name="MOBILE" value="264812345" />
      <Tag name="GEOCODE" value="13.082680,80.270718" />
      <Tag name="LOCATION" value="MUMBAI" />
      <Tag name="IP" value="192.168.43.1" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="0000000000000002" />
      <Tag name="OS" value="Android" />
      <Tag name="APP" value="org.npci.upi.maggi" />
      <Tag name="CAPABILITY" value="1000" />
    </Device>
  <Ac addrType="ACCOUNT">
```

```

        <Detail name="IFSC" value="AABY0000382" />
    </Ac>
</Payer>
<Link type="MOBILE" value="264812345" />
</ReqListAccount>

```

Request from IPS to Issuer SOV Providers:

```

<ReqListAccount>
  <Head ver="2.0" ts="2025-06-06T07:18:07+02:00" orgId="NPCI" msgId="1xysVdeTS1OR" prodType="UPI" />
  <Txn id="MYSIM000000000001vRPtRTgqKswK3ISYYhO" note="List Accounts" refId="112713671978"
    refUrl="http://www.idfcbank.com/" ts="2021-05-07T13:03:10+05:30" type="ListAccount" />
  <Payer addr="deviprd@mypsp" name="Devi" seqNum="1" type="PERSON" code="0000" aadhaarConsent="N">
    <Device>
      <Tag name="MOBILE" value="264812345" />
      <Tag name="GEOCODE" value="13.082680,80.270718" />
      <Tag name="LOCATION" value="MUMBAI" />
      <Tag name="IP" value="192.168.43.1" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="0000000000000002" />
      <Tag name="OS" value="Android" />
      <Tag name="APP" value="org.npci.upi.maggi" />
      <Tag name="CAPABILITY" value="1000" />
    </Device>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
    </Ac>
  </Payer>
  <Link type="MOBILE" value="264812345" />
</ReqListAccount>

```

Response from Issuer SOV to IPS:

```
<RespListAccount>
  <Head ver="2.0" ts="2025-06-06T07:18:07.521+02:00" orgId="700001"
    msgId="XYA0000000000001vRPtRSgrisKTyXAGOlR" prodType="UPI" />
  <Resp reqMsgId="1xysVdeTS1OR" result="SUCCESS" />
  <Txn id="MYSIM000000000001vRPtRTgqKswK3ISYYhO" note="List Accounts" refId="112713671978"
    refUrl="http://www.google.co.in/" ts="2025-06-06T07:18:07.521+02:00" type="ListAccount" />
  <AccountList>
    <Account accType="SAVINGS" accRefNumber="117795514570123" maskedAccnumber="XXXXXXXXXX570123"
      ifsc="AABY0000382" mmid="3004010" name="ABC" aebea="Y" mbebea="Y" aadhaarNo="56789012346">
      <CredsAllowed dLength="6" dType="Numeric" subType="SMS" type="OTP"/>
      <CredsAllowed dLength="6" dType="Numeric" subType="MPIN" type="PIN"/>
      <CredsAllowed dLength="6" dType="Numeric" subType="ATMPIN" type="PIN"/>
    </Account>
    <Account accType="WALLET" accRefNumber="123456789067890" maskedAccnumber="XXXXXXXXXX067890"
      ifsc="AABY0000367" mmid="3004010" name="BankA" aebea="N" mbebea="Y">
      <CredsAllowed dLength="6" dType="Numeric" subType="SMS" type="OTP"/>
      <CredsAllowed dLength="6" dType="Numeric" subType="MPIN" type="PIN"/>
      <CredsAllowed dLength="5" dType="Numeric" subType="WALLETPIN" type="PIN"/>
    </Account>
  </AccountList>
</RespListAccount>
```

Response from IPS to Acquirer Participants:

```
<RespListAccount>
  <Head ver="2.0" ts="2025-06-06T07:18:07+02:00" orgId="NPCI" msgId="1xysVdeTS1OT" prodType="UPI" />
  <Resp reqMsgId="1xysVdeTS1OR" result="SUCCESS" />
  <Txn id="MYSIM000000000001vRPtRTgqKswK3ISYYhO" note="List Accounts" refId="1"
    refUrl="http://www.google.co.in/" ts="2025-06-06T07:18:07.521+02:00" type="ListAccount" />
  <AccountList>
```

```

<Account accType="SAVINGS" accRefNumber="117795514570123" maskedAccnumber="XXXXXXXXXX570123"
  ifsc="AABY0000382" mmid="3004010" name="ABC" aebea="Y" mbebea="Y" >
  <CredsAllowed dLength="6" dType="Numeric" subType="SMS" type="OTP"/>
  <CredsAllowed dLength="6" dType="Numeric" subType="MPIN" type="PIN"/>
  <CredsAllowed dLength="6" dType="Numeric" subType="ATMPIN" type="PIN"/>
</Account>
</AccountList>
</RespListAccount>

```

6.7. Manage Verified Address Entries API

Refer Specifications [Manage Verified Address Entries API](#)

Request:

```

<ReqManageVae>
  <Head ver="2.0" ts="2025-06-05T09:54:12+02:00" orgId="700001" msgId="5t0xf5rB2rA3if8ZGye"
    prodType="UPI" />
  <Txn id="MYSIM000000000001vRPtRTgqKswHS6e61Es" note="Tran Note" refId="1"
    refUrl="http://www.google.co.in/" ts="2020-05-05T11:41:22+05:30" type="ManageVae" />
  <VaeList>
    <Vae op="ADD" name="India0" addr="0Feb@mypsp" logo="http://myurl.com/russia"
      url=http://myurl.com seqNum="1" >
      <key code="NPCI" type="PKI" ki="20201111">
        <keyValue>
MFkwEwYHKOZIZj0CAQYIKoZIZj0DAQcDQgAE6BBQUnO+Z+gpO2BeLp/3vbl1m5VC4UQ0+hh2/PGaxCa38FEzUjf3eNWOiyStPFGK5x/PjZ
0xrAj7KSzJyAxG5w==</keyValue>
        </key>
      </Vae>
    </VaeList>
  </ReqManageVae>

```

Response :

```
<RespManageVae>
  <Head ver="2.0" ts="2025-06-05T09:54:12+02:00" orgId="NPCI" msgId="1xysVbwainT4" prodType="UPI" />
  <Txn id="MYSIM000000000001vRPtRTgqKswHS6e61Es" note="Tran Note" refId="1"
    refUrl="http://www.google.co.in/" ts="2020-05-05T11:41:22+05:30" type="ManageVae" />
  <Resp reqMsgId="5t0xf5rB2rA3if8ZGye" result="SUCCESS">
    <Ref op="ADD" seqNum="1" addr="0Feb@mypsp" respCode="00" result="SUCCESS" />
  </Resp>
</RespManageVae>
```

6.8. Validate Address

Refer Specifications [Validate Address API](#)

P2P:

Request from Payer IPS Payer participants to IPS:

```
<ReqValAdd>
  <Head ver="2.0" ts="2025-06-10T11:46:28+02:00" orgId="700002"
msgId="LVB2e9c06404a8d4b289dc24cdca9b0ad75" prodType="UPI"/>
  <Txn id="MYSIM000000000001vRPtRTgqKswUkw9OK4M" note="Validate vpa" refId="123456"
refUrl=https://upaay.lvbhank.in ts="2019-03-29T14:41:48+05:30" type="ValAdd"
custRef="LVB60a39feff0214ee0a8c5c10cc2a6c0ff"/>
  <Payer addr="payer@mypsp2" name="Shyam" seqNum="1" type="PERSON" code="0000">
    <Info>
      <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22"/>
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
      <Tag name="MOBILE" value="993456789"/>
      <Tag name="TYPE" value="MOB"/>
      <Tag name="ID" value="0000000000000002"/>
      <Tag name="OS" value="android"/>
    </Device>
  </Payer>
</ReqValAdd>
```

```

    <Tag name="APP" value="org.npci.upi.maggi"/>
  </Device>
</Payer>
  <Payee addr="ree@mypsp2" seqNum="1"/>
</ReqValAdd>

```

Request from IPS to Payee IPS participants:

```

<ReqValAdd>
  <Head ver="2.0" ts="2025-06-10T11:46:28+02:00" orgId="NPCI" msgId="1xysVkm4oAd5" prodType="UPI"/>
  <Txn id="MYSIM000000000001vRPtRTgqKswUkw9OK4M" note="Validate vpa" refId="123456"
refUrl="https://upaay.lvbank.in"ts="2019-03-29T14:41:48+05:30" type="ValAdd"
custRef="LVB60a39feff0214ee0a8c5c10cc2a6c0ff"/>
  <Payer addr="payer@mypsp2" name="Shyam" seqNum="1" type="PERSON" code="0000">
    <Info>
      <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22"/>
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
      <Tag name="MOBILE" value="993456789"/>
      <Tag name="TYPE" value="MOB"/>
      <Tag name="ID" value="0000000000000002"/>
      <Tag name="OS" value="android"/>
      <Tag name="APP" value="org.npci.upi.maggi"/>
    </Device>
  </Payer>
  <Payee addr="ree@mypsp2" seqNum="1"/>
</ReqValAdd>

```

Response from Payee IPS participants to IPS:

```

<RespValAdd>
  <Head ver="2.0" ts="2025-06-10T11:46:28.472+02:00" orgId="700002"
msgId="XYB0000000000001vRPtRSgrisL3PKRWb1T" prodType="UPI"/>

```

```
<Resp reqMsgId="1xysVkm4oAd5" result="SUCCESS" errCode="" maskName="Narayanan" code="0000"
type="PERSON" IFSC="AABF0009009" IIN="500004" accType="SAVINGS" addr="ree@mypsp2"/>
<Txn id="MYSIM000000000001vRPtRTgqKswUkw9OK4M" note="Validate vpa" refId="123456"
refUrl="https://upaay.lvbanks.in" ts="2019-03-29T14:41:48+05:30" type="ValAdd"
custRef="LVB60a39feff0214ee0a8c5c10cc2a6c0ff"/>
</RespValAdd>
```

Response from IPS to Payer IPS Participant:

```
<RespValAdd>
<Head ver="2.0" ts="2025-06-10T11:46:28+02:00" orgId="NPCI" msgId="1xysVkm4oAd7" prodType="UPI"/>
<Resp reqMsgId="LVB2e9c06404a8d4b289dc24cdca9b0ad75" result="SUCCESS" errCode=""
maskName="Narayanan" code="0000" type="PERSON" IFSC="AABF0009009" IIN="500004" accType="SAVINGS"
addr="ree@mypsp2"/>
<Txn id="MYSIM000000000001vRPtRTgqKswUkw9OK4M" note="Validate vpa" refId="123456"
refUrl="https://upaay.lvbanks.in" ts="2019-03-29T14:41:48+05:30" type="ValAdd"
custRef="LVB60a39feff0214ee0a8c5c10cc2a6c0ff"/>
</RespValAdd>
```

P2M:

Request from IPS Payer participants to IPS:

```
<ReqValAdd>
<Head ver="2.0" ts="2025-06-06T09:00:41+02:00" orgId="700001"
msgId="LVB2e9c06404a8d4b289dc24cdca9b0ad75" prodType="UPI" />
<Txn id="MYSIM000000000001vRPtRTgqKswKeyCsuje" note="Validate vpa" refId="123456"
refUrl="https://upaay.lvbanks.in" ts="2019-03-29T14:41:48+05:30" type="ValAdd"
custRef="LVB60a39feff0214ee0a8c5c10cc2a6c0ff" />
<Payer addr="mapperchk@mypsp" name="asing" seqNum="1" type="PERSON" code="0000">
<Info>
<Identity type="ACCOUNT" verifiedName="PALANIVEL K" id="1234567" />
<Rating verifiedAddress="TRUE"></Rating>
```



```

</Info>
<Device>
  <Tag name="MOBILE" value="993456789" />
  <Tag name="TYPE" value="MOB" />
  <Tag name="ID" value="0000000000000002" />
  <Tag name="OS" value="android" />
  <Tag name="APP" value="org.npci.upi.maggi" />
  <Tag name="GEOCODE" value="22.5767335,88.4344541" />
  <Tag name="LOCATION" value="9, Street Number 10, DN Block, Sector V," />
  <Tag name="IP" value="10.22.205.176" />
  <Tag name="CAPABILITY" value="100" />
</Device>
</Payer>
<Payee addr="merchant@mymsp" seqNum="1" />
</ReqValAdd>

```

Request from IPS to Payee IPS participants:

```

<ReqValAdd>
  <Head ver="2.0" ts="2025-06-06T09:00:41+02:00" orgId="NPCI" msgId="1xysVdgY8Wan" prodType="UPI" />
  <Txn id="MYSIM000000000001vRPtRTgqKswKeyCsuje" note="Validate vpa" refId="123456"
    refUrl="https://upaay.lvbhank.in" ts="2019-03-29T14:41:48+05:30" type="ValAdd"
    custRef="LVB60a39feff0214ee0a8c5c10cc2a6c0ff" />
  <Payer addr="mapperchk@mymsp" name="asing" seqNum="1" type="PERSON" code="0000">
    <Info>
      <Identity type="ACCOUNT" verifiedName="PALANIVEL K" id="123456" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
      <Tag name="MOBILE" value="993456789" />
    </Device>
  </Payer>
</ReqValAdd>

```

```

    <Tag name="TYPE" value="MOB" />
    <Tag name="ID" value="0000000000000002" />
    <Tag name="OS" value="android" />
    <Tag name="APP" value="org.npci.upi.maggi" />
    <Tag name="GEOCODE" value="22.5767335,88.4344541" />
    <Tag name="LOCATION" value="9, Street Number 10, DN Block, Sector V," />
    <Tag name="IP" value="10.22.205.176" />
    <Tag name="CAPABILITY" value="100" />
  </Device>
</Payer>
  <Payee addr="merchant@mypsp" seqNum="1" />
</ReqValAdd>

```

Response from Payee IPS participants to IPS:

```

<RespValAdd>
  <Head ver="2.0" ts="2025-06-06T09:00:41.529+02:00" orgId="700001"
    msgId="XYA00000000000001vRPtRSgrisKTJNkpQUM" prodType="UPI" />
  <Resp reqMsgId="1xysVdgY8Wan" result="SUCCESS" errCode="" maskName="Narayanan" code="8931"
    type="ENTITY" IFSC="HDFC0009009" IIN="500001" accType="PPIWALLET" addr="merchant@mypsp">
    <Merchant>
      <Identifier subCode="1234" mid="8394" sid="2212" tid="0101" merchantType="SMALL" />
      <Name brand="AllianceFranche" legal="Reliance" franchise="LearnFrench" />
      <Ownership type="PRIVATE" />
    </Merchant>
  </Resp>
  <Txn id="MYSIM000000000001vRPtRTgqKswKeyCsuje" note="Validate vpa" refId="123456"
    refUrl="https://upaay.lvbanks.in" ts="2019-03-29T14:41:48+05:30" type="ValAdd"
    custRef="LVB60a39feff0214ee0a8c5c10cc2a6c0ff" />
</RespValAdd>

```

Response from IPS to Payer IPS participants:

```
<RespValAdd>
  <Head ver="2.0" ts="2025-06-06T09:00:41+02:00" orgId="NPCI" msgId="1xysVdgY8Wap" prodType="UPI" />
  <Resp reqMsgId="LVB2e9c06404a8d4b289dc24cdca9b0ad75" result="SUCCESS" errCode=""
    maskName="Narayanan" code="8931" type="ENTITY" IFSC="HDFC0009009" IIN="500001"
    accType="PPIWALLET" addr="merchant@mypsp">
    <Merchant>
      <Identifier subCode="1234" mid="8394" sid="2212" tid="0101" merchantType="SMALL" />
      <Name brand="AllianceFranche" legal="Reliance" franchise="LearnFrench" />
      <Ownership type="PRIVATE" />
    </Merchant>
  </Resp>
  <Txn id="MYSIM000000000001vRPtRTgqKswKeyCsuje" note="Validate vpa" refId="123456"
    refUrl="https://upaay.lvbank.in" ts="2019-03-29T14:41:48+05:30" type="ValAdd"
    custRef="LVB60a39feff0214ee0a8c5c10cc2a6c0ff" />
</RespValAdd>
```

6.9. Set Credential API

Refer Specifications [Set Credentials API](#)

Request from IPS Participant to IPS:

```
<ReqSetCre>
  <Head ver="2.0" ts="2025-06-06T19:22:16+02:00" orgId="700001"
    msgId="XYD67c67aaded1f4e658ba0f7c14be13ce8" prodType="UPI" />
  <Txn id="MYSIM000000000001vRPtRTgqKswLidA2RKU" note="set credential"
    refId="XYD214e90075ade4d748e109ef54a07f39e" refUrl="http://www.rblbank.com"
    ts="2017-01-16T12:10:35+05:30" type="SetCre" />
  <Payer addr="popop@mypsp" name="Shubham Lamba" seqNum="1" type="PERSON" code="0000">
```

```

<Device>
  <Tag name="GEOCODE" value="0.0,0.0" />
  <Tag name="LOCATION" value="CHENNAI" />
  <Tag name="IP" value="192.168.1.100" />
  <Tag name="MOBILE" value="993456789" />
  <Tag name="TYPE" value="MOB" />
  <Tag name="ID" value="0000000000000002" />
  <Tag name="OS" value="android" />
  <Tag name="APP" value="org.npci.upi.maggi" />
  <Tag name="CAPABILITY" value="100" />
</Device>
<Ac addrType="ACCOUNT">
  <Detail name="IFSC" value="AABY0000382" />
  <Detail name="ACTYPE" value="SAVINGS" />
  <Detail name="ACNUM" value="1234567890" />
</Ac>
<Creds>
  <Cred type="PIN" subType="MPIN">
    <Data code="NPCI"
ki="20150822">2.0|g3qWFnPoaAF2MIMCWzp+DobYPq8gJ0bh7zsJ4kCW/IW2UKQjkOME9k5Nq54V6K7q5PyI478TSm0m&#xd;
      BhxNnJ24lPy1UIjwdgbTdsO6AeYpWEq67s3FtCLkyzs0JH3xWVole7iQQjCaYQgHKE7w6XTqSu3i&#xd;
      Ip5plYl62ZPmTLhPvhdx9FQlYo5bR0CUqhoJeFV7/ksfIFtYA4LqSMYuHX+fplZyH69Ukc6gJQM5&#xd;
      6WZAtxdMurMUZ9u45yG0G6rn+GXy0ftVu1T/XD/QnK8DmVN6lSVRtY5p524ghBvXNkMSkdJtNEGb&#xd;
      0K2efflfWM2O/o6OxtHQdyxTU+E4CH6NaY8K1w==&#xd;
    </Data>
  </Cred>
</Creds>
<NewCred>
  <Cred type="PIN" subType="MPIN">
    <Data code="NPCI"
ki="20150822">2.0|M0+2VuWzxTK4nBxSxfRFVxLSSDKmv6lJE8K+NzieJw5hBihXHmwxIejCEtVHQPQ2yKZfJ4nglvrsv&#xd;
      7SuKqickhsVqDhdBpM6OrxquFVN9RgKFel/3ZGxibj1lv3ImZdV1R0OInYtHBuof4yvIaDB0M9Nq&#xd;
      s+QMzw52OwzSco4m2yM4r3JwLG0rgO6G47+s7yu4dbKnEc6p7Oc+FE9k8uhnnK+fo15N+4xns1vC&#xd;
      1Z+8fhYxe+ugsGHHpqXTzQk4YB317BWEszsXYHBi6RoikAoIUtq7KDsmyXN4j+/feoNVims+8nP2&#xd;
      /zAbEYsWcJ4r3Jl+XjN3Oa/Dt7oRbt6WoOK0Sw==&#xd;
    </Data>
  </Cred>
</NewCred>

```

```

        </Data>
      </Cred>
    </NewCred>
  </Payer>
</ReqSetCre>

```

Request from IPS to Issuer Participants:

```

<ReqSetCre>
  <Head ver="2.0" ts="2025-06-06T19:22:16+02:00" orgId="NPCI" msgId="1xysVds1FiGF" prodType="UPI"
/>
  <Txn id="MYSIM000000000001vRPtRTgqKswLidA2RKU" note="set credential"
    refId="XYD214e90075ade4d748e109ef54a07f39e" refUrl="http://www.rblbank.com"
    ts="2017-01-16T12:10:35+05:30" type="SetCre" />
  <Payer addr="popop@mypsp" name="Shubham Lamba" seqNum="1" type="PERSON" code="0000">
    <Device>
      <Tag name="GEOCODE" value="0.0,0.0" />
      <Tag name="LOCATION" value="CHENNAI" />
      <Tag name="IP" value="192.168.1.100" />
      <Tag name="MOBILE" value="993456789" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="0000000000000002" />
      <Tag name="OS" value="android" />
      <Tag name="APP" value="org.npci.upi.maggi" />
      <Tag name="CAPABILITY" value="100" />
    </Device>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
      <Detail name="ACTYPE" value="SAVINGS" />
    </Ac>
    <Creds>
      <Cred type="PIN" subType="MPIN">
        <Data code="700001" ki="20160217">MYSIM000000000001vRPtRTgqKswLidA2RKU</Data>
      </Cred>
    </Creds>
  </Payer>
</ReqSetCre>

```

```

    </Creds>
    <NewCred>
      <Cred type="PIN" subType="MPIN">
        <Data code="700001" ki="20160217">MYSIM000000000001vRPtRTgqKswLidA2RKU</Data>
      </Cred>
    </NewCred>
  </Payer>
</ReqSetCre>

```

Response from Issuer Participant to IPS:

```

<RespSetCre>
  <Head ver="2.0" ts="2025-06-06T19:22:16.900+02:00" orgId="700001"
    msgId="XYA00000000000001vRPtRSgrisKUNshJrMm" prodType="UPI" />
  <Resp reqMsgId="1xysVds1FiGF" result="SUCCESS" />
  <Txn id="MYSIM000000000001vRPtRTgqKswLidA2RKU" note="set credential"
    refId="XYD214e90075ade4d748e109ef54a07f39e" refUrl="http://www.rblbank.com"
    ts="2017-01-16T12:10:35+05:30" type="SetCre" />
</RespSetCre>

```

Response from IPS to Payer IPS Participants:

```

<RespSetCre>
  <Head ver="2.0" ts="2025-06-06T19:22:16+02:00" orgId="NPCI" msgId="1xysVds1FiGH" prodType="UPI"
/>
  <Resp reqMsgId="XYD67c67aaded1f4e658ba0f7c14be13ce8" result="SUCCESS" />
  <Txn id="MYSIM000000000001vRPtRTgqKswLidA2RKU" note="set credential"
    refId="XYD214e90075ade4d748e109ef54a07f39e" refUrl="http://www.rblbank.com"
    ts="2017-01-16T12:10:35+05:30" type="SetCre" />
</RespSetCre>

```

6.10. Mobile Banking Registration API

Refer Specifications [Mobile Banking Registration API](#)

6.10.1.1. Registration through Debit card for Mobile APP

Request from IPS Payer Participants to IPS:

```
<ReqRegMob>
  <Head ver="2.0" ts="2025-06-03T09:12:07+02:00" orgId="700001"
    msgId="INDFFF5AA5B9EBF48C5B90DBB0A6BDB3D40" prodType="UPI" />
  <Txn id="MYSIM000000000001vRPtRTgqKswCTqFV7DG" note="Mobile registration" refId="21380"
    refUrl="http://www.npci.org.in" ts="2017-01-15T12:32:04.258+05:30" type="ReqRegMob" />
  <Payer addr="shruti@mysp" name="2547BAU" seqNum="1" type="PERSON" code="0000" >
    <Device>
      <Tag name="GEOCODE" value="0.0 ,0.0 " />
      <Tag name="LOCATION" value="Mumbai" />
      <Tag name="IP" value="172.16.50.65" />
      <Tag name="MOBILE" value="993456789" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="0000000000000002" />
      <Tag name="OS" value="android" />
      <Tag name="APP" value="org.npci.upi.maggi" />
      <Tag name="CAPABILITY" value="5200000200010004000639292929292" />
    </Device>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
      <Detail name="ACTYPE" value="SAVINGS" />
      <Detail name="ACNUM" value="10001105827" />
    </Ac>
  </Payer>
</ReqRegMob>
```

```

    </Ac>
  </Payer>
  <RegDetails type="FORMAT2">
    <Creds>
      <Cred type="CARD" subType="CARDDETAILS">
        <Data code="NPCI"
ki="20150822">1.0|Yn80P37ju1W4ZU8jdN3v0kLNI+j8Go4JUP1kfDsAG6dehcaNg+3yx70JVS/5p4V/mx3UeMrNSyU/&#xd;
        65ALf101tmCJW/hGQK6ajeZawxeMQRc5gRVlrcTopnUA05GhPQqJKZ7TFwR33V0+8p0Uht1E2/5i&#xd;
        zsJSvjYp6UDt1zsiqN85WEfAGlueQeE1Ka+JZIXr7X2Uv8gWTY7F8L79DAyybdmWRkcZtqJERt5h&#xd;
        oECmlNX5khKqg8y2yzc8zZenWNDtOFVXnWhs9snWd0pHdmKx/noH4KYNwbiY4DwFgBWju45z4eEi&#xd;
        1T/b5k6X8KoRM/B987jrfrm1TvtZ472X7fzFiHg==&#xd;
      </Data>
    </Cred>
    <Cred type="OTP" subType="SMS">
      <Data code="NPCI"
ki="20150822">1.0|Yn80P37ju1W4ZU8jdN3v0kLNI+j8Go4JUP1kfDsAG6dehcaNg+3yx70JVS/5p4V/mx3UeMrNSyU/&#xd;
        65ALf101tmCJW/hGQK6ajeZawxeMQRc5gRVlrcTopnUA05GhPQqJKZ7TFwR33V0+8p0Uht1E2/5i&#xd;
        zsJSvjYp6UDt1zsiqN85WEfAGlueQeE1Ka+JZIXr7X2Uv8gWTY7F8L79DAyybdmWRkcZtqJERt5h&#xd;
        oECmlNX5khKqg8y2yzc8zZenWNDtOFVXnWhs9snWd0pHdmKx/noH4KYNwbiY4DwFgBWju45z4eEi&#xd;
        1T/b5k6X8KoRM/B987jrfrm1TvtZ472X7fzFiHg==&#xd;
      </Data>
    </Cred>
    <Cred type="PIN" subType="MPIN">
      <Data code="NPCI"
ki="20150822">1.0|UKhAVOuG3dm48vIA86yhI8T6HpRLCnJW0QIq7IK8osjtH6CUea4zCBbHQu5ozPdNyKImKuYgPjOf&#xd;
        QnTWOfRRnuRqPZu0badpz1qNtln1BVoXJn7pFtLAAC1G8EvMANIX0pcVfkOLrQTsA010041gXMEu&#xd;
        Vymp2226SMrVtVrjvr54ZCITcrWu6xmUI6usQPvy6Gwdbav84ZSqBE65Lgs8u9qPpf2a9GYIGSxA&#xd;
        6xe36nCD7nRqpV2HeZbxYm6gr5LnFwUmOP+lDDODEjbyvyTCmldKDie9JaAlt1ZdeT8J0umYxn0K&#xd;
        iUX5OMzDvOLFYGY1h3be8DiEdEy3wnUSfZOJrg==&#xd;
      </Data>
    </Cred>
    <Cred type="PIN" subType="ATMPIN">
      <Data code="NPCI"
ki="20150822">1.0|JLG6vtI49VTNnLy9DVsvt73EzO5nvp7KFTTrJb/voRnboli6EjAG5yTq6hNLgLWSfvEbsPD09Y0W&#xd;
        S65oALvbtXi+WialcskxX1F+lDDyIW9T1TzT+7uRy+NNzYSW+E3sX/d3Tjfl9wJkPCPLuq2KU3m&#xd;

```



```

ZEMHgsG4PD0MFxBcmzAOQGXA+e2FvZUfHe78eL+4R4LZg808H8pxC0MV/gWLa5MqCsxZw/nQ9UL&#xd;
WykvClaKpSjXtan8xP16sZDK41y/obPukvw1XLiYJ1b0pIVC89IDcmeKgZ5mAH3NwmhQvFmZ1irT&#xd;
f+d0Ovr41F3ahMAPU8nP2YY/k803PC/iwQWdQQ==&#xd;
    </Data>
  </Cred>
</Creds>
</RegDetails>
</ReqRegMob>

```

Request from IPS to Issuer IPS Participant:

```

<ReqRegMob>
  <Head ver="2.0" ts="2025-06-03T09:12:07+02:00" orgId="NPCI" msgId="1xysV7ZA3loG" prodType="UPI"
/>
  <Txn id="MYSIM000000000001vRPtRTgqKswCTqFV7DG" note="Mobile registration" refId="21380"
    refUrl="http://www.npci.org.in" ts="2017-01-15T12:32:04.258+05:30" type="ReqRegMob" />
  <Payer addr="shruti@mypsp" name="2547BAU" seqNum="1" type="PERSON" code="0000">
    <Device>
      <Tag name="GEOCODE" value="0.0 ,0.0 " />
      <Tag name="LOCATION" value="Mumbai" />
      <Tag name="IP" value="172.16.50.65" />
      <Tag name="MOBILE" value="993456789" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="0000000000000002" />
      <Tag name="OS" value="android" />
      <Tag name="APP" value="org.npci.upi.maggi" />
      <Tag name="CAPABILITY" value="5200000200010004000639292929292" />
    </Device>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
      <Detail name="ACTYPE" value="SAVINGS" />
      <Detail name="ACNUM" value="10001105827" />
    </Ac>
  </Payer>
</ReqRegMob>

```

```

    </Ac>
  </Payer>
  <RegDetails type="FORMAT2">
    <Detail name="MOBILE" value="993456789" />
    <Detail name="CARDDIGITS" value="074519" />
    <Detail name="EXPDATE" value="0923" />
    <Creds>
      <Cred type="CARD" subType="CARDDETAILS">
        <Data code="" ki="">base-64 encoded/encrypted authentication data </Data>
      </Cred>
      <Cred type="OTP" subType="SMS">
        <Data code="700001" ki="20160218">MYSIM00000000001vRPtRTgqKswCTqFV7DG</Data>
      </Cred>
      <Cred type="PIN" subType="MPIN">
        <Data code="700001" ki="20160218">MYSIM00000000001vRPtRTgqKswCTqFV7DG</Data>
      </Cred>
      <Cred type="PIN" subType="ATMPIN">
        <Data code="700001" ki="20160218">MYSIM00000000001vRPtRTgqKswCTqFV7DG</Data>
      </Cred>
    </Creds>
  </RegDetails>
</ReqRegMob>

```

Response from Issuer Participant to IPS:

```

<RespRegMob>
  <Head ver="2.0" ts="2025-06-03T09:12:07.713+02:00" orgId="700001"
    msgId="XYA0000000000001vRPtRSgrisKMoFo7ALE" prodType="UPI" />
  <Resp reqMsgId="1xysV7ZA3loG" result="SUCCESS" />
  <Txn id="MYSIM000000000001vRPtRTgqKswCTqFV7DG" note="Mobile registration" refId="21380"
    refUrl="http://www.npci.org.in" ts="2017-01-15T12:32:04.258+05:30" type="ReqRegMob" />
</RespRegMob>

```

Response from IPS-to-IPS Participant:

```
<RespRegMob>
  <Head ver="2.0" ts="2025-06-03T09:12:07+02:00" orgId="NPCI" msgId="1xysV7ZA3loI" prodType="UPI"
/>
  <Resp reqMsgId="INDFFF5AA5B9EBF48C5B90DBB0A6BDB3D40" result="SUCCESS" />
  <Txn id="MYSIM000000000001vRPtRTgqKswCTqFV7DG" note="Mobile registration" refId="21380"
    refUrl="http://www.npci.org.in" ts="2017-01-15T12:32:04.258+05:30" type="ReqRegMob" />
</RespRegMob>
```

6.10.1.2. Registration through Debit card for USSD

Request from IPS Payer Participants to IPS:

```
<ReqRegMob>
  <Head ver="2.0" ts="2025-06-03T09:12:07+02:00" orgId="700001"
    msgId="INDFFF5AA5B9EBF48C5B90DBB0A6BDB3D40" prodType="UPI" />
  <Txn id="MYSIM000000000001vRPtRTgqKswCTqFV7DG" note="Mobile registration" refId="21380"
    refUrl="http://www.npci.org.in" ts="2017-01-15T12:32:04.258+05:30" type="ReqRegMob" />
  <Payer addr="shruti@myppsp" name="2547BAU" seqNum="1" type="PERSON" code="0000" >
    <Device>
      <Tag name="MOBILE" value="993456789" />
      <Tag name="TYPE" value="USDC" />
      <Tag name="GEOCODE" value="0.00,0.00" />
      <Tag name="ID" value="993456789" />
      <Tag name="APP" value="com.nuup" />
      <Tag name="TELECOM" value="Airtel" />
    </Device>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
      <Detail name="ACTYPE" value="SAVINGS" />
    </Ac>
  </Payer>
</ReqRegMob>
```

```

        <Detail name="ACNUM" value="10001105827" />
    </Ac>
</Payer>
<RegDetails type="FORMAT1">
    <Detail name="CARDDIGITS" value="062127" />
    <Detail name="EXPDATE" value="1026" />
    <Detail name="MOBILE" value="918235966651" />
    <Creds>
        <Cred type="PIN" subType="MPIN"><Data code="NPCI"
ki="20150822">2.0|WeSW67QUmdNPHYilTUE2ymrBoMSsASc5Rg/R6/iX+44dlwOnanoOIX9gFKi/HCEz6zBb2AuXxSlugsoYJ+G
Pyp+wabrj+Nr5emKNKgs1QXczetOSOF1ptZ+2A8SQiTkJf/QfUd5YjYS6K/evs5qFFZ6iri4NzdtGDzi3URT6/IBlixMl4k8fyxgT
3uSrq2pZKAGeZXlq1C7k3spTgup6Ntn6dn75GiqvAUw6Qii1vs/CEok6PQkYopWRBbk3JGj7lEC+9SCt25YJkEnjocuB4+q2f/Qj9
yFhh9hJAbzm9C1Heghif+4VWB27095cR0Gqm4Mx1ZL1+MQlcBXWFhRy5g==</Data>
        </Cred>
    </Creds>
</RegDetails>
</ReqRegMob>

```

Request from IPS to Issuer IPS Participant:

```

<ReqRegMob>
    <Head ver="2.0" ts="2025-06-03T09:12:07+02:00" orgId="NPCI" msgId="1xysV7ZA3loG" prodType="UPI"
/>
    <Txn id="MYSIM000000000001vRPtRTgqKswCTqFV7DG" note="Mobile registration" refId="21380"
refUrl="http://www.npci.org.in" ts="2017-01-15T12:32:04.258+05:30" type="ReqRegMob" />
    <Payer addr="shruti@mymsp" name="2547BAU" seqNum="1" type="PERSON" code="0000">
        <Device>
            <Tag name="MOBILE" value="993456789" />
            <Tag name="TYPE" value="USDC" />
            <Tag name="GEOCODE" value="0.00,0.00" />
            <Tag name="ID" value="993456789" />
            <Tag name="APP" value="com.nuup" />
        </Device>
    </Payer>
</ReqRegMob>

```

```

        <Tag name="TELECOM" value="Airtel" />
    </Device>
    <Ac addrType="ACCOUNT">
        <Detail name="IFSC" value="AABY0000382" />
        <Detail name="ACTYPE" value="SAVINGS" />
        <Detail name="ACNUM" value="10001105827" />
    </Ac>
</Payer>
<RegDetails type="FORMAT1">
    <Detail name="CARDDIGITS" value="062127" />
    <Detail name="EXPDATE" value="1026" />
    <Detail name="MOBILE" value="918235966651" />
    <Creds>
        <Cred type="PIN" subType="MPIN">
            <Data code="NPCI"
                ki="20150822">2.0|WeSW67QUmdNPHYilTUE2ymrBoMSsASc5Rg/R6/iX+44dlwOnanoOIX9gFKi/HCEz6zBb
                2AuXxSlugsoYJ+GPyp+wabrj+Nr5emKNKgs1QXczetOSOF1ptZ+2A8SQiTkJf/QfUd5YjYS6K/evs5qFFZ6iri
                4NzdtGDzi3URT6/IBlixMl4k8fyxgT3uSrqpZKAGeZXlq1C7k3spTgup6Ntn6dn75GiqvAUw6Qiilvs/CEok6
                PQkYopWRBbk3JGj7lEC+9Sct25YJkEnjocuB4+q2f/Qj9yFhh9hJAbzm9C1Heghif+4VWB27095cR0Gqm4Mx1Z
                L1+MQ1cBXWFhRy5g==</Data>
        </Cred>
    </Creds>
</RegDetails>
</ReqRegMob>

```

Response from Issuer Participant to IPS:

```

<RespRegMob>
    <Head ver="2.0" ts="2025-06-03T09:12:07.713+02:00" orgId="700001"
        msgId="XYA0000000000001vRPtRSgrisKMoFo7ALE" prodType="UPI" />
    <Resp reqMsgId="1xysV7ZA3loG" result="SUCCESS" />
    <Txn id="MYSIM000000000001vRPtRTgqKswCTqFV7DG" note="Mobile registration" refId="21380"
        refUrl="http://www.npci.org.in" ts="2017-01-15T12:32:04.258+05:30" type="ReqRegMob" />
</RespRegMob>

```

Response from IPS-to-IPS Participant:

```
<RespRegMob>
  <Head ver="2.0" ts="2025-06-03T09:12:07+02:00" orgId="NPCI" msgId="1xysV7ZA3loI" prodType="UPI"
/>
  <Resp reqMsgId="INDFFF5AA5B9EBF48C5B90DBB0A6BDB3D40" result="SUCCESS" />
  <Txn id="MYSIM000000000001vRPtRTgqKswCTqFV7DG" note="Mobile registration" refId="21380"
    refUrl="http://www.npci.org.in" ts="2017-01-15T12:32:04.258+05:30" type="ReqRegMob" />
</RespRegMob>
```

6.10.1.3. Registration through Wallet PIN using APP

Request from IPS Payer Participants to IPS:

```
<ReqRegMob>
  <Head ver="2.0" ts="2025-06-03T09:12:07+02:00" orgId="700001"
    msgId="INDFFF5AA5B9EBF48C5B90DBB0A6BDB3D40" prodType="UPI" />
  <Txn id="MYSIM000000000001vRPtRTgqKswCTqFV7DG" note="Mobile registration" refId="21380"
    refUrl="http://www.npci.org.in" ts="2017-01-15T12:32:04.258+05:30" type="ReqRegMob" />
  <Payer addr="shruti@myppsp" name="2547BAU" seqNum="1" type="PERSON" code="0000" >
    <Device>
      <Tag name="GEOCODE" value="0.0 ,0.0 " />
      <Tag name="LOCATION" value="Mumbai" />
      <Tag name="IP" value="172.16.50.65" />
      <Tag name="MOBILE" value="8235966651" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="0000000000000002" />
      <Tag name="OS" value="android" />
      <Tag name="APP" value="org.npci.upi.maggi" />
      <Tag name="CAPABILITY" value="5200000200010004000639292929292" />
    </Device>
  </Payer>
</ReqRegMob>
```

```

</Device>
<Ac addrType="ACCOUNT">
  <Detail name="IFSC" value="AABY0000382" />
  <Detail name="ACTYPE" value="WALLET" />
  <Detail name="ACNUM" value="8235966651" />
</Ac>
</Payer>
<RegDetails type="FORMAT7">
  <Detail name="MOBILE" value="8235966651" />
  <Creds>
    <Cred type="OTP" subType="SMS">
      <Data code="NPCI"
ki="20150822">1.0|Yn80P37ju1W4ZU8jdN3v0kLNI+j8Go4JUP1kfDsAG6dehcaNg+3yx70JVS/5p4V/mx3UeMrNSyU/&#xd;
        65ALf10ltmCJW/hGQK6ajeZawxeMQRc5gRVlrcTopnUA05GhPQqJKZ7TFwR33V0+8p0Uht1E2/5i&#xd;
        zsJSvjYp6UDt1zsiqN85WEfAGlueQeE1Ka+JZIXr7X2Uv8gWTY7F8L79DAyybdmWRkcZtqJERt5h&#xd;
        oECmlNX5khKqg8y2yzc8zZenWNDtOFVXnWhs9snWd0pHdmKx/noH4KYNwbiY4DwFgBWju45z4eEi&#xd;
        1T/b5k6X8KoRM/B987jrflTvtZ472X7fzFiHg==&#xd;
      </Data>
    </Cred>
    <Cred type="PIN" subType="MPIN">
      <Data code="NPCI"
ki="20150822">1.0|UKhAVOuG3dm48vIA86yhI8T6HpRLCnJW0QIq7IK8osjtH6CUea4zCBbHQu5ozPdNyKImKuYgPjOf&#xd;
        QnTWOFRRnuRqPZu0badpz1qNtlN1BVoxJn7pFtLAAc1G8EvMANIX0pcVfkOLrQTsA010041gXMEu&#xd;
        Vymp2226SMrVtVrjvr54ZCITcrWu6xmUI6usQPvy6GwdbaV84ZSqBE65Lgs8u9qPpf2a9GYIGSxA&#xd;
        6xe36nCD7nRqpV2HeZbxYm6gr5LnFwUmOP+lDDODEjbyvyTCmldKDie9JaAlt1ZdeT8J0umYxn0K&#xd;
        iUX50MzDvOLFYGy1h3be8DiEdEy3wnUSfZOJrg==&#xd;
      </Data>
    </Cred>
    <Cred type="PIN" subType="WALLETPIN">
      <Data code="NPCI"
ki="20150822">1.0|JLG6vtI49VTNnLy9DVs+vt73EzO5nvp7KFTrJb/voRnboli6EjAG5yTq6hNLgLWSfvEbsPD09Y0W&#xd;
        S65oALvbtXi+WialcskxX1F+lDDyIW9T1TzT+7uRy+NNzYSW+E3sX/d3Tjfl9wJkPCPLuq2KU3m&#xd;
        ZEMHgsG4PD0MFxBcmzAOQGXA+e2FvZUfHe78eL+4R4LZg808H8pxC0MV/gWLa5MqCsxZw/nQ9UL&#xd;
        WykvClaKpSjXtan8xP16sZDK41y/obPukvw1XLiYJ1b0pIVC89IDcmeKgZ5mAH3NWmhQvFmZ1irT&#xd;
        f+d0Ovr41F3ahMAPU8nP2YY/k803PC/iwQWdQQ==&#xd;
      </Data>
    </Cred>
  </Creds>
</RegDetails>
</Format7>

```

```

        </Data>
    </Cred>
</Creds>
</RegDetails>
</ReqRegMob>

```

Request from IPS to Issuer IPS Participant:

```

<ReqRegMob>
  <Head ver="2.0" ts="2025-06-03T09:12:07+02:00" orgId="NPCI" msgId="1xysV7ZA3loG" prodType="UPI" />
  <Txn id="MYSIM000000000001vRPtRTgqKswCTqFV7DG" note="Mobile registration" refId="21380"
    refUrl="http://www.npci.org.in" ts="2017-01-15T12:32:04.258+05:30" type="ReqRegMob" />
  <Payer addr="shruti@mypsp" name="2547BAU" seqNum="1" type="PERSON" code="0000">
    <Device>
      <Tag name="GEOCODE" value="0.0 ,0.0 " />
      <Tag name="LOCATION" value="Mumbai" />
      <Tag name="IP" value="172.16.50.65" />
      <Tag name="MOBILE" value="8235966651" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="000000000000002" />
      <Tag name="OS" value="android" />
      <Tag name="APP" value="org.npci.upi.maggi" />
      <Tag name="CAPABILITY" value="5200000200010004000639292929292" />
    </Device>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
      <Detail name="ACTYPE" value="WALLET" />
      <Detail name="ACNUM" value="8235966651" />
    </Ac>
  </Payer>
  <RegDetails type="FORMAT7">
    <Detail name="MOBILE" value="8235966651"/>

```



```

<Creds>
  <Cred type="OTP" subType="SMS">
    <Data code="NPCI"
ki="20150822">1.0|Yn80P37ju1W4ZU8jdN3v0kLNI+j8Go4JUP1kfDsAG6dehcaNg+3yx70JVS/5p4V/mx3UeMrNSyU/&#xd;
        65ALf10ltnCJW/hGQK6ajeZawxeMQRc5gRVlrcTopnUA05GhPQqJKZ7TFwR33V0+8p0Uht1E2/5i&#xd;
        zsJSvjYp6UDt1zsiqN85WEfAGlueQeE1Ka+JZIXr7X2Uv8gWTY7F8L79DAyybdmWRkcZtqJERt5h&#xd;
        oECmlNX5khKqg8y2yzc8zZenWNDtOFVXnWhs9snWd0pHdmKx/noH4KYNwbiY4DwFgBWju45z4eEi&#xd;
        1T/b5k6X8KoRM/B987jrflTvtZ472X7fzFiHg==&#xd;
    </Data>
  </Cred>
  <Cred type="PIN" subType="MPIN">
    <Data code="NPCI"
ki="20150822">1.0|UKhAVOuG3dm48vIA86yhI8T6HpRLCnJW0QIq7IK8osjtH6CUea4zCBbHQu5ozPdNyKImKuYgPjOf&#xd;
        QnTWOfRRnuRqPZu0badpz1qNtl1n1BVoXJn7pFtLAAc1G8EvMANIX0pcVfkOLrQTsA010041gXMEu&#xd;
        Vymp2226SMrVtVrjvr54ZCITcrWu6xmUI6usQPvy6GwdbaV84ZSqBE65Lgs8u9qPpf2a9GYIGSxA&#xd;
        6xe36nCD7nRqpV2HeZbxYm6gr5LnFwUmOP+lDDODEjbyvyTCmldKDIE9JaAlt1ZdeT8J0umYxn0K&#xd;
        iUX5OMzDvOLFYGy1h3be8DiEdEy3wnUSfZOJrg==&#xd;
    </Data>
  </Cred>
  <Cred type="PIN" subType="WALLETPIN">
    <Data code="NPCI"
ki="20150822">1.0|JLG6vtI49VTNnLy9DVs+vt73EzO5nvp7KFTTrJb/voRnboli6EjAG5yTq6hNLgLWSfvEbsPD09Y0W&#xd;
        S65oALvbvTxi+WialcskxX1F+lDDyIW9T1TzT+7uRy+NNzYSW+E3sX/d3Tjfl9wJkPCPLuq2KU3m&#xd;
        ZEMHgsG4PD0MFxBcmzAOQGXA+e2FvZUfHe78eL+4R4LZg808H8pxCOMV/gWLa5MqCsxZw/nQ9UL&#xd;
        WykvClaKpSjXtan8xPl6sZDK41y/obPukvw1XLiYJ1b0pIVC89IDcmeKgZ5mAH3NWmhQvFmZ1irT&#xd;
        f+d0Ovr41F3ahMAPU8nP2YY/k803PC/iwQWdQQ==&#xd;
    </Data>
  </Cred>
</Creds>
</RegDetails>
</ReqRegMob>

```

Response from Issuer Participant to IPS:

```
<RespRegMob>
  <Head ver="2.0" ts="2025-06-03T09:12:07.713+02:00" orgId="700001"
    msgId="XYA0000000000001vRPtRSgrisKMoFo7ALE" prodType="UPI" />
  <Resp reqMsgId="1xysV7ZA3loG" result="SUCCESS" />
  <Txn id="MYSIM000000000001vRPtRTggKswCTqFV7DG" note="Mobile registration" refId="21380"
    refUrl="http://www.npci.org.in" ts="2017-01-15T12:32:04.258+05:30" type="ReqRegMob" />
</RespRegMob>
```

Response from IPS-to-IPS Participant:

```
<RespRegMob>
  <Head ver="2.0" ts="2025-06-03T09:12:07+02:00" orgId="NPCI" msgId="1xysV7ZA3loI" prodType="UPI" />
  <Resp reqMsgId="INDFFF5AA5B9EBF48C5B90DBB0A6BDB3D40" result="SUCCESS" />
  <Txn id="MYSIM000000000001vRPtRTggKswCTqFV7DG" note="Mobile registration" refId="21380"
    refUrl="http://www.npci.org.in" ts="2017-01-15T12:32:04.258+05:30" type="ReqRegMob" />
</RespRegMob>
```

6.10.1.4. Registration through National Id using APP

Request from IPS Payer Participants to IPS:

```
<ReqRegMob>
  <Head ver="2.0" ts="2025-06-03T09:12:07+02:00" orgId="700001"
    msgId="INDFFF5AA5B9EBF48C5B90DBB0A6BDB3D40" prodType="UPI" />
  <Txn id="MYSIM000000000001vRPtRTggKswCTqFV7DG" note="Mobile registration" refId="21380"
    refUrl="http://www.npci.org.in" ts="2017-01-15T12:32:04.258+05:30" type="ReqRegMob" />
  <Payer addr="shruti@mypsp" name="2547BAU" seqNum="1" type="PERSON" code="0000" >
    <Device>
      <Tag name="GEOCODE" value="0.0 ,0.0 " />
      <Tag name="LOCATION" value="Mumbai" />
    </Device>
  </Payer>
</ReqRegMob>
```

```

    <Tag name="IP" value="172.16.50.65" />
    <Tag name="MOBILE" value="993456789" />
    <Tag name="TYPE" value="MOB" />
    <Tag name="ID" value="0000000000000002" />
    <Tag name="OS" value="android" />
    <Tag name="APP" value="org.npci.upi.maggi" />
    <Tag name="CAPABILITY" value="5200000200010004000639292929292" />
  </Device>
  <Ac addrType="ACCOUNT">
    <Detail name="IFSC" value="AABY0000382" />
    <Detail name="ACTYPE" value="SAVINGS" />
    <Detail name="ACNUM" value="10001105827" />
  </Ac>
</Payer>
<RegDetails type="FORMAT6">
  <Creds>
    <Cred type="OTP" subType="SMS">
      <Data code="NPCI"
ki="20150822">1.0|Yn80P37ju1W4ZU8jdN3v0kLNI+j8Go4JUP1kfDsAG6dehcaNg+3yx70JVS/5p4V/mx3UeMrNSyU/&#xd;
        65ALf10ltnCJW/hGQK6ajeZawxeMQRC5gRVlrcTopnUA05GhPQqJKZ7TFwR33V0+8p0Uht1E2/5i&#xd;
        zsJSvjYp6UDt1zsiqN85WEfAGlueQeE1Ka+JZIXr7X2Uv8gWTY7F8L79DAyybdmWRkcZtqJERt5h&#xd;
        oECmlNX5khKqg8y2yzc8zZenWNDtOFVXnWhs9snWd0pHdmKx/noH4KYNwbiY4DwFgBWju45z4eEi&#xd;
        1T/b5k6X8KoRM/B987jrflTvtZ472X7fzFiHg==&#xd;
      </Data>
    </Cred>
    <Cred type="PIN" subType="MPIN">
      <Data code="NPCI"
ki="20150822">1.0|UKhAVOuG3dm48vIA86yhI8T6HpRLCnJW0QIq7IK8osjtH6CUea4zCBbHQu5ozPdNyKImKuYgPjOf&#xd;
        QnTWOfRRnuRqPZu0badpz1qNtl1n1BVoXJn7pFtLAAc1G8EvMANIX0pcVfkOLrQTsA010041gXMEu&#xd;
        Vymp2226SMrVtVrjvr54ZCITcrWu6xmUI6usQPvy6GwdbaV84ZSqBE65Lgs8u9qPpf2a9GYIGSxA&#xd;
        6xe36nCD7nRqpV2HeZbxYm6gr5LnFwUmOP+1DDODEjbyvyTCmldKDie9JaAlt1ZdeT8J0umYxn0K&#xd;
        iUX5OMzDvOLFYGY1h3be8DiEdEy3wnUSfZOJrg==&#xd;
      </Data>
    </Cred>
  </Creds>

```

```
</RegDetails>
</ReqRegMob>
```

Request from IPS to Issuer IPS Participant:

```
<ReqRegMob>
  <Head ver="2.0" ts="2025-06-03T09:12:07+02:00" orgId="NPCI" msgId="1xysV7ZA3loG" prodType="UPI" />
  <Txn id="MYSIM000000000001vRPtRTgqKswCTqFV7DG" note="Mobile registration" refId="21380"
    refUrl="http://www.npci.org.in" ts="2017-01-15T12:32:04.258+05:30" type="ReqRegMob" />
  <Payer addr="shruti@myppsp" name="2547BAU" seqNum="1" type="PERSON" code="0000">
    <Device>
      <Tag name="GEOCODE" value="0.0 ,0.0 " />
      <Tag name="LOCATION" value="Mumbai" />
      <Tag name="IP" value="172.16.50.65" />
      <Tag name="MOBILE" value="993456789" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="0000000000000002" />
      <Tag name="OS" value="android" />
      <Tag name="APP" value="org.npci.upi.maggi" />
      <Tag name="CAPABILITY" value="5200000200010004000639292929292" />
    </Device>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
      <Detail name="ACTYPE" value="SAVINGS" />
      <Detail name="ACNUM" value="10001105827" />
    </Ac>
  </Payer>
  <RegDetails type="FORMAT6">
    <Creds>
      <Cred type="OTP" subType="SMS">
        <Data code="NPCI"
ki="20150822">1.0|Yn80P37ju1W4ZU8jdN3v0kLNI+j8Go4JUP1kfDsAG6dehcaNg+3yx70JVS/5p4V/mx3UeMrNSyU/&#xd;
```

```

        65ALf101tmCJW/hGQK6ajeZawxeMQRc5gRVlrcTopnUA05GhPQqJKZ7TFwR33V0+8p0Uht1E2/5i&#xd;
        zsJSvjYp6UDt1zsiqN85WEfAGlueQeE1Ka+JZIXr7X2Uv8gWTY7F8L79DAyybdmWRkcZtqJERt5h&#xd;
        oECmlNX5khKqg8y2yzc8zZenWNDtOFVXnWhs9snWd0pHdmKx/noH4KYNwbiY4DwFgBWju45z4eEi&#xd;
        lT/b5k6X8KoRM/B987jrflm1TvtZ472X7fzFiHg==&#xd;
    </Data>
</Cred>
<Cred type="PIN" subType="MPIN">
    <Data code="NPCI"
ki="20150822">1.0|UKhAVOuG3dm48vIA86yhI8T6HpRLCnJW0QIq7IK8osjtH6CUea4zCBbHQu5ozPdNyKImKuYgPjOf&#xd;
        QnTWOfRRnuRqPzu0badpz1qNtl1n1BVoXJn7pFtLAac1G8EvMANIX0pcVfkOLrQTSA010041gXMEu&#xd;
        Vymp2226SMrVtVrjvr54ZCITcrWu6xmUI6usQPvy6GwdbaV84ZSqBE65Lgs8u9qPpf2a9GYIGSxA&#xd;
        6xe36nCD7nRqpV2HeZbxYm6gr5LnFwUmOP+lDDODEjbyvyTCmldKDie9JaAlt1ZdeT8J0umYxn0K&#xd;
        iUX5OMzDvOLFYGy1h3be8DiEdEy3wnUSfZOJrg==&#xd;
    </Data>
</Cred>
</Creds>
</RegDetails>
</ReqRegMob>

```

Response from Issuer Participant to IPS:

```

<RespRegMob>
    <Head ver="2.0" ts="2025-06-03T09:12:07.713+02:00" orgId="700001"
        msgId="XYA0000000000001vRPtRSgrisKMoFo7ALE" prodType="UPI" />
    <Resp reqMsgId="1xysV7ZA3loG" result="SUCCESS" />
    <Txn id="MYSIM00000000001vRPtRTgqKswCTqFV7DG" note="Mobile registration" refId="21380"
        refUrl="http://www.npci.org.in" ts="2017-01-15T12:32:04.258+05:30" type="ReqRegMob" />
</RespRegMob>

```

Response from IPS-to-IPS Participant:

```
<RespRegMob>
  <Head ver="2.0" ts="2025-06-03T09:12:07+02:00" orgId="NPCI" msgId="1xysV7ZA3loI" prodType="UPI" />
  <Resp reqMsgId="INDFFF5AA5B9EBF48C5B90DBB0A6BDB3D40" result="SUCCESS" />
  <Txn id="MYSIM000000000001vRPtRTgqKswCTqFV7DG" note="Mobile registration" refId="21380"
    refUrl="http://www.npci.org.in" ts="2017-01-15T12:32:04.258+05:30" type="ReqRegMob" />
</RespRegMob>
```

6.11. Check Transaction

Refer Specifications [Check Transaction Status API](#)

Payer IPS Participant initiated Check Transaction:

Request from Pyer IPS participant to IPS:

```
<ReqChkTxn>
  <Head ver="2.0" ts=" 2025-06-04T11:12:57+02:00" orgId="700001"
    msgId="AXI646bfc3856fc42559fbf0e230a9b9d2e" prodType="UPI" />
  <Txn id="MYSIM000000000001vRPtRTgqKswFyiZp5jG" note="Check Txn Status" refId="227329240405"
    refUrl="http:// axisbank.com/ upi" ts="2022-09-30T08:24:30+05:30" type="ChkTxn"
    orgMsgId="IOB05001102211353500XADMnPQlIokYjoB" orgTxnId="MYSIM00000001vRPtRTgqKswFxPLkyzK"
    custRef="227329240405" orgTxnDate="2025-04-29T17:09:29+05:30" initiationMode="00"
    subType="PAY" purpose="14" />
</ReqChkTxn>
```

Response from IPS to Payer IPS Participant:

```
<RespChkTxn>
  <Head ver=" 2.0" ts=" 2025-06-04T11:12:57+02:00" orgId=" NPCI" msgId=" 1xysV9MVjYUi" prodType=" UPI"
  />
  <Txn id=" MYSIM000000000001vRPtRTgqKswFyiZp5jG" note=" Check Txn Status" refId=" 227329240405"
    refUrl=" http:// axisbank.com/ upi" ts=" 2022-09-30T08:24:30+05:30" type=" ChkTxn"
```

```
orgMsgId=" IOB05001102211353500XADMnPQlIokYjoB" orgTxnId=" MYSIM00000001vRPtRTgqKswFxPLkyzK"
custRef=" 227329240405" orgTxnDate=" 2025-04-29T17:09:29+05:30" initiationMode=" 00"
subType=" PAY" purpose=" 14" />
```

```
<Resp reqMsgId=" AXI646bfc3856fc42559fbf0e230a9b9d2e" result=" SUCCESS">
  <Ref type="PAYER" seqNum="1" addr="PRE@mypsp" settAmount="1.00" settCurrency="NAD"
    approvalNum="123456" respCode="00" orgAmount="1.00" />
  <Ref type="PAYEE" seqNum="1" addr="2678892001829@AABY0000382.ifsc.npci"
    settAmount="1.00" settCurrency="NAD" approvalNum="654321" respCode="00"
    regName="SonySuper" orgAmount="1.00" />
```

```
</Resp>
```

```
</RespChkTxn>
```

6.12. OTP API

Refer Specifications [OTP API](#)

Request from Payer IPS Participant to IPS:

```
<?xml version='1.0' encoding='UTF-8'?>
<ns2:ReqOtp xmlns:ns2="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="2025-06-11T12:18:49+05:30" orgId="700001"
    msgId="XYD7f0b408a66d1458a8ec6122f49fa3797" prodType="UPI" />
  <Txn id="MYSIM000000000005sp4lmzgebTqNbrp2Rq" note="Otp Req" refId="0"
    refUrl="http://axis.com/upi" ts="2018-07-11T11:40:25.947+05:30" type="Otp" />
  <Payer addr="wenkar@mypsp" name="CHMURALIMOHAN" seqNum="1" type="PERSON" code="0000">
    <Device>
      <Tag name="MOBILE" value="993456789" />
      <Tag name="GEOCODE" value="19.0911 ,72.9208" />
      <Tag name="ID" value="0000000000000002" />
      <Tag name="OS" value="android" />
      <Tag name="IP" value="10.38.171.177" />
      <Tag name="APP" value="com.upi.axispay" />
      <Tag name="LOCATION" value="Hyderabad" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="CAPABILITY" value="011001" />
    </Device>
  </Payer>
</ns2:ReqOtp>
```

```

</Device>
<Ac addrType="ACCOUNT">
  <Detail name="IFSC" value="AABY0009009" />
  <Detail name="ACTYPE" value="SAVINGS" />
  <Detail name="ACNUM" value="10001105827" />
</Ac>
</Payer>
</ns2:ReqOtp>

```

ReqOtp request to Issuer Bank from IPS:

```

<ns2:ReqOtp xmlns:ns2="http://npci.org/upi/schema/">
  <Head ver="2.0" ts="2025-06-11T12:18:55+05:30" orgId="NPCI" msgId="4EyZ1061Y" prodType="UPI" />
  <Txn id="MYSIM000000000005sp4lmzgebTqNbrp2Rq" note="Otp Req" refId="0"
    refUrl="http://axis.com/upi" ts="2018-07-11T11:40:25.947+05:30" type="Otp" />
  <Payer addr="wenkar@myppsp" name="CHMURALIMOCHAN" seqNum="1" type="PERSON" code="0000">
    <Device>
      <Tag name="MOBILE" value="993456789" />
      <Tag name="GEOCODE" value="19.0911 ,72.9208" />
      <Tag name="ID" value="0000000000000002" />
      <Tag name="OS" value="android" />
      <Tag name="IP" value="10.38.171.177" />
      <Tag name="APP" value="com.upi.axispay" />
      <Tag name="LOCATION" value="Hyderabad" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="CAPABILITY" value="011001" />
    </Device>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0009009" />
      <Detail name="ACTYPE" value="SAVINGS" />
      <Detail name="ACNUM" value="10001105827" />
    </Ac>
  </Payer>
</ns2:ReqOtp>

```


Response from Issuer Participant to IPS:

```
<RespOtp>
  <Head ver="2.0" ts="2025-06-11T12:18:56.454+05:30" orgId="700001"
    msgId="XYA0000000000005sp4lmzgebTqNc79UKk" />
  <Resp reqMsgId="4EyZ1061Y" result="SUCCESS" />
  <Txn id="MYSIM000000000005sp4lmzgebTqNbrp2Rq" note="Otp Req" refId="0"
    refUrl="http://axis.com/upi" ts="2018-07-11T11:40:25.947+05:30" type="Otp" />
</RespOtp>
```

Response from IPS to Acquire IPS Participant:

```
<RespOtp>
  <Head ver="2.0" ts="2025-06-11T12:18:58+05:30" orgId="NPCI" msgId="4EyZ11m4I" />
  <Resp reqMsgId="XYD7f0b408a66d1458a8ec6122f49fa3797" result="SUCCESS" />
  <Txn id="MYSIM000000000005sp4lmzgebTqNbrp2Rq" note="Otp Req" refId="0"
    refUrl="http://axis.com/upi" ts="2018-07-11T11:40:25.947+05:30" type="Otp" />
</RespOtp>
```

6.13. Balance Enquiry

Refer Specifications [Balance-Enquiry API](#)

Request from Payer IPS Participant to IPS:

```
<ReqBalEnq>
  <Head ver="2.0" ts="2025-06-03T10:48:35+02:00" orgId="700001"
    msgId="XYD1442cdd8a121449cae3ab0034f72b165" prodType="UPI" />
```

```

<Txn id="MYSIM000000000001vRPtRTgqKswD3CtDmeI" note="Balance Enquiry" refId="702314088080"
  refUrl="http://upi" ts="2017-01-23T14:14:54.040+05:30" type="BalEnq" custRef="702314088080"
/>
<Payer addr="pass@mypsp" name="rahul" seqNum="1" type="ENTITY" code="5310">
  <Info>
    <Identity type="ACCOUNT" verifiedName="KASHYAP PRAKASH NANDWANA" id="029010100347310" />
  </Info>
  <Device>
    <Tag name="GEOCODE" value="288177,1234" />
    <Tag name="LOCATION" value="Mumbai,Maharashtra" />
    <Tag name="IP" value="124.170.23.22" />
    <Tag name="MOBILE" value="993456789" />
    <Tag name="TYPE" value="MOB" />
    <Tag name="ID" value="000000000000002" />
    <Tag name="OS" value="android" />
    <Tag name="APP" value="org.npci.upi.maggi" />
    <Tag name="CAPABILITY" value="5200000200010004000639292929292" />
  </Device>
  <Ac addrType="ACCOUNT">
    <Detail name="IFSC" value="AABY0000382" />
    <Detail name="ACTYPE" value="SAVINGS" />
    <Detail name="ACNUM" value="10001105827" />
  </Ac>
  <Creds>
    <Cred type="PIN" subType="MPIN">
      <Data code="NPCI" ki="20150822">
2.0|E3UeNksvHBiza5rPFI+Amk/1Vz7GH5/EYMaj1+hacnMLrxA7gl1KrOonqex+9NUYVcwuCJFTyomKrGVGFMQ6cqrIoFU1YnbjB
hzIBRY8Le23UWcNGNfF9KJUa2fHC0OfzoGg+6YwYJCfxloBwxqTVa2/1WyG0U81R/bGELDPrrqMaMm2/Y6IxNjmKmEsFgNIwlv2E4
ZVFtoX9D8cIY4tx1nVr2DpcO0ttLZNktRDEKTO7kCxxBiZnKEAH0vL2/+5twZpQtUELt0gVZmLU5wq+Bi+JXTDOhRU3Ejk1
2W5R3Tc6ZX3WFW3pmr/t8a0n5uTZRWnIQzSYQGFiXHSEVmwg==</Data>
      </Cred>
    </Creds>
  </Payer>
</ReqBalEnq>

```

Request from IPS to Issuer IPS Participant:

```

<ReqBalEnq>
  <Head ver="2.0" ts="2025-06-03T10:48:35+02:00" orgId="NPCI" msgId="1xysV80Uxja5" prodType="UPI"
/>
  <Txn id="MYSIM000000000001vRPtRTgqKswD3CtDmeI" note="Balance Enquiry" refId="702314088080"
    refUrl="http://upi" ts="2017-01-23T14:14:54.040+05:30" type="BalEnq" custRef="702314088080"
/>
  <Payer addr="pass@mypsp" name="rahul" seqNum="1" type="ENTITY" code="5310">
    <Info>
      <Identity type="ACCOUNT" verifiedName="KASHYAP PRAKASH NANDWANA" id="029010100347310" />
    </Info>
    <Device>
      <Tag name="GEOCODE" value="288177,1234" />
      <Tag name="LOCATION" value="Mumbai,Maharashtra" />
      <Tag name="IP" value="124.170.23.22" />
      <Tag name="MOBILE" value="993456789" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="000000000000002" />
      <Tag name="OS" value="android" />
      <Tag name="APP" value="org.npci.upi.maggi" />
      <Tag name="CAPABILITY" value="5200000200010004000639292929292" />
    </Device>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
      <Detail name="ACTYPE" value="SAVINGS" />
      <Detail name="ACNUM" value="10001105827" />
    </Ac>
    <Creds>
      <Cred type="PIN" subType="MPIN">
        <Data code="NPCI" ki="20150822">
          2.0|E3UeNksvHBiza5rPFI+Amk/1Vz7GH5/EYMaj1+hacnMLrxA7gl1KrOonqex+9NUYVcwuCJFTyomKrGVGFMQ6cqrIoFU1YnbjB
          hzIBRY8Le23UWcNGNfF9KJUa2fHC0OfzoGg+6YwYJCfxloBwxqTVa2/1WyG0U81R/bGELDPrrqMaMm2/Y6IxNjmKmEsFgNIwlV2E4
        </Data>
      </Cred>
    </Creds>
  </Payer>
</ReqBalEnq>

```

```
ZVFtoX9D8cIY4tx1nVr2Dpc00ttLZNktRDEKTO7kCxxBiZNKEAH0vL2/+5twZpQtUElt0gVZmLU5wq+Bi+JXTDOhRU3Ejk12W5R3
Tc6ZX3WFW3pmr/t8a0n5uTZRWnIQzSYQGFiXHSEVmwg==</Data>
</Cred>
</Creds>
</Payer>
</ReqBalEnq>
```

Response from Issuer Participants to IPS:

```
<RespBalEnq>
  <Head ver="2.0" ts="2025-06-03T10:48:35.744+02:00" orgId="700001"
    msgId="XYA0000000000001vRPtRSgrisKMyRb4pIH" prodType="UPI" />
  <Resp reqMsgId="1xysV80Uxja5" result="SUCCESS" />
  <Txn id="MYSIM000000000001vRPtRTgqKswD3CtDmeI" note="Balance Enquiry" refId="702314088080"
    refUrl="http://upi" ts="2017-01-23T14:14:54.040+05:30" type="BalEnq" custRef="702314088080" />
  <Payer addr="pass@mypsp" name="rahul" seqNum="1" type="ENTITY" code="5310">
    <Bal>
      <Data>MTAwMTM1NkMwMDAwMDAwNDA1MjUxMDAyMzU2QzAwMDAwMDA0MDUyNQ==</Data>
    </Bal>
  </Payer>
</RespBalEnq>
```

Response from IPS to Payer IPS Participants:

```
<RespBalEnq>
  <Head ver="2.0" ts="2025-06-03T10:48:35+02:00" orgId="NPCI" msgId="1xysV80Uxja7" prodType="UPI" />
  <Resp reqMsgId="XYD1442cdd8a121449cae3ab0034f72b165" result="SUCCESS" />
  <Txn id="MYSIM000000000001vRPtRTgqKswD3CtDmeI" note="Balance Enquiry" refId="702314088080"
    refUrl="http://upi" ts="2017-01-23T14:14:54.040+05:30" type="BalEnq" custRef="702314088080" />
  <Payer addr="pass@mypsp" name="rahul" seqNum="1" type="ENTITY" code="5310">
    <Bal>
      <Data>MTAwMTM1NkMwMDAwMDAwNDA1MjUxMDAyMzU2QzAwMDAwMDA0MDUyNQ==</Data>
    </Bal>
  </Payer>
</RespBalEnq>
```

```

</Bal>
</Payer>
</RespBalEnq>

```

6.14. Get Address API

Refer Specifications [Get Address API](#)

Get Address with type="CHECK"

Request from IPS Participant to IPS:

```

<ReqGetAdd>
  <Head ver="2.0" ts="2025-06-05T10:57:55+02:00" orgId="700001"
    msgId="XYD1442cdd8a121449cae3ab0034f72b165" prodType="UPI" />
  <Txn id="MYSIM000000000001vRPtRTgqKswHYPvXms8" note="Mapper" refId="702314088080"
    refUrl="http://upi" ts="2017-01-23T14:14:54.040+05:30" type="CHECK" />
  <Payer addr="atmvpa@mypsp" name="Rushikesh Garje" seqNum="1" type="PERSON" code="0000">
    <Device>
      <Tag name="GEOCODE" value="288177,1234" />
      <Tag name="LOCATION" value="Mumbai,Maharashtra" />
      <Tag name="IP" value="124.170.23.22" />
      <Tag name="MOBILE" value="993456789" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="0000000000000002" />
      <Tag name="OS" value="android" />
      <Tag name="APP" value="org.npci.upi.maggi" />
      <Tag name="CAPABILITY" value="5200000200010004000639292929292" />
    </Device>
    <Consent name="CMREGISTRATION" value="Y" />
    <RegIdDetails>
      <Id name="MOBILE" value="993456789" />
    </RegIdDetails>
  </Payer>
</ReqGetAdd>

```

Response from IPS-to-IPS Participant:

```
<RespGetAdd>
  <Head ver="2.0" ts="2025-06-05T10:57:55+02:00" orgId="NPCI" msgId="1xysVbxhtQX0" prodType="UPI"/>
  <Txn id="MYSIM000000000001vRPtRTgqKswHYpVxms8" note="Mapper" refId="702314088080"
    refUrl="http://upi" ts="2017-01-23T14:14:54.040+05:30" type="CHECK" />
  <Resp reqMsgId="XYD1442cdd8a121449cae3ab0034f72b165" result="SUCCESS">
    <RegIdDetails addr="atmvpa@mypsp" type="PERSON" idStatus="NEW">
      <Id name="MOBILE" value="993456789" />
    </RegIdDetails>
  </Resp>
</RespGetAdd>
```

Get Address with type=" FETCH"

Request from IPS Participant to IPS:

```
<ReqGetAdd>
  <Head ver="2.0" ts="2025-06-05T11:18:26+02:00" orgId="700001"
    msgId="XYD1442cdd8a121449cae3ab0034f72b165" prodType="UPI" />
  <Txn id="MYSIM000000000001vRPtRTgqKswI0ZRyH5u" note="Mapper" refId="702314088080"
    refUrl="http://upi" ts="2017-01-23T14:14:54.040+05:30" type="FETCH" subType="ID" />
  <Payer addr="atmvpa@mypsp" name="Rushikesh Garje" seqNum="1" type="PERSON" code="0000">
    <Device>
      <Tag name="GEOCODE" value="288177,1234" />
      <Tag name="LOCATION" value="Mumbai,Maharashtra" />
      <Tag name="IP" value="124.170.23.22" />
      <Tag name="MOBILE" value="993456789" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="0000000000000002" />
      <Tag name="OS" value="android" />
      <Tag name="APP" value="org.npci.upi.maggi" />
      <Tag name="CAPABILITY" value="5200000200010004000639292929292" />
    </Device>
  </Payer>
</ReqGetAdd>
```

```

    </Device>
    <Consent name="CMREGISTRATION" value="Y" />
    <RegIdDetails>
      <Id name="MOBILE" value="993456789" />
    </RegIdDetails>
  </Payer>
</ReqGetAdd>

```

Response from IPS-to-IPS Participant:

```

<RespGetAdd>
  <Head ver="2.0" ts="2025-06-05T11:18:26+02:00" orgId="NPCI" msgId="1xysVby77Kai" prodType="UPI" />
  <Txn id="MYSIM000000000001vRPtRTgqKswI0ZRyH5u" note="Mapper" refId="702314088080"
    refUrl="http://upi" ts="2017-01-23T14:14:54.040+05:30" type="FETCH" subType="ID" />
  <Resp reqMsgId="XYD1442cdd8a121449cae3ab0034f72b165" result="SUCCESS">
    <RegIdDetails addr="atmvpa@mypsp" type="PERSON" idStatus="ACTIVE"
      lastUpdatedTs="2025-06-05T11:14:28+02:00" channel="MOB">
      <Id name="MOBILE" value="993456789" />
    </RegIdDetails>
  </Resp>
</RespGetAdd>

```

Get Address with type=" FETCH" and subtype="VPA"

Request from Payer Participant to IPS:

Response from IPS to Payer Participant:

```
<RespGetAdd>
  <Head ver="2.0" ts="2021-08-20T09:29:39+05:30" orgId="NPCI" msgId="
5t0xf6ZKer9I6G1iJA51234567890ABC345"/>
  <Txn id="MMM0000000000005t0xf6TRJPGu8uN7bIkp" note="Mapper" refId="702314088080"
refUrl="http://upi" ts="2017-01-23T14:14:54.040+05:30" type="FETCh" custRef="105015641974"
subType="VPA"/>
  <Resp reqMsgId="XYD1442cdd8a121449cae3ab0034f72b165" result="SUCCESS">
```


Request from IPS Participant to IPS:

```
<ReqGetAdd>
  <Head ver="2.0" ts="2025-06-05T11:22:08+02:00" orgId="700001"
    msgId="XYD1442cdd8a121449cae3ab0034f72b165" prodType="UPI" />
  <Txn id="MYSIM00000000001vRPtRTgqKswIlo5d3Bm" note="Mapper" refId="702314088080"
    refUrl="http://upi" ts="2017-01-23T14:14:54.040+05:30" type="PORT" />
  <Payer addr="123456789@mypsp" name="Rushikesh Garje" seqNum="1" type="PERSON" code="0000">
    <Device>
      <Tag name="GEOCODE" value="288177,1234" />
      <Tag name="LOCATION" value="Mumbai,Maharashtra" />
      <Tag name="IP" value="124.170.23.22" />
      <Tag name="MOBILE" value="993456789" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="0000000000000002" />
      <Tag name="OS" value="android" />
      <Tag name="APP" value="org.npci.upi.maggi" />
      <Tag name="CAPABILITY" value="5200000200010004000639292929292" />
    </Device>
    <Consent name="CMREGISTRATION" value="Y" />
    <RegIdDetails>
      <Id name="MOBILE" value="993456789" />
    </RegIdDetails>
  </Payer>
</ReqGetAdd>
```

Response from IPS to IPS Participant:

```
<RespGetAdd>
  <Head ver="2.0" ts="2025-06-05T11:22:08+02:00" orgId="NPCI" msgId="1xysVby8CTpk" prodType="UPI"
/>
  <Txn id="MYSIM00000000001vRPtRTgqKswIlo5d3Bm" note="Mapper" refId="702314088080"
    refUrl="http://upi" ts="2017-01-23T14:14:54.040+05:30" type="PORT" />
  <Resp reqMsgId="XYD1442cdd8a121449cae3ab0034f72b165" result="SUCCESS">
    <RegIdDetails addr="atmvpa@mypsp" type="PERSON" idStatus="ACTIVE"
      lastUpdatedTs="2025-06-05T11:14:28+02:00" channel="MOB">
      <Id name="MOBILE" value="993456789" />
    </RegIdDetails>
  </Resp>
</RespGetAdd>
```

6.15. RegMapper API

Refer Specifications [RegMapper API](#)

ReqRegMapper with type = "ADD"

Request from IPS Participant to IPS :

```
<ReqRegMapper>
  <Head ver="2.0" ts="2025-06-09T13:00:01+02:00" orgId="700002"
    msgId="XYD1442cdd8a121449cae3ab0034f72b165" prodType="UPI" />
  <Txn id="MYSIM00000000001vRPtRTgqKswS0aYqd4A" note="Mapper" refId="702314088080"
    refUrl="http://upi" ts="2017-01-23T14:14:54.040+05:30" type="CMREGISTRATION" op="ADD" />
  <Payer addr="atmvpa@mypsp2" name="Agath" seqNum="1" type="PERSON" code="0000">
    <Device>
      <Tag name="GEOCODE" value="288177,1234" />
    </Device>
  </Payer>
</ReqRegMapper>
```

```

    <Tag name="LOCATION" value="Mumbai,Maharashtra" />
    <Tag name="IP" value="124.170.23.22" />
    <Tag name="MOBILE" value="993456780" />
    <Tag name="TYPE" value="MOB" />
    <Tag name="ID" value="0000000000000002" />
    <Tag name="OS" value="android" />
    <Tag name="APP" value="org.npci.upi.maggi" />
    <Tag name="CAPABILITY" value="5200000200010004000639292929292" />
  </Device>
  <Ac addrType="ACCOUNT">
    <Detail name="IFSC" value="AABF0000382" />
    <Detail name="ACTYPE" value="SAVINGS" />
    <Detail name="ACNUM" value="3453454385" />
  </Ac>
  <Consent name="CMREGISTRATION" value="Y" />
  <RegIdDetails>
    <Id name="MOBILE" value="993456780" setStatus="ACTIVE" />
  </RegIdDetails>
</Payer>
</ReqRegMapper>

```

Response from IPS to IPS Participant :

```

<RespRegMapper>
  <Head ver="2.0" ts="2025-06-09T13:00:01+02:00" orgId="NPCI" msgId="1xysViCNj7Xb" prodType="UPI"
/>
  <Txn id="MYSIM000000000001vRPtRTgqKswS0aYqd4A" note="Mapper" refId="702314088080"
    refUrl="http://upi" ts="2017-01-23T14:14:54.040+05:30" type="CMREGISTRATION" op="ADD" />
  <Resp reqMsgId="XYD1442cdd8a121449cae3ab0034f72b165" result="SUCCESS">
    <RegIdDetails addr="atmvpa@mypsp2">
      <Id name="MOBILE" value="993456780" setStatus="ACTIVE" />
    </RegIdDetails>
  </Resp>
</RespRegMapper>

```

ReqRegMapper with type = "MODIFY"

Request from IPS Participant to IPS :

```
<ReqRegMapper>
  <Head ver="2.0" ts="2025-06-09T13:35:52+02:00" orgId="700001"
    msgId="XYD1442cdd8a121449cae3ab0034f72b165" prodType="UPI" />
  <Txn id="MYSIM000000000001vRPtRTgqKswS3XI8BZ6" note="Mapper" refId="702314088080"
    refUrl="http://upi" ts="2017-01-23T14:14:54.040+05:30" type="CMREGISTRATION"
    custRef="105015571146" op="MODIFY" />
  <Payer addr="atmvpa2@myppsp" name="Rushikesh Garje" seqNum="1" type="PERSON" code="0000">
    <Device>
      <Tag name="GEOCODE" value="288177,1234" />
      <Tag name="LOCATION" value="Mumbai,Maharashtra" />
      <Tag name="IP" value="124.170.23.22" />
      <Tag name="MOBILE" value="993456780" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="0000000000000002" />
      <Tag name="OS" value="android" />
      <Tag name="APP" value="org.npci.upi.maggi" />
      <Tag name="CAPABILITY" value="5200000200010004000639292929292" />
    </Device>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABF0000382" />
      <Detail name="ACTYPE" value="SAVINGS" />
      <Detail name="ACNUM" value="3453454385" />
    </Ac>
    <Consent name="CMREGISTRATION" value="Y" prevVpa="atmvpa@myppsp2" />
    <RegIdDetails>
      <Id name="MOBILE" value="993456780" setStatus="ACTIVE" />
    </RegIdDetails>
  </Payer>
</ReqRegMapper>
```

Response from IPS Participant to IPS:

```
<RespRegMapper>
  <Head ver="2.0" ts="2025-06-09T13:35:52+02:00" orgId="NPCI" msgId="1xysViD1RFmL" />
  <Txn id="MYSIM00000000001vRPtRTgqKswS3XI8BZ6" note="Mapper" refId="702314088080"
    refUrl="http://upi" ts="2017-01-23T14:14:54.040+05:30" type="CMREGISTRATION"
    custRef="105015571146" op="MODIFY" />
  <Resp reqMsgId="XYD1442cdd8a121449cae3ab0034f72b165" result="SUCCESS">
    <RegIdDetails addr="atmvpa2@mypsp">
      <Id name="MOBILE" value="993456780" setStatus="ACTIVE" />
    </RegIdDetails>
  </Resp>
</RespRegMapper>
```

6.16. Mapper Confirmation

Refer Specifications [ReqMapperConfirmation API](#)

Confirmation Request from IPS to Previous IPS PSP:

```
<ReqMapperConfirmation>
  <Head ver="2.0" ts="2025-06-09T13:35:52+02:00" orgId="700002" msgId="1xysViD1RFmN"
    prodType="UPI" />
  <Txn id="MYSIM00000000001vRPtRTgqKswS3XI8BZ6" note="Mapper" refId="702314088080"
    refUrl="http://upi" ts="2017-01-23T14:14:54.040+05:30" type="ReqMapperConfirmation"
    custRef="105015571146" />
  <TxnConfirmation orgStatus="SUCCESS" op="MODIFY" note="Check" >
    <Refs type="PAYER" addr="atmvpa2@mypsp" cmId="993456780" channel="MOB" status="ACTIVE" />
    <Consent name="CMREGISTRATION" value="Y" prevVpa="atmvpa@mypsp2" />
  </TxnConfirmation>
</ReqMapperConfirmation>
```

Confirmation Response from Previous PSP to IPS:

```
<RespMapperConfirmation>
  <Head ver="" ts="2025-06-09T13:35:52.525+02:00" orgId="700002"
    msgId="XYB00000000000001vRPtRSgrisL1zcq2Cti" prodType="UPI" />
  <Txn id="MYSIM0000000000001vRPtRTgqKswS3XI8BZ6" note="Mapper" refId="702314088080"
    refUrl="http://upi" ts="2017-01-23T14:14:54.040+05:30" type="ReqMapperConfirmation"
    custRef="105015571146" />
  <Resp reqMsgId="1xysViD1RFmN" result="SUCCESS" />
</RespMapperConfirmation>
```

6.17. Payment Request

Refer Specifications [Pay API](#)

P2P

Request from Payer IPS Participant to IPS: ReqPay with type = "PAY"

```
<ReqPay>
  <Head ver="2.0" ts="2025-06-09T11:27:41+02:00" orgId="700001"
    msgId="XYD00000000000001GRDpegB9EWpFIHL7Tzs" prodType="UPI" />
  <Meta>
    <Tag name="PAYREQSTART" value="2017-12-04T14:15:35+05:30" />
    <Tag name="PAYREQEND" value="2017-12-04T14:15:35+05:30" />
  </Meta>
  <Txn id="MYSIM000000001vRPtRTgqKswRQqezciI" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY"
    custRef="516011845328" initiationMode="00" purpose="00">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
    </RiskScores>
  </Txn>
</ReqPay>
```

```

    </RiskScores>
</Txn>
<Payer addr="payer@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
  <Info>
    <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
    <Rating verifiedAddress="TRUE"></Rating>
  </Info>
  <Device>
    <Tag name="MOBILE" value="993456789" />
    <Tag name="TYPE" value="MOB" />
    <Tag name="ID" value="0000000000000002" />
    <Tag name="OS" value="android" />
    <Tag name="APP" value="org.npci.upi.maggi" />
  </Device>
  <Ac addrType="ACCOUNT">
    <Detail name="IFSC" value="AABY0000382" />
    <Detail name="ACTYPE" value="SAVINGS" />
    <Detail name="ACNUM" value="3453454385" />
  </Ac>
  <Creds>
    <Cred type="PIN" subType="MPIN">
      <Data code="NPCI"
ki="20150822">2.0|FHLMEhFHQ1fVGKJGDvGH5vEW75jPpJ6lpc/jr3l2Hitc9cwV9V4rRsCnFYav+Ge3/JGXpQTopLL0&#xd;
      vzQGjE5K8kUmiXyb4x+TU3jWgbx+HuplJQcMeTbFnb+n70U7K4ix76eEFSBLkzpdfZiDO0X69KER&#xd;
      ExGCWz90btFA8aFVQBzDE0bbtrt6L1RT50sal+Hxzuf1T/Zkye82srgq338SDSI/bC40EgGY54a+p&#xd;
      95uZeh4NiC4qsTxnQiaUlKeqAKBeILNG3BRkQ1PpeQh+aeBE0zOsOyctlye8QKq5fJEBWnKPx5wG&#xd;
      SObbr4LCbdJ5zOd138Ah7Jjf8BnpKpprHMLkAg==&#xd;
      </Data>
    </Cred>
  </Creds>
  <Amount value="1.00" curr="NAD" />
</Payer>
<Payees>
  <Payee addr="ree@mypsp" name="ree" seqNum="1" type="PERSON" code="0000" cmId="">
    <Amount value="1.00" curr="NAD" />
  </Payee>
</Payees>

```

```

    </Payee>
  </Payees>
</ReqPay>

```

ReqAuthDetails to Payee IPS Participants from IPS: ReqAuthDetails

```

<ReqAuthDetails>
  <Head ver="2.0" ts="2025-06-09T11:27:41+02:00" orgId="NPCI" msgId="1xysViANc6bE" />
  <Txn id="MYSIM00000001vRPtRTgqKswRQqezciI" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY"
    custRef="516011845328" initiationMode="00" purpose="00">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
    </RiskScores>
  </Txn>
  <Payees>
    <Payee addr="ree@mypsp" name="ree" seqNum="1" type="PERSON" code="0000" cmId="">
      <Amount value="1.00" curr="NAD" />
    </Payee>
  </Payees>
  <Payer addr="payer@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
    <Info>
      <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
      <Detail name="ACTYPE" value="SAVINGS" />
      <Detail name="ACNUM" value="3453454385" />
    </Ac>
    <Amount value="1.00" curr="NAD" />
  </Payer>
</ReqAuthDetails>

```


RespAuthDetails from Payee IPS Participant to IPS:

```
<RespAuthDetails>
  <Head ver="2.0" ts="2025-06-09T11:27:41.686+02:00" orgId="700001"
    msgId="XYA00000000000001vRPtRSgrisL1lEVckXl" />
  <Resp reqMsgId="1xysViANc6bE" result="SUCCESS" />
  <Txn id="MYSIM000000001vRPtRTggKswRQgezciI" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY"
    custRef="516011845328" initiationMode="00" purpose="00">
    <RiskScores>
      <Score provider="SBI" type="TXNRISK" value="10" />
    </RiskScores>
  </Txn>
  <Payer addr="payer@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
    <Info>
      <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
      <Detail name="ACTYPE" value="SAVINGS" />
      <Detail name="ACNUM" value="3453454385" />
    </Ac>
    <Amount value="1.00" curr="NAD" />
  </Payer>
  <Payees>
    <Payee addr="ree@mypsp" name="ree" seqNum="1" type="PERSON" code="0000" cmId="">
      <Info>
        <Identity type="ACCOUNT" verifiedName="narayanan" id="AAB45645BJB15" />
        <Rating verifiedAddress="TRUE"></Rating>
      </Info>
      <Device>
        <Tag name="MOBILE" value="993456780" />
      </Device>
    </Payee>
  </Payees>
</RespAuthDetails>
```

```

        <Tag name="APP" value="org.npci.upi.maggi" />
        <Tag name="TYPE" value="MOB" />
        <Tag name="ID" value="00000000000000020" />
    </Device>
    <Ac addrType="ACCOUNT">
        <Detail name="IFSC" value="AABY0000382" />
        <Detail name="ACNUM" value="2678892001829" />
        <Detail name="ACTYPE" value="SAVINGS" />
    </Ac>
    <Amount value="1.00" curr="NAD" />
</Payee>
</Payees>
</RespAuthDetails>

```

Debit Request from IPS to Remitter SoV Provider: ReqPay with type=" DEBIT":

```

<ReqPay>
  <Head ver="2.0" ts="2025-06-09T11:27:43+02:00" orgId="NPCI" msgId="1xysViANcWdy" />
  <Meta>
    <Tag name="PAYREQSTART" value="2017-12-04T14:15:35+05:30" />
    <Tag name="PAYREQEND" value="2017-12-04T14:15:35+05:30" />
  </Meta>
  <Txn id="MYSIM00000001vRPtRTgqKswRQqezciI" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="DEBIT"
    custRef="516011845328" initiationMode="00" subType="PAY" purpose="00">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
      <Score provider="NPCI" type="TXNRISK" value="00999" />
    </RiskScores>
  </Txn>

```

```

<Payer addr="payer@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
  <Info>
    <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
    <Rating verifiedAddress="TRUE"></Rating>
  </Info>
  <Device>
    <Tag name="MOBILE" value="993456789" />
    <Tag name="TYPE" value="MOB" />
    <Tag name="ID" value="0000000000000002" />
    <Tag name="OS" value="android" />
    <Tag name="APP" value="org.npci.upi.maggi" />
  </Device>
  <Ac addrType="ACCOUNT">
    <Detail name="IFSC" value="AABY0000382" />
    <Detail name="ACTYPE" value="SAVINGS" />
    <Detail name="ACNUM" value="3453454385" />
  </Ac>
  <Creds>
    <Cred type="PIN" subType="MPIN">
      <Data code="700001" ki="20160217">

```

B9jvjTmAfuktxnAYaJl2MIexo5D3rf4Zr8NS4IrpK6mrCbeaIxUTkWCfu8mXGTlFQq3CpxN+DCwmKTj63LGK3TceMJtsL2uZQ1sPh
 mx3H0Se0AxmllBKUblCok71AN/mfB7pTmzw3mEeVbTGEwYECNqmU/J5sxtjJ4KmPtHrNW8QhI+uzEHl1szCBtlb4EgZ2tuXkiu0Ig
 UjXS+h73WSWhcs5OYdBHlPILXZjzPzsfQYTmRnNXd3Li6fHTdrCrxKOSc0gV5icC5BdzUg6RopbG1wgK2+2qpc/S5NT6oLvFItnR/
 /sQARRVE3NvTJOWzb3MDXKkPVniotsnlAUozBlg==</Data>

```

      </Cred>
    </Creds>
    <Amount value="1.00" curr="NAD" />
  </Payer>
  <Payees>
    <Payee addr="ree@mypsp" name="ree" seqNum="1" type="PERSON" code="0000" cmId="">
      <Info>
        <Identity type="ACCOUNT" verifiedName="narayanan" id="AAB45645BJB15" />
        <Rating verifiedAddress="TRUE"></Rating>
      </Info>

```

```

    <Device>
      <Tag name="MOBILE" value="993456780" />
      <Tag name="APP" value="org.npci.upi.maggi" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="0000000000000020" />
    </Device>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
      <Detail name="ACNUM" value="2678892001829" />
      <Detail name="ACTYPE" value="SAVINGS" />
    </Ac>
    <Amount value="1.00" curr="NAD" />
  </Payee>
</Payees>
</ReqPay>

```

Debit Response from Remitter SoV provider to IPS:

```

<RespPay>
  <Head ver="2.0" ts="2025-06-09T11:27:43+02:00" orgId="700001"
    msgId="XYA0000000001vRPtRSgrisL1lF9qiFS" />
  <Txn id="MYSIM000000001vRPtRTgqKswRQgezciI" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="DEBIT"
    custRef="516011845328" initiationMode="00" subType="PAY" purpose="00">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
      <Score provider="NPCI" type="TXNRISK" value="00999" />
    </RiskScores>
  </Txn>
  <Resp reqMsgId="1xysViANcWdy" result="SUCCESS">
    <Ref type="PAYER" seqNum="1" addr="payer@mypsp" settAmount="1.00" settCurrency="NAD"
      approvalNum="654321" respCode="00" regName="Shyam" acNum="3453454385" IFSC="AABY0000382"

```

```
code="0000" accType="SAVINGS" />
</Resp>
</RespPay>
```

Credit Request from IPS to Beneficiary SoV Provider: ReqPay with type "CREDIT"

```
<ReqPay>
  <Head ver="2.0" ts="2025-06-09T11:27:43+02:00" orgId="NPCI" msgId="1xysViANcWdA" />
  <Meta>
    <Tag name="PAYREQSTART" value="2017-12-04T14:15:35+05:30" />
    <Tag name="PAYREQEND" value="2017-12-04T14:15:35+05:30" />
  </Meta>
  <Txn id="MYSIM00000001vRPtRTgqKswRQqezciI" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="CREDIT"
    custRef="516011845328" initiationMode="00" subType="PAY" purpose="00">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
      <Score provider="NPCI" type="TXNRISK" value="00999" />
    </RiskScores>
  </Txn>
  <Payer addr="payer@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
    <Info>
      <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
      <Tag name="MOBILE" value="993456789" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="0000000000000002" />
      <Tag name="OS" value="android" />
      <Tag name="APP" value="org.npci.upi.maggi" />
    </Device>
  <Ac addrType="ACCOUNT">
```

```

        <Detail name="IFSC" value="AABY0000382" />
        <Detail name="ACTYPE" value="SAVINGS" />
        <Detail name="ACNUM" value="3453454385" />
    </Ac>
    <Amount value="1.00" curr="NAD" />
</Payer>
<Payees>
    <Payee addr="ree@mysp" name="ree" seqNum="1" type="PERSON" code="0000" cmId="">
        <Info>
            <Identity type="ACCOUNT" verifiedName="narayanan" id="AAB45645BJB15" />
            <Rating verifiedAddress="TRUE"></Rating>
        </Info>
        <Device>
            <Tag name="MOBILE" value="993456780" />
            <Tag name="APP" value="org.npci.upi.maggi" />
            <Tag name="TYPE" value="MOB" />
            <Tag name="ID" value="00000000000000020" />
        </Device>
        <Ac addrType="ACCOUNT">
            <Detail name="IFSC" value="AABY0000382" />
            <Detail name="ACNUM" value="2678892001829" />
            <Detail name="ACTYPE" value="SAVINGS" />
        </Ac>
        <Amount value="1.00" curr="NAD" />
    </Payee>
</Payees>
</ReqPay>

```

Credit Response from Beneficiary SoV Provider to IPS :

```
<RespPay>
  <Head ver="2.0" ts="2025-06-09T11:27:43+02:00" orgId="700001"
    msgId="XYA0000000001vRPtRSgrisL1lF9uuOW" />
  <Txn id="MYSIM00000001vRPtRTgqKswRQqezciI" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="CREDIT"
    custRef="516011845328" initiationMode="00" subType="PAY" purpose="00">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
      <Score provider="NPCI" type="TXNRISK" value="00999" />
    </RiskScores>
  </Txn>
  <Resp reqMsgId="1xysViANcWdA" result="SUCCESS">
    <Ref type="PAYEE" seqNum="1" addr="ree@mypsp" settAmount="1.00" settCurrency="NAD"
      approvalNum="654321" respCode="00" regName="ree" acNum="2678892001829"
      IFSC="AABY0000382" code="0000" accType="SAVINGS" />
  </Resp>
</RespPay>
```

Final ResPay request from IPS to Payer IPS Participant:

```
<RespPay>
  <Head ver="2.0" ts="2025-06-09T11:27:43+02:00" orgId="NPCI" msgId="1xysViANcWdC" />
  <Txn id="MYSIM00000001vRPtRTgqKswRQqezciI" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY"
    custRef="516011845328" initiationMode="00" purpose="00">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
      <Score provider="NPCI" type="TXNRISK" value="00999" />
    </RiskScores>
  </Txn>
</RespPay>
```

```

    </RiskScores>
  </Txn>
  <Resp reqMsgId="XYD00000000000001GRDpegB9EWpFIHL7Tzs" result="SUCCESS">
    <Ref type="PAYER" seqNum="1" addr="payer@mypsp" settAmount="1.00" settCurrency="NAD"
      approvalNum="654321" respCode="00" regName="Shyam" orgAmount="1.00" acNum="3453454385"
      IFSC="AABY0000382" code="0000" accType="SAVINGS" />
    <Ref type="PAYEE" seqNum="1" addr="ree@mypsp" settAmount="1.00" settCurrency="NAD"
      approvalNum="654321" respCode="00" regName="ree" orgAmount="1.00" acNum="2678892001829"
      IFSC="AABY0000382" code="0000" accType="SAVINGS" cmId="" />
  </Resp>
</RespPay>

```

Request TXn Confirmation from IPS to Payee IPS Participant:

```

<ReqTxnConfirmation>
  <Head ver="2.0" ts="2025-06-09T11:27:43+02:00" orgId="NPCI" msgId="1xysViANcWdF" />
  <Txn id="MYSIM00000001vRPtRTgqKswRQgezciI" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="TxnConfirmation"
    orgTxnId="MYSIM00000001vRPtRTgqKswRQgezciI" custRef="516011845328" initiationMode="00"
    purpose="00" />
  <TxnConfirmation note="test" orgStatus="SUCCESS" type="PAY">
    <Ref type="PAYEE" seqNum="1" addr="ree@mypsp" settAmount="1.00" settCurrency="NAD"
      approvalNum="654321" respCode="00" regName="ree" orgAmount="1.00" acNum="2678892001829"
      IFSC="AABY0000382" code="0000" accType="SAVINGS" cmId="" />
  </TxnConfirmation>
</ReqTxnConfirmation>

```


Response Txn Confirmation from Payee IPS Participant to IPS:

```
<RespTxnConfirmation>
  <Head ver="2.0" ts="2025-06-09T11:27:43+02:00" orgId="700001" msgId="3BIhGBUToMhIdZooU" />
  <Txn id="MYSIM00000001vRPtRTgqKswRQqezciI" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/"
    ts="2018-03-02T16:27:44+05:30" type="TxnConfirmation"
    orgTxnId="MYSIM00000001vRPtRTgqKswRQqezciI" custRef="516011845328" initiationMode="00"
    purpose="00" />
  <Resp reqMsgId="3BIhGBUToMhIdZooU" result="SUCCESS" />
</RespTxnConfirmation>
```

P2M :

Request from Payer IPS Participant to IPS: ReqPay with type = "DEBIT"

```
<ReqPay>
  <Head ver="2.0" ts="2025-06-05T09:14:03+02:00" orgId="700001"
    msgId="XYD00000000000001GRDpegB9EWpFIHL7Tzs" />
  <Meta>
    <Tag name="PAYREQSTART" value="2017-12-04T14:15:35+05:30" />
    <Tag name="PAYREQEND" value="2017-12-04T14:15:35+05:30" />
  </Meta>
  <Txn id="MYSIM00000001vRPtRTgqKswHNRgIyly" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY"
    custRef="515609473903" initiationMode="00" purpose="00">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
    </RiskScores>
  </Txn>
  <Payer addr="payer@myppsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
```

```

<Info>
  <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
  <Rating verifiedAddress="TRUE"></Rating>
</Info>
<Device>
  <Tag name="MOBILE" value="993456789" />
  <Tag name="TYPE" value="MOB" />
  <Tag name="ID" value="0000000000000002" />
  <Tag name="OS" value="android" />
  <Tag name="APP" value="org.npci.upi.maggi" />
</Device>
<Ac addrType="ACCOUNT">
  <Detail name="IFSC" value="AABY0000382" />
  <Detail name="ACTYPE" value="SAVINGS" />
  <Detail name="ACNUM" value="3453454385" />
</Ac>
<Creds>
  <Cred type="PIN" subType="MPIN">
    <Data code="NPCI"
ki="20150822">2.0|fMbMKk8O1ipA4NCF02Kr0ji1oq0P1hQhkaQFfQghQuE/qBcgbT54o+5aysAt6ulaw30VvTRXDzW7&#xd;
      FKrkum3WkQtARhv6dlM00ZTVsle1irq7T6H59xB+ZFzc7PqBQucOvoYpRnKCXtO8WKM2n8WsiXx4&#xd;
      MSeSKzpYP4fwTYW1YqKgUCwp3nMeFB+M+zektV2Y0IAodSgSps91yb3qMFGtaWulVIrKK/wCrMtC&#xd;
      xOTfP55tdUtGsR3QSoXhA3acErgjOz1fAjfcwwyPacxMc3kATI0RHJGunQ4yZg0M0qA54V2P4tDw&#xd;
      QHdeVx2ZN/1EL839wPepu/kaucMriM1KyNfcYA==&#xd;
    </Data>
  </Cred>
</Creds>
<Amount value="1.00" curr="NAD" />
</Payer>
<Payees>
  <Payee addr="agath@mypsp" name="SonySuper" seqNum="1" type="ENTITY" code="5310" cmId="">
    <Amount value="1.00" curr="NAD" />
    <Merchant>
      <Identifier subCode="1234" mid="123" sid="89311234567890122306" tid="8765987654"
merchantType="SMALL" merchantGenre="ONLINE" onBoardingType="AGGREGATOR"
    </Identifier>
    </Merchant>
  </Payee>
</Payees>

```

```

        regId="AB12De" pinCode="507123" tier="TIER3" />
        <Name brand="AllianceFranchise" legal="Reliance" franchise="LearnFrench" />
        <Ownership type="PUBLIC" />
        <Invoice name="ramya" num="1" date="2020-05-30T07:06:06+05:30" />
    </Merchant>
</Payee>
</Payees>
</ReqPay>

```

Request Auth Details from IPS to Payee IPS Participant:

```

<ReqAuthDetails>
  <Head ver="2.0" ts="2025-06-05T09:14:03+02:00" orgId="NPCI" msgId="1xysVbvTZB2F" />
  <Txn id="MYSIM00000001vRPtRTggKswHNRgIyly" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY"
    custRef="515609473903" initiationMode="00" purpose="00">
    <RiskScores>
      <Score provider="pspl" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
    </RiskScores>
  </Txn>
  <Payees>
    <Payee addr="agath@mypsp" name="SonySuper" seqNum="1" type="ENTITY" code="5310" cmId="">
      <Amount value="1.00" curr="NAD" />
      <Merchant>
        <Identifier subCode="1234" mid="123" sid="89311234567890122306" tid="8765987654"
          merchantType="SMALL" merchantGenre="ONLINE" onBoardingType="AGGREGATOR"
          regId="AB12De" pinCode="507123" tier="TIER3" />
        <Name brand="AllianceFranchise" legal="Reliance" franchise="LearnFrench" />
        <Ownership type="PUBLIC" />
        <Invoice name="ramya" num="1" date="2020-05-30T07:06:06+05:30" />
      </Merchant>
    </Payee>
  </Payees>
</ReqAuthDetails>

```

```

</Payees>
<Payer addr="payer@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
  <Info>
    <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
    <Rating verifiedAddress="TRUE"></Rating>
  </Info>
  <Ac addrType="ACCOUNT">
    <Detail name="IFSC" value="AABY0000382" />
    <Detail name="ACTYPE" value="SAVINGS" />
    <Detail name="ACNUM" value="3453454385" />
  </Ac>
  <Amount value="1.00" curr="NAD" />
</Payer>
</ReqAuthDetails>

```

Response Auth Details from Payee IPS Participant to IPS:

```

<RespAuthDetails>
  <Head ver="2.0" ts="2025-06-05T09:14:03.942+02:00" orgId="700001"
    msgId="XYA00000000000001vRPtRSgrisKRj5Y6fId" />
  <Resp reqMsgId="1xysVbvTZB2F" result="SUCCESS" />
  <Txn id="MYSIM00000001vRPtRTggKswHNRgIyly" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY"
    custRef="515609473903" initiationMode="00" purpose="00">
    <RiskScores>
      <Score provider="SBI" type="TXNRISK" value="10" />
    </RiskScores>
  </Txn>
  <Payer addr="payer@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
    <Info>
      <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>

```

```

    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
      <Detail name="ACTYPE" value="SAVINGS" />
      <Detail name="ACNUM" value="3453454385" />
    </Ac>
    <Amount value="1.00" curr="NAD" />
  </Payer>
  <Payees>
    <Payee addr="agath@myppsp" name="SonySuper" seqNum="1" type="ENTITY" code="5310" cmId="">
      <Info>
        <Identity type="ACCOUNT" verifiedName="narayanan" id="AAB45645BJB15" />
        <Rating verifiedAddress="TRUE"></Rating>
      </Info>
      <Device>
        <Tag name="MOBILE" value="993456780" />
        <Tag name="APP" value="org.npci.upi.maggi" />
        <Tag name="TYPE" value="MOB" />
        <Tag name="ID" value="00000000000000020" />
      </Device>
      <Ac addrType="ACCOUNT">
        <Detail name="IFSC" value="AABY0000382" />
        <Detail name="ACNUM" value="2678892001829" />
        <Detail name="ACTYPE" value="SAVINGS" />
      </Ac>
      <Amount value="1.00" curr="NAD" />
      <Merchant>
        <Identifier subCode="1234" mid="123" sid="89311234567890122306" tid="8765987654"
          merchantType="SMALL" merchantGenre="ONLINE" onBoardingType="AGGREGATOR"
          regId="AB12De" pinCode="507123" tier="TIER3" />
        <Name brand="AllianceFranchise" legal="Reliance" franchise="LearnFrench" />
        <Ownership type="PUBLIC" />
        <Invoice name="ramya" num="1" date="2020-05-30T07:06:06+05:30" />
      </Merchant>
    </Payee>
  </Payees>

```

</RespAuthDetails>

Debit Request from IPS to Payer SoV Provider: ReqPay with type = "DEBIT"

```
<ReqPay>
  <Head ver="2.0" ts="2025-06-05T09:14:05+02:00" orgId="NPCI" msgId="1xysVbvU0r4x" />
  <Meta>
    <Tag name="PAYREQSTART" value="2017-12-04T14:15:35+05:30" />
    <Tag name="PAYREQEND" value="2017-12-04T14:15:35+05:30" />
  </Meta>
  <Txn id="MYSIM00000001vRPtRTggKswHNRgIyly" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="DEBIT"
    custRef="515609473903" initiationMode="00" subType="PAY" purpose="00">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
      <Score provider="NPCI" type="TXNRISK" value="00999" />
    </RiskScores>
  </Txn>
  <Payer addr="payer@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
    <Info>
      <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
      <Tag name="MOBILE" value="993456789" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="0000000000000002" />
      <Tag name="OS" value="android" />
      <Tag name="APP" value="org.npci.upi.maggi" />
    </Device>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
    </Ac>
  </Payer>
</ReqPay>
```

```

        <Detail name="ACTYPE" value="SAVINGS" />
        <Detail name="ACNUM" value="3453454385" />
    </Ac>
    <Creds>
        <Cred type="PIN" subType="MPIN">
            <Data code="700001" ki="20181226">

q5f/muRNF2osOl785TNFAVdMaUw2THOAZyg2ss9fy5MoO+3z86WD/wdS1iQmhfiPBn2sVooqp35q4QFdUej2QSvUT/ximKmXvyx1U
hZ0G7aPt5GGKStaEaV8E+MHVGrC0u9atFqF/mxXJzwVQYWCCdqCVplRDhpDnyeg+0hJbFu8dMNeR7ut3cvDwvdvMY4F1n2RMXu7gT
p0dduUk7vKndbl/Z3SKMkrWWLafUP/9jWDIVPZfy0ZgHTTX3xooX2NrRojvjP9e36I6j2OkCENP8B0v/RgozkX36XdjxkoSBoQclt
zZojKKY4VfMitCHwgpXIn86SqaSEEI8eHZ/qlDw==</Data>

            </Cred>
        </Creds>
        <Amount value="1.00" curr="NAD" />
    </Payer>
    <Payees>
        <Payee addr="agath@mypsp" name="SonySuper" seqNum="1" type="ENTITY" code="5310" cmId="">
            <Info>
                <Identity type="ACCOUNT" verifiedName="narayanan" id="AAB45645BJB15" />
                <Rating verifiedAddress="TRUE"></Rating>
            </Info>
            <Device>
                <Tag name="MOBILE" value="993456780" />
                <Tag name="APP" value="org.npci.upi.maggi" />
                <Tag name="TYPE" value="MOB" />
                <Tag name="ID" value="00000000000000020" />
            </Device>
            <Ac addrType="ACCOUNT">
                <Detail name="IFSC" value="AABY0000382" />
                <Detail name="ACNUM" value="2678892001829" />
                <Detail name="ACTYPE" value="SAVINGS" />
            </Ac>
            <Amount value="1.00" curr="NAD" />
            <Merchant>
                <Identifier subCode="1234" mid="123" sid="89311234567890122306" tid="8765987654"

```

```

        merchantType="SMALL" merchantGenre="ONLINE" onBoardingType="AGGREGATOR"
        regId="AB12De" pinCode="507123" tier="TIER3" />
        <Name brand="AllianceFranchise" legal="Reliance" franchise="LearnFrench" />
        <Ownership type="PUBLIC" />
        <Invoice name="ramya" num="1" date="2020-05-30T07:06:06+05:30" />
    </Merchant>
</Payee>
</Payees>
</ReqPay>

```

Response from Payer IPS Participant to IPS:

```

<RespPay>
    <Head ver="2.0" ts="2025-06-05T09:14:06+02:00" orgId="700001"
        msgId="XYA0000000001vRPtRSgrisKRj6c83UA" />
    <Txn id="MYSIM000000001vRPtRTgqKswHNRgIyly" note="test" refId="Ref"
        refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="DEBIT"
        custRef="515609473903" initiationMode="00" subType="PAY" purpose="00">
        <RiskScores>
            <Score provider="psp1" type="TXNRISK" value="00032" />
            <Score provider="psp3" type="TXNRISK" value="00040" />
            <Score provider="NPCI" type="TXNRISK" value="00999" />
        </RiskScores>
    </Txn>
    <Resp reqMsgId="1xysVbvU0r4x" result="SUCCESS">
        <Ref type="PAYER" seqNum="1" addr="payer@mypsp" settAmount="1.00" settCurrency="NAD"
            approvalNum="654321" respCode="00" regName="Shyam" acNum="3453454385" IFSC="AABY0000382"
            code="0000" accType="SAVINGS" />
    </Resp>
</RespPay>

```


Credit Request from IPS to Payee Sov Provider: ReqPayr with type = "CREDIT"

```

<ReqPay>
  <Head ver="2.0" ts="2025-06-05T09:14:06+02:00" orgId="NPCI" msgId="1xysVbvU0R5t" />
  <Meta>
    <Tag name="PAYREQSTART" value="2017-12-04T14:15:35+05:30" />
    <Tag name="PAYREQEND" value="2017-12-04T14:15:35+05:30" />
  </Meta>
  <Txn id="MYSIM00000001vRPtRTgqKswHNRgIyly" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="CREDIT"
    custRef="515609473903" initiationMode="00" subType="PAY" purpose="00">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
      <Score provider="NPCI" type="TXNRISK" value="00999" />
    </RiskScores>
  </Txn>
  <Payer addr="payer@myppsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
    <Info>
      <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
      <Tag name="MOBILE" value="993456789" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="0000000000000002" />
      <Tag name="OS" value="android" />
      <Tag name="APP" value="org.npci.upi.maggi" />
    </Device>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
      <Detail name="ACTYPE" value="SAVINGS" />
      <Detail name="ACNUM" value="3453454385" />
    </Ac>
    <Amount value="1.00" curr="NAD" />
  </Payer>
</ReqPay>

```

```

</Payer>
<Payees>
  <Payee addr="agath@mypsp" name="SonySuper" seqNum="1" type="ENTITY" code="5310" cmId="">
    <Info>
      <Identity type="ACCOUNT" verifiedName="narayanan" id="AAB45645BJB15" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
      <Tag name="MOBILE" value="993456780" />
      <Tag name="APP" value="org.npci.upi.maggi" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="00000000000000020" />
    </Device>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
      <Detail name="ACNUM" value="2678892001829" />
      <Detail name="ACTYPE" value="SAVINGS" />
    </Ac>
    <Amount value="1.00" curr="NAD" />
    <Merchant>
      <Identifier subCode="1234" mid="123" sid="89311234567890122306" tid="8765987654"
        merchantType="SMALL" merchantGenre="ONLINE" onBoardingType="AGGREGATOR"
        regId="AB12De" pinCode="507123" tier="TIER3" />
      <Name brand="AllianceFranchise" legal="Reliance" franchise="LearnFrench" />
      <Ownership type="PUBLIC" />
      <Invoice name="ramya" num="1" date="2020-05-30T07:06:06+05:30" />
    </Merchant>
  </Payee>
</Payees>
</ReqPay>

```

Response from Payee IPS participant to IPS :

```
<RespPay>
  <Head ver="2.0" ts="2025-06-05T09:14:06+02:00" orgId="700001"
    msgId="XYA0000000001vRPtRSgrisKRj6clUoq" />
  <Txn id="MYSIM000000001vRPtRTgqKswHNRgIyly" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="CREDIT"
    custRef="515609473903" initiationMode="00" subType="PAY" purpose="00">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
      <Score provider="NPCI" type="TXNRISK" value="00999" />
    </RiskScores>
  </Txn>
  <Resp reqMsgId="1xysVbvU0R5t" result="SUCCESS">
    <Ref type="PAYEE" seqNum="1" addr="agath@mypsp" settAmount="1.00" settCurrency="NAD"
      approvalNum="654321" respCode="00" regName="SonySuper" acNum="2678892001829"
      IFSC="AABY0000382" code="0000" accType="SAVINGS" />
  </Resp>
</RespPay>
```

Final Response Pay from IPS to Payer IPS Participant:

```
<RespPay>
  <Head ver="2.0" ts="2025-06-05T09:14:06+02:00" orgId="NPCI" msgId="1xysVbvU0R5v" />
  <Txn id="MYSIM000000001vRPtRTgqKswHNRgIyly" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY"
    custRef="515609473903" initiationMode="00" purpose="00">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
      <Score provider="NPCI" type="TXNRISK" value="00999" />
    </RiskScores>
  </Txn>
```

```
<Resp reqMsgId="XYD0000000000001GRDpegB9EWpFIHL7Tzs" result="SUCCESS">
  <Ref type="PAYER" seqNum="1" addr="payer@mypsp" settAmount="1.00" settCurrency="NAD"
    approvalNum="654321" respCode="00" regName="Shyam" orgAmount="1.00" acNum="3453454385"
    IFSC="AABY0000382" code="0000" accType="SAVINGS" />
  <Ref type="PAYEE" seqNum="1" addr="agath@mypsp" settAmount="1.00" settCurrency="NAD"
    approvalNum="654321" respCode="00" regName="SonySuper" orgAmount="1.00"
    acNum="2678892001829" IFSC="AABY0000382" code="5310" accType="SAVINGS" cmId="" />
</Resp>
</RespPay>
```

Req Txn Confirmation from IPS to Payee IPS Participant:

```
<ReqTxnConfirmation>
  <Head ver="2.0" ts="2025-06-05T09:14:06+02:00" orgId="NPCI" msgId="1xysVbvU0R5y" />
  <Txn id="MYSIM00000001vRPtRTgqKswHNRgIyly" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="TxnConfirmation"
    orgTxnId="MYSIM00000001vRPtRTgqKswHNRgIyly" custRef="515609473903" initiationMode="00"
    purpose="00" />
  <TxnConfirmation note="test" orgStatus="SUCCESS" type="PAY">
    <Ref type="PAYEE" seqNum="1" addr="agath@mypsp" settAmount="1.00" settCurrency="NAD"
      approvalNum="654321" respCode="00" regName="SonySuper" orgAmount="1.00"
      acNum="2678892001829" IFSC="AABY0000382" code="5310" accType="SAVINGS" cmId="" />
  </TxnConfirmation>
</ReqTxnConfirmation>
```

Response Txn Confirmation from Payee IPS Participant to IPS:

```
<RespTxnConfirmation>
  <Head ver="2.0" ts="2025-06-05T09:14:06+02:00" orgId="700001" msgId="3BIhGBUToCf9h3Oqm" />
  <Txn id="MYSIM00000001vRPtRTgqKswHNRgIyly" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="TxnConfirmation"
    orgTxnId="MYSIM00000001vRPtRTgqKswHNRgIyly" custRef="515609473903" initiationMode="00"
    purpose="00" />
```

```
<Resp reqMsgId="3BIhGBUToCf9h3Oqm" result="SUCCESS" />
</RespTxnConfirmation>
```

6.18. G2P Transaction

Refer Specifications

Request from IPS Payer Participants to IPS:

```
<ReqPay>
  <Head ver="2.0" ts="2025-06-02T08:41:24+02:00" orgId="700001"
    msgId="XYD00000000000001GRDpegB9EWpFIHL7Tzs" prodType="UPI"/>
  <Meta>
    <Tag name="PAYREQSTART" value="2017-12-04T14:15:35+05:30" />
    <Tag name="PAYREQEND" value="2017-12-04T14:15:35+05:30" />
  </Meta>
  <Txn id="MYSIM00000001vRPtRTgqKswAo4B4R32" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY"
    custRef="515308298018" initiationMode="00" purpose="14">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
    </RiskScores>
  </Txn>
  <Payer addr="PRE@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
    <Info>
      <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
      <Tag name="MOBILE" value="993456789" />
      <Tag name="TYPE" value="MOB" />
    </Device>
  </Payer>
</ReqPay>
```

```

        <Tag name="ID" value="0000000000000002" />
        <Tag name="OS" value="android" />
        <Tag name="APP" value="org.npci.upi.maggi" />
    </Device>
    <Ac addrType="ACCOUNT">
        <Detail name="IFSC" value="AABY0000382" />
        <Detail name="ACTYPE" value="SAVINGS" />
        <Detail name="ACNUM" value="3453454385" />
    </Ac>
    <Creds>
        <Cred type="PreApproved" subType="NA">
            <Data code="NPCI" ki="20150822">MDB8MTIzNDU2</Data>
        </Cred>
    </Creds>
    <Amount value="1.00" curr="NAD" />
</Payer>
<Payees>
    <Payee addr="2678892001829@AABY0000382.ifsc.npci" name="SonySuper" seqNum="1" type="PERSON"
        code="0000" cmId="">
        <Amount value="1.00" curr="NAD" />
    </Payee>
</Payees>
</ReqPay>

```

Credit Request to Payee IPS Participants from IPS:

```

<ReqPay>
    <Head ver="2.0" ts="2025-06-02T08:41:26+02:00" orgId="NPCI" msgId="1xysV6dwHEEP" />
    <Meta>
        <Tag name="PAYREQSTART" value="2017-12-04T14:15:35+05:30" />
        <Tag name="PAYREQEND" value="2017-12-04T14:15:35+05:30" />
    </Meta>
    <Txn id="MYSIM00000001vRPtRTgqKswAo4B4R32" note="test" refId="Ref"
        refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="CREDIT"
        custRef="515308298018" initiationMode="00" subType="PAY" purpose="14">

```

```

<RiskScores>
  <Score provider="psp1" type="TXNRISK" value="00032" />
  <Score provider="psp3" type="TXNRISK" value="00040" />
  <Score provider="NPCI" type="TXNRISK" value="00999" />
</RiskScores>
</Txn>
<Payer addr="PRE@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
  <Info>
    <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
    <Rating verifiedAddress="TRUE"></Rating>
  </Info>
  <Device>
    <Tag name="MOBILE" value="993456789" />
    <Tag name="TYPE" value="MOB" />
    <Tag name="ID" value="0000000000000002" />
    <Tag name="OS" value="android" />
    <Tag name="APP" value="org.npci.upi.maggi" />
  </Device>
  <Ac addrType="ACCOUNT">
    <Detail name="IFSC" value="AABY0000382" />
    <Detail name="ACTYPE" value="SAVINGS" />
    <Detail name="ACNUM" value="3453454385" />
  </Ac>
  <Amount value="1.00" curr="NAD" />
</Payer>
<Payees>
  <Payee addr="2678892001829@AABY0000382.ifsc.npci" name="SonySuper" seqNum="1" type="PERSON"
    code="0000" cmId="">
    <Ac addrType="ACCOUNT">
      <Detail name="ACNUM" value="2678892001829" />
      <Detail name="ACTYPE" value="DEFAULT" />
      <Detail name="IFSC" value="AABY0000382" />
    </Ac>
    <Amount value="1.00" curr="NAD" />
  </Payee>

```

```
</Payees>
</ReqPay>
```

Credit Response from Payee IPS Participants to IPS:

```
<RespPay>
  <Head ver="2.0" ts="2025-06-02T08:41:26+02:00" orgId="700001"
    msgId="null000000001vRPtRSgrisKJTjvGQTV" />
  <Txn id="MYSIM00000001vRPtRTgqKswAo4B4R32" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="CREDIT"
    custRef="515308298018" initiationMode="00" subType="PAY" purpose="14">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
      <Score provider="NPCI" type="TXNRISK" value="00999" />
    </RiskScores>
  </Txn>
  <Resp reqMsgId="1xysV6dwHEEP" result="SUCCESS">
    <Ref type="PAYEE" seqNum="1" addr="2678892001829@AABY0000382.ifsc.npci" settAmount="1.00"
      settCurrency="NAD" approvalNum="654321" respCode="00" regName="SonySuper"
      acNum="2678892001829" IFSC="AABY0000382" code="0000" accType="DEFAULT" />
  </Resp>
</RespPay>
```

Final Response to Payer IPS Participant from IPS:

```
<RespPay>
  <Head ver="2.0" ts="2025-06-02T08:41:26+02:00" orgId="NPCI" msgId="1xysV6dwHEER" />
  <Txn id="MYSIM00000001vRPtRTgqKswAo4B4R32" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY"
    custRef="515308298018" initiationMode="00" purpose="14">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
    </RiskScores>
  </Txn>
</RespPay>
```



```

        <Score provider="NPCI" type="TXNRISK" value="00999" />
    </RiskScores>
</Txn>
<Resp reqMsgId="XYD00000000000001GRDpegB9EWpFIHL7Tzs" result="SUCCESS">
    <Ref type="PAYER" seqNum="1" addr="PRE@mysp" settAmount="1.00" settCurrency="NAD"
        approvalNum="123456" respCode="00" regName="Ram" orgAmount="1.00" acNum="3453454385"
        IFSC="AABY0000382" code="0000" accType="SAVINGS" />
    <Ref type="PAYEE" seqNum="1" addr="2678892001829@AABY0000382.ifsc.npci" settAmount="1.00"
        settCurrency="NAD" approvalNum="654321" respCode="00" regName="SonySuper"
        orgAmount="1.00" acNum="2678892001829" code="0000" cmId="" />
</Resp>
</RespPay>

```

6.19. Merchant Cash In – Pay by Alias

Refer Specifications [Pay API](#)

Request from Payer IPS Participant to IPS: ReqPay - PAY

```

<ReqPay>
    <Head ver="2.0" ts="2025-06-11T06:40:56+02:00" orgId="700001"
        msgId="XYD00000000000001GRDpegB9EWpFIHL7Tzs" prodType="UPI" />
    <Meta>
        <Tag name="PAYREQSTART" value="2017-12-04T14:15:35+05:30" />
        <Tag name="PAYREQEND" value="2017-12-04T14:15:35+05:30" />
    </Meta>
    <Txn id="MYSIM000000001vRPtRTgqKswWgm6RcQw" note="test" refId="Ref"
        refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY"
        custRef="516206118970" initiationMode="00" purpose="12">
        <RiskScores>
            <Score provider="psp1" type="TXNRISK" value="00032" />
            <Score provider="psp3" type="TXNRISK" value="00040" />
        </RiskScores>
    </Txn>
</ReqPay>

```

```

</Txn>
<Payer addr="payer@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
  <Info>
    <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
    <Rating verifiedAddress="TRUE"></Rating>
  </Info>
  <Device>
    <Tag name="MOBILE" value="993456789" />
    <Tag name="TYPE" value="MOB" />
    <Tag name="ID" value="0000000000000002" />
    <Tag name="OS" value="android" />
    <Tag name="APP" value="org.npci.upi.maggi" />
  </Device>
  <Ac addrType="ACCOUNT">
    <Detail name="IFSC" value="AABY0000382" />
    <Detail name="ACTYPE" value="SAVINGS" />
    <Detail name="ACNUM" value="3453454385" />
  </Ac>
  <Creds>
    <Cred type="PIN" subType="MPIN">
      <Data code="NPCI"
ki="20150822">2.0|Iq+eCfIxetz3PNmTM4F1NrVUyqF4RboHsOLtkrjxlT2v9cmhCYXpFnnC0TmfHS4PxdKJlQgL/FfN&#x
d;7ZIfU0vDUMB/ZDEt7bZ2Lc9moveEHlC6iMMtF0fmKe8cgJ8s+T+qK/kKtdW7+iW0PF2EArknXHU+&#xd;
Ld6W/8gludVs5wvHYm+nmuOyhbOf24oux3WPpmjS/DCRko4aEwJ70chE0SkI8voqOetLUXEdXre2&#xd;
nvR+7LdPqBdGVhi62TbufIxctc+pvcyl4SxKzw+vSS335cPjJc5VhAvUhkeOn84uGkHKK+dLLr4g&#xd;
      0RMfbq2AdRzzyizJ+Yh3FXT7Q9BppIPsGXZ62A==&#xd;
      </Data>
    </Cred>
  </Creds>
  <Amount value="1.00" curr="NAD" />
</Payer>
<Payees>
  <Payee addr="agath@mypsp" name="ree" seqNum="1" type="PERSON" code="0000" cmId="">
    <Amount value="1.00" curr="NAD" />
  </Payee>

```

```
</Payees>
</ReqPay>
```

Request from IPS to Payee IPS Participant: ReqAuthDetails

```
<ReqAuthDetails>
  <Head ver="2.0" ts="2025-06-11T06:40:56+02:00" orgId="NPCI" msgId="1xysVm1JlAi0" />
  <Txn id="MYSIM00000001vRPtRTgqKswWgm6RcQw" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY"
    custRef="516206118970" initiationMode="00" purpose="12">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
    </RiskScores>
  </Txn>
  <Payees>
    <Payee addr="agath@mypsp" name="ree" seqNum="1" type="PERSON" code="0000" cmId="">
      <Amount value="1.00" curr="NAD" />
    </Payee>
  </Payees>
  <Payer addr="payer@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
    <Info>
      <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
      <Detail name="ACTYPE" value="SAVINGS" />
      <Detail name="ACNUM" value="3453454385" />
    </Ac>
    <Amount value="1.00" curr="NAD" />
  </Payer>
</ReqAuthDetails>
```

Response from Payee IPS Participant to IPS: RespAuthDetails

```

<RespAuthDetails>
  <Head ver="2.0" ts="2025-06-11T06:40:56.551+02:00" orgId="700001"
    msgId="XYA00000000000001vRPtRSgrisL5LANW1z5" />
  <Resp reqMsgId="1xysVm1JlAi0" result="SUCCESS" />
  <Txn id="MYSIM00000001vRPtRTggKswWgm6RcQw" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY"
    custRef="516206118970" initiationMode="00" purpose="12">
    <RiskScores>
      <Score provider="SBI" type="TXNRISK" value="10" />
    </RiskScores>
  </Txn>
  <Payer addr="payer@myppsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
    <Info>
      <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
      <Detail name="ACTYPE" value="SAVINGS" />
      <Detail name="ACNUM" value="3453454385" />
    </Ac>
    <Amount value="1.00" curr="NAD" />
  </Payer>
  <Payees>
    <Payee addr="agath@myppsp" name="ree" seqNum="1" type="PERSON" code="0000" cmId="">
      <Info>
        <Identity type="ACCOUNT" verifiedName="narayanan" id="AAB45645BJB15" />
        <Rating verifiedAddress="TRUE"></Rating>
      </Info>
      <Device>
        <Tag name="MOBILE" value="993456780" />
        <Tag name="APP" value="org.npci.upi.maggi" />
        <Tag name="TYPE" value="MOB" />
      </Device>
    </Payee>
  </Payees>
</RespAuthDetails>

```

```

        <Tag name="ID" value="0000000000000020" />
    </Device>
    <Ac addrType="ACCOUNT">
        <Detail name="IFSC" value="AABY0000382" />
        <Detail name="ACNUM" value="2678892001829" />
        <Detail name="ACTYPE" value="SAVINGS" />
    </Ac>
    <Amount value="1.00" curr="NAD" />
</Payee>
</Payees>
</RespAuthDetails>

```

Debit Request from IPS to Merchant Sov Provider: ReqPay - DEBIT

```

<ReqPay>
    <Head ver="2.0" ts="2025-06-11T06:40:58+02:00" orgId="NPCI" msgId="1xysVm1JmqjS" />
    <Meta>
        <Tag name="PAYREQSTART" value="2017-12-04T14:15:35+05:30" />
        <Tag name="PAYREQEND" value="2017-12-04T14:15:35+05:30" />
    </Meta>
    <Txn id="MYSIM00000001vRPtRTgqKswWgm6RcQw" note="test" refId="Ref"
        refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="DEBIT"
        custRef="516206118970" initiationMode="00" subType="PAY" purpose="12">
        <RiskScores>
            <Score provider="psp1" type="TXNRISK" value="00032" />
            <Score provider="psp3" type="TXNRISK" value="00040" />
            <Score provider="NPCI" type="TXNRISK" value="00999" />
        </RiskScores>
    </Txn>
    <Payer addr="payer@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
        <Info>
            <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
        </Info>
    </Payer>
</ReqPay>

```

```

    <Rating verifiedAddress="TRUE"></Rating>
</Info>
<Device>
    <Tag name="MOBILE" value="993456789" />
    <Tag name="TYPE" value="MOB" />
    <Tag name="ID" value="0000000000000002" />
    <Tag name="OS" value="android" />
    <Tag name="APP" value="org.npci.upi.maggi" />
</Device>
<Ac addrType="ACCOUNT">
    <Detail name="IFSC" value="AABY0000382" />
    <Detail name="ACTYPE" value="SAVINGS" />
    <Detail name="ACNUM" value="3453454385" />
</Ac>
<Creds>
    <Cred type="PIN" subType="MPIN">
        <Data code="700001" ki="20160217">
VRZoY+H0XotFLjRFAYLYr9/tmp//WExT3txT5TvIpu8o7qO4s3L7UmMel9ME6mNIaQWIBzjMxYeXlZfjVDTN4cbmkhMKykQb0
9SaAhwhAAIaNKPUxAsly833qigcEPQty8mmw3VIhaj9xYxjoWgeOwKg0ChgVlol+XZlHw3qlYgI3Qh9IdopNJWW2rIoH6OGkd
5XSX+InxNir1QUfajlUwRT8sexA6phLulIMkLRHV6VwgQSj3MnZnn0GkPrA7mgX/ixixcxDJVkzo/LkM2WoOCf9Vcu/JNyj8D
dkbVVbly9Lxt0T3+c9mGdhUyy+tZ7aeGbmCuKvr6tyXMh86XBHg==</Data>
        </Cred>
    </Creds>
    <Amount value="1.00" curr="NAD" />
</Payer>
<Payees>
    <Payee addr="agath@mypsp" name="ree" seqNum="1" type="PERSON" code="0000" cmId="">
        <Info>
            <Identity type="ACCOUNT" verifiedName="narayanan" id="AAB45645BJB15" />
            <Rating verifiedAddress="TRUE"></Rating>
        </Info>
        <Device>
            <Tag name="MOBILE" value="993456780" />
            <Tag name="APP" value="org.npci.upi.maggi" />
            <Tag name="TYPE" value="MOB" />
        </Device>
    </Payee>
</Payees>

```

```

        <Tag name="ID" value="0000000000000020" />
    </Device>
    <Ac addrType="ACCOUNT">
        <Detail name="IFSC" value="AABY0000382" />
        <Detail name="ACNUM" value="2678892001829" />
        <Detail name="ACTYPE" value="SAVINGS" />
    </Ac>
    <Amount value="1.00" curr="NAD" />
</Payee>
</Payees>
</ReqPay>

```

Debit Response from Merchant Sov Provider to IPS: RespPay - DEBIT

```

<RespPay>
    <Head ver="2.0" ts="2025-06-11T06:40:58+02:00" orgId="700001"
        msgId="XYA0000000001vRPtRSgrisL5LB1JZhE" prodType="UPI" />
    <Txn id="MYSIM00000001vRPtRTgqKswWgm6RcQw" note="test" refId="Ref"
        refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="DEBIT"
        custRef="516206118970" initiationMode="00" subType="PAY" purpose="12">
        <RiskScores>
            <Score provider="psp1" type="TXNRISK" value="00032" />
            <Score provider="psp3" type="TXNRISK" value="00040" />
            <Score provider="NPCI" type="TXNRISK" value="00999" />
        </RiskScores>
    </Txn>
    <Resp reqMsgId="1xysVm1JmqjS" result="SUCCESS">
        <Ref type="PAYER" seqNum="1" addr="payer@myppsp" settAmount="1.00" settCurrency="NAD"
            approvalNum="654321" respCode="00" regName="Shyam" acNum="3453454385"
            IFSC="AABY0000382" code="0000" accType="SAVINGS" />
    </Resp>
</RespPay>

```

Credit Request from IPS to Beneficiary SoV Provider: ReqPay- Credit

```

<ReqPay>
  <Head ver="2.0" ts="2025-06-11T06:40:58+02:00" orgId="NPCI" msgId="1xysVm1JmqjU" prodType="UPI"
/>
  <Meta>
    <Tag name="PAYREQSTART" value="2017-12-04T14:15:35+05:30" />
    <Tag name="PAYREQEND" value="2017-12-04T14:15:35+05:30" />
  </Meta>
  <Txn id="MYSIM00000001vRPtRTggKswWgm6RcQw" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="CREDIT"
    custRef="516206118970" initiationMode="00" subType="PAY" purpose="12">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
      <Score provider="NPCI" type="TXNRISK" value="00999" />
    </RiskScores>
  </Txn>
  <Payer addr="payer@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
    <Info>
      <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
      <Tag name="MOBILE" value="993456789" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="0000000000000002" />
      <Tag name="OS" value="android" />
      <Tag name="APP" value="org.npci.upi.maggi" />
    </Device>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
      <Detail name="ACTYPE" value="SAVINGS" />
      <Detail name="ACNUM" value="3453454385" />
    </Ac>
  </Payer>
</ReqPay>

```



```

    </Ac>
    <Amount value="1.00" curr="NAD" />
  </Payer>
  <Payees>
    <Payee addr="agath@mypsp" name="ree" seqNum="1" type="PERSON" code="0000" cmId="">
      <Info>
        <Identity type="ACCOUNT" verifiedName="narayanan" id="AAB45645BJB15" />
        <Rating verifiedAddress="TRUE"></Rating>
      </Info>
      <Device>
        <Tag name="MOBILE" value="993456780" />
        <Tag name="APP" value="org.npci.upi.maggi" />
        <Tag name="TYPE" value="MOB" />
        <Tag name="ID" value="00000000000000020" />
      </Device>
      <Ac addrType="ACCOUNT">
        <Detail name="IFSC" value="AABY0000382" />
        <Detail name="ACNUM" value="2678892001829" />
        <Detail name="ACTYPE" value="SAVINGS" />
      </Ac>
      <Amount value="1.00" curr="NAD" />
    </Payee>
  </Payees>
</ReqPay>

```

Credit Response from Beneficiary SoV Provider to IPS : RespPay- Credit

```

<RespPay>
  <Head ver="2.0" ts="2025-06-11T06:40:58+02:00" orgId="700001"
    msgId="XYA0000000001vRPtRSgrisL5LB10BrC" prodType="UPI" />
  <Txn id="MYSIM00000001vRPtRTgqKswWgm6RcQw" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="CREDIT"
    custRef="516206118970" initiationMode="00" subType="PAY" purpose="12">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
    </RiskScores>
  </Txn>
</RespPay>

```

```

        <Score provider="psp3" type="TXNRISK" value="00040" />
        <Score provider="NPCI" type="TXNRISK" value="00999" />
    </RiskScores>
</Txn>
<Resp reqMsgId="1xysVm1JmqjU" result="SUCCESS">
    <Ref type="PAYEE" seqNum="1" addr="agath@mypsp" settAmount="1.00" settCurrency="NAD"
        approvalNum="654321" respCode="00" regName="ree" acNum="2678892001829"
        IFSC="AABY0000382" code="0000" accType="SAVINGS" />
</Resp>
</RespPay>

```

Final Response from IPS to Payer IPS Participant: RespPay - PAY

```

<RespPay>
    <Head ver="2.0" ts="2025-06-11T06:40:58+02:00" orgId="NPCI" msgId="1xysVm1JmqjW" prodType="UPI"/>
    <Txn id="MYSIM00000001vRPtRTgqKswWgm6RcQw" note="test" refId="Ref"
        refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY"
        custRef="516206118970" initiationMode="00" purpose="12">
        <RiskScores>
            <Score provider="psp1" type="TXNRISK" value="00032" />
            <Score provider="psp3" type="TXNRISK" value="00040" />
            <Score provider="NPCI" type="TXNRISK" value="00999" />
        </RiskScores>
    </Txn>
    <Resp reqMsgId="XYD00000000000001GRDpegB9EWpFIHL7Tzs" result="SUCCESS">
        <Ref type="PAYER" seqNum="1" addr="payer@mypsp" settAmount="1.00" settCurrency="NAD"
            approvalNum="654321" respCode="00" regName="Shyam" orgAmount="1.00" acNum="3453454385"
            IFSC="AABY0000382" code="0000" accType="SAVINGS" />
        <Ref type="PAYEE" seqNum="1" addr="agath@mypsp" settAmount="1.00" settCurrency="NAD"
            approvalNum="654321" respCode="00" regName="ree" orgAmount="1.00" acNum="2678892001829"
            IFSC="AABY0000382" code="0000" accType="SAVINGS" cmId="" />
    </Resp>
</RespPay>

```

Transaction Confirmation Request from IPS to Payee IPS Participant:

```
<ReqTxnConfirmation>
  <Head ver="2.0" ts="2025-06-11T06:40:58+02:00" orgId="NPCI" msgId="1xysVmlJmqjZ" prodType="UPI"/>
  <Txn id="MYSIM00000001vRPtRTgqKswWgm6RcQw" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="TxnConfirmation"
    orgTxnId="MYSIM00000001vRPtRTgqKswWgm6RcQw" custRef="516206118970" initiationMode="00"
    purpose="12" />
  <TxnConfirmation note="test" orgStatus="SUCCESS" type="PAY">
    <Ref type="PAYEE" seqNum="1" addr="agath@mypsp" settAmount="1.00" settCurrency="NAD"
      approvalNum="654321" respCode="00" regName="ree" orgAmount="1.00" acNum="2678892001829"
      IFSC="AABY0000382" code="0000" accType="SAVINGS" cmId="" />
  </TxnConfirmation>
</ReqTxnConfirmation>
```

Transaction Confirmation Response from Payee IPS Participant to IPS:

```
<ReqTxnConfirmation>
  <Head ver="2.0" ts="2025-06-11T06:40:58+02:00" orgId="NPCI" msgId="1xysVmlJmqjZ" prodType="UPI"
  />
  <Txn id="MYSIM00000001vRPtRTgqKswWgm6RcQw" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="TxnConfirmation"
    orgTxnId="MYSIM00000001vRPtRTgqKswWgm6RcQw" custRef="516206118970" initiationMode="00"
    purpose="12" />
  <TxnConfirmation note="test" orgStatus="SUCCESS" type="PAY">
    <Ref type="PAYEE" seqNum="1" addr="agath@mypsp" settAmount="1.00" settCurrency="NAD"
      approvalNum="654321" respCode="00" regName="ree" orgAmount="1.00" acNum="2678892001829"
      IFSC="AABY0000382" code="0000" accType="SAVINGS" cmId="" />
  </TxnConfirmation>
</ReqTxnConfirmation>
```

6.20. Merchant Cash out – Pay by Alias

Refer Specifications [Pay API](#)

Request from Payer IPS Participant to IPS: ReqPay - Pay

```
<ReqPay>
  <Head ver="2.0" ts="2025-06-11T06:54:10+02:00" orgId="700001"
    msgId="XYD0000000000001GRDpegB9EWpFIHL7Tzs" prodType="UPI" prodType="UPI" />
  <Meta>
    <Tag name="PAYREQSTART" value="2017-12-04T14:15:35+05:30" />
    <Tag name="PAYREQEND" value="2017-12-04T14:15:35+05:30" />
  </Meta>
  <Txn id="MYSIM00000001vRPtRTgqKswWhKKYR5S" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY"
    custRef="516206652643" initiationMode="00" purpose="11">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
    </RiskScores>
  </Txn>
  <Payer addr="payer@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
    <Info>
      <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
      <Tag name="MOBILE" value="993456789" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="0000000000000002" />
      <Tag name="OS" value="android" />
      <Tag name="APP" value="org.npci.upi.maggi" />
    </Device>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
    </Ac>
  </Payer>
</ReqPay>
```

```

        <Detail name="ACTYPE" value="SAVINGS" />
        <Detail name="ACNUM" value="3453454385" />
    </Ac>
    <Creds>
        <Cred type="PIN" subType="MPIN">
            <Data code="NPCI"
ki="20150822">2.0|f/QmvYkC0vxnsFd1jX94C6d250Oph3/H3Q6KIL11Wo++NZ7L7vICZMqvHMYrAkb4BJWarwis1NTq&#x
d;cxS22MxdclHtFFmRCI+Bp+uFGDagbZnx7mgpztXLNypxyJhZIKB8JqkntYDeUGgXZsT7W7IcgmVn&#xd;
ayDmpCCEAnc/urtALA6x03f1ONXeEY1lHQWMIEOJjgcOpsW9aDVCxcsYW75v5dDLc2ZR1CyEpIPN&#xd;
ECOVayEAGrMTNzArSvqQ261sEPrBFhAnxSNBNeIQdoVn/n2TjLzzAvNXxaXXg07gS/s5l/K9nzU+&#xd;
            9GC/pww7NxZrcKHI32kFf0LCw9EP+uvfgQzCzA==&#xd;
            </Data>
        </Cred>
    </Creds>
    <Amount value="1.00" curr="NAD" />
</Payer>
<Payees>
    <Payee addr="agath@mypsp" name="SonySuper" seqNum="1" type="ENTITY" code="5310" cmId="">
        <Amount value="1.00" curr="NAD" />
        <Merchant>
            <Identifier subCode="1234" mid="123" sid="89311234567890122306" tid="8765987654"
            merchantType="SMALL" merchantGenre="ONLINE" onBoardingType="AGGREGATOR"
            regId="AB12De" pinCode="507123" tier="TIER3" />
            <Name brand="AllianceFranche" legal="Reliance" franchise="LearnFrench" />
            <Ownership type="PUBLIC" />
            <Invoice name="ramya" num="1" date="2020-05-30T07:06:06+05:30" />
        </Merchant>
    </Payee>
</Payees>
</ReqPay>

```

Request from IPS to Merchant IPS Participant: ReqAuthDetails

```
<ReqAuthDetails>
  <Head ver="2.0" ts="2025-06-11T06:54:10+02:00" orgId="NPCI" msgId="1xysVm1OIJT5" prodType="UPI"/>
  <Txn id="MYSIM00000001vRPtRTgqKswWhKKYR5S" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY"
    custRef="516206652643" initiationMode="00" purpose="11">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
    </RiskScores>
  </Txn>
  <Payees>
    <Payee addr="agath@mypsp" name="SonySuper" seqNum="1" type="ENTITY" code="5310" cmId="">
      <Amount value="1.00" curr="NAD" />
      <Merchant>
        <Identifier subCode="1234" mid="123" sid="89311234567890122306" tid="8765987654"
          merchantType="SMALL" merchantGenre="ONLINE" onBoardingType="AGGREGATOR"
          regId="AB12De" pinCode="507123" tier="TIER3" />
        <Name brand="AllianceFranche" legal="Reliance" franchise="LearnFrench" />
        <Ownership type="PUBLIC" />
        <Invoice name="ramya" num="1" date="2020-05-30T07:06:06+05:30" />
      </Merchant>
    </Payee>
  </Payees>
  <Payer addr="payer@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
    <Info>
      <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
      <Detail name="ACTYPE" value="SAVINGS" />
    </Ac>
  </Payer>
</ReqAuthDetails>
```

```

        <Detail name="ACNUM" value="3453454385" />
    </Ac>
    <Amount value="1.00" curr="NAD" />
</Payer>
</ReqAuthDetails>

```

Response from Merchant IPS Participant to IPS: RespAuthDetails

```

<RespAuthDetails>
  <Head ver="2.0" ts="2025-06-11T06:54:10.353+02:00" orgId="700001"
    msgId="XYA0000000000001vRPtRSgrisL5MZs3fNz" prodType="UPI"/>
  <Resp reqMsgId="1xysVm1OIJT5" result="SUCCESS" />
  <Txn id="MYSIM00000001vRPtRTgqKswWhKKYR5S" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY"
    custRef="516206652643" initiationMode="00" purpose="11">
    <RiskScores>
      <Score provider="SBI" type="TXNRISK" value="10" />
    </RiskScores>
  </Txn>
  <Payer addr="payer@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
    <Info>
      <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
      <Detail name="ACTYPE" value="SAVINGS" />
      <Detail name="ACNUM" value="3453454385" />
    </Ac>
    <Amount value="1.00" curr="NAD" />
  </Payer>
  <Payees>
    <Payee addr="agath@mypsp" name="SonySuper" seqNum="1" type="ENTITY" code="5310" cmId="">
      <Info>

```

```

        <Identity type="ACCOUNT" verifiedName="narayanan" id="AAB45645BJB15" />
        <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
        <Tag name="MOBILE" value="993456780" />
        <Tag name="APP" value="org.npci.upi.maggi" />
        <Tag name="TYPE" value="MOB" />
        <Tag name="ID" value="00000000000000020" />
    </Device>
    <Ac addrType="ACCOUNT">
        <Detail name="IFSC" value="AABY0000382" />
        <Detail name="ACNUM" value="2678892001829" />
        <Detail name="ACTYPE" value="SAVINGS" />
    </Ac>
    <Amount value="1.00" curr="NAD" />
    <Merchant>
        <Identifier subCode="1234" mid="123" sid="89311234567890122306" tid="8765987654"
            merchantType="SMALL" merchantGenre="ONLINE" onBoardingType="AGGREGATOR"
            regId="AB12De" pinCode="507123" tier="TIER3" />
        <Name brand="AllianceFranchise" legal="Reliance" franchise="LearnFrench" />
        <Ownership type="PUBLIC" />
        <Invoice name="ramya" num="1" date="2020-05-30T07:06:06+05:30" />
    </Merchant>
</Payee>
</Payees>
</RespAuthDetails>

```


Request from IPS to Remitter SoV Provider: ReqPay -Debit

```

<ReqPay>
  <Head ver="2.0" ts="2025-06-11T06:54:12+02:00" orgId="NPCI" msgId="1xysVm1OJzUX" prodType="UPI"/>
  <Meta>
    <Tag name="PAYREQSTART" value="2017-12-04T14:15:35+05:30" />
    <Tag name="PAYREQEND" value="2017-12-04T14:15:35+05:30" />
  </Meta>
  <Txn id="MYSIM00000001vRPtRTgqKswWhKKYR5S" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="DEBIT"
    custRef="516206652643" initiationMode="00" subType="PAY" purpose="11">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
      <Score provider="NPCI" type="TXNRISK" value="00999" />
    </RiskScores>
  </Txn>
  <Payer addr="payer@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
    <Info>
      <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
      <Tag name="MOBILE" value="993456789" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="0000000000000002" />
      <Tag name="OS" value="android" />
      <Tag name="APP" value="org.npci.upi.maggi" />
    </Device>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
      <Detail name="ACTYPE" value="SAVINGS" />
      <Detail name="ACNUM" value="3453454385" />
    </Ac>
  </Payer>
</ReqPay>

```

```

<Creds>
  <Cred type="PIN" subType="MPIN">
    <Data code="700001" ki="20160217">

qMmG1Dcpd+LzL+Dw9ZoPlu8ijngWf0+LwQ4Wq4SYx4ztId9FtaTVQl28vUCZ3VledMNrs8+gsmYV8ed9/+hAKs8yYRDxvsMr0Pr9H
qyZj8azJXYnwVVnV3FhOFe7bqxFbaMj1llo+s4kOB/cOaPOwb9ZPiAnqJdHUOjDt8Uh9gR/8J7Gq5dDdnkbkVU7I0p/wsumX7y9xW9
SU4JSSgpmhDaHlkcGj9sIRELK1CiDcqjgttaubXgwf4xywSMgmLLdHPER0JVFN4+MGZpm0SLn2Fj2adhtft6qfNQh+7r2xlAlXMEw
kCYbEyFlSeIsEly9luNUiKxjQYDPk81NUHsH2oQ==</Data>
  </Cred>
</Creds>
<Amount value="1.00" curr="NAD" />
</Payer>
<Payees>
  <Payee addr="agath@mypsp" name="SonySuper" seqNum="1" type="ENTITY" code="5310" cmId="">
    <Info>
      <Identity type="ACCOUNT" verifiedName="narayanan" id="AAB45645BJB15" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
      <Tag name="MOBILE" value="993456780" />
      <Tag name="APP" value="org.npci.upi.maggi" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="00000000000000020" />
    </Device>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
      <Detail name="ACNUM" value="2678892001829" />
      <Detail name="ACTYPE" value="SAVINGS" />
    </Ac>
    <Amount value="1.00" curr="NAD" />
    <Merchant>
      <Identifier subCode="1234" mid="123" sid="89311234567890122306" tid="8765987654"
        merchantType="SMALL" merchantGenre="ONLINE" onBoardingType="AGGREGATOR"
        regId="AB12De" pinCode="507123" tier="TIER3" />
      <Name brand="AllianceFranche" legal="Reliance" franchise="LearnFrench" />
    </Merchant>
  </Payee>
</Payees>

```

```

        <Ownership type="PUBLIC" />
        <Invoice name="ramya" num="1" date="2020-05-30T07:06:06+05:30" />
    </Merchant>
</Payee>
</Payees>
</ReqPay>

```

Response from Remitter Bank to IPS : RespPay Debit

```

<RespPay>
  <Head ver="2.0" ts="2025-06-11T06:54:12+02:00" orgId="700001"
    msgId="XYA0000000001vRPtRSgrisL5MZFLljv" prodType="UPI"/>
  <Txn id="MYSIM000000001vRPtRTggKswWhKKYR5S" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="DEBIT"
    custRef="516206652643" initiationMode="00" subType="PAY" purpose="11">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
      <Score provider="NPCI" type="TXNRISK" value="00999" />
    </RiskScores>
  </Txn>
  <Resp reqMsgId="1xysVm10JzUX" result="SUCCESS">
    <Ref type="PAYER" seqNum="1" addr="payer@myppsp" settAmount="1.00" settCurrency="NAD"
      approvalNum="654321" respCode="00" regName="Shyam" acNum="3453454385" IFSC="AABY0000382"
      code="0000" accType="SAVINGS" />
  </Resp>
</RespPay>

```

Request from IPS to Beneficiary Sov Provider: ReqPay-Credit

```

<ReqPay>
  <Head ver="2.0" ts="2025-06-11T06:54:12+02:00" orgId="NPCI" msgId="1xysVm1OJzUZ" prodType="UPI"/>
  <Meta>
    <Tag name="PAYREQSTART" value="2017-12-04T14:15:35+05:30" />
    <Tag name="PAYREQEND" value="2017-12-04T14:15:35+05:30" />
  </Meta>
  <Txn id="MYSIM00000001vRPtRTgqKswWhKKYR5S" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="CREDIT"
    custRef="516206652643" initiationMode="00" subType="PAY" purpose="11">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
      <Score provider="NPCI" type="TXNRISK" value="00999" />
    </RiskScores>
  </Txn>
  <Payer addr="payer@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
    <Info>
      <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
      <Tag name="MOBILE" value="993456789" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="0000000000000002" />
      <Tag name="OS" value="android" />
      <Tag name="APP" value="org.npci.upi.maggi" />
    </Device>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
      <Detail name="ACTYPE" value="SAVINGS" />
      <Detail name="ACNUM" value="3453454385" />
    </Ac>
    <Amount value="1.00" curr="NAD" />
  </Payer>
</ReqPay>

```

```

</Payer>
<Payees>
  <Payee addr="agath@mypsp" name="SonySuper" seqNum="1" type="ENTITY" code="5310" cmId="">
    <Info>
      <Identity type="ACCOUNT" verifiedName="narayanan" id="AAB45645BJB15" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
      <Tag name="MOBILE" value="993456780" />
      <Tag name="APP" value="org.npci.upi.maggi" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="00000000000000020" />
    </Device>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
      <Detail name="ACNUM" value="2678892001829" />
      <Detail name="ACTYPE" value="SAVINGS" />
    </Ac>
    <Amount value="1.00" curr="NAD" />
    <Merchant>
      <Identifier subCode="1234" mid="123" sid="89311234567890122306" tid="8765987654"
        merchantType="SMALL" merchantGenre="ONLINE" onBoardingType="AGGREGATOR"
        regId="AB12De" pinCode="507123" tier="TIER3" />
      <Name brand="AllianceFranchise" legal="Reliance" franchise="LearnFrench" />
      <Ownership type="PUBLIC" />
      <Invoice name="ramya" num="1" date="2020-05-30T07:06:06+05:30" />
    </Merchant>
  </Payee>
</Payees>
</ReqPay>

```

Response from Beneficiary Sov Provider to IPS: ReqPay-Credit

```
<RespPay>
  <Head ver="2.0" ts="2025-06-11T06:54:12+02:00" orgId="700001"
    msgId="XYA000000001vRPtRSgrisL5MZFPxsZ" prodType="UPI"/>
  <Txn id="MYSIM00000001vRPtRTggKswWhKKYR5S" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="CREDIT"
    custRef="516206652643" initiationMode="00" subType="PAY" purpose="11">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
      <Score provider="NPCI" type="TXNRISK" value="00999" />
    </RiskScores>
  </Txn>
  <Resp reqMsgId="1xysVm1OJzUZ" result="SUCCESS">
    <Ref type="PAYEE" seqNum="1" addr="agath@myppsp" settAmount="1.00" settCurrency="NAD"
      approvalNum="654321" respCode="00" regName="SonySuper" acNum="2678892001829"
      IFSC="AABY0000382" code="0000" accType="SAVINGS" />
  </Resp>
</RespPay>
```

Response from ISP to Payer IPS Participant: RespPay-PAY

```
<RespPay>
  <Head ver="2.0" ts="2025-06-11T06:54:12+02:00" orgId="NPCI" msgId="1xysVm1OJzV1" prodType="UPI"
  />
  <Txn id="MYSIM00000001vRPtRTggKswWhKKYR5S" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY"
    custRef="516206652643" initiationMode="00" purpose="11">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
      <Score provider="NPCI" type="TXNRISK" value="00999" />
    </RiskScores>
  </Txn>
</RespPay>
```

```

</Txn>
<Resp reqMsgId="XYD0000000000001GRDpegB9EWpFIHL7Tzs" result="SUCCESS">
  <Ref type="PAYER" seqNum="1" addr="payer@mypsp" settAmount="1.00" settCurrency="NAD"
    approvalNum="654321" respCode="00" regName="Shyam" orgAmount="1.00" acNum="3453454385"
    IFSC="AABY0000382" code="0000" accType="SAVINGS" />
  <Ref type="PAYEE" seqNum="1" addr="agath@mypsp" settAmount="1.00" settCurrency="NAD"
    approvalNum="654321" respCode="00" regName="SonySuper" orgAmount="1.00"
    acNum="2678892001829" IFSC="AABY0000382" code="5310" accType="SAVINGS" cmId="" />
</Resp>
</RespPay>

```

Transaction Confirmation Request from IPS to Merchant ISP Participant:

```

<ReqTxnConfirmation>
  <Head ver="2.0" ts="2025-06-11T06:54:12+02:00" orgId="NPCI" msgId="1xysVm1OJzV4" />
  <Txn id="MYSIM00000001vRPtRTgqKswWhKKYR5S" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="TxnConfirmation"
    orgTxnId="MYSIM00000001vRPtRTgqKswWhKKYR5S" custRef="516206652643" initiationMode="00"
    purpose="11" />
  <TxnConfirmation note="test" orgStatus="SUCCESS" type="PAY">
    <Ref type="PAYEE" seqNum="1" addr="agath@mypsp" settAmount="1.00" settCurrency="NAD"
      approvalNum="654321" respCode="00" regName="SonySuper" orgAmount="1.00"
      acNum="2678892001829" IFSC="AABY0000382" code="5310" accType="SAVINGS" cmId="" />
  </TxnConfirmation>
</ReqTxnConfirmation>

```

Transaction Confirmation Response from Merchant ISP Participant to IPS:

```
<RespTxnConfirmation>
  <Head ver="2.0" ts="2025-06-11T06:54:12+02:00" orgId="700001" msgId="3BIhGBUToQJ2KjaZM"
    prodType="UPI" />
  <Txn id="MYSIM00000001vRPtRTgqKswWhKKYR5S" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="TxnConfirmation"
    orgTxnId="MYSIM00000001vRPtRTgqKswWhKKYR5S" custRef="516206652643" initiationMode="00"
    purpose="11" />
  <Resp reqMsgId="3BIhGBUToQJ2KjaZM" result="SUCCESS" />
</RespTxnConfirmation>
```


6.21. ATM Cash Out

Refer Specifications for Payment [Pay API](#)

Request from ATM Acquirer to IPS :

```
<ReqPay>
  <Head ver="2.0" ts="2025-09-30T16:03:38+05:30" orgId="700001"
    msgId="XYD00000000000001GRDpegB9EWpFIHL7Tzs" prodType="UPI" />
  <Meta>
    <Tag name="PAYREQSTART" value="2017-12-04T14:15:35+05:30" />
    <Tag name="PAYREQEND" value="2017-12-04T14:15:35+05:30" />
  </Meta>
  <Txn id="null10000000005sp20wQHPg8viLq2N5m" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY"
    custRef="527316114361" initiationMode="18" purpose="10">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
    </RiskScores>
  </Txn>
  <Payer addr="987654321@mapper.npci" name="Shyam" seqNum="1" type="PERSON" code="0000">
    <Creds>
      <Cred type="PIN" subType="MPIN">
        <Data code="NPCI"
ki="20150822">2.2.nipl|Pz0Ij/WLUaLeH4kVOFdFAMYdrcfvCbZNm0pc2YVmNcYD09stZ5QPZRWeiKjwJi25Yaz5HLh2OMLu&#
xd;
          01KkPv6XTbuqf9bSs1AUNJDMGRsdgokKRjUs2QGwBovPEgNY5D/ol4o+bfgb0qwo+49EMOiDuqTa&#xd;
          E+m0H7KHC6JgErItqlNMm6VnEoz/TTXuyLJXnnHXfBxBGpF70zU6zo9kMrihQ5y9Wa4/1IvLzuX9&#xd;
          DGjqfPhyfbwMKVrDAQ/bXuRaLmWADiq8nje1FGkbeZaO1EK2jVH0nbKxGpyl9WTxm/kiul3Zr+v+&#xd;
          IpdjZ7sJZnLmbgr2dtGhb8eQdzYEyUyoA0nRVw==&#xd;
        </Data>
      </Cred>
      <Cred type="OTP" subType="SMS">
```

```

        <Data code="NPCI"
ki="20150822">2.2.nipl|Al4fqWm1Ot699226kcAK8yPFKH5HNP/U25zASEiSKDgmSAhesubAtxSlZ3Pi0V9ehQgSHN/ssm4T&#
xd;
        okBFucij+Bq3WltPKQEW3rdEoscvcjlZcoT5EbogMKAKIhnNK6Y6hJ487RMu18yIFMgwqoiCFem3&#xd;
        BsEfxvm/+1Cab/hlDlI8TT7Z8fzreRRs8LOC0srDY1c4tL7r9bGWWX82BOvE6hkbxaJ1gth2z6bI&#xd;
        VrGIZtrwQzRRxLc7Hzy2LtdSeW1AFCzGpcr1SRtwyReHQtr5kMakPuCa1jscDyzkBnSSfy3hSfeX&#xd;
        oB16k9Wb5UHQO+NJD9cV+rJey0WXgWr0epyxuw==&#xd;
    </Data>
</Cred>
</Creds>
<Amount value="999.00" curr="NAD" />
</Payer>
<Payees>
    <Payee addr="payee@mypsp" name="SonySuper" seqNum="1" type="ENTITY" code="6011" cmId="">
        <Info>
            <Identity type="ACCOUNT" verifiedName="narayanan" id="AAB45645BJB15" />
            <Rating verifiedAddress="TRUE"></Rating>
        </Info>
        <Device>
            <Tag name="MOBILE" value="987654321" />
            <Tag name="APP" value="org.npci.upi.maggi0" />
            <Tag name="TYPE" value="MOB" />
            <Tag name="ID" value="0000000000000020" />
        </Device>
        <Ac addrType="ACCOUNT">
            <Detail name="IFSC" value="AABY0288115" />
            <Detail name="ACNUM" value="2678892001829" />
            <Detail name="ACTYPE" value="SAVINGS" />
        </Ac>
        <Amount value="1.00" curr="NAD" />
        <Merchant>
            <Identifier subCode="6011" mid="123" sid="89311234567890122306" tid="8765987654"
            merchantType="SMALL" merchantGenre="ONLINE" onBoardingType="AGGREGATOR"
            regId="AB12De" pinCode="507123" tier="TIER3" />
            <Name brand="AllianceFranchise" legal="Reliance" franchise="LearnFrench" />
        </Merchant>
    </Payee>
</Payees>

```

```

        <Ownership type="PUBLIC" />
        <Invoice name="ramya" num="1" date="2020-05-30T07:06:06+05:30" />
    </Merchant>
</Payee>
</Payees>
</ReqPay>

```

Note: IPS will fetch the full alias from alias directory corresponding to the mobile number provided in input. Obtained full alias will be used for further processing.

Request from IPS to IPS Participant : ReqAuthDetails

```

<ReqAuthDetails>
  <Head ver="2.0" ts="2025-09-30T16:03:39+05:30" orgId="NPCI" msgId="4HitqC8XT" prodType="UPI" />
  <Txn id="null0000000005sp20wQHPg8viLq2N5m" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY"
    custRef="527316114361" initiationMode="00" purpose="10">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
    </RiskScores>
  </Txn>
  <Payees>
    <Payee addr="payee@myppsp" name="SonySuper" seqNum="1" type="ENTITY" code="6011" cmId="">
      <Info>
        <Identity type="ACCOUNT" verifiedName="narayanan" id="AAB45645BJB15" />
        <Rating verifiedAddress="TRUE"></Rating>
      </Info>
      <Ac addrType="ACCOUNT">
        <Detail name="IFSC" value="AABY0288115" />
        <Detail name="ACNUM" value="2678892001829" />
        <Detail name="ACTYPE" value="SAVINGS" />
      </Ac>
    </Payee>
  </Payees>
</ReqAuthDetails>

```

```

        <Amount value="1.00" curr="NAD" />
        <Merchant>
            <Identifier subCode="6011" mid="123" sid="89311234567890122306" tid="8765987654"
                merchantType="SMALL" merchantGenre="ONLINE" onBoardingType="AGGREGATOR" />
            <Name brand="AllianceFranchise" legal="Reliance" franchise="LearnFrench" />
            <Ownership type="PUBLIC" />
        </Merchant>
    </Payee>
</Payees>
<Payer addr="mappervpa@myppsp" seqNum="1" type="PERSON" cmId="987654321">
    <Amount value="999.00" curr="NAD" />
</Payer>
</ReqAuthDetails>

```

Response from IPS Participant to IPS : RespAuthDetails

```

<RespAuthDetails>
    <Head ver="2.0" ts="2025-09-30T16:03:39.472+05:30" orgId="700001"
        msgId="XYA00000000000005sp20wQHPg8viLwBNdV" prodType="UPI" />
    <Resp reqMsgId="4HItqC8XT" result="SUCCESS" />
    <Txn id="null0000000000005sp20wQHPg8viLq2N5m" note="test" refId="Ref"
        refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY"
        custRef="527316114361" initiationMode="18" purpose="10">
        <RiskScores>
            <Score provider="SBI" type="TXNRISK" value="10" />
        </RiskScores>
    </Txn>
    <Payer addr="mappervpa@myppsp" seqNum="1" type="PERSON" cmId="987654321">
        <Info>
            <Identity type="ACCOUNT" verifiedName="narayanan" id="AAB45645BJB15" />
            <Rating verifiedAddress="TRUE"></Rating>
        </Info>
    </Payer>
</RespAuthDetails>

```

```

<Device>
  <Tag name="MOBILE" value="993456789" />
  <Tag name="APP" value="org.npci.upi.maggi" />
  <Tag name="TYPE" value="MOB" />
  <Tag name="ID" value="0000000000000020" />
</Device>
<Ac addrType="ACCOUNT">
  <Detail name="IFSC" value="AABY0000382" />
  <Detail name="ACNUM" value="2678892001822" />
  <Detail name="ACTYPE" value="WALLET" />
</Ac>
<Amount value="999.00" curr="NAD" />
</Payer>
<Payees>
  <Payee addr="payee@mypsp" name="SonySuper" seqNum="1" type="ENTITY" code="6011" cmId="">
    <Info>
      <Identity type="ACCOUNT" verifiedName="narayanan" id="AAB45645BJB15" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
      <Tag name="MOBILE" value="993456780" />
      <Tag name="APP" value="org.npci.upi.maggi" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="0000000000000020" />
    </Device>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
      <Detail name="ACNUM" value="2678892001829" />
      <Detail name="ACTYPE" value="SAVINGS" />
    </Ac>
    <Amount value="1.00" curr="NAD" />
    <Merchant>
      <Identifier subCode="6011" mid="123" sid="89311234567890122306" tid="8765987654"
        merchantType="SMALL" merchantGenre="ONLINE" onBoardingType="AGGREGATOR" />
      <Name brand="AllianceFranchise" legal="Reliance" franchise="LearnFrench" />
    </Merchant>
  </Payee>
</Payees>

```

```

        <Ownership type="PUBLIC" />
    </Merchant>
</Payee>
</Payees>
</RespAuthDetails>

```

Request from IPS to IPS Participant: ReqPay-Debit

```

<ReqPay>
  <Head ver="2.0" ts="2025-09-30T16:03:39+05:30" orgId="NPCI" msgId="4HitqC8XV" prodType="UPI" />
  <Meta>
    <Tag name="PAYREQSTART" value="2017-12-04T14:15:35+05:30" />
    <Tag name="PAYREQEND" value="2017-12-04T14:15:35+05:30" />
  </Meta>
  <Txn id="null1000000005sp20wQHPg8viLq2N5m" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="DEBIT"
    custRef="527316114361" initiationMode="18" subType="PAY" purpose="10">
    <RiskScores>
      <Score provider="pspl" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
    </RiskScores>
  </Txn>
  <Payer addr="mappervpa@myppsp" name="Shyam" seqNum="1" type="PERSON" code="0000" cmId="987654321">
    <Info>
      <Identity type="ACCOUNT" verifiedName="narayanan" id="AAB45645BJB15" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
      <Tag name="MOBILE" value="993456789" />
      <Tag name="APP" value="org.npci.upi.maggi" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="00000000000000020" />
    </Device>
  </Payer>
</ReqPay>

```

```

</Device>
<Ac addrType="ACCOUNT">
  <Detail name="IFSC" value="AABY0000382" />
  <Detail name="ACNUM" value="2678892001822" />
  <Detail name="ACTYPE" value="WALLET" />
</Ac>
<Creds>
  <Cred type="PIN" subType="MPIN">
    <Data code="700001" ki="20160218">
      KNKImvZ76ZzoBOaiT5td6m4R/ioMtPbp3ra0B5c553oK7FSO9pH93f+q8P5SMG8kAZPCxtgsOwkIwRpLXhcQnlSnG9TCk2cvz3FOE
      2S4kDC7kiLnGX2t791mVK/ugZGRC5Ec6WlfgPHQSEJCBvn/CvZYsVb7n0xqtvrpdMogyyMHxtoOfZKgluKFTNa5bbCdUi8H36onS
      RVicsIbcZxFtpnKkVnJC0gwtU6AKC0agOwVMiPsGVQxm5xmBcjt87jUEanrNuOBxbWUM4pr10XHKrHW82kBKY1JVIgvf9ODQxnpm
      cRoelk2Oh3DEcmJlYBtV3rulv+b3bPQOIItISMVg==</Data>
    </Cred>
    <Cred type="OTP" subType="SMS">
      <Data code="700001" ki="20160218">
        tL6pY2wZLTE3tfcGxmxn6uJXsFzdeuf/tm+iQoUYKTEhZ3HALqOVt5twOyPJ5sgx0drYOrL6B4F2rORwIQNSur1jSdHQXuILTPat7
        zAaVrVfBSigcQNGRvQnjcWQI5Qc9fIhrF4fhU1kYr1N8EJbqiAlLmuEibOW5cj72hlwmGbRzRx8c/XTRVbz2wp9N70KRwM+NoYf6x
        QlzuJPM6kQn+HMBzQWDOUWhLSSp+vz3eqCuxJfiyiBMpKu9Tu7DivPhgRcbvIIK/HoZlTPiemIpAe0fh+ZG8LDsH6kkYviYp4ZOis
        A6AJKQnQjNlfgIlVBVh4QXFaTcB3wZ8lPuuOG1A==</Data>
      </Cred>
    </Creds>
    <Amount value="999.00" curr="NAD" />
  </Payer>
  <Payees>
    <Payee addr="payee@mysp" name="SonySuper" seqNum="1" type="ENTITY" code="6011" cmId="">
      <Info>
        <Identity type="ACCOUNT" verifiedName="narayanan" id="AAB45645BJB15" />
        <Rating verifiedAddress="TRUE"></Rating>
      </Info>
      <Device>
        <Tag name="MOBILE" value="987654321" />
        <Tag name="APP" value="org.npci.upi.maggi0" />
      </Device>
    </Payee>
  </Payees>

```

```

        <Tag name="TYPE" value="MOB" />
        <Tag name="ID" value="00000000000000020" />
    </Device>
    <Ac addrType="ACCOUNT">
        <Detail name="IFSC" value="AABY0288115" />
        <Detail name="ACNUM" value="2678892001829" />
        <Detail name="ACTYPE" value="SAVINGS" />
    </Ac>
    <Amount value="1.00" curr="NAD" />
    <Merchant>
        <Identifier subCode="6011" mid="123" sid="89311234567890122306" tid="8765987654"
            merchantType="SMALL" merchantGenre="ONLINE" onBoardingType="AGGREGATOR"
            regId="AB12De" pinCode="507123" tier="TIER3" />
        <Name brand="AllianceFranchise" legal="Reliance" franchise="LearnFrench" />
        <Ownership type="PUBLIC" />
        <Invoice name="ramya" num="1" date="2020-05-30T07:06:06+05:30" />
    </Merchant>
</Payee>
</Payees>
</ReqPay>

```

Response from IPS Participant to IPS : RespPay-Debit

```

<Head ver="2.0" ts="2025-09-30T16:03:39+05:30" orgId="700001"
    msgId="XYA0000000005sp20wQHPg8viLxHlzk" prodType="UPI" />
<Txn id="null0000000005sp20wQHPg8viLq2N5m" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="DEBIT"
    custRef="527316114361" initiationMode="18" subType="PAY" purpose="10">
    <RiskScores>
        <Score provider="psp1" type="TXNRISK" value="00032" />
        <Score provider="psp3" type="TXNRISK" value="00040" />
    </RiskScores>
</Txn>

```



```
<Resp reqMsgId="4HItqC8XV" result="SUCCESS">
  <Ref type="PAYER" seqNum="1" addr="mappervpa@mypsp" settAmount="999.00" settCurrency="NAD"
    approvalNum="654321" respCode="00" regName="Shyam" acNum="2678892001822"
    IFSC="AABY0000382" code="0000" accType="WALLET" balAmt="20.00" />
</Resp>
</RespPay>
```

Request from IPS to IPS Participant : ReqPay-Credit

```
<ReqPay>
  <Head ver="2.0" ts="2025-09-30T16:03:39+05:30" orgId="NPCI" msgId="4HItqC8XX" prodType="UPI" />
  <Meta>
    <Tag name="PAYREQSTART" value="2017-12-04T14:15:35+05:30" />
    <Tag name="PAYREQEND" value="2017-12-04T14:15:35+05:30" />
  </Meta>
  <Txn id="null1000000005sp20wQHPg8viLq2N5m" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="CREDIT"
    custRef="527316114361" initiationMode="18" subType="PAY" purpose="10">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
    </RiskScores>
  </Txn>
  <Payer addr="mappervpa@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000" cmId="987654321">
    <Info>
      <Identity type="ACCOUNT" verifiedName="narayanan" id="AAB45645BJB15" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
      <Tag name="MOBILE" value="993456789" />
      <Tag name="APP" value="org.npci.upi.maggi" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="00000000000000020" />
    </Device>
```

```

    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
      <Detail name="ACNUM" value="2678892001822" />
      <Detail name="ACTYPE" value="WALLET" />
    </Ac>
    <Amount value="999.00" curr="NAD" />
  </Payer>
  <Payees>
    <Payee addr="payee@mypsp" name="SonySuper" seqNum="1" type="ENTITY" code="6011" cmId="">
      <Info>
        <Identity type="ACCOUNT" verifiedName="narayanan" id="AAB45645BJB15" />
        <Rating verifiedAddress="TRUE"></Rating>
      </Info>
      <Device>
        <Tag name="MOBILE" value="987654321" />
        <Tag name="APP" value="org.npci.upi.maggi0" />
        <Tag name="TYPE" value="MOB" />
        <Tag name="ID" value="00000000000000020" />
      </Device>
      <Ac addrType="ACCOUNT">
        <Detail name="IFSC" value="AABY0288115" />
        <Detail name="ACNUM" value="2678892001829" />
        <Detail name="ACTYPE" value="SAVINGS" />
      </Ac>
      <Amount value="1.00" curr="NAD" />
      <Merchant>
        <Identifier subCode="6011" mid="123" sid="89311234567890122306" tid="8765987654"
          merchantType="SMALL" merchantGenre="ONLINE" onBoardingType="AGGREGATOR"
          regId="AB12De" pinCode="507123" tier="TIER3" />
        <Name brand="AllianceFranchise" legal="Reliance" franchise="LearnFrench" />
        <Ownership type="PUBLIC" />
        <Invoice name="ramya" num="1" date="2020-05-30T07:06:06+05:30" />
      </Merchant>
    </Payee>
  </Payees>

```

```
</ReqPay>
```

Response from IPS Participant to IPS : RespPay-Credit

```
<RespPay>
  <Head ver="2.0" ts="2025-09-30T16:03:39+05:30" orgId="700001"
    msgId="XYA0000000005sp20wQHPg8viLyLDS4" prodType="UPI"/>
  <Txn id="null10000000005sp20wQHPg8viLq2N5m" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="CREDIT"
    custRef="527316114361" initiationMode="18" subType="PAY" purpose="10">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
    </RiskScores>
  </Txn>
  <Resp reqMsgId="4HitqC8XX" result="SUCCESS">
    <Ref type="PAYEE" seqNum="1" addr="payee@mypsp" settAmount="1.00" settCurrency="NAD"
      approvalNum="654321" respCode="00" regName="SonySuper" acNum="2678892001829"
      IFSC="AABY0288115" code="0000" accType="SAVINGS" />
  </Resp>
</RespPay>
```

Request from IPS to IPS Participant: ReqTxnConfirmation

```
<ReqTxnConfirmation>
  <Head ver="2.0" ts="2025-09-30T16:03:39+05:30" orgId="NPCI" msgId="4HitqC8Y2" prodType="UPI" />
  <Txn id="null10000000005sp20wQHPg8viLq2N5m" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="TxnConfirmation"
    orgTxnId="null10000000005sp20wQHPg8viLq2N5m" custRef="527316114361" initiationMode="18"
    purpose="10" />
  <TxnConfirmation note="test" orgStatus="SUCCESS" type="PAY">
    <Ref type="PAYER" seqNum="1" addr="payee@mypsp" settAmount="1.00" settCurrency="NAD"
      approvalNum="654321" respCode="00" regName="SonySuper" orgAmount="1.00"
```

```

        acNum="2678892001829" IFSC="AABY0288115" code="5310" accType="SAVINGS" cmId="" />
    </TxnConfirmation>
</ReqTxnConfirmation>

```

Response from IPS Participant to IPS: RespTxnConfirmation

```

<RespTxnConfirmation>
  <Head ver="2.0" ts="2025-09-30T16:03:39+05:30" orgId="700001" msgId="d0vFQh110AmtLnha"
prodType="UPI" />
  <Txn id="null1000000005sp20wQHPg8viLq2N5m" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="TxnConfirmation"
    orgTxnId="null1000000005sp20wQHPg8viLq2N5m" custRef="527316114361" initiationMode="18"
    purpose="10" />
  <Resp reqMsgId="d0vFQh110AmtLnha" result="SUCCESS" />
</RespTxnConfirmation>

```

6.22. Merchant Cash out – Pay by Merchant Id

Refer Specifications for Payment [Pay API](#)

Request from Payer IPS Participant to IPS: ReqValAdd

```

<ReqValAdd>
  <Head ver="2.0" ts="2025-06-13T10:32:09+02:00" orgId="700001"
msgId="LVB2e9c06404a8d4b289dc24cdca9b0ad75" prodType="UPI" />
  <Txn id="MYSIM00000000001vRPtRTgqKsx1z0mc3NS" note="Numeric Id Mapper" refId="123456"
    refUrl="https://upaay.lvbank.in" ts="2019-03-29T14:41:48+05:30" type="ValAdd"
    custRef="LVB60a39feff0214ee0a8c5c10cc2a6c0ff" />
  <Payer addr="payer@mysp" name="Shyam" seqNum="1" type="PERSON" code="0000">

```

```

<Info>
  <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
  <Rating verifiedAddress="TRUE"></Rating>
</Info>
<Device>
  <Tag name="MOBILE" value="993456789" />
  <Tag name="TYPE" value="MOB" />
  <Tag name="ID" value="0000000000000002" />
  <Tag name="OS" value="android" />
  <Tag name="APP" value="org.npci.upi.maggi" />
</Device>
</Payer>
<Payee addr="12345677@mapper.npci" seqNum="1" />
</ReqValAdd>

```

Request from IPS to Merchant IPS Participant: ReqValAdd

```

<ReqValAdd>
  <Head ver="2.0" ts="2025-06-13T10:32:10+02:00" orgId="NPCI" msgId="1xysVpClEcah" prodType="UPI" />
  <Txn id="MYSIM000000000001vRPtRTgqKsx1z0mc3NS" note="Numeric Id Mapper" refId="123456"
    refUrl="https://upaay.lvbank.in" ts="2019-03-29T14:41:48+05:30" type="ValAdd"
    custRef="LVB60a39feff0214ee0a8c5c10cc2a6c0ff" />
  <Payer addr="payer@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
    <Info>
      <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
      <Tag name="MOBILE" value="993456789" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="0000000000000002" />
      <Tag name="OS" value="android" />
      <Tag name="APP" value="org.npci.upi.maggi" />
    </Device>
  </Payer>
</ReqValAdd>

```

```

    </Device>
  </Payer>
  <Payee addr="atmvpa@mypsp" seqNum="1" cmId="12345677" />
</ReqValAdd>

```

Response from Merchant IPS participant to IPS : RespValAdd

```

<RespValAdd>
  <Head ver="2.0" ts="2025-06-13T10:32:10.174+02:00" orgId="700001"
    msgId="XYA0000000000001vRPtRSgrisLb4f49QqS" prodType="UPI" />
  <Resp reqMsgId="1xysVpClEcah" result="SUCCESS" errCode="" maskName="Narayanan" code="8931"
    type="ENTITY" IFSC="HDFC0009009" IIN="500001" accType="PPIWALLET">
    <Merchant>
      <Identifier subCode="1234" mid="8394" sid="2212" tid="0101" merchantType="SMALL" />
      <Name brand="AllianceFranche" legal="Reliance" franchise="LearnFrench" />
      <Ownership type="PRIVATE" />
    </Merchant>
  </Resp>
  <Txn id="MYSIM000000000001vRPtRTgqKsx1z0mc3NS" note="Numeric Id Mapper" refId="123456"
    refUrl="https://upaay.lvbank.in" ts="2019-03-29T14:41:48+05:30" type="ValAdd"
    custRef="LVB60a39feff0214ee0a8c5c10cc2a6c0ff" />
</RespValAdd>

```

Response from IPS to Payer IPS Participant: RespValAdd

```

<RespValAdd>
  <Head ver="2.0" ts="2025-06-13T10:32:10+02:00" orgId="NPCI" msgId="1xysVpClEcaj" prodType="UPI"
  />
  <Resp reqMsgId="LVB2e9c06404a8d4b289dc24cdca9b0ad75" result="SUCCESS" errCode=""
    maskName="Narayanan" code="8931" type="ENTITY" IFSC="HDFC0009009" IIN="500001"
    accType="PPIWALLET" cmId="12345677" addr="atmvpa@mypsp">
    <Merchant>
      <Identifier subCode="1234" mid="8394" sid="2212" tid="0101" merchantType="SMALL" />
      <Name brand="AllianceFranche" legal="Reliance" franchise="LearnFrench" />
      <Ownership type="PRIVATE" />
    </Merchant>
  </Resp>
</RespValAdd>

```

```

    </Merchant>
  </Resp>
  <Txn id="MYSIM000000000001vRPtRTgqKsx1z0mc3NS" note="Numeric Id Mapper" refId="123456"
    refUrl="https://upaay.lvbank.in" ts="2019-03-29T14:41:48+05:30" type="ValAdd"
    custRef="LVB60a39feff0214ee0a8c5c10cc2a6c0ff" />
</RespValAdd>

```

Request from Payer IPS Participant to IPS: ReqPay - Pay

```

<ReqPay>
  <Head ver="2.0" ts="2025-06-13T12:48:06+02:00" orgId="700001"
    msgId="XYD0000000000001GRDpegB9EWpFIHL7Tzs" prodType="UPI" />
  <Meta>
    <Tag name="PAYREQSTART" value="2017-12-04T14:15:35+05:30" />
    <Tag name="PAYREQEND" value="2017-12-04T14:15:35+05:30" />
  </Meta>
  <Txn id="MYSIM000000001vRPtRTgqKsx1NmFqRTq" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY"
    custRef="516412422169" initiationMode="00" purpose="12">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
    </RiskScores>
  </Txn>
  <Payer addr="payer@mymsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
    <Info>
      <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
      <Tag name="MOBILE" value="993456789" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="0000000000000002" />
      <Tag name="OS" value="android" />
    </Device>
  </Payer>
</ReqPay>

```

```

    <Tag name="APP" value="org.npci.upi.maggi" />
  </Device>
  <Ac addrType="ACCOUNT">
    <Detail name="IFSC" value="AABY0000382" />
    <Detail name="ACTYPE" value="SAVINGS" />
    <Detail name="ACNUM" value="3453454385" />
  </Ac>
  <Creds>
    <Cred type="PIN" subType="MPIN">
      <Data code="NPCI"
ki="20150822">2.0|jnj119sU8fTVI7sHTg7Yv+UaJX8okYm0ZZqgV/5gFcYortJ61+DYLgcEyyVaP5taLuG0/xUWmuPv&#xd;
      ozNz8rapuCKAsrMYI5u3A0ymVvWwSHg9TlM551xF9SQ58CWpfnOtWtzLqVY5JwfXxOMhw2QgHlJu&#xd;
      h0je8tURNcmBgOlnOx8D9tw6zhKup/IaaiTNI7En4CRdo2h+OlwTBj/141CEfJ0S7vNm78lCwLLl&#xd;
      EOH32kZU47TnJyBz2bfkj3sgCXv693+R+ahcOGfhvxS+slk1Bq3v1cGWmpk1lFPIKsgSh/frVKOG&#xd;
      gkiusQm1tSQohVTsAP8/CVTK82QUUYQ0wc+Mw==&#xd;
      </Data>
    </Cred>
  </Creds>
  <Amount value="1.00" curr="NAD" />
</Payer>
<Payees>
  <Payee addr="atmvpa@mypsp" name="ree" seqNum="1" type="PERSON" code="0000" cmId="1234567">
    <Amount value="1.00" curr="NAD" />
  </Payee>
</Payees>
</ReqPay>

```

Request from IPS to Merchant IPS Participant: ReqAuthDetails

```

<ReqAuthDetails>
  <Head ver="2.0" ts="2025-06-13T12:48:06+02:00" orgId="NPCI" msgId="1xysVpEDt7Kj" />
  <Txn id="MYSIM00000001vRPtRTgqKsxlNmFqRTq" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY"
    custRef="516412422169" initiationMode="00" purpose="12">

```



```

    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
    </RiskScores>
  </Txn>
  <Payees>
    <Payee addr="atmvpa@mypsp" name="ree" seqNum="1" type="PERSON" code="0000"
cmId="1234567">
      <Amount value="1.00" curr="NAD" />
    </Payee>
  </Payees>
  <Payer addr="payer@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
    <Info>
      <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382" />
      <Detail name="ACTYPE" value="SAVINGS" />
      <Detail name="ACNUM" value="3453454385" />
    </Ac>
    <Amount value="1.00" curr="NAD" />
  </Payer>
</ReqAuthDetails>

```

Response from Merchant IPS Participant to IPS: RespAuthDetails

```

<RespAuthDetails>
  <Head ver="2.0" ts="2025-06-13T12:48:06.468+02:00" orgId="700001"
msgId="XYA00000000000001vRPtRSgrisLbiBmvGcb" />
  <Resp reqMsgId="1xysVpEDt7Kj" result="SUCCESS" />
  <Txn id="MYSIM00000001vRPtRTggKsx1NmFqRTq" note="test" refId="Ref"
refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY"
custRef="516412422169" initiationMode="00" purpose="12">
    <RiskScores>

```

```

        <Score provider="SBI" type="TXNRISK" value="10" />
    </RiskScores>
</Txn>
<Payer addr="payer@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
    <Info>
        <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
        <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Ac addrType="ACCOUNT">
        <Detail name="IFSC" value="AABY0000382" />
        <Detail name="ACTYPE" value="SAVINGS" />
        <Detail name="ACNUM" value="3453454385" />
    </Ac>
    <Amount value="1.00" curr="NAD" />
</Payer>
<Payees>
    <Payee addr="atmvpa@mypsp" name="ree" seqNum="1" type="PERSON" code="0000" cmId="1234567">
        <Info>
            <Identity type="ACCOUNT" verifiedName="narayanan" id="AAB45645BJB15" />
            <Rating verifiedAddress="TRUE"></Rating>
        </Info>
        <Device>
            <Tag name="MOBILE" value="993456780" />
            <Tag name="APP" value="org.npci.upi.maggi" />
            <Tag name="TYPE" value="MOB" />
            <Tag name="ID" value="00000000000000020" />
        </Device>
        <Ac addrType="ACCOUNT">
            <Detail name="IFSC" value="AABY0000382" />
            <Detail name="ACNUM" value="2678892001829" />
            <Detail name="ACTYPE" value="SAVINGS" />
        </Ac>
        <Amount value="1.00" curr="NAD" />
    </Payee>
</Payees>

```

</RespAuthDetails>

Request from IPS to Remitter SoV Provider: ReqPay -Debit

```
<ReqPay>
  <Head ver="2.0" ts="2025-06-13T12:48:08+02:00" orgId="NPCI" msgId="1xysVpEDtXMB" />
  <Meta>
    <Tag name="PAYREQSTART" value="2017-12-04T14:15:35+05:30" />
    <Tag name="PAYREQEND" value="2017-12-04T14:15:35+05:30" />
  </Meta>
  <Txn id="MYSIM00000001vRPtRTggKsx1NmFqRTq" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="DEBIT"
    custRef="516412422169" initiationMode="00" subType="PAY" purpose="12">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
      <Score provider="NPCI" type="TXNRISK" value="00999" />
    </RiskScores>
  </Txn>
  <Payer addr="payer@myppsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
    <Info>
      <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
      <Tag name="MOBILE" value="993456789" />
      <Tag name="TYPE" value="MOB" />
      <Tag name="ID" value="0000000000000002" />
      <Tag name="OS" value="android" />
      <Tag name="APP" value="org.npci.upi.maggi" />
    </Device>
  </Payer>
  <Ac addrType="ACCOUNT">
```

```

        <Detail name="IFSC" value="AABY0000382" />
        <Detail name="ACTYPE" value="SAVINGS" />
        <Detail name="ACNUM" value="3453454385" />
    </Ac>
    <Creds>
        <Cred type="PIN" subType="MPIN">
            <Data code="700001" ki="20160217">
                T44gWG7u79OR9ySVA4M+2avbc1xSvEy5sDy34xDiQsSU0NFCnlCNTbz279H5Y0L166z3sLQ+pfQxgJ/+QWPB69ddbVgpyl8sfn/f
                rXH8NeBwbXP1BI/17JgfyzdYCUyAfDaPv8Kg6Ajn7cNxBTLv/lw7fv5TH0Iwbb0w0u2t505VLO3nfKLgT1D85Y+BY8jYTo7GfMcH8
                rYIdsIuyq3Wiqvd5lWeYttY8357K/HBum1IqsS0pH146GxQDFcv1dswvuhXF/3EwQKKgm1VLtoche34XivFjJ1QDy4t5Zykqkh4v7
                zkvbIwLs8g8eB40fC2cvEhgTLtER9h0BSz5qsrg==</Data>
            </Cred>
        </Creds>
        <Amount value="1.00" curr="NAD" />
    </Payer>
    <Payees>
        <Payee addr="atmvpa@mypsp" name="ree" seqNum="1" type="PERSON" code="0000" cmId="1234567">
            <Info>
                <Identity type="ACCOUNT" verifiedName="narayanan" id="AAB45645BJB15" />
                <Rating verifiedAddress="TRUE"></Rating>
            </Info>
            <Device>
                <Tag name="MOBILE" value="993456780" />
                <Tag name="APP" value="org.npci.upi.maggi" />
                <Tag name="TYPE" value="MOB" />
                <Tag name="ID" value="00000000000000020" />
            </Device>
            <Ac addrType="ACCOUNT">
                <Detail name="IFSC" value="AABY0000382" />
                <Detail name="ACNUM" value="2678892001829" />
                <Detail name="ACTYPE" value="SAVINGS" />
            </Ac>
            <Amount value="1.00" curr="NAD" />
        </Payee>
    </Payees>

```

```
</Payees>
</ReqPay>
```

Response from Remitter Bank to IPS : RespPay Debit

```
<RespPay>
  <Head ver="2.0" ts="2025-06-13T12:48:08+02:00" orgId="700001"
    msgId="XYA0000000001vRPtRSgrisLbiBAdm76" />
  <Txn id="MYSIM000000001vRPtRTgqKsx1NmFqRTq" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="DEBIT"
    custRef="516412422169" initiationMode="00" subType="PAY" purpose="12">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
      <Score provider="NPCI" type="TXNRISK" value="00999" />
    </RiskScores>
  </Txn>
  <Resp reqMsgId="1xysVpEDtXmb" result="SUCCESS">
    <Ref type="PAYER" seqNum="1" addr="payer@mypsp" settAmount="1.00" settCurrency="NAD"
      approvalNum="654321" respCode="00" regName="Shyam" acNum="3453454385" IFSC="AABY0000382"
      code="0000" accType="SAVINGS" />
  </Resp>
</RespPay>
```

Request from IPS to Beneficiary Sov Provider: ReqPay-Credit

```
<ReqPay>
  <Head ver="2.0" ts="2025-06-13T12:48:08+02:00" orgId="NPCI" msgId="1xysVpEDtXmd" />
  <Meta>
    <Tag name="PAYREQSTART" value="2017-12-04T14:15:35+05:30" />
    <Tag name="PAYREQEND" value="2017-12-04T14:15:35+05:30" />
  </Meta>
  <Txn id="MYSIM000000001vRPtRTgqKsx1NmFqRTq" note="test" refId="Ref">
```

```

refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="CREDIT"
custRef="516412422169" initiationMode="00" subType="PAY" purpose="12">
<RiskScores>
  <Score provider="psp1" type="TXNRISK" value="00032" />
  <Score provider="psp3" type="TXNRISK" value="00040" />
  <Score provider="NPCI" type="TXNRISK" value="00999" />
</RiskScores>
</Txn>
<Payer addr="payer@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
  <Info>
    <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22" />
    <Rating verifiedAddress="TRUE"></Rating>
  </Info>
  <Device>
    <Tag name="MOBILE" value="993456789" />
    <Tag name="TYPE" value="MOB" />
    <Tag name="ID" value="0000000000000002" />
    <Tag name="OS" value="android" />
    <Tag name="APP" value="org.npci.upi.maggi" />
  </Device>
  <Ac addrType="ACCOUNT">
    <Detail name="IFSC" value="AABY0000382" />
    <Detail name="ACTYPE" value="SAVINGS" />
    <Detail name="ACNUM" value="3453454385" />
  </Ac>
  <Amount value="1.00" curr="NAD" />
</Payer>
<Payees>
  <Payee addr="atmvpa@mypsp" name="ree" seqNum="1" type="PERSON" code="0000" cmId="1234567">
    <Info>
      <Identity type="ACCOUNT" verifiedName="narayanan" id="AAB45645BJB15" />
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
      <Tag name="MOBILE" value="993456780" />

```

```

        <Tag name="APP" value="org.npci.upi.maggi" />
        <Tag name="TYPE" value="MOB" />
        <Tag name="ID" value="00000000000000020" />
    </Device>
    <Ac addrType="ACCOUNT">
        <Detail name="IFSC" value="AABY0000382" />
        <Detail name="ACNUM" value="2678892001829" />
        <Detail name="ACTYPE" value="SAVINGS" />
    </Ac>
    <Amount value="1.00" curr="NAD" />
</Payee>
</Payees>
</ReqPay>

```

Response from Beneficiary Sov Provider to IPS: ReqPay-Credit

```

<RespPay>
  <Head ver="2.0" ts="2025-06-13T12:48:08+02:00" orgId="700001"
    msgId="XYA0000000001vRPtRSgrisLbiBAhyga" />
  <Txn id="MYSIM000000001vRPtRTgqKsxlNmFqRTq" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="CREDIT"
    custRef="516412422169" initiationMode="00" subType="PAY" purpose="12">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
      <Score provider="NPCI" type="TXNRISK" value="00999" />
    </RiskScores>
  </Txn>
  <Resp reqMsgId="1xysVpEDtXMd" result="SUCCESS">
    <Ref type="PAYEE" seqNum="1" addr="atmvpa@mypsp" settAmount="1.00" settCurrency="NAD"
      approvalNum="654321" respCode="00" regName="ree" acNum="2678892001829"
      IFSC="AABY0000382" code="0000" accType="SAVINGS" />
  </Resp>
</RespPay>

```

Response from IPS to Payer IPS Participant: RespPay-PAY

```
<RespPay>
  <Head ver="2.0" ts="2025-06-13T12:48:08+02:00" orgId="NPCI" msgId="1xysVpEDtXMf" />
  <Txn id="MYSIM00000001vRPtRTgqKsx1NmFqRTq" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY"
    custRef="516412422169" initiationMode="00" purpose="12">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032" />
      <Score provider="psp3" type="TXNRISK" value="00040" />
      <Score provider="NPCI" type="TXNRISK" value="00999" />
    </RiskScores>
  </Txn>
  <Resp reqMsgId="XYD00000000000001GRDpegB9EWpFIHL7Tzs" result="SUCCESS">
    <Ref type="PAYER" seqNum="1" addr="payer@mypsp" settAmount="1.00" settCurrency="NAD"
      approvalNum="654321" respCode="00" regName="Shyam" orgAmount="1.00" acNum="3453454385"
      IFSC="AABY0000382" code="0000" accType="SAVINGS" />
    <Ref type="PAYEE" seqNum="1" addr="atmvpa@mypsp" settAmount="1.00" settCurrency="NAD"
      approvalNum="654321" respCode="00" regName="ree" orgAmount="1.00" acNum="2678892001829"
      IFSC="AABY0000382" code="0000" accType="SAVINGS" cmId="1234567" />
  </Resp>
</RespPay>
```

Transaction Confirmation Request from IPS to Merchant IPS Participant:

```
<ReqTxnConfirmation>
  <Head ver="2.0" ts="2025-06-13T12:48:08+02:00" orgId="NPCI" msgId="1xysVpEDtXMi" />
  <Txn id="MYSIM00000001vRPtRTgqKsx1NmFqRTq" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="TxnConfirmation"
    orgTxnId="MYSIM00000001vRPtRTgqKsx1NmFqRTq" custRef="516412422169" initiationMode="00">
```



```

    purpose="12" />
    <TxnConfirmation note="test" orgStatus="SUCCESS" type="PAY">
      <Ref type="PAYEE" seqNum="1" addr="atmvpa@mymsp" settAmount="1.00" settCurrency="NAD"
        approvalNum="654321" respCode="00" regName="ree" orgAmount="1.00" acNum="2678892001829"
        IFSC="AABY0000382" code="0000" accType="SAVINGS" cmId="1234567" />
    </TxnConfirmation>
  </ReqTxnConfirmation>

```

Transaction Confirmation Response from Merchant IPS Participant to IPS:

```

<RespTxnConfirmation>
  <Head ver="2.0" ts="2025-06-13T12:48:08+02:00" orgId="700001" msgId="3BIhGBUToWeEEKLMA" />
  <Txn id="MYSIM00000001vRPtRTgqKsx1NmFqRTq" note="test" refId="Ref"
    refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="TxnConfirmation"
    orgTxnId="MYSIM00000001vRPtRTgqKsx1NmFqRTq" custRef="516412422169" initiationMode="00"
    purpose="12" />
  <Resp reqMsgId="3BIhGBUToWeEEKLMA" result="SUCCESS" />
</RespTxnConfirmation>

```

6.23. Payment Request – Pay by Mobile Number

Request from Payer IPS Participant to IPS :

```
<ReqValAdd>
  <Head ver="2.0" ts="2025-07-18T16:41:56+05:30" orgId="700001"
msgId="LVB2e9c06404a8d4b289dc24cdca9b0ad75" prodType="UPI"/>
  <Txn id="MYSIM000000000005sp20ulJcgEXzBV5m48" note="Validate vpa" refId="123456"
refUrl="https://upaay.lvbank.in" ts="2019-03-29T14:41:48+05:30" type="ValAdd"
custRef="LVB60a39feff0214ee0a8c5c10cc2a6c0ff"/>
  <Payer addr="mapperchk@mypsp" name="asing" seqNum="1" type="PERSON" code="0000">
    <Info>
      <Identity type="ACCOUNT" verifiedName="PALANIVEL K" id="123456789"/>
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
      <Tag name="MOBILE" value="993456789"/>
      <Tag name="TYPE" value="MOB"/>
      <Tag name="ID" value="0000000000000002"/>
      <Tag name="OS" value="android"/>
      <Tag name="APP" value="org.npci.upi.maggi"/>
      <Tag name="GEOCODE" value="22.5767335,88.4344541"/>
      <Tag name="LOCATION" value="9, Street Number 10, DN Block, Sector V,"/>
      <Tag name="IP" value="10.22.205.176"/>
      <Tag name="CAPABILITY" value="100"/>
    </Device>
  </Payer>
  <Payee addr="993456789@mapper.npci" seqNum="1"/>
</ReqValAdd>
```

Request from IPS to Payee IPS Participant:

```
<ReqValAdd>
  <Head ver="2.0" ts="2025-07-18T16:41:56+05:30" orgId="NPCI" msgId="4FCcfq4NJ" prodType="UPI"/>
  <Txn id="MYSIM000000000005sp20ulJcgEXzBV5m48" note="Validate vpa" refId="123456"
refUrl="https://upaay.lvbank.in" ts="2019-03-29T14:41:48+05:30" type="ValAdd"
custRef="LVB60a39feff0214ee0a8c5c10cc2a6c0ff"/>
  <Payer addr="mapperchk@mypsp" name="asing" seqNum="1" type="PERSON" code="0000">
    <Info>
      <Identity type="ACCOUNT" verifiedName="PALANIVEL K" id="123456789"/>
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
      <Tag name="MOBILE" value="993456789"/>
      <Tag name="TYPE" value="MOB"/>
      <Tag name="ID" value="0000000000000002"/>
      <Tag name="OS" value="android"/>
      <Tag name="APP" value="org.npci.upi.maggi"/>
      <Tag name="GEOCODE" value="22.5767335,88.4344541"/>
      <Tag name="LOCATION" value="9, Street Number 10, DN Block, Sector V,"/>
      <Tag name="IP" value="10.22.205.176"/>
      <Tag name="CAPABILITY" value="100"/>
    </Device>
  </Payer>
  <Payee addr="mappervpatest@mypsp" seqNum="1" cmId="993456789"/>
</ReqValAdd>
```

Response from Payee IPS Participant to IPS:

```
<RespValAdd>
  <Head ver="2.0" ts="2025-07-18T16:41:57.154+05:30" orgId="700001"
msgId="XYA0000000000005sp20ulJcgEXzBZuVz2" prodType="UPI"/>
```

```
<Resp reqMsgId="4FCcfq4NJ" result="SUCCESS" errCode="" maskName="Narayanan" code="0000"
type="PERSON" IFSC="HDFC0009009" IIN="500001" accType="SAVINGS"/>
<Txn id="MYSIM000000000005sp20ulJcgEXzBV5m48" note="Validate vpa" refId="123456"
refUrl="https://upaay.lvbank.in" ts="2019-03-29T14:41:48+05:30" type="ValAdd"
custRef="LVB60a39feff0214ee0a8c5c10cc2a6c0ff"/>
</RespValAdd>
```

Response from IPS to Payer IPS Participant :

```
<RespValAdd>
  <Head ver="2.0" ts="2025-07-18T16:41:57+05:30" orgId="NPCI" msgId="4FCcfquOF" prodType="UPI"/>
  <Resp reqMsgId="LVB2e9c06404a8d4b289dc24cdca9b0ad75" result="SUCCESS" errCode=""
maskName="Narayanan" code="0000" type="PERSON" IFSC="HDFC0009009" IIN="500001" accType="SAVINGS"
cmId="993456789" addr="mappervpatest@mysp" />
  <Txn id="MYSIM000000000005sp20ulJcgEXzBV5m48" note="Validate vpa" refId="123456"
refUrl="https://upaay.lvbank.in" ts="2019-03-29T14:41:48+05:30" type="ValAdd"
custRef="LVB60a39feff0214ee0a8c5c10cc2a6c0ff"/>
</RespValAdd>
```

Payment Request from Payer IPS Participant to IPS: ReqPay with type="PAY"

```
<ReqPay>
  <Head ver="2.0" ts="2025-07-18T16:47:05+05:30" orgId="700001"
msgId="XYD0000000000001GRDpegB9EWpFIHL7Tzs" prodType="UPI"/>
  <Meta>
    <Tag name="PAYREQSTART" value="2017-12-04T14:15:35+05:30"/>
    <Tag name="PAYREQEND" value="2017-12-04T14:15:35+05:30"/>
  </Meta>
  <Txn id="MYSIM000000005sp20ulJcgEXA9D4L3W" note="test" refId="Ref"
refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY" custRef="519916126323"
initiationMode="00" purpose="00">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032"/>
      <Score provider="psp3" type="TXNRISK" value="00040"/>
    </RiskScores>
  </Txn>
</ReqPay>
```

```

    </RiskScores>
</Txn>
<Payer addr="mapperchk@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
  <Info>
    <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22"/>
    <Rating verifiedAddress="TRUE"></Rating>
  </Info>
  <Device>
    <Tag name="MOBILE" value="993456789"/>
    <Tag name="TYPE" value="MOB"/>
    <Tag name="ID" value="0000000000000002"/>
    <Tag name="OS" value="android"/>
    <Tag name="APP" value="org.npci.upi.maggi"/>
  </Device>
  <Ac addrType="ACCOUNT">
    <Detail name="IFSC" value="AABY0000382"/>
    <Detail name="ACTYPE" value="SAVINGS"/>
    <Detail name="ACNUM" value="3453454385"/>
  </Ac>
  <Creds>
    <Cred type="PIN" subType="MPIN">
      <Data code="NPCI"
ki="20150822">2.2.nipl|cd8NtQbGxAYHDMCq8H8UjJJEbhongzaEVdwHP8kR1dd+4aGgdL8Cw1hVc1Ai4TB9zdQByFq0D41T
&#xd;
tif5gXva3GVo5IKneiyyqyibrf7tBF+pQ4ZuOF8HDWFdZaXcyJGyIov4zSHjQ29te54o4mKfCwRyb&#xd;
O5OZP8y9QJhAmpSkSt7j0msefGp8TlOLLJkovt5w3YVts6R/GEgXuhL7mig5qlKzgufR/riUNJub&#xd;
pjlkn8cKAtgS9nx4h3X31KcUXyj+QF3u5CfY5ZiGG39bErcpWXjRSkcDY7i/NGiaBEr7c7cRzcmf&#xd;
X5HI7sIBaCXOiInyTKoM1LdcsoDBlRhloqTbIQ==&#xd;
      </Data>
    </Cred>
  </Creds>
  <Amount value="1.00" curr="NAD"/>
</Payer>
<Payees>

```

```

    <Payee addr="mappervpatest@mypsp" name="SonySuper" seqNum="1" type="PERSON" code="0000"
cmId="993456789">
        <Amount value="1.00" curr="NAD"/>
    </Payee>
</Payees>
</ReqPay>

```

Payment AuthDetails Request from IPS to Payee IPS Participant: ReqAuthDetails

```

<ReqAuthDetails>
    <Head ver="2.0" ts="2025-07-18T16:47:05+05:30" orgId="NPCI" msgId="4FCchvJjy" prodType="UPI"/>
    <Txn id="MYSIM00000005sp20ulJcgEXA9D4L3W" note="test" refId="Ref"
refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY" custRef="519916126323"
initiationMode="00" purpose="00">
        <RiskScores>
            <Score provider="psp1" type="TXNRISK" value="00032"/>
            <Score provider="psp3" type="TXNRISK" value="00040"/>
        </RiskScores>
    </Txn>
    <Payees>
        <Payee addr="mappervpatest@mypsp" name="SonySuper" seqNum="1" type="PERSON" code="0000"
cmId="993456789">
            <Amount value="1.00" curr="NAD"/>
        </Payee>
    </Payees>
    <Payer addr="mapperchk@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
        <Info>
            <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22"/>
            <Rating verifiedAddress="TRUE"></Rating>
        </Info>
        <Ac addrType="ACCOUNT">
            <Detail name="IFSC" value="AABY0000382"/>
            <Detail name="ACTYPE" value="SAVINGS"/>
            <Detail name="ACNUM" value="3453454385"/>
        </Ac>
    </Payer>
</ReqAuthDetails>

```

```

    </Ac>
    <Amount value="1.00" curr="NAD"/>
  </Payer>
</ReqAuthDetails>

```

Payment Auth Details Response from Payee IPS Participant to IPS: RespAuthDetails

```

<RespAuthDetails>
  <Head ver="2.0" ts="2025-07-18T16:47:05.930+05:30" orgId="700001"
msgId="XYA0000000000005sp20ulJcgEXA9Fqm7r" prodType="UPI"/>
  <Resp reqMsgId="4FCchvJjy" result="SUCCESS"/>
  <Txn id="MYSIM00000005sp20ulJcgEXA9D4L3W" note="test" refId="Ref"
refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY" custRef="519916126323"
initiationMode="00" purpose="00">
    <RiskScores>
      <Score provider="SBI" type="TXNRISK" value="10"/>
    </RiskScores>
  </Txn>
  <Payer addr="mapperchk@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
    <Info>
      <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22"/>
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382"/>
      <Detail name="ACTYPE" value="SAVINGS"/>
      <Detail name="ACNUM" value="3453454385"/>
    </Ac>
    <Amount value="1.00" curr="NAD"/>
  </Payer>
  <Payees>
    <Payee addr="mappervpatest@mypsp" name="SonySuper" seqNum="1" type="PERSON" code="0000"
cmId="993456789">
      <Info>

```

```

        <Identity type="ACCOUNT" verifiedName="narayanan" id="AAB45645BJB15"/>
        <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
        <Tag name="MOBILE" value="993456780"/>
        <Tag name="APP" value="org.npci.upi.maggi"/>
        <Tag name="TYPE" value="MOB"/>
        <Tag name="ID" value="0000000000000020"/>
    </Device>
    <Ac addrType="ACCOUNT">
        <Detail name="IFSC" value="AABY0000382"/>
        <Detail name="ACNUM" value="2678892001829"/>
        <Detail name="ACTYPE" value="SAVINGS"/>
    </Ac>
    <Amount value="1.00" curr="NAD"/>
</Payee>
</Payees>
</RespAuthDetails>

```

Debit Request from IPS to Payer SoV Provider: ReqPay with type="DEBIT"

```

<ReqPay>
    <Head ver="2.0" ts="2025-07-18T16:47:07+05:30" orgId="NPCI" msgId="4FCchwz1q" prodType="UPI"/>
    <Meta>
        <Tag name="PAYREQSTART" value="2017-12-04T14:15:35+05:30"/>
        <Tag name="PAYREQEND" value="2017-12-04T14:15:35+05:30"/>
    </Meta>
    <Txn id="MYSIM00000005sp20ulJcgEXA9D4L3W" note="test" refId="Ref"
refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="DEBIT" custRef="519916126323"
initiationMode="00" subType="PAY" purpose="00">
        <RiskScores>
            <Score provider="psp1" type="TXNRISK" value="00032"/>
            <Score provider="psp3" type="TXNRISK" value="00040"/>
            <Score provider="NPCI" type="TXNRISK" value="00999"/>
        </RiskScores>
    </Txn>
</ReqPay>

```



```

    </RiskScores>
  </Txn>
  <Payer addr="mapperchk@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
    <Info>
      <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22"/>
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
      <Tag name="MOBILE" value="993456789"/>
      <Tag name="TYPE" value="MOB"/>
      <Tag name="ID" value="0000000000000002"/>
      <Tag name="OS" value="android"/>
      <Tag name="APP" value="org.npci.upi.maggi"/>
    </Device>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382"/>
      <Detail name="ACTYPE" value="SAVINGS"/>
      <Detail name="ACNUM" value="3453454385"/>
    </Ac>
    <Creds>
      <Cred type="PIN" subType="MPIN">
        <Data code="700001"
ki="20160218">pUuLpBOlyZtowsI1rkH8EPa6jOC5QMEfYQ6Qv7bv2TdbP3SnYGJHJqcqpLxdI5K36sDAvbuNLXcMFk4IU1Fi9
iYqSr3zBJXIp4aMZtFdBTfGEIukeEHsIrTX8IEekDzFnobBnZzzVeBToFGZOFFBdm5oj3OZqe+sWex/ZAQPypHiuyli4PtD89yAo
VtlV5ulFJb1N1NPkwOv4AH33iScYoCSItcEcRO9O72vV76Kl0RW/oXaYKikotGqSPH5CrQCXzA3OwDiTqRHmthJIeVEZEpP3aey
Dh4ePgSarIGLE0nlebZT/rtY0+dCuq+p76Qgd2Ft907Ubk4qXs90cb1aNFA==</Data>
        </Cred>
      </Creds>
      <Amount value="1.00" curr="NAD"/>
    </Payer>
    <Payees>
      <Payee addr="mappervpatest@mypsp" name="SonySuper" seqNum="1" type="PERSON" code="0000"
cmId="993456789">
        <Info>
          <Identity type="ACCOUNT" verifiedName="narayanan" id="AAB45645BJB15"/>

```

```

        <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
        <Tag name="MOBILE" value="993456780"/>
        <Tag name="APP" value="org.npci.upi.maggi"/>
        <Tag name="TYPE" value="MOB"/>
        <Tag name="ID" value="00000000000000020"/>
    </Device>
    <Ac addrType="ACCOUNT">
        <Detail name="IFSC" value="AABY0000382"/>
        <Detail name="ACNUM" value="2678892001829"/>
        <Detail name="ACTYPE" value="SAVINGS"/>
    </Ac>
    <Amount value="1.00" curr="NAD"/>
</Payee>
</Payees>
</ReqPay>

```

Debit Response from Payer SoV Provider to IPS: RespPay with type="DEBIT"

```

<RespPay>
    <Head ver="2.0" ts="2025-07-18T16:47:08+05:30" orgId="700001"
msgId="XYA0000000005sp20ulJcgEXA9TzIA3" prodType="UPI"/>
    <Txn id="MYSIM000000005sp20ulJcgEXA9D4L3W" note="test" refId="Ref"
refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="DEBIT" custRef="519916126323"
initiationMode="00" subType="PAY" purpose="00">
        <RiskScores>
            <Score provider="psp1" type="TXNRISK" value="00032"/>
            <Score provider="psp3" type="TXNRISK" value="00040"/>
            <Score provider="NPCI" type="TXNRISK" value="00999"/>
        </RiskScores>
    </Txn>
    <Resp reqMsgId="4FCchwz1q" result="SUCCESS">

```

```

        <Ref type="PAYER" seqNum="1" addr="mapperchk@mypsp" settAmount="1.00" settCurrency="NAD"
approvalNum="654321" respCode="00" regName="Shyam" acNum="3453454385" IFSC="AABY0000382"
code="0000" accType="SAVINGS" />
    </Resp>
</RespPay>

```

Credit Request from IPS to Payee SoV Provider: ReqPay with type="CREDIT"

```

<ReqPay>
    <Head ver="2.0" ts="2025-07-18T16:47:08+05:30" orgId="NPCI" msgId="4FCchwZmm" prodType="UPI"/>
    <Meta>
        <Tag name="PAYREQSTART" value="2017-12-04T14:15:35+05:30"/>
        <Tag name="PAYREQEND" value="2017-12-04T14:15:35+05:30"/>
    </Meta>
    <Txn id="MYSIM00000005sp20ulJcgEXA9D4L3W" note="test" refId="Ref"
refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="CREDIT" custRef="519916126323"
initiationMode="00" subType="PAY" purpose="00">
        <RiskScores>
            <Score provider="psp1" type="TXNRISK" value="00032"/>
            <Score provider="psp3" type="TXNRISK" value="00040"/>
            <Score provider="NPCI" type="TXNRISK" value="00999"/>
        </RiskScores>
    </Txn>
    <Payer addr="mapperchk@mypsp" name="Shyam" seqNum="1" type="PERSON" code="0000">
        <Info>
            <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22"/>
            <Rating verifiedAddress="TRUE"></Rating>
        </Info>
        <Device>
            <Tag name="MOBILE" value="993456789"/>
            <Tag name="TYPE" value="MOB"/>
            <Tag name="ID" value="0000000000000002"/>
            <Tag name="OS" value="android"/>
            <Tag name="APP" value="org.npci.upi.maggi"/>
        </Device>
    </Payer>
</ReqPay>

```

```

</Device>
<Ac addrType="ACCOUNT">
  <Detail name="IFSC" value="AABY0000382"/>
  <Detail name="ACTYPE" value="SAVINGS"/>
  <Detail name="ACNUM" value="3453454385"/>
</Ac>
<Amount value="1.00" curr="NAD"/>
</Payer>
<Payees>
  <Payee addr="mappervpatest@mysp" name="SonySuper" seqNum="1" type="PERSON" code="0000"
cmId="993456789">
    <Info>
      <Identity type="ACCOUNT" verifiedName="narayanan" id="AAB45645BJB15"/>
      <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
      <Tag name="MOBILE" value="993456780"/>
      <Tag name="APP" value="org.npci.upi.maggi"/>
      <Tag name="TYPE" value="MOB"/>
      <Tag name="ID" value="00000000000000020"/>
    </Device>
    <Ac addrType="ACCOUNT">
      <Detail name="IFSC" value="AABY0000382"/>
      <Detail name="ACNUM" value="2678892001829"/>
      <Detail name="ACTYPE" value="SAVINGS"/>
    </Ac>
    <Amount value="1.00" curr="NAD"/>
  </Payee>
</Payees>
</ReqPay>

```

Credit Response from Payee SoV Provider to IPS: RespPay with type="CREDIT"

```
<RespPay>
  <Head ver="2.0" ts="2025-07-18T16:47:08+05:30" orgId="700001"
msgId="XYA0000000005sp20ulJcgEXA9TLsZn" prodType="UPI"/>
  <Txn id="MYSIM000000005sp20ulJcgEXA9D4L3W" note="test" refId="Ref"
refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="CREDIT" custRef="519916126323"
initiationMode="00" subType="PAY" purpose="00">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032"/>
      <Score provider="psp3" type="TXNRISK" value="00040"/>
      <Score provider="NPCI" type="TXNRISK" value="00999"/>
    </RiskScores>
  </Txn>
  <Resp reqMsgId="4FCchwZmm" result="SUCCESS">
    <Ref type="PAYEE" seqNum="1" addr="mappervpatest@mypsp" settAmount="1.00"
settCurrency="NAD" approvalNum="654321" respCode="00" regName="SonySuper" acNum="2678892001829"
IFSC="AABY0000382" code="0000" accType="SAVINGS"/>
  </Resp>
</RespPay>
```

Final Response Pay from IPS to Payer IPS Participant:

```
<RespPay>
  <Head ver="2.0" ts="2025-07-18T16:47:08+05:30" orgId="NPCI" msgId="4FCchwZmo" prodType="UPI"/>
  <Txn id="MYSIM000000005sp20ulJcgEXA9D4L3W" note="test" refId="Ref"
refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY" custRef="519916126323"
initiationMode="00" purpose="00">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032"/>
      <Score provider="psp3" type="TXNRISK" value="00040"/>
    </RiskScores>
  </Txn>
</RespPay>
```

```

        <Score provider="NPCI" type="TXNRISK" value="00999"/>
    </RiskScores>
</Txn>
<Resp reqMsgId="XYD00000000000001GRDpegB9EWpFIHL7Tzs" result="SUCCESS">
    <Ref type="PAYER" seqNum="1" addr="mapperchk@mypsp" settAmount="1.00" settCurrency="NAD"
approvalNum="654321" respCode="00" regName="Shyam" orgAmount="1.00" acNum="3453454385"
IFSC="AABY0000382" code="0000" accType="SAVINGS" />
    <Ref type="PAYEE" seqNum="1" addr="mappervpatest@mypsp" settAmount="1.00"
settCurrency="NAD" approvalNum="654321" respCode="00" regName="SonySuper" orgAmount="1.00"
acNum="2678892001829" IFSC="AABY0000382" code="0000" accType="SAVINGS" cmId="993456789"/>
</Resp>
</RespPay>

```

TransactionConfirmation Request from IPS to Payee IPS Participant:

```

<ReqTxnConfirmation>
    <Head ver="2.0" ts="2025-07-18T16:47:08+05:30" orgId="NPCI" msgId="4FCchwZmr" prodType="UPI"/>
    <Txn id="MYSIM00000005sp20ulJcgEXA9D4L3W" note="test" refId="Ref"
refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="TxnConfirmation"
orgTxnId="MYSIM00000005sp20ulJcgEXA9D4L3W" custRef="519916126323" initiationMode="00"
purpose="00"/>
    <TxnConfirmation note="test" orgStatus="SUCCESS" type="PAY">
        <Ref type="PAYEE" seqNum="1" addr="mappervpatest@mypsp" settAmount="1.00"
settCurrency="NAD" approvalNum="654321" respCode="00" regName="SonySuper" orgAmount="1.00"
acNum="2678892001829" IFSC="AABY0000382" code="0000" accType="SAVINGS" cmId="993456789"/>
    </TxnConfirmation>
</ReqTxnConfirmation>

```

TransactionConfirmation Response from Payee IPS Participant to IPS:

```
<RespTxnConfirmation>
  <Head ver="2.0" ts="2025-07-18T16:47:08+05:30" orgId="700001" msgId="d0vFQb3W1OKJHQA6"
prodType="UPI"/>
  <Txn id="MYSIM00000005sp20ulJcgEXA9D4L3W" note="test" refId="Ref"
refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="TxnConfirmation"

orgTxnId="MYSIM00000005sp20ulJcgEXA9D4L3W" custRef="519916126323" initiationMode="00"
purpose="00"/>
  <Resp reqMsgId="d0vFQb3W1OKJHQA6" result="SUCCESS"/>
</RespTxnConfirmation>
```

6.24. Sample Negative Scenario Logs:

6.24.1.1. Multiple Error Code in Acknowledgement

Payment Request:

```
<ReqPay>
  <Head ver="2.0" ts="2025-08-21T14:34:38+05:30" orgId="700001"
msgId="XYD0000000000001GRDpegB9EWpFIHL7Tzs"/>
  <Meta>
    <Tag name="PAYREQSTART" value="2017-12-04T14:15:35+05:30"/>
    <Tag name="PAYREQEND" value="2017-12-04T14:15:35+05:30"/>
  </Meta>
  <Txn id="MYSIM00000005sp4lozf8btWd0vJTIQ" note="REQRESPCRDFailure" refId="Ref"
refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY" custRef="523314230610"
initiationMode="00" purpose="14">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032"/>
    </RiskScores>
  </Txn>
</ReqPay>
```

```

        <Score provider="psp3" type="TXNRISK" value="00040"/>
    </RiskScores>
</Txn>
<Payer addr="PRE@mypsp" name="NOREQREV" seqNum="1" type="PERSON" code="00000">
    <Info>
        <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22"/>
        <Rating verifiedAddress="TRUE"></Rating>
    </Info>
    <Device>
        <Tag name="MOBILE" value="99345670011"/>
        <Tag name="TYPE" value="MOB"/>
        <Tag name="ID" value="0000000000000002"/>
        <Tag name="OS" value="android"/>
        <Tag name="APP" value="org.npci.upi.maggi"/>
    </Device>
    <Ac addrType="ACCOUNT">
        <Detail name="IFSC" value="AABY0000382"/>
        <Detail name="ACTYPE" value="SAVINGS"/>
        <Detail name="ACNUM" value="3453454385"/>
    </Ac>
    <Creds>
        <Cred type="PreApproved" subType="NA">
            <Data code="NPCI" ki="20150822">MDB8MTIzNDU2</Data>
        </Cred>
    </Creds>
    <Amount value="1.00" curr="NAD"/>
</Payer>
<Payees>
    <Payee addr="2678892001829@AABY0000382.ifsc.npci" name="SonySuper" seqNum="1" code="0000"
cmId="">
        <Amount value="1.00" curr="NAD"/>
    </Payee>
</Payees>
</ReqPay>

```


Ack with Multiple error Code:

```
<Ack api="ReqPay" reqMsgId="XYD0000000000001GRDpegB9EWpFIHL7Tzs" err="VALIDATION_ERR" ts="2025-08-21T14:34:39+05:30">
  <errorMessages>
    <errorCd>R06</errorCd>
    <errorDtl>Payer.Code invalid</errorDtl>
  </errorMessages>
  <errorMessages>
    <errorCd>D04</errorCd>
    <errorDtl>Payer.Tag.Device.Mobile must be present and valid</errorDtl>
  </errorMessages>
</Ack>
```

6.24.1.2. Duplicate Transaction Id

PayRequest to IPS:

```
<ReqPay>
  <Head ver="2.0" ts="2025-08-21T14:06:36+05:30" orgId="700001"
  msgId="XYD0000000000001GRDpegB9EWpFIHL7Tzs"/>
  <Meta>
    <Tag name="PAYREQSTART" value="2017-12-04T14:15:35+05:30"/>
    <Tag name="PAYREQEND" value="2017-12-04T14:15:35+05:30"/>
  </Meta>
  <Txn id="MYSIM00000005sp4lozf8btWa2V6H0Q" note="REQRESPCRDFailure" refId="Ref"
  refUrl="https://www.sbi.co.in/" ts="2018-03-02T16:27:44+05:30" type="PAY" custRef="523314499597"
  initiationMode="00" purpose="14">
    <RiskScores>
      <Score provider="psp1" type="TXNRISK" value="00032"/>
      <Score provider="psp3" type="TXNRISK" value="00040"/>
    </RiskScores>
```

```

</Txn>
<Payer addr="PRE@mypsp" name="NOREQREV" seqNum="1" type="PERSON" code="0000">
  <Info>
    <Identity type="PAN" verifiedName="Ram" id="SDF45645BJB22"/>
    <Rating verifiedAddress="TRUE"></Rating>
  </Info>
  <Device>
    <Tag name="MOBILE" value="993456700"/>
    <Tag name="TYPE" value="MOB"/>
    <Tag name="ID" value="0000000000000002"/>
    <Tag name="OS" value="android"/>
    <Tag name="APP" value="org.npci.upi.maggi"/>
  </Device>
  <Ac addrType="ACCOUNT">
    <Detail name="IFSC" value="AABY0000382"/>
    <Detail name="ACTYPE" value="SAVINGS"/>
    <Detail name="ACNUM" value="3453454385"/>
  </Ac>
  <Creds>
    <Cred type="PreApproved" subType="NA">
      <Data code="NPCI" ki="20150822">MDB8MTIzNDU2</Data>
    </Cred>
  </Creds>
  <Amount value="1.00" curr="NAD"/>
</Payer>
<Payees>
  <Payee addr="2678892001829@AABY0000382.ifsc.npci" name="SonySuper" seqNum="1" type="PERSON"
code="0000" cmId="">
    <Amount value="1.00" curr="NAD"/>
  </Payee>
</Payees>
</ReqPay>

```

Negative Acknowledgement:

```
<Ack api="ReqPay" reqMsgId="XYD0000000000001GRDpegB9EWpFIHL7Tzs" err="DUPLICATE_REQ" ts="2025-08-21T14:06:36+05:30">  
  <errorMessages>  
    <errorCd>U01</errorCd>  
    <errorDtl>The request is duplicate</errorDtl>  
  </errorMessages>  
</Ack>
```

=====END OF THE DOCUMENT=====