















t8code - modular adaptive mesh refinement in the exascale era

Johannes Holke¹[¶], Johannes Markert¹^{*}, David Knapp¹^{*}, Lukas Dreyer¹^{*}, Sandro Elswijker¹^{*}, Niklas Böing¹^{*}, Chiara Hergl¹^{*}, Prasanna Ponnusamy¹^{*}, Jakob Fussbroich¹^{*}, Tabea Leistikow¹^{*}, Florian Becker¹^{*}, Ioannis Lilikakis¹^{*}, Julia Weber¹^{*}, Sven Goldberg¹^{*}, Veli Ünlü¹^{*}, and Achim Basermann¹

¹ German Aerospace Center (DLR), Institute for Software Technology, Cologne, Germany 
Corresponding author ^{*} These authors contributed equally.

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

Software

- [Review](#) 
- [Repository](#) 
- [Archive](#) 

Editor: [Open Journals](#) 

Reviewers:

- [@openjournals](#)

Submitted: 01 January 1970

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).

Summary

In this paper, we present our scalable dynamic adaptive mesh refinement (AMR) library t8code, which was officially released in 2022 ([Holke et al., 2022](#)). t8code is written in C/C++, open source, and readily available at www.dlr-amr.github.io/t8code. It is developed and maintained at the [Institute for Software Technology](#) of the German Aerospace Center (DLR). The software library provides fast and memory efficient parallel algorithms for dynamic AMR to handle tasks such as mesh adaptation, load-balancing, ghost computation, feature search and more. t8code can manage meshes with over one trillion mesh elements ([Holke et al., 2021](#)) and scales up to one million parallel processes ([Holke, 2018](#)). It is intended to be used as mesh management backend in scientific and engineering simulation codes paving the way towards high-performance applications of the upcoming exascale era.

Statement of Need

Adaptive Mesh Refinement has been established as a successful approach for scientific and engineering simulations over the past decades ([Babuvška & Rheinboldt, 1978](#); [Bangerth et al., 2007](#); [Dörfler, 1996](#); [Teunissen & Keppens, 2019](#)). By modifying the mesh resolution locally according to problem specific indicators, the computational power is efficiently concentrated where needed and the overall memory usage is reduced by orders of magnitude. However, managing adaptive meshes and associated data is a very challenging task, especially for parallel codes. Implementing fast and scalable AMR routines generally leads to a large development overhead motivating the need for external mesh management libraries like t8code.

Currently, t8code's AMR routines support a wide range of element types: vertices, lines, quadrilaterals, triangles, hexahedra, tetrahedra, prisms, and pyramids. Additionally, implementation of other refinement patterns and element shapes is possible according to the specific requirements of the application. t8code aims to provide a comprehensive mesh management framework for a wide range of use cases in science and engineering applications.

Fundamental Concepts

t8code is based on the concept of tree-based adaptive mesh refinement. Starting point for the usage of t8code is an unstructured input mesh, which we denote a coarse mesh. This coarse mesh describes the geometry of the computational domain. Each of the coarse mesh cells are

39 then viewed as the root of a refinement tree. These trees are refined recursively in a structured
40 pattern, resulting in a collection of trees, which we denote a forest. This forest stores only
41 minimal information about the finest elements of the mesh (the leafs of the trees).

42 By enumerating the children in the refinement pattern we obtain a space-filling curve (SFC)
43 logic. Via these SFCs, all elements in a refinement tree are assigned an index and are stored
44 in the linear order of these indices. Information such as coordinates or element neighbors
45 do not need to be stored explicitly but can be deduced from the index and the appropriate
46 information of the coarse mesh. The forest mesh can be distributed across multiple processes,
47 so that each one only stores a unique portion of the forest mesh. See [Figure 1](#).

48 While being successfully applied to quadrilateral and hexahedral meshes ([Burstedde et al.,](#)
49 [2011](#); [Weinzierl, 2019](#)), these SFC techniques are extended by t8code in a modular fashion,
50 such that arbitrary element shapes are supported. We achieve this modularity through a novel
51 decoupling approach that separates high-level (mesh global) algorithms from low-level (element
52 local) implementations. All high-level algorithms can be applied to different implementations
53 of element shapes and refinement patterns. A mix of different element shapes in the same
54 mesh is also supported.

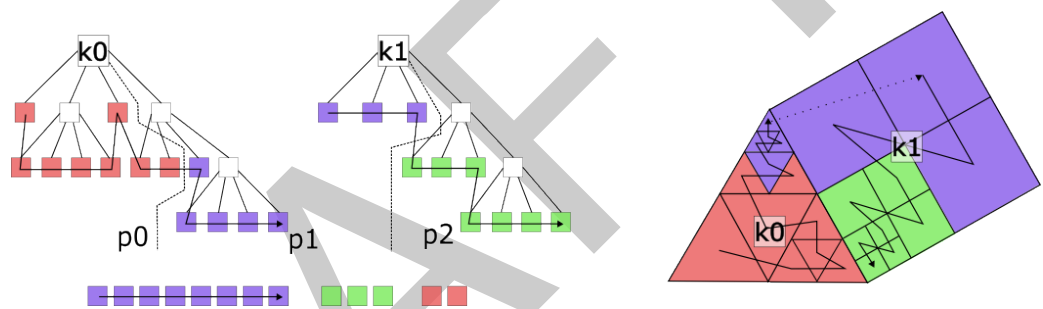


Figure 1: Left: Quad-tree of an exemplary forest mesh consisting of two trees (k_0, k_1) distributed over three parallel processes p_0 to p_2 . The SFC is represented by a black curve tracing only the finest elements (leafs) of each tree. Right: Sketch of the associated mixed shape mesh refined up to level three. Bottom left: The elements saved by p_1 and the associated ghost elements (non process local neighbors).

55 Performance

56 t8code supports distributed coarse meshes of arbitrary size and complexity, which we tested
57 for up to 370 million coarse mesh cells ([Burstedde & Holke, 2017](#)). Moreover, we conducted
58 various performance studies on the JUQUEEN ([JUQUEEN Supercomputer, n.d.](#)) and the
59 JUWELS ([JUWELS Supercomputer, n.d.](#)) supercomputers at the Jülich Supercomputing
60 Center. t8code's ghost and partition routines are exceptionally fast with proper scaling of up to
61 1.1 trillion mesh elements; see [Table 1](#), ([Holke et al., 2021](#)). Furthermore, in a prototype code
62 ([Dreyer, 2021](#)) implementing a high-order discontinuous Galerkin method (DG) for advection-
63 diffusion equations on dynamically adaptive hexahedral meshes we observe a speed-up of 12
64 compared to non-AMR meshes with only an overall 15% runtime contribution of t8code; see
65 [Figure 2](#).

# Process	# Elements	# Elem. / process	Ghost	Partition
49,152	1,099,511,627,776	22,369,621	2.08 s	0.73 s
98,304	1,099,511,627,776	11,184,811	1.43 s	0.33 s

Table 1: Runtimes on JUQUEEN for the ghost layer and partitioning operations for a distributed mesh consisting of 1.1 trillion elements.

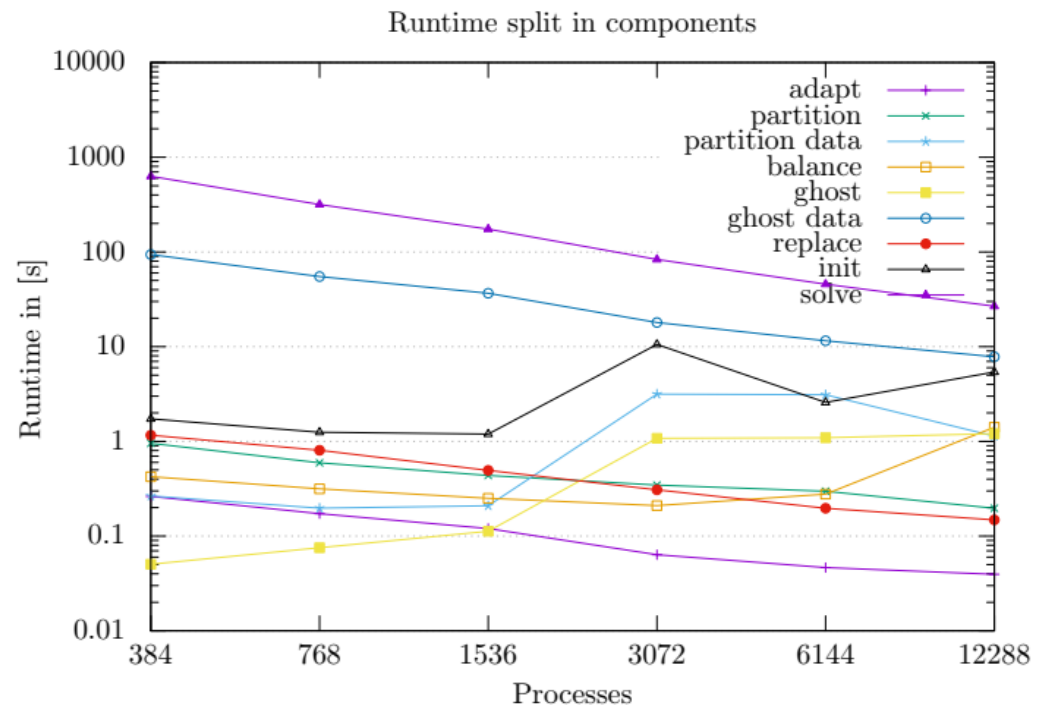


Figure 2: Runtimes on JUQUEEN of the different components of our DG prototype code coupled with t8code. Note that all features associated with dynamical mesh adaptation utilize only around 15% of the total runtime largely independent of the number of processes.

Research Projects

Even though t8code is a newcomer to the market, it is already in use as the mesh management backend in various research projects, most notably in the earth system modeling (ESM) community. In the [ADAPTEX](#) project t8code is integrated with the [Trixi framework](#) ([Schlottke-Lakemper et al., 2020](#)) - a modern computational fluid dynamics code written in [Julia](#). Over the next years several ESM applications are planned to couple to this combination, including [MESSy](#), [MPTrac](#), and [SERGHEI](#). Moreover, t8code also plays an important role in several DLR funded projects, e.g., VISPLORE, HYTAZER, Greenstars and PADME-AM.

Conclusion

In this note, we introduce our open source AMR library t8code. We give a brief overview of the fundamental design principles and high-level operations. Due to the high modularity, t8code can be easily extended for a wide range of use cases. Performance results confirm that t8code is a solid choice for mesh management in high-performance applications in the upcoming exascale era.

For further information beyond this short note and also for code examples, we refer to our [Documentation](#) and [Wiki](#) reachable via our homepage www.dlr-amr.github.io/t8code and our technical publications on t8code ([Becker, 2021](#); [Burstedde & Holke, 2016, 2017](#); [Dreyer, 2021](#); [Elsweijer, 2021](#); [Fußbroich, 2023](#); [Holke, 2018](#); [Holke et al., 2021, 2022](#); [Knapp, 2020](#); [Lilikakis, 2022](#)).

Acknowledgement

Development and maintenance of t8code is mainly funded by the Institute of Software Technology of the German Aerospace Center.

The authors state that there are no conflicts of interest.

References

- Babuvška, I., & Rheinboldt, W. C. (1978). Error estimates for adaptive finite element computations. *SIAM Journal on Numerical Analysis*, 15(4), 736–754. <https://doi.org/10.1137/0715049>
- Bangerth, W., Hartmann, R., & Kanschat, G. (2007). Deal.II—a general-purpose object-oriented finite element library. *ACM Trans. Math. Softw.*, 33(4), 24–es. <https://doi.org/10.1145/1268776.1268779>
- Becker, F. (2021). *Removing hanging faces from tree-based adaptive meshes for numerical simulations* [Master's thesis]. Universität zu Köln.
- Burstedde, C., & Holke, J. (2016). A tetrahedral space-filling curve for nonconforming adaptive meshes. *SIAM Journal on Scientific Computing*, 38, C471–C503. <https://doi.org/10.1137/15M1040049>
- Burstedde, C., & Holke, J. (2017). Coarse Mesh Partitioning for Tree-Based AMR. *SIAM Journal on Scientific Computing*, Vol. 39, C364–C392. <https://doi.org/10.1137/16M1103518>
- Burstedde, C., Wilcox, L. C., & Ghattas, O. (2011). p4est: Scalable Algorithms for Parallel Adaptive Mesh Refinement on Forests of Octrees. *SIAM Journal on Scientific Computing*, 33(3), 1103–1133. <https://doi.org/10.1137/100791634>
- Dörfler, W. (1996). A convergent adaptive algorithm for poisson's equation. *SIAM Journal on Numerical Analysis*, 33(3), 1106–1124. <https://doi.org/10.1137/0733054>
- Dreyer, L. (2021). *The local discontinuous galerkin method for the advection-diffusion equation on adaptive meshes* [Master's thesis, Rheinische Friedrich-Wilhelms-Universität Bonn]. <https://elib.dlr.de/143969/>
- Elsweijer, S. (2021). *Curved Domain Adaptive Mesh Refinement with Hexahedra*. Hochschule Bonn-Rhein-Sieg. <https://elib.dlr.de/143537/>
- Fußbroich, J. (2023). *Towards high-order, hybrid adaptive mesh refinement: Implementation and evaluation of curved unstructured mesh elements* [Master's thesis, Technische Hochschule Köln]. <https://elib.dlr.de/200442/>
- Holke, J. (2018). *Scalable algorithms for parallel tree-based adaptive mesh refinement with general element types* [PhD thesis]. Rheinische Friedrich-Wilhelms-Universität Bonn.
- Holke, J., Burstedde, C., Knapp, D., Dreyer, L., Elsweijer, S., Uenlue, V., Markert, J., Lilikakis, I., & Boeing, N. (2022). t8code (Version 1.0.0). <https://doi.org/10.5281/zenodo.7034838>
- Holke, J., Knapp, D., & Burstedde, C. (2021). An Optimized, Parallel Computation of the Ghost Layer for Adaptive Hybrid Forest Meshes. *SIAM Journal on Scientific Computing*, C359–C385. <https://doi.org/10.1137/20M1383033>
- JUQUEEN supercomputer. (n.d.). FZ Jülich. Retrieved January 3, 2023, from https://hbp-hpc-platform.fz-juelich.de/?page_id=34
- JUWELS supercomputer. (n.d.). FZ Jülich. Retrieved January 3, 2023, from <https://www.fz-juelich.de/en/ias/jsc/systems/supercomputers/juwels>

- 127 Knapp, D. (2020). *A space-filling curve for pyramidal adaptive mesh refinement* [Master's
128 Thesis]. Rheinische Friedrich-Wilhelms-Universität Bonn.
- 129 Lilikakis, I. (2022). *Algorithms for tree-based adaptive meshes with incomplete trees* [Master's
130 thesis, Universität zu Köln]. <https://elib.dlr.de/191968/>
- 131 Schlottke-Lakemper, M., Gassner, G. J., Ranocha, H., & Winters, A. R. (2020). *Trixi.jl:
132 Adaptive high-order numerical simulations of hyperbolic PDEs in Julia*. [https://github.
133 com/trixi-framework/Trixi.jl](https://github.com/trixi-framework/Trixi.jl). <https://doi.org/10.5281/zenodo.3996439>
- 134 Teunissen, J., & Keppens, R. (2019). A geometric multigrid library for quadtree/octree
135 AMR grids coupled to MPI-AMRVAC. *Computer Physics Communications*, 245, 106866.
136 <https://doi.org/https://doi.org/10.1016/j.cpc.2019.106866>
- 137 Weinzierl, T. (2019). The Peano Software-Parallel, Automaton-based, Dynamically Adaptive
138 Grid Traversals. *ACM Transactions on Mathematical Software*, 45(2), 1–41. [https:
139 //doi.org/10.1145/3319797](https://doi.org/10.1145/3319797)

DRAFT