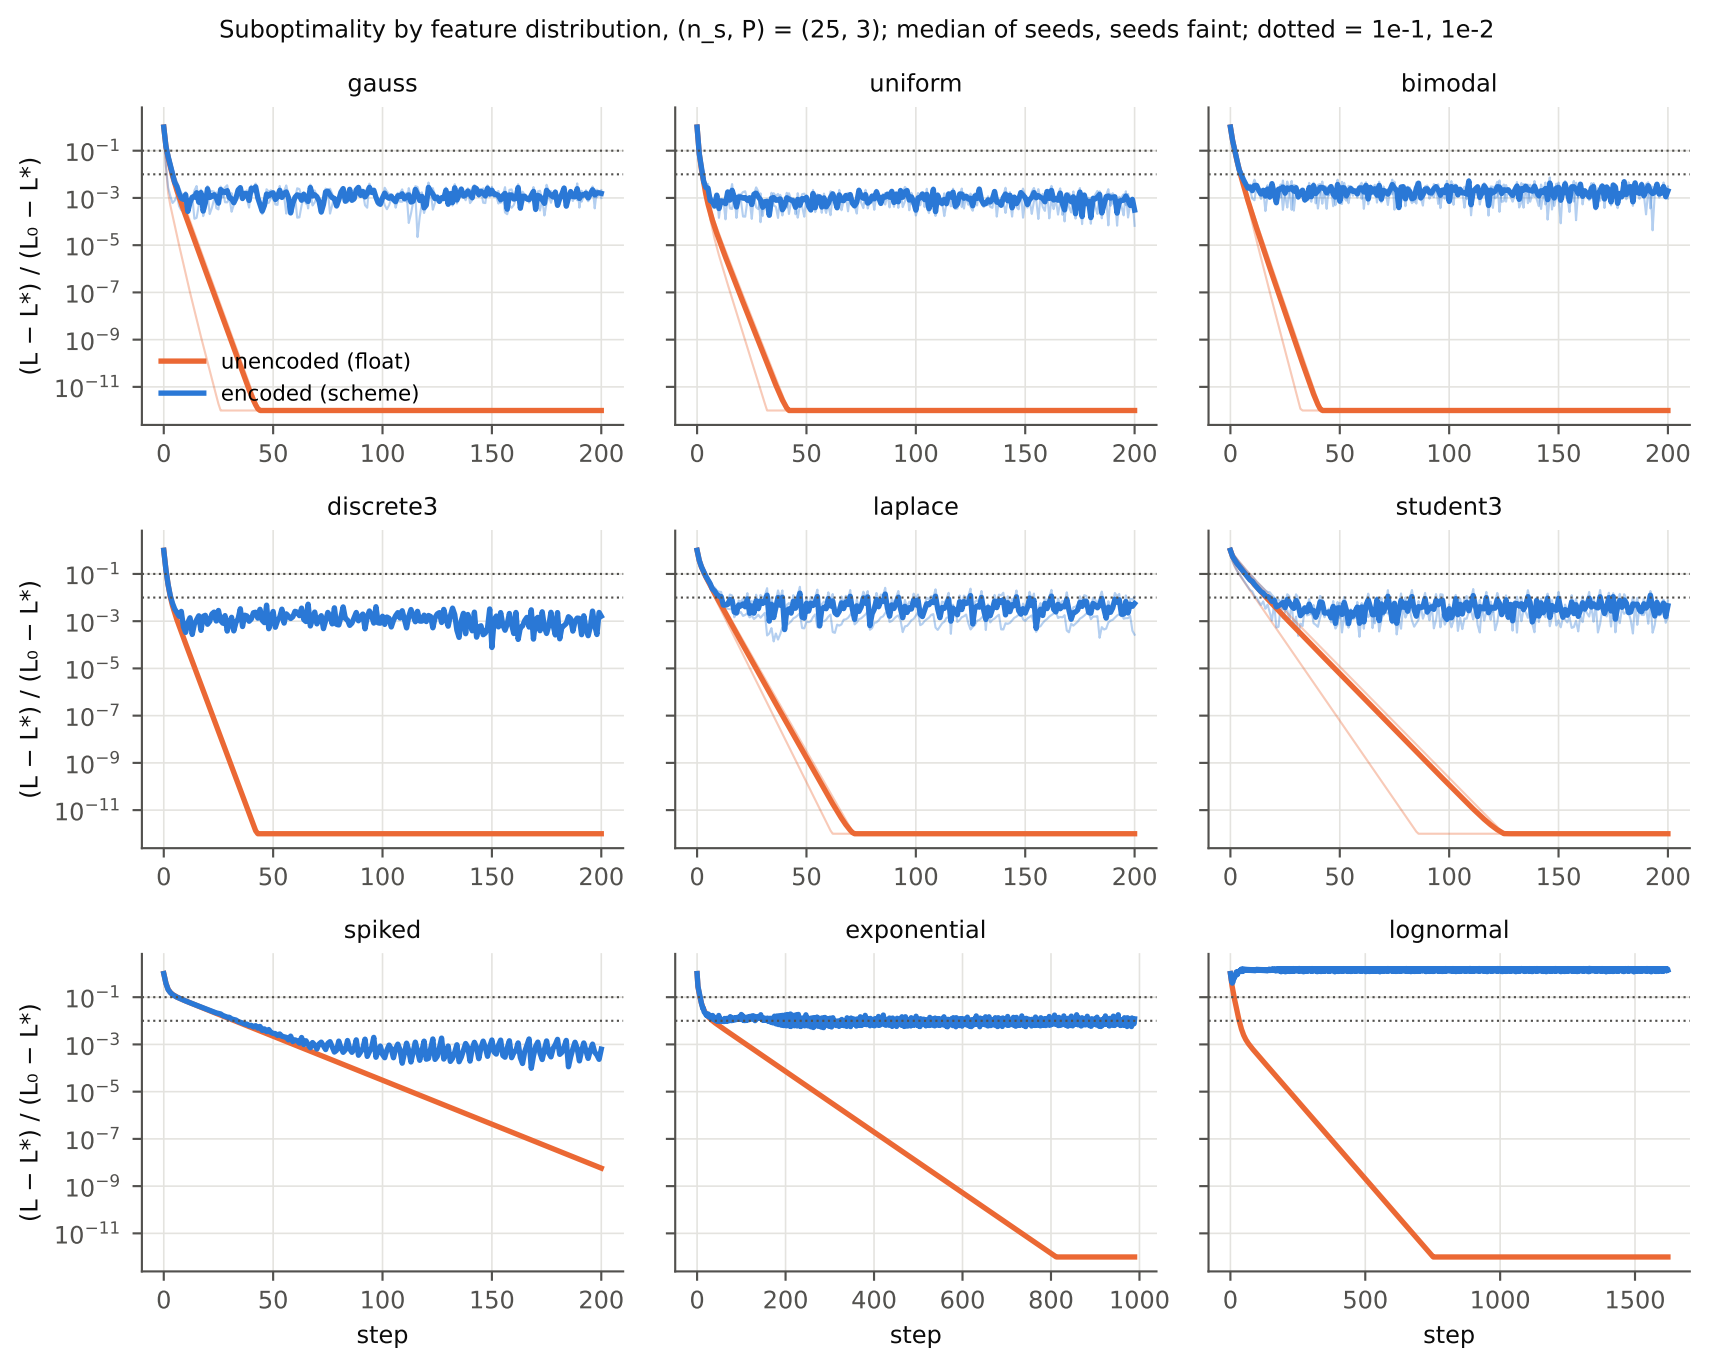

Suboptimality by feature distribution, (n_s, P) = (25, 3); median of seeds, seeds faint; dotted = 1e-1, 1e-2
gauss
uniform
bimodal
discrete3
laplace
student3
spiked
exponential
lognormal
(L − L*) / (L₀ − L*)
unencoded (float)
encoded (scheme)
step